

LA-12625-M, Version 4B
Manual

UC 705
and
UC 700

Issued: March 1997

MCNPTM—A General Monte Carlo N-Particle Transport Code

Version 4B

Judith F. Briesmeister, Editor

An Affirmative Action/Equal Opportunity Employer

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

FOREWORD

This manual is a practical guide for the use of our general-purpose Monte Carlo code MCNP. The first chapter is a primer for the novice user. The second chapter describes the mathematics, data, physics, and Monte Carlo simulation found in MCNP. This discussion is not meant to be exhaustive—details of the particular techniques and of the Monte Carlo method itself will have to be found elsewhere. The third chapter shows the user how to prepare input for the code. The fourth chapter contains several examples, and the fifth chapter explains the output. The appendices show how to use MCNP on various computer systems and also give details about some of the code internals.

The Monte Carlo method emerged from work done at Los Alamos during World War II. The invention is generally attributed to Fermi, von Neumann, Ulam, Metropolis, and Richtmyer. MCNP is the successor to their work and represents over 450 person-years of development.

Neither the code nor the manual is static. The code is changed as the need arises and the manual is changed to reflect the latest version of the code. This particular manual refers to Version 4B.

MCNP and this manual are the product of the combined effort of many people in the Transport Methods Group (XTM) of the Applied Theoretical & Computational Physics Division (X Division) at the Los Alamos National Laboratory.

The code and manual can be obtained from the Radiation Safety Information Computational Center (RSICC), P. O. Box 2008, Oak Ridge, TN, 37831-6362.

J. F. Briesmeister
Editor
505-667-7277
FAX: 505-665-5538
email: mcnp@lanl.gov

COPYRIGHT NOTICE FOR MCNP VERSION 4B

Unless otherwise indicated, this information has been authored by an employee or employees of the University of California, operator of the Los Alamos National Laboratory under Contract No. W-7405-ENG-36 with the U.S. Department of Energy. The U.S. Government has rights to use, reproduce, and distribute this information. The public may copy and use this information without charge, provided that this Notice and any statement of authorship are reproduced on all copies. Neither the government nor the University makes any warranty, express or implied, or assumes any liability or responsibility for the use of this information.

CONTENTS

CHAPTER 1. PRIMER	1-1
I. PARTICLE TRANSPORT CALCULATIONS WITH MONTE CARLO	1-2
II. INTRODUCTION TO MCNP FEATURES	1-4
III. MCNP GEOMETRY	1-13
IV. MCNP INPUT FOR SAMPLE PROBLEM	1-19
V. HOW TO RUN MCNP	1-29
VI. TIPS FOR CORRECT AND EFFICIENT PROBLEMS	1-33
VII. REFERENCES	1-35
CHAPTER 2. GEOMETRY, DATA, PHYSICS, AND MATHEMATICS	2-1
I. INTRODUCTION	2-1
A. History	2-2
B. MCNP Structure	2-5
C. History Flow	2-6
II. GEOMETRY	2-9
A. Complement Operator	2-9
B. Repeated Structure Geometry	2-10
C. Surfaces	2-11
III. CROSS SECTIONS	2-16
A. Neutron Interaction Data	2-17
B. Photon Interaction Data	2-21
C. Electron Interaction Data	2-22
D. Neutron Dosimetry Cross Sections	2-23
E. Neutron Thermal $S(\alpha, \beta)$ Tables	2-23
F. Multigroup Tables	2-24
IV. PHYSICS	2-24
A. Particle Weight	2-25
B. Particle Tracks	2-26
C. Neutron Interactions	2-27
D. Photon Interactions	2-50
E. Electron Interactions	2-57
V. TALLIES	2-68
A. Surface Current Tally	2-70

B. Flux Tallies	2-70
C. Track Length Cell Energy Deposition Tallies	2-72
D. Pulse Height Tallies	2-74
E. Flux at a Detector	2-75
F. Additional Tally Features	2-85
VI. ESTIMATION OF THE MONTE CARLO PRECISION	2-88
A. Monte Carlo Means, Variances, and Standard Deviations	2-89
B. Precision and Accuracy	2-90
C. The Central Limit Theorem	2-92
D. Estimated Relative Errors in MCNP	2-93
E. MCNP <i>FOM</i>	2-96
F. Separation of Relative Error into Two Components	2-97
G. Variance of the Variance	2-99
H. History Score Probability Density Function	2-101
I. Forming Statistically Valid Confidence Intervals	2-107
VII. VARIANCE REDUCTION	2-114
A. General Considerations	2-114
B. Variance Reduction Techniques	2-119
VIII. CRITICALITY CALCULATIONS	2-143
A. Criticality Program Flow	2-144
B. Estimation of k_{eff} Confidence Intervals and Prompt Neutron Lifetimes	2-146
IX. VOLUMES AND AREAS	2-163
A. Rotationally Symmetric Volumes and Areas	2-164
B. Polyhedron Volumes and Areas	2-165
C. Stochastic Volume and Area Calculation	2-165
X. PLOTTER	2-166
XI. PSEUDORANDOM NUMBERS	2-169
XII. PERTURBATIONS	2-170
A. Derivation of the Operator	2-171
B. Limitations	2-173
C. Accuracy	2-174
XII. REFERENCES	2-175
CHAPTER 3 DESCRIPTION OF MCNP INPUT	3-1
I. INP FILE	3-1
A. Message Block	3-1

B. Initiate-Run	3-2
C. Continue-Run	3-2
D. Card Format	3-4
E. Particle Designators	3-7
F. Default Values	3-7
G. Input Error Messages	3-8
H. Geometry Errors	3-8
II. CELL CARDS	3-9
A. Shorthand Cell Specification	3-12
III. SURFACE CARDS	3-12
A. Surfaces Defined by Equations	3-12
B. Axisymmetric Surfaces Defined by Points	3-16
C. General Plane Defined by Three Points	3-18
IV. DATA CARDS	3-18
A. Problem Type (MODE) Card	3-19
B. Geometry Cards	3-19
C. Variance Reduction	3-28
D. Source Specification	3-39
E. Tally Specification	3-62
F. Material Specification Cards	3-95
G. Energy and Thermal Treatment Specification	3-103
H. Problem Cutoff Cards	3-109
I. User Data Arrays	3-112
J. Peripheral Cards	3-113
V. SUMMARY OF MCNP INPUT FILE	3-131
A. Input Cards	3-131
B. Storage Limitations	3-134
CHAPTER 4 EXAMPLES	4-1
I. GEOMETRY SPECIFICATION	4-1
II. COORDINATE TRANSFORMATIONS	4-14
III. REPEATED STRUCTURE AND LATTICE EXAMPLES	4-19
IV. TALLY EXAMPLES	4-34
A. FMn Examples (Simple Form)	4-34
B. FMn Examples (General Form)	4-36
C. FSn Examples	4-37
D. FTn Examples	4-39

E. Repeated Structure/Lattice Tally Example	4-42
F. TALLYX Subroutine Examples	4-45
V. SOURCE EXAMPLES	4-48
VI. SOURCE SUBROUTINE	4-51
VII. SRCDX SUBROUTINE	4-52
CHAPTER 5. OUTPUT	5-1
I. DEMO PROBLEM AND OUTPUT	5-1
II. TEST1 PROBLEM AND OUTPUT	5-10
III. CONC PROBLEM AND OUTPUT	5-50
IV. KCODE	5-64
V. EVENT LOG AND GEOMETRY ERRORS	5-99
A. Event Log	5-99
B. Debug Print	5-101
APPENDICES	A-1
B. MCNP GEOMETRY AND TALLY PLOTTING	B-1
C. INSTALLING MCNP ON VARIOUS SYSTEMS	C-1
D. MODIFYING MCNP	D-1
E. GLOBAL CONSTANTS, VARIABLES, AND ARRAYS	E-1
F. DATA TABLE FORMATS	F-1
G. NEUTRON CROSS-SECTION LIBRARIES	G-1
H. FISSION SPECTRA CONSTANTS AND FLUX-TO-DOSE FACTORS	H-1
I. PTRAC TABLES	I-1
INDEX	INDEX-1

MCNP—A General Monte Carlo
N-Particle Transport Code
Version 4B

Transport Methods Group
Los Alamos National Laboratory

ABSTRACT

MCNP is a general-purpose Monte Carlo N-Particle code that can be used for neutron, photon, electron, or coupled neutron/photon/electron transport, including the capability to calculate eigenvalues for critical systems. The code treats an arbitrary three-dimensional configuration of materials in geometric cells bounded by first- and second-degree surfaces and fourth-degree elliptical tori.

Pointwise cross-section data are used. For neutrons, all reactions given in a particular cross-section evaluation (such as ENDF/B-VI) are accounted for. Thermal neutrons are described by both the free gas and $S(\alpha, \beta)$ models. For photons, the code takes account of incoherent and coherent scattering, the possibility of fluorescent emission after photoelectric absorption, absorption in pair production with local emission of annihilation radiation, and bremsstrahlung. A continuous slowing down model is used for electron transport that includes positrons, k x-rays, and bremsstrahlung but does not include external or self-induced fields.

Important standard features that make MCNP very versatile and easy to use include a powerful general source, criticality source, and surface source; both geometry and output tally plotters; a rich collection of variance reduction techniques; a flexible tally structure; and an extensive collection of cross-section data.

NOTES:

CHAPTER 1
PRIMER

WHAT IS COVERED IN CHAPTER 1

Brief explanation of the Monte Carlo method.
Summary of MCNP features.
Introduction to geometry.
Description of MCNP data input illustrated by a sample problem.
How to run MCNP.
Tips on problem setup.

Chapter 1 will enable the novice to start using MCNP, assuming very little knowledge of the Monte Carlo method and no experience with MCNP. The primer begins with a short discussion of the Monte Carlo method. Five features of MCNP are introduced: (1) nuclear data and reactions, (2) source specifications, (3) tallies and output, (4) estimation of errors, and (5) variance reduction. The third section explains MCNP geometry setup, including the concept of cells and surfaces. A general description of an input deck is followed by a sample problem and a detailed description of the input cards used in the sample problem. Section V tells how to run MCNP, VI lists tips for setting up correct problems and running them efficiently, and VII is the references for Chapter 1. The word “card” is used throughout this document to describe a single line of input up to 80 characters.

MCNP is a general-purpose, continuous-energy, generalized-geometry, time-dependent, coupled neutron/photon/electron Monte Carlo transport code. It can be used in several transport modes: neutron only, photon only, electron only, combined neutron/photon transport where the photons are produced by neutron interactions, neutron/photon/electron, photon/electron, or electron/photon. The neutron energy regime is from 10^{-11} MeV to 20 MeV, and the photon and electron energy regimes are from 1 keV to 1000 MeV. The capability to calculate k_{eff} eigenvalues for fissile systems is also a standard feature.

The user creates an input file that is subsequently read by MCNP. This file contains information about the problem in areas such as:

- the geometry specification,
- the description of materials and selection of cross-section evaluations,
- the location and characteristics of the neutron, photon, or electron source,
- the type of answers or tallies desired, and
- any variance reduction techniques used to improve efficiency.

Each area will be discussed in the primer by use of a sample problem.

Remember five “rules” when running a Monte Carlo calculation. They will be more meaningful as you read this manual and gain experience with MCNP, but no matter how sophisticated a user you may become, never forget the following five points:

CHAPTER 1

Introduction

1. Define and sample the geometry and source well;
2. You cannot recover lost information;
3. Question the stability and reliability of results;
4. Be conservative and cautious with variance reduction biasing; and
5. The number of histories run is not indicative of the quality of the answer.

The following sections compare Monte Carlo and deterministic methods and provide a simple description of the Monte Carlo method.

A. Monte Carlo Method vs Deterministic Method

Monte Carlo methods are very different from deterministic transport methods. Deterministic methods, the most common of which is the discrete ordinates method, solve the transport equation for the average particle behavior. By contrast, Monte Carlo does not solve an explicit equation, but rather obtains answers by simulating individual particles and recording some aspects (tallies) of their average behavior. The average behavior of particles in the physical system is then inferred (using the central limit theorem) from the average behavior of the simulated particles. Not only are Monte Carlo and deterministic methods very different ways of solving a problem, even what constitutes a solution is different. Deterministic methods typically give fairly complete information (for example, flux) throughout the phase space of the problem. Monte Carlo supplies information only about specific tallies requested by the user.

When Monte Carlo and discrete ordinates methods are compared, it is often said that Monte Carlo solves the integral transport equation, whereas discrete ordinates solves the integro-differential transport equation. Two things are misleading about this statement. First, the integral and integro-differential transport equations are two different forms of the same equation; if one is solved, the other is solved. Second, Monte Carlo “solves” a transport problem by simulating particle histories rather than by solving an equation. No transport equation need ever be written to solve a transport problem by Monte Carlo. Nonetheless, one can derive an equation that describes the probability density of particles in phase space; this equation turns out to be the same as the integral transport equation.

Without deriving the integral transport equation, it is instructive to investigate why the discrete ordinates method is associated with the integro-differential equation and Monte Carlo with the integral equation. The discrete ordinates method visualizes the phase space to be divided into many small boxes, and the particles move from one box to another. In the limit as the boxes get progressively smaller, particles moving from box to box take a differential amount of time to move a differential distance in space. In the limit this approaches the integro-differential transport equation, which has derivatives in space and time. By contrast, Monte Carlo transports particles between events (for example, collisions) that are separated in space and time. Neither differential space nor time are inherent parameters of Monte Carlo transport. The integral equation does not have time or space derivatives.

Monte Carlo is well suited to solving complicated three-dimensional time-dependent problems. Because the Monte Carlo method does not use phase space boxes, there are no averaging approximations required in space, energy, and time. This is especially important in allowing detailed representation of all aspects of physical data.

B. The Monte Carlo Method

Monte Carlo can be used to duplicate theoretically a statistical process (such as the interaction of nuclear particles with materials) and is particularly useful for complex problems that cannot be modeled by computer codes that use deterministic methods. The individual probabilistic events that comprise a process are simulated sequentially. The probability distributions governing these events are statistically sampled to describe the total phenomenon. In general, the simulation is performed on a digital computer because the number of trials necessary to adequately describe the phenomenon is usually quite large. The statistical sampling process is based on the selection of random numbers—analogue to throwing dice in a gambling casino—hence the name “Monte Carlo.” In particle transport, the Monte Carlo technique is pre-eminently realistic (a theoretical experiment). It consists of actually following each of many particles from a source throughout its life to its death in some terminal category (absorption, escape, etc.). Probability distributions are randomly sampled using transport data to determine the outcome at each step of its life.

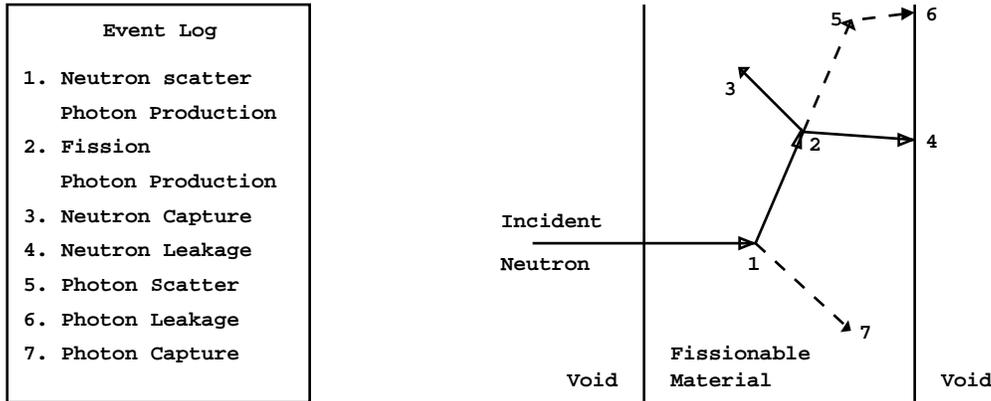


Figure 1.1

Figure 1.1 represents the random history of a neutron incident on a slab of material that can undergo fission. Numbers between 0 and 1 are selected randomly to determine what (if any) and where interaction takes place, based on the rules (physics) and probabilities (transport data) governing the processes and materials involved. In this particular example, a neutron collision occurs at event 1. The neutron is scattered in the direction shown, which is selected randomly from the physical scattering distribution. A photon is also produced and is temporarily stored, or banked, for later analysis. At event 2, fission occurs, resulting in the termination of the incoming neutron and the birth of two outgoing neutrons and one photon. One neutron and

CHAPTER 1

Features

the photon are banked for later analysis. The first fission neutron is captured at event 3 and terminated. The banked neutron is now retrieved and, by random sampling, leaks out of the slab at event 4. The fission-produced photon has a collision at event 5 and leaks out at event 6. The remaining photon generated at event 1 is now followed with a capture at event 7. Note that MCNP retrieves banked particles such that the last particle stored in the bank is the first particle taken out.

This neutron history is now complete. As more and more such histories are followed, the neutron and photon distributions become better known. The quantities of interest (whatever the user requests) are tallied, along with estimates of the statistical precision (uncertainty) of the results.

II. INTRODUCTION TO MCNP FEATURES

Various features, concepts, and capabilities of MCNP are summarized in this section. More detail concerning each topic is available in later chapters or appendices.

A. Nuclear Data and Reactions

MCNP uses continuous-energy nuclear and atomic data libraries. The primary sources of nuclear data are evaluations from the Evaluated Nuclear Data File (ENDF)¹ system, the Evaluated Nuclear Data Library (ENDL)² and the Activation Library (ACTL)³ compilations from Livermore, and evaluations from the Applied Nuclear Science (T-2) Group⁴⁻⁶ at Los Alamos. Evaluated data are processed into a format appropriate for MCNP by codes such as NJOY⁷. The processed nuclear data libraries retain as much detail from the original evaluations as is feasible to faithfully reproduce the evaluator's intent.

Nuclear data tables exist for neutron interactions, neutron-induced photons, photon interactions, neutron dosimetry or activation, and thermal particle scattering $S(\alpha, \beta)$. Photon and electron data are atomic rather than nuclear in nature. Each data table available to MCNP is listed on a directory file, XSDIR. Users may select specific data tables through unique identifiers for each table, called ZAIDs. These identifiers generally contain the atomic number Z , mass number A , and library specifier ID.

Over 500 neutron interaction tables are available for approximately 100 different isotopes and elements. Multiple tables for a single isotope are provided primarily because data have been derived from different evaluations, but also because of different temperature regimes and different processing tolerances. More neutron interaction tables are constantly being added as new and revised evaluations become available. Neutron-induced photon production data are given as part of the neutron interaction tables when such data are included in the evaluations.

Photon interaction tables exist for all elements from $Z=1$ through $Z=94$. The data in the photon interaction tables allow MCNP to account for coherent and incoherent scattering, photoelectric absorption with the possibility of fluorescent emission, and pair production. Scattering angular distributions are modified by atomic form factors and incoherent scattering functions.

Cross sections for nearly 2000 dosimetry or activation reactions involving over 400 target nuclei in ground and excited states are part of the MCNP data package. These cross sections can be used as energy-dependent response functions in MCNP to determine reaction rates but can not be used as transport cross sections.

Thermal data tables are appropriate for use with the $S(\alpha, \beta)$ scattering treatment in MCNP. The data include chemical (molecular) binding and crystalline effects that become important as the neutron's energy becomes sufficiently low. Data at various temperatures are available for light and heavy water, beryllium metal, beryllium oxide, benzene, graphite, polyethylene, and zirconium and hydrogen in zirconium hydride.

B. Source Specification

MCNP's generalized user-input source capability allows the user to specify a wide variety of source conditions without having to make a code modification. Independent probability distributions may be specified for the source variables of energy, time, position and direction, and for other parameters such as starting cell(s) or surface(s). Information about the geometrical extent of the source can also be given. In addition, source variables may depend on other source variables (for example, energy as a function of angle) thus extending the built-in source capabilities of the code. The user can bias all input distributions.

In addition to input probability distributions for source variables, certain built-in functions are available. These include various analytic functions for fission and fusion energy spectra such as Watt, Maxwellian and Gaussian spectra; Gaussian for time; and isotropic, cosine, and monodirectional for direction. Biasing may also be accomplished by special built-in functions.

A surface source allows particles crossing a surface in one problem to be used as the source for a subsequent problem. The decoupling of a calculation into several parts allows detailed design or analysis of certain geometrical regions without having to rerun the entire problem from the beginning each time. The surface source has a fission volume source option that starts particles from fission sites where they were written in a previous run.

MCNP provides the user three methods to define an initial criticality source to estimate k_{eff} , the ratio of neutrons produced in successive generations in fissile systems.

C. Tallies and Output

The user can instruct MCNP to make various tallies related to particle current, particle flux, and energy deposition. MCNP tallies are normalized to be per starting particle except for a few special cases with criticality sources. Currents can be tallied as a function of direction across any set of surfaces, surface segments, or sum of surfaces in the problem. Charge can be tallied for electrons and positrons. Fluxes across any set of surfaces, surface segments, sum of surfaces, and in cells, cell segments, or sum of cells are also available. Similarly, the fluxes at designated detectors (points or rings) are standard tallies. Heating and fission tallies give the energy deposition in specified

CHAPTER 1

Features

cells. A pulse height tally provides the energy distribution of pulses created in a detector by radiation. In addition, particles may be flagged when they cross specified surfaces or enter designated cells, and the contributions of these flagged particles to the tallies are listed separately. Tallies such as the number of fissions, the number of absorptions, the total helium production, or any product of the flux times the approximately 100 standard ENDF reactions plus several nonstandard ones may be calculated with any of the MCNP tallies. In fact, any quantity of the form

$$C \int \phi(\mathbf{E}) \mathbf{f}(\mathbf{E}) \, d\mathbf{E}$$

may be tallied, where $\phi(\mathbf{E})$ is the energy-dependent fluence, and $\mathbf{f}(\mathbf{E})$ is any product or summation of the quantities in the cross-section libraries or a response function provided by the user. The tallies may also be reduced by line-of-sight attenuation. Tallies may be made for segments of cells and surfaces without having to build the desired segments into the actual problem geometry. All tallies are functions of time and energy as specified by the user and are normalized to be per starting particle.

In addition to the tally information, the output file contains tables of standard summary information to give the user a better idea of how the problem ran. This information can give insight into the physics of the problem and the adequacy of the Monte Carlo simulation. If errors occur during the running of a problem, detailed diagnostic prints for debugging are given. Printed with each tally is also its statistical relative error corresponding to one standard deviation. Following the tally is a detailed analysis to aid in determining confidence in the results. Ten pass/no pass checks are made for the user-selectable tally fluctuation chart (TFC) bin of each tally. The quality of the confidence interval still cannot be guaranteed because portions of the problem phase space possibly still have not been sampled. Tally fluctuation charts, described in the following section, are also automatically printed to show how a tally mean, error, variance of the variance, and slope of the largest history scores fluctuate as a function of the number of histories run.

Tally results can be displayed graphically, either while the code is running or in a separate postprocessing mode.

D. Estimation of Monte Carlo Errors

MCNP tallies are normalized to be per starting particle and are printed in the output accompanied by a second number R , which is the estimated relative error defined to be one estimated standard deviation of the mean $S_{\bar{x}}$ divided by the estimated mean \bar{x} . In MCNP, the quantities required for this error estimate—the tally and its second moment—are computed after each complete Monte Carlo history, which accounts for the fact that the various contributions to a tally from the same history are correlated. For a well-behaved tally, R will be proportional to $1/\sqrt{N}$ where N is the number of histories. Thus, to halve R , we must increase the total number of histories fourfold. For a poorly behaved tally, R may increase as the number of histories increases.

The estimated relative error can be used to form confidence intervals about the estimated mean, allowing one to make a statement about what the true result is. The Central Limit Theorem states that as N approaches infinity there is a 68% chance that the true result will be in the range $\bar{x}(1 \pm R)$ and a 95% chance in the range $\bar{x}(1 \pm 2R)$. *It is extremely important to note that these confidence statements refer only to the precision of the Monte Carlo calculation itself and not to the accuracy of the result compared to the true physical value.* A statement regarding accuracy requires a detailed analysis of the uncertainties in the physical data, modeling, sampling techniques and approximations, etc., used in a calculation.

The guidelines for interpreting the quality of the confidence interval for various values of R are listed in Table 1.1.

Table 1.1
Guidelines for Interpreting the Relative Error R^*

<u>Range of R</u>	<u>Quality of the Tally</u>
0.5 to 1.0	Not meaningful
0.2 to 0.5	Factor of a few
0.1 to 0.2	Questionable
< 0.10	Generally reliable
< 0.05	Generally reliable for point detectors

* $R = S_{\bar{x}}/\bar{x}$ and represents the estimated relative error at the 1σ level. These interpretations of R assume that all portions of the problem phase space are being sampled well by the Monte Carlo process.

For all tallies except next–event estimators, hereafter referred to as point detector tallies, the quantity R should be less than 0.10 to produce generally reliable confidence intervals. Point detector results tend to have larger third and fourth moments of the individual tally distributions, so a smaller value of R , < 0.05 , is required to produce generally reliable confidence intervals. The estimated uncertainty in the Monte Carlo result must be presented with the tally so that all are aware of the estimated precision of the results.

Keep in mind the footnote to Table 1.1. For example, if an important but highly unlikely particle path in phase space has not been sampled in a problem, the Monte Carlo results will not have the correct expected values and the confidence interval statements may not be correct. The user can guard against this situation by setting up the problem so as not to exclude any regions of phase space and by trying to sample all regions of the problem adequately.

Despite one’s best effort, an important path may not be sampled often enough, causing confidence interval statements to be incorrect. To try to inform the user about this behavior, MCNP calculates a figure of merit (FOM) for one tally bin of each tally as a function of the number of histories and prints the results in the tally fluctuation charts at the end of the output. The FOM is defined as

$$FOM \equiv 1/(R^2T),$$

CHAPTER 1

Features

where T is the computer time in minutes. The more efficient a Monte Carlo calculation is, the larger the FOM will be because less computer time is required to reach a given value of R .

The FOM should be approximately constant as N increases because R^2 is proportional to $1/N$ and T is proportional to N . *Always examine the tally fluctuation charts to be sure that the tally appears well behaved, as evidenced by a fairly constant FOM .* A sharp decrease in the FOM indicates that a seldom-sampled particle path has significantly affected the tally result and relative error estimate. In this case, the confidence intervals may not be correct the fraction of the time that statistical theory would indicate. Examine the problem to determine what path is causing the large scores and try to redefine the problem to sample that path much more frequently.

After each tally, an analysis is done and additional useful information is printed about the TFC tally bin result. The nonzero scoring efficiency, the zero and nonzero score components of the relative error, number and magnitude of negative history scores, if any, and the effect on the result if the largest observed history score in the TFC were to occur again on the very next history are given. A table just before the TFCs summarizes the results of these checks for all tallies in the problem. Ten statistical checks are made and summarized in table 160 after each tally, with a pass yes/no criterion. The empirical history score probability density function (PDF) for the TFC bin of each tally is calculated and displayed in printed plots.

The TFCs at the end of the problem include the variance of the variance (an estimate of the error of the relative error), and the slope (the estimated exponent of the PDF large score behavior) as a function of the number of particles started.

All this information provides the user with statistical information to aid in forming valid confidence intervals for Monte Carlo results. There is no GUARANTEE, however. The possibility always exists that some as yet unsampled portion of the problem may change the confidence interval if more histories were calculated. Chapter 2 contains more information about estimation of Monte Carlo precision.

E. Variance Reduction

As noted in the previous section, R (the estimated relative error) is proportional to $1/\sqrt{N}$, where N is the number of histories. For a given MCNP run, the computer time T consumed is proportional to N . Thus $R = C/\sqrt{T}$, where C is a positive constant. There are two ways to reduce R : (1) increase T and/or (2) decrease C . Computer budgets often limit the utility of the first approach. For example, if it has taken 2 hours to obtain $R = 0.10$, then 200 hours will be required to obtain $R = 0.01$. For this reason MCNP has special variance reduction techniques for decreasing C . (Variance is the square of the standard deviation.) The constant C depends on the tally choice and/or the sampling choices.

1. Tally Choice

As an example of the tally choice, note that the fluence in a cell can

be estimated either by a collision estimate or a track length estimate. The collision estimate is obtained by tallying $1/\Sigma_t$ (Σ_t =macroscopic total cross section) at each collision in the cell and the track length estimate is obtained by tallying the distance the particle moves while inside the cell. Note that as Σ_t gets very small, very few particles collide but give enormous tallies when they do, a high variance situation (see page 2–97). In contrast, the track length estimate gets a tally from every particle that enters the cell. For this reason MCNP has track length tallies as standard tallies, whereas the collision tally is not standard in MCNP, except for estimating k_{eff} .

2. Nonanalog Monte Carlo

Explaining how sampling affects C requires understanding of the nonanalog Monte Carlo model.

The simplest Monte Carlo model for particle transport problems is the analog model that uses the natural probabilities that various events occur (for example, collision, fission, capture, etc.). Particles are followed from event to event by a computer, and the next event is always sampled (using the random number generator) from a number of possible next events according to the natural event probabilities. This is called the analog Monte Carlo model because it is directly analogous to the naturally occurring transport.

The analog Monte Carlo model works well when a significant fraction of the particles contribute to the tally estimate and can be compared to detecting a significant fraction of the particles in the physical situation. There are many cases for which the fraction of particles detected is very small, less than 10^{-6} . For these problems analog Monte Carlo fails because few, if any, of the particles tally, and the statistical uncertainty in the answer is unacceptable.

Although the analog Monte Carlo model is the simplest conceptual probability model, there are other probability models for particle transport. They estimate the same average value as the analog Monte Carlo model, while often making the variance (uncertainty) of the estimate much smaller than the variance for the analog estimate. Practically, this means that problems that would be impossible to solve in days of computer time can be solved in minutes of computer time.

A nonanalog Monte Carlo model attempts to follow “interesting” particles more often than “uninteresting” ones. An “interesting” particle is one that contributes a large amount to the quantity (or quantities) that needs to be estimated. There are many nonanalog techniques, and they all are meant to increase the odds that a particle scores (contributes). To ensure that the average score is the same in the nonanalog model as in the analog model, the score is modified to remove the effect of biasing (changing) the natural odds. Thus, if a particle is artificially made q times as likely to execute a given random walk, then the particle’s score is weighted by (multiplied by) $1/q$. The average score is thus preserved because the average score is the sum, over all random walks, of the probability of a random walk multiplied by the score resulting from that random walk.

A nonanalog Monte Carlo technique will have the same expected tallies as an analog technique if the expected weight executing any given random walk

CHAPTER 1

Features

is preserved. For example, a particle can be split into two identical pieces and the tallies of each piece are weighted by $1/2$ of what the tallies would have been without the split. Such nonanalog, or variance reduction, techniques can often decrease the relative error by sampling naturally rare events with an unnaturally high frequency and weighting the tallies appropriately.

3. Variance Reduction Tools in MCNP

There are four classes of variance reduction techniques⁸ that range from the trivial to the esoteric.

Truncation Methods are the simplest of variance reduction methods. They speed up calculations by truncating parts of phase space that do not contribute significantly to the solution. The simplest example is geometry truncation in which unimportant parts of the geometry are simply not modeled. Specific truncation methods available in MCNP are energy cutoff and time cutoff.

Population Control Methods use particle splitting and Russian roulette to control the number of samples taken in various regions of phase space. In important regions many samples of low weight are tracked, while in unimportant regions few samples of high weight are tracked. A weight adjustment is made to ensure that the problem solution remains unbiased. Specific population control methods available in MCNP are geometry splitting and Russian roulette, energy splitting/roulette, weight cutoff, and weight windows.

Modified Sampling Methods alter the statistical sampling of a problem to increase the number of tallies per particle. For any Monte Carlo event it is possible to sample from any arbitrary distribution rather than the physical probability as long as the particle weights are then adjusted to compensate. Thus with modified sampling methods, sampling is done from distributions that send particles in desired directions or into other desired regions of phase space such as time or energy, or change the location or type of collisions. Modified sampling methods in MCNP include the exponential transform, implicit capture, forced collisions, source biasing, and neutron-induced photon production biasing.

Partially-Deterministic Methods are the most complicated class of variance reduction methods. They circumvent the normal random walk process by using deterministic-like techniques, such as next event estimators, or by controlling of the random number sequence. In MCNP these methods include point detectors, DXTRAN, and correlated sampling.

Variance reduction techniques, used correctly, can greatly help the user to produce a more efficient calculation. Used poorly, they can result in a wrong answer with good statistics and few clues that anything is amiss. Some variance reduction methods have general application and are not easily misused. Others are more specialized and attempts to use them carry high risk. The use of weight windows tends to be more powerful than the use of importances but typically requires more input data and more insight into the problem. The exponential transform for thick shields is not recommended for the inexperienced user; rather, use many cells with increasing importances (or decreasing weight windows) through the shield. Forced collisions are used

to increase the frequency of random walk collisions within optically thin cells but should be used only by an experienced user. The point detector estimator should be used with caution, as should DXTRAN.

For many problems, variance reduction is not just a way to speed up the problem but is absolutely necessary to get any answer at all. Deep penetration problems and pipe detector problems, for example, will run too slowly by factors of trillions without adequate variance reduction. Consequently, users have to become skilled in using the variance reduction techniques in MCNP. Most of the following techniques can not be used with the pulse height tally.

The following summarizes briefly the main MCNP variance reduction techniques. Detailed discussion is in Chapter 2, page 2–114.

- a. Energy cutoff:* Particles whose energy is out of the range of interest are terminated so that computation time is not spent following them.
- b. Time cutoff:* Like the energy cutoff but based on time.
- c. Geometry splitting with Russian roulette:* Particles transported from a region of higher importance to a region of lower importance (where they will probably contribute little to the desired problem result) undergo Russian roulette; that is, some of those particles will be killed a certain fraction of the time, but survivors will be counted more by increasing their weight the remaining fraction of the time. In this way, unimportant particles are followed less often, yet the problem solution remains undistorted. On the other hand, if a particle is transported to a region of higher importance (where it will likely contribute to the desired problem result), it may be split into two or more particles (or tracks), each with less weight and therefore counting less. In this way, important particles are followed more often, yet the solution is undistorted because on average total weight is conserved.
- d. Energy splitting/Russian roulette:* Particles can be split or rouletted upon entering various user-supplied energy ranges. Thus important energy ranges can be sampled more frequently by splitting the weight among several particles and less important energy ranges can be sampled less frequently by rouletting particles.
- e. Weight cutoff/Russian roulette:* If a particle weight becomes so low that the particle becomes insignificant, it undergoes Russian roulette. Most particles are killed, and some particles survive with increased weight. The solution is unbiased because total weight is conserved, but computer time is not wasted on insignificant particles.
- f. Weight window:* As a function of energy, geometrical location, or both, low-weighted particles are eliminated by Russian roulette and high-weighted particles are split. This technique helps keep the weight dispersion within reasonable bounds throughout the problem. An importance generator is available that estimates the optimal limits for a weight window.
- g. Exponential transformation:* To transport particles long distances, the distance between collisions in a preferred direction is artificially increased and the weight is correspondingly artificially decreased. Because large

CHAPTER 1

Features

weight fluctuations often result, it is highly recommended that the weight window be used with the exponential transform.

- h. Implicit capture:* When a particle collides, there is a probability that it is captured by the nucleus. In analog capture, the particle is killed with that probability. In implicit capture, also known as survival biasing, the particle is never killed by capture; instead, its weight is reduced by the capture probability at each collision. Important particles are permitted to survive by not being lost to capture. On the other hand, if particles are no longer considered useful after undergoing a few collisions, analog capture efficiently gets rid of them.
- i. Forced collisions:* A particle can be forced to undergo a collision each time it enters a designated cell that is almost transparent to it. The particle and its weight are appropriately split into a collided and uncollided part. Forced collisions are often used to generate contributions to point detectors, ring detectors, or DXTRAN spheres.
- j. Source variable biasing:* Source particles with phase space variables of more importance are emitted with a higher frequency but with a compensating lower weight than are less important source particles. This technique can be used with pulse height tallies.
- k. Point and ring detectors:* When the user wishes to tally a flux-related quantity at a point in space, the probability of transporting a particle precisely to that point is vanishingly small. Therefore, pseudoparticles are directed to the point instead. Every time a particle history is born in the source or undergoes a collision, the user may require that a pseudoparticle be tallied at a specified point in space. In this way, many pseudoparticles of low weight reach the detector, which is the point of interest, even though no particle histories could ever reach the detector. For problems with rotational symmetry, the point may be represented by a ring to enhance the efficiency of the calculation.
- l. DXTRAN:* DXTRAN, which stands for deterministic transport, improves sampling in the vicinity of detectors or other tallies. It involves deterministically transporting particles on collision to some arbitrary, user-defined sphere in the neighborhood of a tally and then calculating contributions to the tally from these particles. Contributions to the detectors or to the DXTRAN spheres can be controlled as a function of geometric cell or as a function of the relative magnitude of the contribution to the detector or DXTRAN sphere.

The DXTRAN method is a way of obtaining large numbers of particles on user-specified “DXTRAN spheres.” DXTRAN makes it possible to obtain many particles in a small region of interest that would otherwise be difficult to sample. Upon sampling a collision or source density function, DXTRAN estimates the correct weight fraction that should scatter toward, and arrive without collision at, the surface of the sphere. The DXTRAN method then puts this correct weight on the sphere. The source or collision event is sampled in the usual manner, except that the particle is killed if it tries to enter the sphere because all particles

entering the sphere have already been accounted for deterministically.

- m. Correlated sampling:* The sequence of random numbers in the Monte Carlo process is chosen so that statistical fluctuations in the problem solution will not mask small variations in that solution resulting from slight changes in the problem specification. The i^{th} history will always start at the same point in the random number sequence no matter what the previous $i - 1$ particles did in their random walks.

III. MCNP GEOMETRY

We will present here only basic information about geometry setup, surface specification, and cell and surface card input. Areas of further interest would be the complement operator, use of parentheses, and repeated structure and lattice definitions, found in Chapter 2. Chapter 4 contains geometry examples and is recommended as a next step. Chapter 3 has detailed information about the format and entries on cell and surface cards.

The geometry of MCNP treats an arbitrary three-dimensional configuration of user-defined materials in geometric cells bounded by first- and second-degree surfaces and fourth-degree elliptical tori. The cells are defined by the intersections, unions, and complements of the regions bounded by the surfaces. Surfaces are defined by supplying coefficients to the analytic surface equations or, for certain types of surfaces, known points on the surfaces.

MCNP has a more general geometry than is available in most combinatorial geometry codes. Rather than combining several predefined geometrical bodies as in a combinatorial geometry scheme, MCNP gives the user the added flexibility of defining geometrical regions from all the first and second degree surfaces of analytical geometry and elliptical tori and then of combining them with Boolean operators. The code does extensive internal checking to find input errors. In addition, the geometry-plotting capability in MCNP helps the user check for geometry errors.

MCNP treats geometric cells in a Cartesian coordinate system. The surface equations recognized by MCNP are listed in Table 3.1 on page 3–14. The particular Cartesian coordinate system used is arbitrary and user defined, but the right-handed system shown in Figure 1.2 is often chosen.

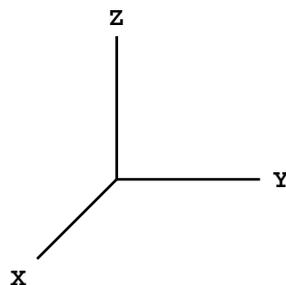


Figure 1.2

Using the bounding surfaces specified on cell cards, MCNP tracks particles through the geometry, calculates the intersection of a track's trajectory

CHAPTER 1

Geometry

with each bounding surface, and finds the minimum positive distance to an intersection. If the distance to the next collision is greater than this minimum distance and there are no DXTRAN spheres along the track, the particle leaves the current cell. At the appropriate surface intersection, MCNP finds the correct cell that the particle will enter by checking the sense of the intersection point for each surface listed for the cell. When a complete match is found, MCNP has found the correct cell on the other side and the transport continues.

A. Cells

When cells are defined, an important concept is that of the *sense* of all points in a cell with respect to a bounding surface. Suppose that $s = f(x, y, z) = 0$ is the equation of a surface in the problem. For any set of points (x, y, z) , if $s = 0$ the points are on the surface. However, for points not on the surface, if s is negative the points are said to have a negative sense with respect to that surface and, conversely, a positive sense if s is positive. For example, a point at $x = 3$ has a positive sense with respect to the plane $x - 2 = 0$. That is, the equation $x - D = 3 - 2 = s = 1$ is positive for $x = 3$ (where $D = \text{constant}$).

Cells are defined on cells cards. Each cell is described by a cell number, material number, and material density followed by a list of operators and signed surfaces that bound the cell. If the sense is positive, the sign can be omitted. The material number and material density can be replaced by a single zero to indicate a void cell. The cell number must begin in columns 1–5. The remaining entries follow, separated by blanks. A more complete description of the cell card format can be found on page 1–22. Each surface divides all space into two regions, one with positive sense with respect to the surface and the other with negative sense. The geometry description defines the cell to be the intersection, union, and/or complement of the listed regions.

The subdivision of the physical space into cells is not necessarily governed only by the different material regions, but may be affected by problems of sampling and variance reduction techniques (such as splitting and Russian roulette), the need to specify an unambiguous geometry, and the tally requirements. The tally segmentation feature may eliminate most of the tally requirements.

Be cautious about making any one cell very complicated. With the union operator and disjointed regions, a very large geometry can be set up with just one cell. The problem is that for each track flight between collisions in a cell, the intersection of the track with each bounding surface of the cell is calculated, a calculation that can be costly if a cell has many surfaces. As an example, consider Figure 1.3a. It is just a lot of parallel cylinders and is easy to set up. However, the cell containing all the little cylinders is bounded by fourteen surfaces (counting a top and bottom). A much more efficient geometry is seen in Figure 1.3b, where the large cell has been broken up into a number of smaller cells.

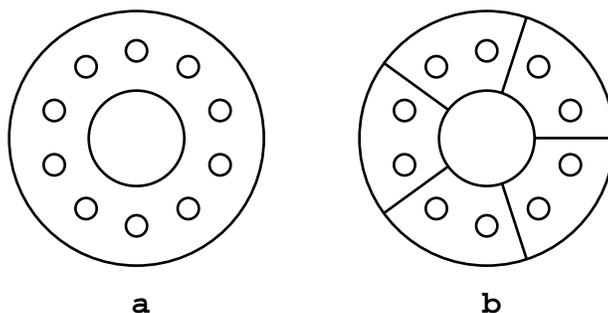


Figure 1.3

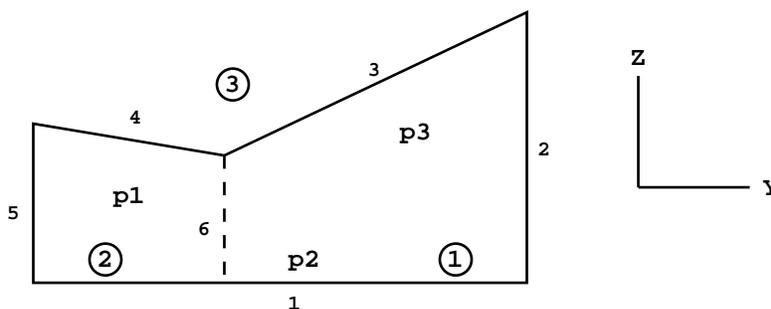


Figure 1.4

1. Cells Defined by Intersections of Regions of Space

The intersection operator in MCNP is implicit; it is simply the blank space between two surface numbers on the cell card.

If a cell is specified using only intersections, all points in the cell must have the same sense with respect to a given bounding surface. This means that, for each bounding surface of a cell, all points in the cell must remain on only one side of any particular surface. Thus, there can be no concave corners in a cell specified only by intersections. Figure 1.4, a cell formed by the intersection of five surfaces (ignore surface 6 for the time being), illustrates the problem of concave corners by allowing a particle (or point) to be on two sides of a surface in one cell.

Surfaces 3 and 4 form a concave corner in the cell such that points p_1 and p_2 are on the same side of surface 4 (that is, have the same sense with respect to 4) but point p_3 is on the other side of surface 4 (opposite sense). Points p_2 and p_3 have the same sense with respect to surface 3, but p_1 has the opposite sense. One way to remedy this dilemma (and there are others) is to add surface 6 between the 3/4 corner and surface 1 to divide the original cell into two cells.

With surface 6 added to Figure 1.4, the cell to the right of surface 6 is number 1 (cells indicated by circled numbers); to the left number 2; and the outside cell number 3. The cell cards (in two dimensions, all cells void) are

1	0	1	-2	-3	6
2	0	1	-6	-4	5

Cell 1 is a void and is formed by the intersection of the region above (positive sense) surface 1 with the region to the left (negative sense) of surface 2

CHAPTER 1 Geometry

intersected with the region below (negative sense) surface 3 and finally intersected with the region to the right (positive sense) of surface 6. Cell 2 is described similarly.

Cell 3 cannot be specified with the intersection operator. The following section about the union operator is needed to describe cell 3.

2. Cells Defined by Unions of Regions of Space

The union operator, signified by a colon on the cell cards, allows concave corners in cells and also cells that are completely disjoint. The intersection and union operators are binary Boolean operators, so their use follows Boolean algebra methodology; unions and intersections can be used in combination in any cell description.

Spaces on either side of the union operator are irrelevant, but remember that a space without the colon signifies an intersection. In the hierarchy of operations, intersections are performed first and then unions. There is no left to right ordering. Parentheses can be used to clarify operations and in some cases are required to force a certain order of operations. Innermost parentheses are cleared first. Spaces are optional on either side of a parenthesis. A parenthesis is equivalent to a space and signifies an intersection.

For example, let A and B be two regions of space. The region containing points that belong to both A and B is called the intersection of A and B. The region containing points that belong to A alone or to B alone or to both A and B is called the union of A and B. The lined area in Figure 1.5a represents the union of A and B (or $A : B$), and the lined area in Figure 1.5b represents the intersection of A and B (or $A B$). The only way regions of space can be added is with the union operator. An intersection of two spaces always results in a region no larger than either of the two spaces. Conversely, the union of two spaces always results in a region no smaller than either of the two spaces.

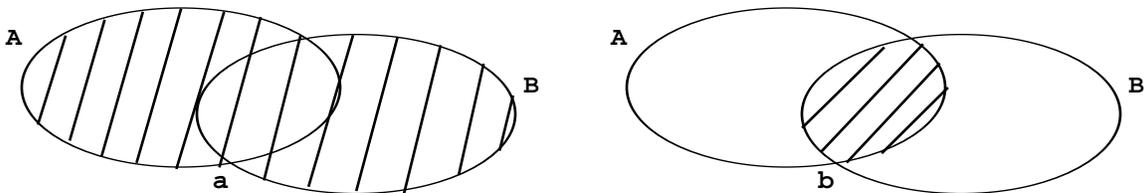


Figure 1.5

A simple example will further illustrate the concept of Figure 1.5 and the union operator to solidify the concept of adding and intersecting regions of space to define a cell. See also the second example in Chapter 4. In Figure 1.6 we have two infinite planes that meet to form two cells. Cell 1 is easy to define; it is everything in the universe to the right of surface 1 (that is, a positive sense) that is also in common with (or intersected with) everything in the universe below surface 2 (that is, a negative sense). Therefore, the surface relation of cell 1 is $1 - 2$.

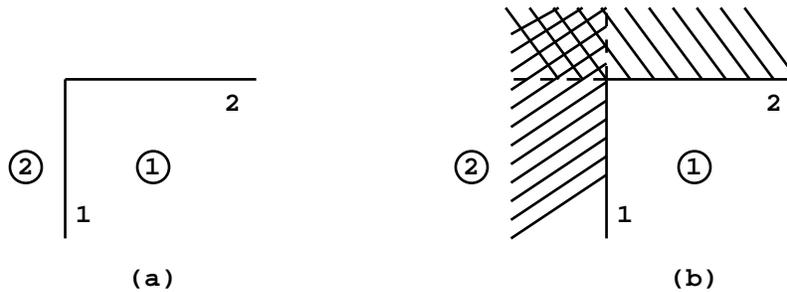


Figure 1.6

Cell 2 is everything in the universe to the left (negative sense) of surface 1 plus everything in the universe above (positive sense) surface 2, or $-1 : 2$, illustrated in Figure 1.6b by all the shaded regions of space. If cell 2 were specified as $-1 \ 2$, that would represent the region of space common to -1 and 2 , which is only the cross-hatched region in the figure and is obviously an improper specification for cell 2.

Returning to Figure 1.4 on page 1–15, if cell 1 is inside the solid black line and cell 2 is the entire region outside the solid line, then the MCNP cell cards in two dimensions are (assuming both cells are voids)

$$\begin{array}{r} 1 \quad 0 \quad 1 \quad -2 \quad (-3 \quad : \quad -4) \quad 5 \\ 2 \quad 0 \quad -5 \quad : \quad -1 \quad : \quad 2 \quad : \quad 3 \quad 4 \end{array}$$

Cell 1 is defined as the region above surface 1 intersected with the region to the left of surface 2, intersected with the union of regions below surfaces 3 and 4, and finally intersected with the region to the right of surface 5. Cell 2 contains four concave corners (all but between surfaces 3 and 4), and its specification is just the converse (or complement) of cell 1. Cell 2 is the space defined by the region to the left of surface 5 plus the region below 1 plus the region to the right of 2 plus the space defined by the intersections of the regions above surfaces 3 and 4.

A simple consistency check can be noted with the two cell cards above. All intersections for cell 1 become unions for cell 2 and vice versa. The senses are also reversed.

Note that in this example, all corners less than 180 degrees in a cell are handled by intersections and all corners greater than 180 degrees are handled by unions.

To illustrate some of the concepts about parentheses, assume an intersection is thought of mathematically as multiplication and a union is thought of mathematically as addition. Parentheses are removed first, with multiplication being performed before addition. The cell cards for the example cards above from Figure 1.4 may be written in the form

$$\begin{array}{r} 1 \quad a \cdot b \cdot (c + d) \cdot e \\ 2 \quad e + a + b + c \cdot d \end{array}$$

Note that parentheses are required for the first cell but not for the second, although the second could have been written as $e + a + b + (c \cdot d)$, $(e + a + b) + (c \cdot d)$, $(e) + (a) + (b) + (c \cdot d)$, etc.

CHAPTER 1 Geometry

Several more examples using the union operator are given in Chapter 4. Study them to get a better understanding of this powerful operator that can greatly simplify geometry setups.

B. Surface Type Specification

The first- and second-degree surfaces plus the fourth-degree elliptical and degenerate tori of analytical geometry are all available in MCNP. The surfaces are designated by mnemonics such as C/Z for a cylinder parallel to the z-axis. A cylinder at an arbitrary orientation is designated by the general quadratic GQ mnemonic. A paraboloid parallel to a coordinate axis is designated by the special quadratic SQ mnemonic. The 29 mnemonics representing various types of surfaces are listed in Table 3.1 on page 3–14.

C. Surface Parameter Specification

There are two ways to specify surface parameters in MCNP: (1) by supplying the appropriate coefficients needed to satisfy the surface equation, and (2) by specifying known geometrical points on a surface that is rotationally symmetric about a coordinate axis.

1. Coefficients for the Surface Equations

The first way to define a surface is to use one of the surface-type mnemonics from Table 3.1 on page 3–14 and to calculate the appropriate coefficients needed to satisfy the surface equation. For example, a sphere of radius 3.62-cm with the center located at the point (4,1,-3) is specified by

```
S      4  1  -3  3.62
```

An ellipsoid whose axes are not parallel to the coordinate axes is defined by the GQ mnemonic plus up to 10 coefficients of the general quadratic equation. Calculating the coefficients can be (and frequently is) nontrivial, but the task is greatly simplified by defining an auxiliary coordinate system whose axes coincide with the axes of the ellipsoid. The ellipsoid is easily defined in terms of the auxiliary coordinate system, and the relationship between the auxiliary coordinate system and the main coordinate system is specified on a TRn card, described on page 3–26.

The use of the SQ (special quadratic) and GQ (general quadratic) surfaces is determined by the orientation of the axes. One should always use the simplest possible surface in describing geometries; for example, using a GQ surface instead of an S to specify a sphere will require more computational effort for MCNP.

2. Points that Define a Surface

The second way to define a surface is to supply known points on the surface. This method is convenient if you are setting up a geometry from something like a blueprint where you know the coordinates of intersections of surfaces or points on the surfaces. When three or more surfaces intersect at a point, this second method also produces a more nearly perfect point of intersection if the common point is used in the surface specification. It is frequently difficult to get complicated surfaces to meet at one point if the

surfaces are specified by the equation coefficients. Failure to achieve such a meeting can result in the unwanted loss of particles.

There are, however, restrictions that must be observed when specifying surfaces by points that do not exist when specifying surfaces by coefficients. Surfaces described by points must be either skew planes or surfaces rotationally symmetric about the x, y, or z axes. They must be unique, real, and continuous. For example, points specified on both sheets of a hyperboloid are not allowed because the surface is not continuous. However, it is valid to specify points that are all on one sheet of the hyperboloid. (See the X,Y,Z, and P input cards description on page 3–16 for additional explanation.)

IV. MCNP INPUT FOR SAMPLE PROBLEM

The main input file for the user is the INP (the default name) file that contains the input information to describe the problem. We will present here only the subset of cards required to run the simple fixed source demonstration problem. All input cards are discussed in Chapter 3 and summarized in Table 3.6 starting on page 3–132.

MCNP does extensive input checking but is not foolproof. A geometry should be checked by looking at several different views with the geometry plotting option. You should also surround the entire geometry with a sphere and flood the geometry with particles from a source with an inward cosine distribution on the spherical surface, using a VOID card to remove all materials specified in the problem. If there are any incorrectly specified places in your geometry, this procedure will usually find them. Make sure the importance of the cell just inside the source sphere is not zero. Then run a short job and study the output to see if you are calculating what you think you are calculating.

The basic constants used in MCNP are printed in optional print table 98 in the output file. The units used are:

1. lengths in centimeters,
2. energies in MeV,
3. times in shakes (10^{-8} sec),
4. temperatures in MeV (kT),
5. atomic densities in units of atoms/barn-cm,
6. mass densities in g/cm^3 ,
7. cross sections in barns (10^{-24} cm^2),
8. heating numbers in MeV/collision, and
9. atomic weight ratio based on a neutron mass of 1.008664967. In these units, Avogadro's number is $0.59703109 \times 10^{-24}$.

A simple sample problem illustrated in Figure 1.7 is referred to throughout the remainder of this chapter. We wish to start 14-MeV neutrons at a point isotropic source in the center of a small sphere of oxygen that is embedded in a cube of carbon. A small sphere of iron is also embedded in the carbon. The carbon is a cube 10 cm on each side; the spheres have a 0.5-cm radius and are centered between the front and back faces of the cube.

CHAPTER 1

Input File

We wish to calculate the total and energy-dependent flux in increments of 1 MeV from 14 to 1 MeV

1. on the surface of the iron sphere and
2. averaged in the iron sphere volume.

Bin 1 will be the tally from 0 to 1 MeV.

This geometry has four cells, indicated by circled numbers, and eight surfaces—six planes and two spheres. Surface numbers are written next to the appropriate surfaces. Surface 5 comes out from the page in the $+x$ direction and surface 6 goes back into the page in the $-x$ direction.

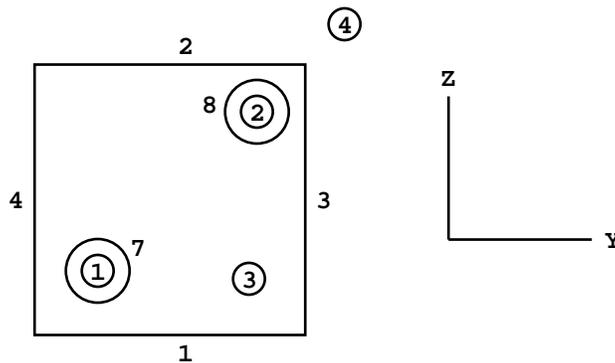


Figure 1.7

With knowledge of the cell card format, the sense of a surface, and the union and intersection operators, we can set up the cell cards for the geometry of our example problem. To simplify this step, assume the cells are void, for now. Cells 1 and 2 are described by the following cards:

$$\begin{array}{l} 1 \quad 0 \quad -7 \\ 2 \quad 0 \quad -8 \end{array}$$

where the negative signs denote the regions inside (negative sense) surfaces 7 and 8. Cell 3 is everything in the universe above surface 1 intersected with everything below surface 2 intersected with everything to the left of surface 3 and so forth for the remaining three surfaces. The region in common to all six surfaces is the cube, but we need to exclude the two spheres by intersecting everything outside surface 7 and outside surface 8. The card for cell 3 is

$$3 \quad 0 \quad 1 \quad -2 \quad -3 \quad 4 \quad -5 \quad 6 \quad 7 \quad 8$$

Cell 4 requires the use of the union operator and is similar to the idea illustrated in Figure 1.6. Cell 4 is the outside world, has zero importance, and is defined as everything in the universe below surface 1 plus everything above surface 2 plus everything to the right of surface 3 and so forth. The cell card for cell 4 is

$$4 \quad 0 \quad -1 : 2 : 3 : -4 : 5 : -6$$

A. INP File

An input file has the following form:

Message Block	}	Optional
Blank Line Delimiter		
One Line Problem Title Card		
Cell Cards		
.		
.		
Blank Line Delimiter		
Surface Cards		
.		
.		
Blank Line Delimiter		
Data Cards		
.		
.		
Blank Line Terminator (optional)		

All input lines are limited to 80 columns. Alphabetic characters can be upper, lower, or mixed case. A \$ (dollar sign) terminates data entry. Anything that follows the \$ is interpreted as a comment. Blank lines are used as delimiters and as an optional terminator. Data entries are separated by one or more blanks.

Comment cards can be used anywhere in the INP file after the problem title card and before the optional blank terminator card. Comment lines must have a C somewhere in columns 1–5 followed by at least one blank and can be a total of 80 columns long.

Cell, surface, and data cards must all begin within the first five columns. Entries are separated by one or more blanks. Numbers can be integer or floating point. MCNP makes the appropriate conversion. A data entry item, e.g., IMP:N or 1.1e2, must be completed on one line.

Blanks filling the first five columns indicate a continuation of the data from the last named card. An & (ampersand) ending a line indicates data will continue on the following card, where data on the continuation card can be in columns 1-80.

The optional message block, discussed in detail on page 3–1, is used to change file names and specify running options such as a continuation run. On most systems these options and files may alternatively be specified with an execution line message (see page 1–29). Message block entries supersede execution line entries. The blank line delimiter signals the end of the message block.

The first card in the file after the optional message block is the required problem title card. If there is no message block, this must be the first card in the INP file. It is limited to one 80-column line and is used as a title in various places in the MCNP output. It can contain any information you desire but usually contains information describing the particular problem.

CHAPTER 1

Input File

MCNP makes extensive checks of the input file for user errors. A FATAL error occurs if a basic constraint of the input specification is violated, and MCNP will terminate before running any particles. The first fatal error is real; subsequent error messages may or may not be real because of the nature of the first fatal message.

B. Cell Cards

The cell number is the first entry and must begin in the first five columns.

The next entry is the cell material number, which is arbitrarily assigned by the user. The material is described on a material card (Mn) that has the same material number (see page 1–27). If the cell is a void, a zero is entered for the material number. The cell and material numbers can not exceed 5 digits.

Next is the cell material density. A positive entry is interpreted as atom density in units of 10^{24} atoms/cm³. A negative entry is interpreted as mass density in units of g/cm³. No density is entered for a void cell.

A complete specification of the geometry of the cell follows. This specification includes a list of the signed surfaces bounding the cell where the sign denotes the sense of the regions defined by the surfaces. The regions are combined with the Boolean intersection and union operators. A space indicates an intersection and a colon indicates a union.

Optionally, after the geometry description, cell parameters can be entered. The form is keyword=value. The following line illustrates the cell card format:

```
1    1  -0.0014  -7  IMP:N=1
```

Cell 1 contains material 1 with density 0.0014 g/cm³, is bounded by only one surface (7), and has an importance of 1. If cell 1 were a void, the cell card would be

```
1    0                -7  IMP:N=1
```

The complete cell card input for this problem (with 2 comment cards) is

```
c  cell cards for sample problem
1    1 -0.0014  -7
2    2 -7.86    -8
3    3 -1.60    1 -2 -3 4 -5 6 7 8
4    0          -1:2:3:-4:5:-6
c  end of cell cards for sample problem
blank line delimiter
```

The blank line terminates the cell card section of the INP file. We strongly suggest that the cells be numbered sequentially starting with one. A complete explanation of the cell card input is found in Chapter 3, page 3–9.

C. Surface Cards

The surface number is the first entry. It must begin in columns 1–5 and not exceed 5 digits. The next entry is an alphabetic mnemonic indicating the surface type. Following the surface mnemonic are the numerical coefficients of the equation of the surface in the proper order. This simplified description

enables us to proceed with the example problem. For a full description of the surface card see page 3–12.

Our problem uses planes normal to the x, y, and z axes and two general spheres. The respective mnemonics are PX, PY, PZ, and S. Table 1.2 shows the equations that determine the sense of the surface for the cell cards and the entries required for the surface cards. A complete list of available surface equations is contained in Table 3.1 on page 3–14.

Table 1.2
Surface Equations

Mnemonic	Equation	Card Entries
PX	$x - D = 0$	D
PY	$y - D = 0$	D
PZ	$z - D = 0$	D
S	$(x - \bar{x})^2 + (y - \bar{y})^2 + (z - \bar{z})^2 - R^2 = 0$	$\bar{x} \bar{y} \bar{z} R$

For the planes, D is the point where the plane intersects the axis. If we place the origin in the center of the 10-cm cube shown in Figure 1.7, the planes will be at $x = -5$, $x = 5$, etc. The two spheres are not centered at the origin or on an axis, so we must give the x,y,z of their center as well as their radii. The complete surface card input for this problem is shown below. A blank line terminates the surface card portion of the input.

```

C   Beginning of surfaces for cube
1   PZ   -5
2   PZ   5
3   PY   5
4   PY  -5
5   PX   5
6   PX  -5
C   End of cube surfaces
7   S    0  -4  -2.5  .5  $ oxygen sphere
8   S    0   4   4    .5    $ iron sphere
blank line delimiter

```

D. Data Cards

The remaining data input for MCNP follow the second blank card delimiter, or third blank card if there is a message block. The card name is the first entry and must begin in the first five columns. The required entries follow, separated by one or more blanks.

Several of the data cards require a particle designator to distinguish between input data for neutrons, data for photons, and data for electrons. The particle designator consists of the symbol : (colon) and the letter N or P or E immediately following the name of the card. For example, to enter

CHAPTER 1

Input File

neutron importances, use an IMP:N card; enter photon importances on an IMP:P card; enter electron importances on an IMP:E card. No data card can be used more than once with the same mnemonic, that is, M1 and M2 are acceptable, but two M1 cards are not allowed. Defaults have been set for cards in some categories. A summary starting on page 3–132 shows which cards are required, which are optional, and whether defaults exist and if so, what they are. The sample problem will use cards in the following categories:

	<u>MCNP card name</u>
1. mode,	MODE
2. cell and surface parameters,	IMP:N
3. source specification,	SDEF
4. tally specification,	Fn, En
5. material specification, and	Mn
6. problem cutoffs.	NPS

A complete description of the data cards is found on page 3–18 in Chapter 3.

1. MODE card

MCNP can be run in several different modes:

- Mode N – neutron transport only (default)
- N P – neutron and neutron-induced photon transport
- P – photon transport only
- E – electron transport only
- P E – photon and electron transport
- N P E – neutron, neutron-induced photon and electron transport

The MODE card consists of the mnemonic MODE followed by either an N, N P, P, E, P E, or N P E. If the MODE card is omitted, mode N is assumed.

Mode N P does not account for photo-neutrons but only neutron-induced photons. Photon-production cross sections do not exist for all nuclides. If they are not available for a Mode N P problem, MCNP will print out warning messages. To find out whether a particular table for a nuclide has photon-production cross sections available, check the Appendix G cross-section list.

Mode P or mode N P problems generate bremsstrahlung photons with a computationally expensive thick-target bremsstrahlung approximation. This approximation can be turned off with the PHYS:E card.

The sample problem is a neutron-only problem, so the MODE card can be omitted because MODE N is the default.

2. Cell and surface parameter cards

Most of these cards define values of cell parameters. Entries correspond in order to the cell or surface cards that appear earlier in the INP file. A listing of all available cell and surface parameter cards is found on page 3–28. A few examples are neutron and photon importance cards (IMP:N,IMP:P), weight window cards (WWE:N, WWE:P, WWNi:N, WWNi:P), etc. Some method of specifying relative cell importances is required; the majority of the other cell parameter cards are for optional variance reduction techniques. The number of entries on a cell or surface parameter card must equal the

number of cells or surfaces in the problem or MCNP prints out a WARNING or FATAL error message. In the case of a WARNING, MCNP assumes zeros.

The IMP:N card is used to specify relative cell importances in the sample problem. There are four cells in the problem, so the IMP:N card will have four entries. The IMP:N card is used (a) for terminating the particle's history if the importance is zero and (b) for geometry splitting and Russian roulette to help particles move more easily to important regions of the geometry. An IMP:N card for the sample problem is

```
IMP:N 1 1 1 0
```

Cell parameters also can be defined on cell cards using the keyword=value format. If a cell parameter is specified on **any** cell card, it must be specified **only** on cell cards and **not at all** in the data card section.

3. Source specification cards

A source definition card SDEF is one of four available methods of defining starting particles. Chapter 3 has a complete discussion of source specification. The SDEF card defines the basic source parameters, some of which are

POS = x y z	default is 0 0 0;
CEL = starting cell number	
ERG = starting energy	default is 14 MeV;
WGT= starting weight	default is 1;
TME= time	default is 0;
PAR = source particle type	N for N, N P, N P E; P for P, P E; E for E.

MCNP will determine the starting cell number for a point isotropic source, so the CEL entry is not always required. The default starting direction for source particles is isotropic.

For the example problem, a fully specified source card is

```
SDEF POS=0 -4 -2.5 CEL=1 ERG=14 WGT=1 TME=0 PAR=N
```

Neutron particles will start at the center of the oxygen sphere (0 -4 -2.5), in cell 1, with an energy of 14 MeV, and with weight 1 at time 0. All these source parameters except the starting position are the default values, so the most concise source card is

```
SDEF POS=0 -4 -2.5
```

If all the default conditions were satisfactory for the problem, only the mnemonic SDEF would be required.

4. Tally specification cards

The tally cards are used to specify what you want to learn from the Monte Carlo calculation, perhaps current across a surface, flux at a point, etc. You request this information with one or more tally cards. Tally specification cards are not required, but if none is supplied, no tallies will be printed when the problem is run and a warning message is issued. Many of the tally specification cards describe tally "bins." A few examples are energy (En), time (Tn), and cosine (Cn) cards.

CHAPTER 1

Input File

MCNP provides six standard neutron, six standard photon, and four standard electron tallies, all normalized to be per starting particle. Some tallies in criticality calculations are normalized differently. Chapter 2, page 2–68, discusses tallies more completely and Chapter 3, page 3–62, lists all the tally cards and fully describes each one.

Tally Mnemonic	Description
F1:N or F1:P or F1:E	Surface current
F2:N or F2:P or F2:E	Surface flux
F4:N or F4:P or F4:E	Track length estimate of cell flux
F5a:N or F5a:P	Flux at a point (point detector)
F6:N or F6:N,P or F6:P	Track length estimate of energy deposition
F7:N	Track length estimate of fission energy deposition
F8:P or F8:E or F8:P,E	Energy distribution of pulses created in a detector

The tallies are identified by tally type and particle type. Tallies are given the numbers 1, 2, 4, 5, 6, 7, 8, or increments of 10 thereof, and are given the particle designator :N or :P or :E (or :N,P only in the case of tally type 6 or P,E only for tally type 8). Thus you may have as many of any basic tally as you need, each with different energy bins or flagging or anything else. F4:N, F14:N, F104:N, and F234:N are all legitimate neutron cell flux tallies; they could all be for the same cell(s) but with different energy or multiplier bins, for example. Similarly F5:P, F15:P, and F305:P are all photon point detector tallies. Having both an F1:N card and an F1:P card in the same INP file is not allowed. The tally number may not exceed three digits.

For our sample problem we will use Fn cards (Tally type) and En cards (Tally energy).

a. Tally (Fn) Cards: The sample problem has a surface flux tally and a track length cell flux tally. Thus, the tally cards for the sample problem shown in Figure 1.7 are

```
F2:N    8  $ flux across surface 8
F4:N    2  $ track length in cell 2
```

Printed out with each tally bin is the relative error of the tally corresponding to one estimated standard deviation. Read page 1–6 for an explanation of the relative error. Results are not reliable until they become stable as a function of the number of histories run. Much information is provided for one bin of each tally in the tally fluctuation charts at the end of the output file to help determine tally stability. The user is strongly encouraged to look at this information carefully.

b. Tally Energy (En) Card: We wish to calculate flux in increments of 1 MeV from 14 to 1 MeV. Another tally specification card in the sample input deck establishes these energy bins.

The entries on the En card are the upper bounds in MeV of the energy bins for tally n. The entries must be given in order of increasing magnitude.

If a particle has an energy greater than the last entry, it will not be tallied, and a warning is issued. MCNP automatically provides the total over all specified energy bins unless inhibited by putting the symbol NT as the last entry on the selected En card.

The following cards will create energy bins for the sample problem:

```
E2  1 2 3 4 5 6 7 8 9 10 11 12 13 14
E4  1 12I 14
```

If no En card exists for tally n, a single bin over all energy will be used. To change this default, an E0 (zero) card may be used to set up a default energy bin structure for all tallies. A specific En card will override the default structure for tally n. We could replace the E2 and E4 cards with one E0 card for the sample problem, thus setting up identical bins for both tallies.

5. Materials specification

The cards in this section specify both the isotopic composition of the materials and the cross-section evaluations to be used in the cells. For a comprehensive discussion of materials specification, see page 3–95.

a. Material (Mm) Card: The following card is used to specify a material for all cells containing material m, where m can not exceed 5 digits:

```
Mm      ZAIID1  fraction1  ZAIID2  fraction2  ...
```

The m on a material card corresponds to the material number on the cell card (see page 1–22). The consecutive pairs of entries on the material card consist of the identification number (ZAIID) of the constituent element or nuclide followed by the atomic fraction (or weight fraction if entered as a negative number) of that element or nuclide, until all the elements and nuclides needed to define the material have been listed.

i. Nuclide Identification Number (ZAIID). This number is used to identify the element or nuclide desired. The form of the number is ZZZAAA.nnX, where

- ZZZ is the atomic number of the element or nuclide,
- AAA is the mass number of the nuclide, ignored for photons and electrons,
- nn is the cross-section evaluation identifier; if blank or zero, a default cross-section evaluation will be used, and
- X is the class of data: C is continuous energy; D is discrete reaction; T is thermal; Y is dosimetry; P is photon; E is electron; and M is multigroup.

For naturally occurring elements, AAA=000. Thus ZAIID=74182 represents the isotope $^{182}_{74}\text{W}$, and ZAIID=74000 represents the element tungsten.

ii. Nuclide Fraction. The nuclide fractions may be normalized to 1 or left unnormalized. For example, if the material is H₂O the fractions can be entered as .667 and .333 or as 2 and 1 for H and O respectively. If the fractions are entered with negative signs, they are weight fractions; otherwise they are atomic fractions. Weight fractions and atomic fractions cannot be mixed on the same Mm card.

CHAPTER 1

Input File

The material cards for the sample problem are

```
M1  8016  1  $ oxygen 16
M2  26000 1  $ natural iron
M3   6000  1  $ carbon
```

b. VOID Card: The VOID card removes all materials and cross sections in a problem and sets all nonzero importances to unity. It is very effective for finding errors in the geometry description because many particles can be run in a short time. Flooding the geometry with many particles increases the chance of particles going to most parts of the geometry—in particular, to an incorrectly specified part of the geometry—and getting lost. The history of a lost particle often helps locate the geometry error. The other actions of and uses for the VOID card are discussed on page 3–100.

The sample input deck could have a VOID card while testing the geometry for errors. When you are satisfied that the geometry is error-free, remove the VOID card.

6. Problem Cutoffs

Problem cutoff cards are used to specify parameters for some of the ways to terminate execution of MCNP. The full list of available cards and a complete discussion of problem cutoffs is found on page 3–110. For our problem we will use only the history cutoff (NPS) card. The mnemonic NPS is followed by a single entry that specifies the number of histories to transport. MCNP will terminate after NPS histories unless it has terminated earlier for some other reason.

7. Sample Problem Summary

The entire input deck for the sample problem follows. Recall that the input can be upper, lower, or mixed case.

```
Sample Problem Input Deck
c  cell cards for sample problem
1   1 -0.0014  -7
2   2 -7.86    -8
3   3 -1.60    1 -2 -3 4 -5 6 7 8
4   0          -1:2:3:-4:5:-6
c  end of cell cards for sample problem
blank line delimiter
C   Beginning of surfaces for cube
1   PZ  -5
2   PZ   5
3   PY   5
4   PY  -5
5   PX   5
6   PX  -5
C   End of cube surfaces
7   S   0  -4  -2.5  .5  $ oxygen sphere
8   S   0   4   4    .5  $ iron sphere
blank line delimiter
```

```

IMP:N 1 1 1 0
SDEF POS=0 -4 -2.5
F2:N 8 $ flux across surface 8
F4:N 2 $ track length in cell 2
E0 1 12I 14
M1 8016 1 $ oxygen 16
M2 26000 1 $ natural iron
M3 6000 1 $ carbon
NPS 100000
blank line delimiter (optional)

```

V. HOW TO RUN MCNP

This section assumes a basic knowledge of UNIX. Lines the user will type are shown in *lower case typewriter style* type. Press the RETURN key after each input line. MCNP is the executable binary file and XSDIR is the cross-section directory. If XSDIR is not in your current directory, you may need to set the environmental variable:

```
setenv DATAPATH /ab/cd
```

where /ab/cd is the directory containing both XSDIR and the data libraries.

A. Execution Line

The MCNP execution line has the following form:

```
mcnp Files Options
```

Files and *Options* are described below. Their order on the execution line is irrelevant. If there are no changes in default file names, nothing need be entered for *Files* and *Options*.

1. Files

MCNP uses several files for input and output. The file names cannot be longer than eight characters. The files pertinent to the sample problem are shown in Table 1.3. File INP must be present as a local file. MCNP will create OUTP and RUNTPE.

Table 1.3
MCNP Files

<u>Default File Name</u>	<u>Description</u>
INP	Problem input specification
OUTP	BCD output for printing
RUNTPE	Binary start-restart data
XSDIR	Cross-section directory

The default name of any of the files in Table 1.3 can be changed on the MCNP execution line by entering

```
default_file_name=newname
```

CHAPTER 1

Execution

For example, if you have an input file called MCIN and want the output file to be MCOUT and the runtpe to be MCRUNTPE, the execution line is

```
mcnp inp=mcin outp=mcout runtpe=mcruntpe
```

Only enough letters of the default name are required to uniquely identify it. For example,

```
mcnp i=mcin o=mcout ru=mcrntpe
```

also works. If a file in your local file space has the same name as a file MCNP needs to create, the file is created with a different unique name by changing the last letter of the name of the new file to the next letter in the alphabet. For example, if you already have an OUP, MCNP will create OUTQ.

Sometimes it is useful for all files from one run to have similar names. If your input file is called JOB1, the following line

```
mcnp name=job1
```

will create an OUP file called JOB1O and a RUNTPE file called JOB1R. If these files already exist, MCNP will NOT overwrite them, but will issue a message that JOB1O already exists and then will terminate.

2. *Options*

There are two kinds of options: program module execution options and other options. Execution options are discussed next.

MCNP consists of five distinct execution operations, each given a module name. These operations, their corresponding module names, and a one-letter mnemonic for each operation are listed in Table 1.4.

Table 1.4
Execution Options

<u>Mnemonic</u>	<u>Module</u>	<u>Operation</u>
i	IMCN	Process problem input file
p	PLOT	Plot geometry
x	XACT	Process cross sections
r	MCRUN	Particle transport
z	MCPLOT	Plot tally results or cross section data

When *Options* are omitted, the default is *ixr*. The execution of the modules is controlled by entering the proper mnemonic on the execution line. If more than one operation is desired, combine the single characters (in any order) to form a string. Examples of use are: *i* to look for input errors, *ip* to debug a geometry by plotting, *ixz* to plot cross-section data, and *z* to plot tally results from the RUNTPE file.

After a job has been run, the BCD print file OUP can be examined with an editor on the computer and/or sent to a printer. Numerous messages about the problem execution and statistical quality of the results are displayed at the terminal.

The “other” options add more flexibility when running MCNP and are shown in Table 1.5.

Table 1.5
Other Options

<u>Mnemonic</u>	<u>Operation</u>
C m	Continue a run starting with m th dump. If m is omitted, last dump is used. See page 3–2.
CN	Like C, but dumps are written immediately after the fixed part of the RUNTPE, rather than at the end. See page 3–2.
DEBUG n	Write debug information every n particles. See DBCN card, page 3–115.
NOTEK	Indicates that your terminal has no graphics capability. PLOT output is in PLOTM.PS. Equivalent to TERM=0. See page B–3.
FATAL	Transport particles and calculate volumes even if fatal errors are found.
PRINT	Create the full output file; equivalent to PRINT card. See page 3–120.
TASKS n	Invokes multiprocessing on common or distributed memory systems. n=number of processors to be used. –n is allowed only on distributed memory systems to disable load balancing and fault tolerance, increasing system efficiency.

The TASK option must be used to invoke multiprocessing on common or distributed memory computer systems and is followed by the number of tasks or CPUs to be used for particle tracking. The multiprocessing capability must be invoked at the time of compilation to create a compatible executable. Two compilation options exist: common memory systems (UNICOS, etc.) and distributed memory systems (workstation clusters, Cray T3D, etc.) While multiprocessing on common memory systems is invoked and handled by the compiler with compiler directives, on distributed memory systems it is performed by the software communications package Parallel Virtual Machine⁹ (PVM). Thus, using this capability on distributed memory systems requires the installation and execution of PVM.¹⁰ On such systems, a negative entry following the TASKS option will maximize efficiency for homogeneous dedicated systems (e.g., workstation with multiple CPUs). For heterogeneous or multiuser systems, a positive entry should be used, in which case load balancing and fault tolerance are enabled.¹¹ In either case, the absolute value of this entry indicates the number of hosts (or CPUs) available for use during particle tracking. On both common and distributed memory systems, a table is provided in the output file that lists the number of particles tracked by each host.

CHAPTER 1

Execution

Examples: `mcnp i=input o=output tasks 8`

Indicates eight processors are to be used for particle tracking. On a common memory system, eight tasks are initiated (if fewer processors are actually available, multiple tasks are run on each processor.) On a distributed memory system, the master task and one subtask are initiated on the primary host (i.e., machine from which the execution is initiated), and a subtask is initiated on each of the seven secondary hosts.

`mcnp name=inp tasks -4`

A negative entry following the TASKS option is allowed only on a distributed memory system and is recommended for homogeneous dedicated systems. As in the previous example, the master task and one subtask are initiated on the primary host, and a subtask is initiated on each of the three secondary hosts. The negative entry disables load balancing and fault tolerance, increasing system efficiency.

B. Interrupts

MCNP allows four interactive interrupts while it is running:

(ctrl c)<cr> (default)	MCNP status
(ctrl c)s	MCNP status
(ctrl c)m	Make interactive plots of tallies
(ctrl c)q	Terminate MCNP normally after current history
(ctrl c)k	Kill MCNP immediately

The (ctrl c)s interrupt prints the computer time used so far, the number of particles run so far, and the number of collisions. In the IMCN module, it prints the input line being processed. In the XACT module, it prints the cross section being processed.

The (ctrl c)q interrupt has no effect until MCRUN is executed. (Ctrl c)q causes the code to stop after the current particle history, to terminate “gracefully,” and to produce a final print output file and RUNTPE file.

The (ctrl c)k interrupt kills MCNP immediately, without normal termination. If (ctrl c)k fails, enter (ctrl c) three or more times in a row.

C. Running MCNP

To run the example problem, have the input file in your current directory. For illustration, assume the file is called SAMPLE. Type

`mcnp n=sample`

where n uniquely identifies NAME. MCNP will produce an output file SAMPLEO that you can examine at your terminal, send to a printer, or both. To look at the geometry with the PLOT module using an interactive graphics terminal, type in

`mcnp ip n=sample`

After the plot prompt *plot*> appears, type in

`px=0 ex=20`

This plot will show an intersection of the surfaces of the problem by the plane X=0 with an extent in the x-direction of 20 cm on either side of the

origin. If you want to do more with PLOT, see the instructions on page B-1. Otherwise type `end` after the next prompt to terminate the session.

VI. TIPS FOR CORRECT AND EFFICIENT PROBLEMS

This section has a brief checklist of helpful hints that apply to three phases of your calculation: defining and setting up the problem, preparing for the long computer runs that you may require, and making the runs that will give you results. Not everything mentioned in the checklist has been covered in this chapter, but the list can serve as a springboard for further reading in preparation for tackling more difficult problems.

A. Problem Setup

1. Model the geometry and source distribution accurately.
2. Use the best problem cutoffs.
3. Use zero (default) for the neutron energy cutoff (MODE N P).
4. Do not use too many variance reduction techniques.
5. Use the most conservative variance reduction techniques.
6. Do not use cells with many mean free paths.
7. Use simple cells.
8. Use the simplest surfaces.
9. Study warning messages.
10. Always plot the geometry.
11. Use the VOID card when checking geometry.
12. Use separate tallies for the fluctuation chart.
13. Generate the best output (consider PRINT card).
14. RECHECK the INP file (materials, densities, masses, sources, etc.).
15. GARBAGE into code = GARBAGE out of code.

B. Preproduction

1. Run some short jobs.
2. Examine the outputs carefully.
3. Study the summary tables.
4. Study the statistical checks on tally quality and the sources of variance.
5. Compare the figures of merit and variance of the variance.
6. Consider the collisions per source particle.
7. Examine the track populations by cell.
8. Scan the mean free path column.
9. Check detector diagnostic tables.
10. Understand large detector contributions.
11. Strive to eliminate unimportant tracks.
12. Check MODE N P photon production.
13. Do a back-of-the-envelope check of the results.
14. DO NOT USE MCNP AS A BLACK BOX.

CHAPTER 1

Execution

C. Production

1. Save RUNTPE for expanded output printing, continue run, tally plotting.
2. Look at figure of merit stability.
3. Make sure answers seem reasonable.
4. Make continue runs if necessary.
5. See if stable errors decrease by $1/\sqrt{N}$ (that is, be careful of the brute force approach).
6. Remember, accuracy is only as good as the nuclear data, modeling, MCNP sampling approximations, etc.

VII. REFERENCES

1. R. Kinsey, "Data Formats and Procedures for the Evaluated Nuclear Data File, ENDF," Brookhaven National Laboratory report BNL-NCS-50496 (ENDF 102) 2nd Edition (ENDF/B-V) (October 1979).
2. R. J. Howerton, D. E. Cullen, R. C. Haight, M. H. MacGregor, S. T. Perkins, and E. F. Plechaty, "The LLL Evaluated Nuclear Data Library (ENDL): Evaluation Techniques, Reaction Index, and Descriptions of Individual Reactions," Lawrence Livermore National Laboratory report UCRL-50400, Vol. 15, Part A (September 1975).
3. M. A. Gardner and R. J. Howerton, "ACTL: Evaluated Neutron Activation Cross-Section Library—Evaluation Techniques and Reaction Index," Lawrence Livermore National Laboratory report UCRL-50400, Vol. 18 (October 1978).
4. E. D. Arthur and P. G. Young, "Evaluated Neutron-Induced Cross Sections for $^{54,56}\text{Fe}$ to 40 MeV," Los Alamos Scientific Laboratory report LA-8626-MS (ENDF-304) (December 1980).
5. D. G. Foster, Jr. and E. D. Arthur, "Average Neutronic Properties of "Prompt" Fission Products," Los Alamos National Laboratory report LA-9168-MS (February 1982).
6. E. D. Arthur, P. G. Young, A. B. Smith, and C. A. Philis, "New Tungsten Isotope Evaluations for Neutron Energies Between 0.1 and 20 MeV," *Trans. Am. Nucl. Soc.* 39, 793 (1981).
7. R. E. MacFarlane, D. W. Muir, and R. M. Boicourt, "The NJOY Nuclear Data Processing System, Volume I: User's Manual," Los Alamos National Laboratory report LA-9303-M, Vol. I (ENDF-324) (May 1982).
R. E. MacFarlane, D. W. Muir, and R. M. Boicourt, "The NJOY Nuclear Data Processing System, Volume II: The NJOY, RECONR, BROADR, HEATR, and THERMR Modules," Los Alamos National Laboratory report LA-9303-M, Vol. II (ENDF-324) (May 1982).
8. R. A. Forster, R. C. Little, J. F. Briesmeister, and J. S. Hendricks, "MCNP Capabilities For Nuclear Well Logging Calculations," *IEEE Transactions on Nuclear Science*, **37** (3), 1378 (June 1990)
9. A. Geist et al, "PVM 3 User's Guide and Reference Manual," ORNL/TM-12187, Oak Ridge National Laboratory (1993).
10. G. McKinney, "A Practical Guide to Using MCNP with PVM," *Trans. Am. Nucl. Soc.* 71, 397 (1994).
11. G. McKinney, "MCNP4B Multiprocessing Enhancements Using PVM," LANL memo X-6:GWM-95-212 (1995).

CHAPTER 1

CHAPTER 2
GEOMETRY, DATA, PHYSICS, AND MATHEMATICS

I. INTRODUCTION

Chapter 2 discusses the mathematics and physics of MCNP, including geometry, cross-section libraries, sources, variance reduction schemes, Monte Carlo simulation of neutron and photon transport, and tallies. This discussion is not meant to be exhaustive; many details of the particular techniques and of the Monte Carlo method itself will be found elsewhere. Carter and Cashwell's book *Particle-Transport Simulation with the Monte Carlo Method*,¹ a good general reference on radiation transport by Monte Carlo, is based upon what is in MCNP. A more recent reference is Lux and Koblinger's book, *Monte Carlo Particle Transport Methods: Neutron and Photon Calculations*.² Methods of sampling from standard probability densities are discussed in the Monte Carlo samplers by Everett and Cashwell.³

MCNP was originally developed by the Monte Carlo Group, currently the Transport Methods Group, (Group XTM) in the Applied Theoretical and Computational Physics Division (X Division) at the Los Alamos National Laboratory. Group XTM improves MCNP (releasing a new version every two to three years), maintains it at Los Alamos and at other laboratories where we have collaborators or sponsors, and provides limited free consulting and support for MCNP users. MCNP is distributed to other users through the Radiation Safety Information Computational Center (RSICC) at Oak Ridge, Tennessee, and the OECD/NEA data bank in Paris, France.

MCNP has approximately 44,000 lines of FORTRAN and 1000 lines of C source coding, including comments and with the COMMON blocks listed only once and not in every subroutine. There are about 360 subroutines. There is only one source code; it is used for all systems. At Los Alamos, there are about 250 active users. Worldwide, there are about 3000 active users at about 200 installations.

MCNP takes advantage of parallel computer architectures. It is supported in multitasking mode on some mainframes and in multiprocessing mode on a cluster of workstations where the distributed processing uses the Parallel Virtual Machine (PVM) software from Oak Ridge.

MCNP has not been successfully vectorized because the overhead required to set up and break apart vector queues at random decision points is greater than the savings from vectorizing the simple arithmetic between the decision points. MCNP (and any general Monte Carlo code) is little more than a collection of random decision points with some simple arithmetic in between. Because MCNP does not take advantage of vectorization, it is fairly inefficient on vectorized computers. In particular, many workstations run MCNP as fast or faster than the Cray-YMP.⁴

MCNP has been made as system independent as possible to enhance its portability, and has been written to comply with the ANSI FORTRAN 77 standard. With one source code, MCNP is maintained on many platforms.

CHAPTER 2

Introduction

A. History

The Monte Carlo method is generally attributed to scientists working on the development of nuclear weapons in Los Alamos during the 1940s. However, its roots go back much farther.

Perhaps the earliest documented use of random sampling to solve a mathematical problem was that of Comte de Buffon in 1772.⁵ A century later people performed experiments in which they threw a needle in a haphazard manner onto a board ruled with parallel straight lines and inferred the value of π from observations of the number of intersections between needle and lines.^{6,7} Laplace suggested in 1786 that π could be evaluated by random sampling.⁸ Lord Kelvin appears to have used random sampling to aid in evaluating some time integrals of the kinetic energy that appear in the kinetic theory of gasses⁹ and acknowledged his secretary for performing calculations for more than 5000 collisions.¹⁰

According to Emilio Segrè, Enrico Fermi's student and collaborator, Fermi invented a form of the Monte Carlo method when he was studying the moderation of neutrons in Rome.^{10,11} Though Fermi did not publish anything, he amazed his colleagues with his predictions of experimental results. After indulging himself, he would reveal that his "guesses" were really derived from the statistical sampling techniques that he performed in his head when he couldn't fall asleep.

During World War II at Los Alamos, Fermi joined many other eminent scientists to develop the first atomic bomb. It was here that Stan Ulam became impressed with electromechanical computers used for implosion studies. Ulam realized that statistical sampling techniques were considered impractical because they were long and tedious, but with the development of computers they could become practical. Ulam discussed his ideas with others like John von Neumann and Nicholas Metropolis. Statistical sampling techniques reminded everyone of games of chance, where randomness would statistically become resolved in predictable probabilities. It was Nicholas Metropolis who noted that Stan had an uncle who would borrow money from relatives because he "just had to go to Monte Carlo" and thus named the mathematical method "Monte Carlo."¹¹

Meanwhile, a team of wartime scientists headed by John Mauchly was working to develop the first electronic computer at the University of Pennsylvania in Philadelphia. Mauchly realized that if Geiger counters in physics laboratories could count, then they could also do arithmetic and solve mathematical problems. When he saw a seemingly limitless array of women cranking out firing tables with desk calculators at the Ballistic Research Laboratory at Aberdeen, he proposed¹¹ that an electronic computer be built to deal with these calculations. The result was ENIAC (Electronic Numerical Integrator and Computer), the world's first computer, built for Aberdeen at the University of Pennsylvania. It had 18,000 double triode vacuum tubes in a system with 500,000 solder joints.¹¹

John von Neumann was a consultant to both Aberdeen and Los Alamos. When he heard about ENIAC, he convinced the authorities at Aberdeen

that he could provide a more exhaustive test of the computer than mere firing-table computations. In 1945 John von Neumann, Stan Frankel, and Nicholas Metropolis visited the Moore School of Electrical Engineering at the University of Pennsylvania to explore using ENIAC for thermonuclear weapon calculations with Edward Teller at Los Alamos.¹¹ After the successful testing and dropping of the first atomic bombs a few months later, work began in earnest to calculate a thermonuclear weapon. On March 11, 1947, John von Neumann sent a letter to Robert Richtmyer, leader of the Theoretical Division at Los Alamos, proposing use of the statistical method to solve neutron diffusion and multiplication problems in fission devices.¹¹ His letter was the first formulation of a Monte Carlo computation for an electronic computing machine. In 1947, while in Los Alamos, Fermi invented a mechanical device called FERMIAC¹² to trace neutron movements through fissionable materials by the Monte Carlo Method.

By 1948 Stan Ulam was able to report to the Atomic Energy Commission that not only was the Monte Carlo method being successfully used on problems pertaining to thermonuclear as well as fission devices, but also it was being applied to cosmic ray showers and the study of partial differential equations.¹¹ In the late 1940s and early 1950s, there was a surge of papers describing the Monte Carlo method and how it could solve problems in radiation or particle transport and other areas.^{13,14,15} Many of the methods described in these papers are still used in Monte Carlo today, including the method of generating random numbers¹⁶ used in MCNP. Much of the interest was based on continued development of computers such as the Los Alamos MANIAC (Mechanical Analyzer, Numerical Integrator, and Computer) in March, 1952.

The Atomic Energy Act of 1946 created the Atomic Energy Commission to succeed the Manhattan Project. In 1953 the United States embarked upon the “Atoms for Peace” program with the intent of developing nuclear energy for peaceful applications such as nuclear power generation. Meanwhile, computers were advancing rapidly. These factors led to greater interest in the Monte Carlo method. In 1954 the first comprehensive review of the Monte Carlo method was published by Herman Kahn¹⁷ and the first book was published by Cashwell and Everett¹⁸ in 1959.

At Los Alamos, Monte Carlo computer codes developed along with computers. The first Monte Carlo code was the simple 19-step computing sheet in John von Neumann’s letter to Richtmyer. But as computers became more sophisticated, so did the codes. At first the codes were written in machine language and each code would solve a specific problem. In the early 1960s, better computers and the standardization of programming languages such as FORTRAN made possible more general codes. The first Los Alamos general-purpose particle transport Monte Carlo code was MCS,¹⁹ written in 1963. Scientists who were not necessarily experts in computers and Monte Carlo mathematical techniques now could take advantage of the Monte Carlo method for radiation transport. They could run the MCS code to solve modest problems without having to do either the programming

CHAPTER 2

Introduction

or the mathematical analysis themselves. MCS was followed by MCN²⁰ in 1965. MCN could solve the problem of neutrons interacting with matter in a three-dimensional geometry and used physics data stored in separate, highly-developed libraries.

In 1973 MCN was merged with MCG,²¹ a Monte Carlo gamma code that treated higher energy photons, to form MCNG, a coupled neutron-gamma code. In 1977 MCNG was merged with MCP,²¹ a Monte Carlo Photon code with detailed physics treatment down to 1 keV, to accurately model neutron-photon interactions. The code has been known as MCNP ever since. Though at first MCNP stood for Monte Carlo Neutron Photon, now it stands for Monte Carlo N-Particle. Other major advances in the 70s included the present generalized tally structure, automatic calculation of volumes, and a Monte Carlo eigenvalue algorithm to determine k_{eff} for nuclear criticality (KCODE).

In 1983 MCNP3 was released, entirely rewritten in ANSI standard FORTRAN 77. MCNP3 was the first MCNP version internationally distributed through the Radiation Shielding and Information Center at Oak Ridge, Tennessee. Other 1980s versions of MCNP were MCNP3A (1986) and MCNP3B (1988), that included tally plotting graphics (MCPLOT), the present generalized source, surface sources, repeated structures/lattice geometries, and multigroup/adjoint transport.

MCNP4 was released in 1990 and was the first UNIX version of the code. It accommodated N-particle transport and multitasking on parallel computer architectures. MCNP4 added electron transport (patterned after the Integrated TIGER Series (ITS) continuous-slowing-down approximation physics),²² the pulse height tally (F8), a thick-target bremsstrahlung approximation for photon transport, enabled detectors and DXTRAN with the $S(\alpha, \beta)$ thermal treatment, provided greater random number control, and allowed plotting of tally results while the code was running.

MCNP4A, released in 1993, featured enhanced statistical analysis, distributed processor multitasking for running in parallel on a cluster of scientific workstations, new photon libraries, ENDF/B-VI capabilities, color X-Windows graphics, dynamic memory allocation, expanded criticality output, periodic boundaries, plotting of particle tracks via SABRINA, improved tallies in repeated structures, and many smaller improvements.

MCNP4B, released in 1997, features differential operator perturbations, enhanced photon physics equivalent to ITS3.0, PVM load balance and fault tolerance, cross section plotting, postscript file plotting, 64-bit workstation upgrades, PC X-windows, inclusion of LAHET HMCNP, lattice universe mapping, enhanced neutron lifetimes, coincident-surface lattice capability, and many smaller features and improvements.

Large production codes such as MCNP have revolutionized science — not only in the way it is done, but also by becoming the repositories for physics knowledge. MCNP represents about 500 person-years of sustained effort. The knowledge and expertise contained in MCNP is formidable.

Current MCNP development is characterized by a strong emphasis on

quality control, documentation, and research. New features continue to be added to the code to reflect new advances in computer architecture, improvements in Monte Carlo methodology, and better physics models. MCNP has a proud history and a promising future.

B. MCNP Structure

MCNP is written in the style of Dr. Thomas N. K. Godfrey, the principal MCNP programmer from 1975 - 1989. Variable dimensions for arrays are achieved by massive use of EQUIVALENCE statements and offset indexing. All variables local to a routine are no more than two characters in length, and all COMMON variables are between three and six characters in length. The code strictly complies with the ANSI FORTRAN 77 standard. The principal characteristic of Tom Godfrey's style is its terseness. Everything is accomplished in as few lines of code as possible. Thus MCNP does more than some other codes that are more than ten times larger. It was Godfrey's philosophy that anyone can understand code at the highest level by making a flow chart and anyone can understand code at the lowest level (one FORTRAN line); it is the intermediate level that is most difficult. Consequently, by using a terse programming style, subroutines could fit within a few pages and be most easily understood. Tom Godfrey's style is clearly counter to modern computer science programming philosophies, but it has served MCNP well and is preserved to provide stylistic consistency throughout.

The general structure of MCNP is as follows:

Initiation (IMCN):

- Read input file (INP) to get dimensions (PASS1);
- Set up variable dimensions or dynamically allocated storage (SETDAS);
- Re-read input file (INP) to load input (RDPROB);
- Process source (ISOURC);
- Process tallies (ITALLY);
- Process materials specifications (STUFF) including masses but without loading in the data files;
- Calculate cell volumes and surface areas (VOLUME).

Interactive Geometry Plot (PLOT).

Cross Section Processing (XACT):

- Load libraries (GETXST);
- Eliminate excess neutron data outside problem energy range (EXPUNG);
- Doppler broaden elastic and total cross sections to the proper temperature if the problem temperature is higher than the library temperature (BROADN);
- Process multigroup libraries (MGXSPT);
- Process electron libraries (XSGEN) including calculation of range tables, straggling tables, scattering angle distributions, and bremsstrahlung.

MCRUN sets up multitasking and multiprocessing, runs histories (by calling TRNSPT, which calls HISTORY), and returns to OUTPUT to print, write RUNTPE dumps, or process another criticality (KCODE) cycle.

CHAPTER 2

Introduction

Under MCRUN, MCNP runs neutron, photon, or electron histories (HISTORY), calling ELECTR for electron tracks:

- Start a source particle (STARTP);
- Find the distance to the next boundary (TRACK), cross the surface (SURFAC) and enter the next cell (NEWCEL);
- Find the total neutron cross section (ACETOT) and process neutron collisions (COLIDN) producing photons as appropriate (ACEGAM);
- Find the total photon cross section (PHOTOT) and process photon collisions (COLIDP) producing electrons as appropriate (EMAKER);
- Use the optional thick-target bremsstrahlung approximation if no electron transport (TTBR);
- Follow electron tracks (ELECTR);
- Process optional multigroup collisions (MGCOLN, MGCOLP, MGA-COL);
- Process detector tallies (TALLYD) or DXTRAN;
- Process surface, cell, and pulse height tallies (TALLY).

Periodically write output file, restart dumps, update to next criticality (KCODE) cycle, rendezvous for multitasking and updating detector and DXTRAN Russian roulette criteria, etc. (OUTPUT):

- Go to the next criticality cycle (KCALC);
- Print output file summary tables (SUMARY, ACTION);
- Print tallies (TALLYP);
- Generate weight windows (OUTWWG).

Plot tallies, cross sections, and other data (MC PLOT).

GKS graphics simulation routines.

PVM distributed processor multiprocessing routines.

Random number generator and control (RANDOM).

Mathematics, character manipulation, and other slave routines.

C. History Flow

The basic flow of a particle history for a coupled neutron/photon/electron problem is handled in subroutine HISTORY. HISTORY is called from TRN-SPT after the random number sequence is set up and the number of the history, NPS, is incremented. The flow of HISTORY is then as follows.

First, STARTP is called. The flag IPT is set for the type of particle being run: 1 for a neutron, 2 for a photon, and 3 for an electron. Some arrays and variables (such as NBNK, the number of particles in the bank) are initialized to zero. The starting random number is saved (RANB, RANS, RNRTC0), and the branch of the history, NODE, is set to 1.

Next, the appropriate source routine is called. Source options are the standard fixed sources (SOURCB), the surface source (SURSRC), the KCODE criticality source (SOURCK), or a user-provided source (SOURCE). All of

the parameters describing the particle are set in these source routines, including position, direction of flight, energy, weight, time, and starting cell (and possibly surface), by sampling the various distributions described on the source input control cards. Several checks are made at this time to verify that the particle is in the correct cell or on the correct surface, and directed toward the correct cell; then control is returned to STARTP.

Next in STARTP, the initial parameters of the first fifty particle histories are printed. Then some of the summary information is incremented (see Appendix E for an explanation of these arrays). Energy, time, and weight are checked against cutoffs. A number of error checks are made. TALLYD is called to score any detector contributions, and then DXTRAN is called (if used in the problem) to create particles on the spheres. The particles are saved with BANKIT for later tracking. TALPH is called to start the bookkeeping for the pulse height cell tally energy balance. The weight window game is played, with any additional particles from splitting put into the bank and any losses to Russian roulette terminated. Control is returned to HISTORY.

Back in HISTORY, the actual particle transport is started. For an electron source, ELECTR is called and electrons are run separately. For a neutron or photon source, TRACK is called to calculate the intersection of the particle trajectory with each bounding surface of the cell. The minimum positive distance DLS to the cell boundary indicates the next surface JSU the particle is heading toward. The distance to the nearest DXTRAN sphere DXL is calculated, as is the distance to time cutoff DTC, and energy boundary for multigroup charged particles DEB. The cross sections for cell ICL are calculated using a binary table lookup in ACETOT for neutrons and in PHOTOT for photons. The total cross section is modified in EXTRAN by the exponential transformation if necessary. The distance PMF to the next collision is determined (if a forced collision is required, FORCOL is called and the uncollided part is banked). The track length D of the particle in the cell is found as the minimum of the distance PMF to collision, the distance DLS to the surface JSU, the distance DXL to a DXTRAN sphere, the distance DTC to time cutoff, or the distance DEB to energy boundary. TALLY then is called to increment any track length cell tallies. Some summary information is incremented. The particle's parameters (time, position, and energy) are then updated. If the particle's distance DXL to a DXTRAN sphere (of the same type as the current particle) is equal to the minimum track length D, the particle is terminated because particles reaching the DXTRAN sphere are already accounted for by the DXTRAN particles from each collision. If the particle exceeds the time cutoff, the track is terminated. If the particle was detected leaving a DXTRAN sphere, the DXTRAN flag IDX is set to zero and the weight cutoff game is played. The particle is either terminated to weight cutoff or survives with an increased weight. Weight adjustments then are made for the exponential transformation.

If the minimum track length D is equal to the distance-to-surface crossing DLS, the particle is transported distance D to surface JSU and SURFAC is

CHAPTER 2

Introduction

called to cross the surface and do any surface tallies (by calling TALLY) and to process the particle across the surface into the next cell by calling NEWCEL. It is in SURFAC that reflecting surfaces, periodic boundaries, geometry splitting, Russian roulette from importance sampling, and loss to escape are treated. For splitting, one bank entry of NPA particle tracks is made in BANKIT for an (NPA+1)-for-1 split. The bank is the IBNK array, and entries or retrievals are made with the GPBLCM and JPBLCM arrays (the bank operates strictly on a last-in, first-out basis). The history is continued by going back to HSTORY and calling TRACK.

If the distance to collision PMF is less than the distance to surface DLS, or if a multigroup charged particle reaches the distance to energy boundary DEB, the particle undergoes a collision. Everything about the collision is determined in COLIDN for neutrons and COLIDP for photons. COLIDN determines which nuclide is involved in the collision, samples the target velocity of the collision nuclide by calling TGTVEL for the free gas thermal treatment, generates and banks any photons (ACEGAM), handles analog capture or capture by weight reduction, plays the weight cutoff game, handles $S(\alpha, \beta)$ thermal collisions (SABCOL) and elastic or inelastic scattering (ACECOL). For criticality problems, COLIDK is called to store fission sites for subsequent generations. Any additional tracks generated in the collision are put in the bank. ACECAS and ACECOS determine the energies and directions of particles exiting the collision. Multigroup and multigroup/adjoint collisions are treated separately in MGCOLN and MGACOL that are called from COLIDN. The collision process and thermal treatments are described in more detail later in this chapter (see page 2–27).

COLIDP for photons is similar to COLIDN, and it covers the simple or the detailed physics treatments. The simple physics treatment is better for free electrons; the detailed treatment is the default and includes form factors for electron binding effects, coherent (Thomson) scatter, and fluorescence from photoelectric capture (see page 2–50). COLIDP samples for the collision nuclide, treats photoelectric absorption, or capture (with fluorescence in the detailed physics treatment), incoherent (Compton) scatter (with form factors in the detailed physics treatment to account for electron binding), coherent (Thomson) scatter for the detailed physics treatment only (again with form factors), and pair production. Electrons are generated (EMAKER) for incoherent scatter, pair production, and photoelectric absorption. These electrons may be assumed to instantly deposit all their energy if IDES=1 on the PHYS:P card, or they may produce electrons with the thick-target bremsstrahlung approximation (default for MODE P problems, IDES=0 on the PHYS:P card), or they may undergo full electron transport (default for MODE P E problems, IDES=0 on the PHYS:P card.) Multigroup or multigroup/adjoint photons are treated separately in MGCOLP or MGACOL.

After the surface crossing or collision is processed, control returns to HSTORY and transport continues by calling TRACK, where the distance to cell boundary is calculated. Or if the particle involved in the collision was killed by capture or variance reduction, the bank is checked for any remaining

progeny, and if none exists, the history is terminated. Appropriate summary information is incremented, the tallies of this particular history are added to the total tally data by TALSHF, and a return is made to TRNSPT.

In TRNSPT, checks are made to see if output is required or if the job should be terminated because enough histories have been run or too little time remains to continue. For continuation, HISTORY is called again. Otherwise a return is made to MCRUN. MCRUN calls OUTPUT, which calls SUMMARY to print the summary information. Then SUMMARY calls TALLYP to print the tally data. Appendix E defines all of the MCNP variables that are in COMMON as well as detailed descriptions of some important arrays.

II. GEOMETRY

The basic MCNP geometry concepts, discussed in Chapter 1, include the sense of a cell, the intersection and union operators, and surface specification. Covered in this section are the complement operator; the repeated structure capability; an explanation of two surfaces, the cone and the torus; and a description of ambiguity, reflecting, white, and periodic boundary surfaces.

A. Complement Operator

This operator provides no new capability over the intersection and union operators; it is just a shorthand cell-specifying method that implicitly uses the intersection and union operators.

The symbol # is the complement operator and can be thought of as standing for *not in*. There are two basic uses of the operator:

#*n* means that the description of the current cell is the complement of the description of cell *n*.

#(...) means complement the portion of the cell description in the parentheses (usually just a list of surfaces describing another cell).

In the first of the two above forms, MCNP performs five operations: (1) the symbol # is removed, (2) parentheses are placed around *n*, (3) any intersections in *n* become unions, (4) any unions in *n* are replaced by back-to-back parentheses)(which is an intersection, and (5) the senses of the surfaces defining *n* are reversed.

A simple example is a cube. We define a two-cell geometry with six surfaces, where cell 1 is the cube and cell 2 is the outside world:

```
1    0 -1  2 -3  4 -5  6
2    0  1:-2: 3:-4: 5:-6
```

Note that cell 2 is everything in the universe that is *not in* cell 1, or

```
2    0 #1
```

The form #(*n*) is not allowed; it is functionally available as the equivalent of $-n$.

CHAPTER 2

Geometry

CAUTION: Using the complement operator can destroy some of the necessary conditions for some cell volume and surface area calculations by MCNP. See page 4–14 for an example.

The complement operator can be easily abused if it is used indiscriminately. A simple example can best illustrate the problems. Fig. 2.1 consists of two concentric spheres inside a box. Cell 4 can be described using the complement operator as

$$4 \quad 0 \quad \#3 \quad \#2 \quad \#1$$

Although cells 1 and 2 do not touch cell 4, to omit them would be incorrect. If they were omitted, the description of cell 4 would be everything in the universe that is not in cell 3. Since cells 1 and 2 are not part of cell 3, they would be included in cell 4. Even though surfaces 1 and 2 do not physically bound cell 4, using the complement operator as in this example causes MCNP to think that all surfaces involved with the complement do bound the cell. Even though this specification is correct and required by MCNP, the disadvantage is that when a particle enters cell 4 or has a collision in cell 4, MCNP must calculate the intersection of the particle's trajectory with all real bounding surfaces of cell 4 plus any extraneous ones brought in by the complement operator. This intersection calculation is very expensive and can add significantly to the required computer time.

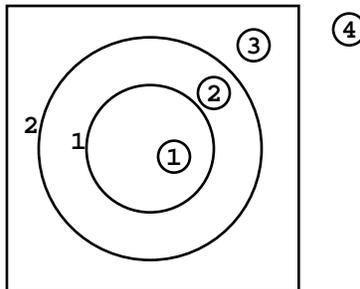


Figure 2.1

A better description of cell 4 would be to complement the description of cell 3 (omitting surface 2) by reversing the senses and interchanging union and intersection operators as illustrated in the cell cards that describe the simple cube in the preceding paragraphs.

B. Repeated Structure Geometry

The repeated structure geometry feature is explained in detail starting on page 3–21. The capabilities are only introduced here. Examples are shown in Chapter 4. The cards associated with the repeated structure feature are U (universe), FILL, TRCL, and LAT (lattice) and cell cards with LIKE m BUT.

The repeated structure feature makes it possible to describe only once the cells and surfaces of any structure that appears more than once in a geometry. This unit then can be replicated at other xyz locations by using

the “LIKE m BUT” construct on a cell card. The user specifies that a cell is filled with something called a universe. The U card identifies the universe, if any, to which a cell belongs. The FILL card specifies with which universe a cell is to be filled. A universe is either a lattice or an arbitrary collection of cells. The two types of lattice shapes, hexagonal prisms and hexahedra, need not be rectangular nor regular, but they must fill space exactly. Several concepts and cards combine in order to use this capability.

C. Surfaces

1. Explanation of Cone and Torus

Two surfaces, the cone and torus, require more explanation. The quadratic equation for a cone describes a cone of two sheets (just like a hyperboloid of two sheets)—one sheet is a cone of positive slope, and the other has a negative slope. A cell whose description contains a two-sheeted cone may require an ambiguity surface to distinguish between the two sheets. MCNP provides the option to select either of the two sheets; this option frequently simplifies geometry setups and eliminates any ambiguity. The +1 or the -1 entry on the cone surface card causes the one sheet cone treatment to be used. If the sign of the entry is positive, the specified sheet is the one that extends to infinity in the positive direction of the coordinate axis to which the cone axis is parallel. The converse is true for a negative entry. This feature is available only for cones whose axes are parallel to the coordinate axes of the problem.

The treatment of fourth degree surfaces in Monte Carlo calculations has always been difficult because of the resulting fourth order polynomial (“quartic”) equations. These equations must be solved to find the intersection of a line of flight of a particle with a toroidal surface. In MCNP these equations must also be solved to find the intersection of surfaces to compute the volumes and surface areas of geometric regions of a given problem. In either case, the quartic equation,

$$x^4 + Bx^3 + Cx^2 + Dx + E = 0$$

is difficult to solve on a computer because of roundoff errors. For many years the MCNP toroidal treatment required 30 decimal digits (CDC double-precision) accuracy to solve quartic equations. Even then there were roundoff errors that had to be corrected by Newton-Raphson iterations. Schemes using a single-precision quartic formula solver followed by a Newton-Raphson iteration were inadequate because if the initial guess of roots supplied to the Newton-Raphson iteration is too inaccurate, the iteration will often diverge when the roots are close together.

The single-precision quartic algorithm in MCNP basically follows the quartic solution of Cashwell and Everett.²³ When roots of the quartic equation are well separated, a modified Newton-Raphson iteration quickly achieves convergence. But the key to this method is that if the roots are double roots or very close together, they are simply thrown out because a double root

CHAPTER 2

Geometry

corresponds to a particle's trajectory being tangent to a toroidal surface, and it is a very good approximation to assume that the particle then has no contact with the toroidal surface. In extraordinarily rare cases where this is not a good assumption, the particle would become "lost." Additional refinements to the quartic solver include a carefully selected finite size of zero, the use of a cubic rather than a quartic equation solver whenever a particle is transported from the surface of a torus, and a gross quartic coefficient check to ascertain the existence of any real positive roots. As a result, the single-precision quartic solver is substantially faster than double-precision schemes, portable, and also somewhat more accurate.

In MCNP, elliptical tori symmetric about any axis parallel to a coordinate axis may be specified. The volume and surface area of various tallying segments of a torus usually will be calculated automatically.

2. Ambiguity Surfaces

The description of the geometry of a cell must eliminate any ambiguities as to which region of space is included in the cell. That is, a particle entering a cell should be able to uniquely determine which cell it is in from the senses of the bounding surfaces. This is not possible in a geometry such as shown in Fig. 2.2 unless an *ambiguity surface* is specified. Suppose the figure is rotationally symmetric about the y-axis.

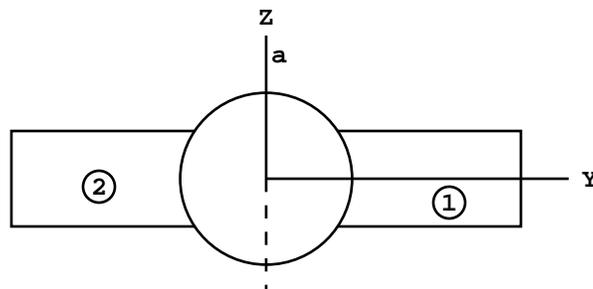


Figure 2.2

A particle entering cell 2 from the inner spherical region might think it was entering cell 1 because a test of the senses of its coordinates would satisfy the description of cell 1 as well as that of cell 2. In such cases, an ambiguity surface is introduced such as a , the plane $y = 0$. An ambiguity surface need not be a bounding surface of a cell, but it may be and frequently is. It can also be the bounding surface of some cell other than the one in question. However, the surface must be listed among those in the problem and must not be a reflecting surface (see page 2–13). The description of cells 1 and 2 in Fig. 2.2 is augmented by listing for each its sense relative to surface a as well as that of each of its other bounding surfaces. A particle in cell 1 cannot have the same sense relative to surface a as does a particle in cell 2. More than one ambiguity surface may be required to define a particular cell.

A second example may help to clarify the significance of ambiguity surfaces. We would like to describe the geometry of Fig. 2.3a. Without the

use of an ambiguity surface, the result will be Fig. 2.3b. Surfaces 1 and 3 are spheres about the origin, and surface 2 is a cylinder around the y-axis. Cell 1 is both the center and outside world of the geometry connected by the region interior to surface 2.

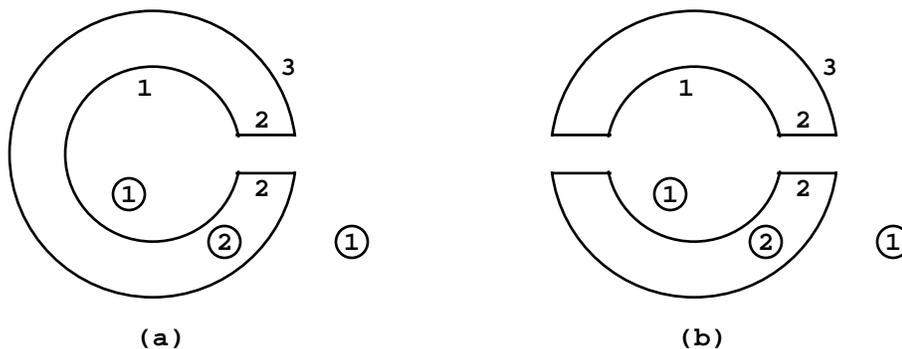


Figure 2.3

At first glance it may appear that cell 1 can easily be specified by $-1 : -2 : 3$ whereas cell 2 is simply $\#1$. This results in Figure 2.3b, in which cell 1 is everything in the universe interior to surface 1 plus everything in the universe interior to surface 2 (remember the cylinder goes to plus and minus infinity) plus everything in the universe exterior to surface 3.

An ambiguity surface (a plane at $y=0$) will solve the problem. Everything in the universe to the right of the ambiguity surface (call it surface 4) *intersected* with everything in the universe interior to the cylinder is a cylindrical region that goes to plus infinity but terminates at $y=0$. Therefore, $-1 : (4 - 2) : 3$ defines cell 1 as desired in Figure 2.3a. The parentheses in this last expression are not required because intersections are done before unions. Another expression for cell 2 rather than $\#1$ is $1 - 3 \#(4 - 2)$.

For the user, ambiguity surfaces are specified the same way as any other surface—simply list the signed surface number as an entry on the cell card. For MCNP, if a particular ambiguity surface appears on cell cards with only one sense, it is treated as a true ambiguity surface. Otherwise, it still functions as an ambiguity surface but the TRACK subroutine will try to find intersections with it, thereby using a little more computer time.

3. Reflecting Surfaces

A surface can be designated a reflecting surface by preceding its number on the surface card with an asterisk. Any particle hitting a reflecting surface is specularly (mirror) reflected. Reflecting planes are valuable because they can simplify a geometry setup (and also tracking) in a problem. They can, however, make it difficult (or even impossible) to get the correct answer. The user is cautioned to check the source weight and tallies to ensure that the desired result is achieved. Any tally in a problem with reflecting planes should have the same expected result as the tally in the same problem with-

CHAPTER 2

Geometry

out reflecting planes. Detectors or DXTRAN used with reflecting surfaces give wrong answers (see page 2–81).

The following example illustrates the above points and hopefully makes you very cautious in the use of reflecting surfaces; they should never be used in any situation without a lot of thought.

Consider a cube of carbon 10 cm on a side sitting on top of a 5-MeV neutron source distributed uniformly in volume. The source cell is a 1-cm-thick void completely covering the bottom of the carbon cube and no more. The average neutron flux across any one of the sides (but not top or bottom) is calculated to be 0.150 ($\pm 0.5\%$) per cm^2 per starting neutron from an MCNP F2 tally, and the flux at a point at the center of the same side is $1.55\text{E}-03$ n/cm^2 ($\pm 1\%$) from an MCNP F5 tally.

The cube can be modeled by half a cube and a reflecting surface. All dimensions remain the same except the distance from the tally surface to the opposite surface (which becomes the reflecting surface) is 5 cm. The source cell is cut in half also. Without any source normalization, the flux across the surface is now 0.302 ($\pm 0.5\%$), which is twice the flux in the nonreflecting geometry. The detector flux is $2.58\text{E}-03$ ($\pm 1\%$), which is *less* than twice the point detector flux in the nonreflecting problem.

The problem is that for the surface tally to be correct, the starting weight of the source particles has to be normalized; it should be half the weight of the nonreflected source particles. The detector results will always be wrong (and lower) for the reason discussed on page 2–81.

In this particular example, the normalization factor for the starting weight of source particles should be 0.5 because the source volume is half of the original volume. Without the normalization, the full weight of source particles is started in only half the volume. These normalization factors are problem dependent and should be derived very carefully.

Another way to view this problem is that the tally surface has doubled because of the reflecting surface; two scores are being made across the tally surface when one is made across each of two opposite surfaces in the nonreflecting problem. The detector has doubled, too—except that the contributions to it from beyond the reflecting surface are not being made, as explained on page 2–81.

4. White Boundaries

A surface can be designated a white boundary surface by preceding its number on the surface card with a plus. A particle hitting a white boundary is reflected with a cosine distribution, $p(\mu) = \mu$, relative to the surface normal; that is, $\mu = \sqrt{\xi}$, where ξ is a random number. White boundary surfaces are useful for comparing MCNP results with other codes that have white boundary conditions. They also can be used to approximate a boundary with an infinite scatterer. They make absolutely no sense in problems with next event estimators such as detectors or DXTRAN (see page 2–81) and should always be used with caution.

5. Periodic Boundaries

Periodic boundary conditions can be applied to pairs of planes to simulate an infinite lattice. Although the same effect can be achieved with an infinite lattice, the periodic boundary is easier to use, simplifies comparison with other codes having periodic boundaries, and can save considerable computation time. There is approximately a 55% run time penalty associated with repeated structures and lattices that can be avoided with periodic boundaries. However, collisions and other aspects of the Monte Carlo random walk usually dominate running time, so the savings realized by using periodic boundaries are usually much smaller. A simple periodic boundary problem is illustrated in Figure 2.3c.

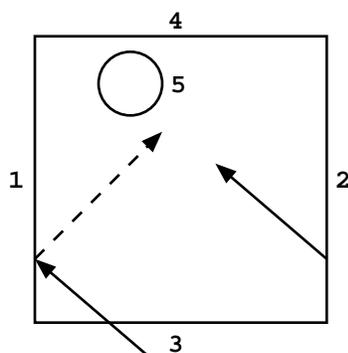


Figure 2.3(c)

It consists of a square reactor lattice infinite in the z direction and 10 cm on a side in the x and y directions with an off-center 1-cm-radius cylindrical fuel pin. The MCNP surface cards are:

```

1 -2 px -5
2 -1 px 5
3 -4 py -5
4 -3 py 5
5 c/z -2 4 1

```

The negative entries before the surface mnemonics specify periodic boundaries. Card one says that surface 1 is periodic with surface 2 and is a px plane. Card two says that surface 2 is periodic with surface 1 and is a px plane. Card three says that surface 3 is periodic with surface 4 and is a py plane. Card four says that surface 4 is periodic with surface 3 and is a py plane. Card five says that surface 5 is an infinite cylinder parallel to the z-axis. A particle leaving the lattice out the left side (surface 1) re-enters on the right side (surface 2). If the surfaces were reflecting, the re-entering particle would miss the cylinder, shown by the dotted line. In a fully specified lattice and in the periodic geometry, the re-entering particle will hit the cylinder as it should.

Much more complicated examples are possible, particularly hexagonal prism lattices. In all cases, MCNP checks that the periodic surface pair

CHAPTER 2

Cross Sections

matches properly and performs all the necessary surface rotations and translations to put the particle in the proper place on the corresponding periodic plane.

The following limitations apply:

- Periodic boundaries cannot be used with next event estimators such as detectors or DXTRAN (see page 2–81);
- All periodic surfaces must be planes;
- Periodic planes cannot also have a surface transformation;
- The periodic cells may be infinite or bounded by planes on the top or bottom that must be reflecting or white boundaries but not periodic;
- Periodic planes can only bound other periodic planes or top and bottom planes;
- A single zero-importance cell must be on one side of each periodic plane;
- All periodic planes must have a common rotational vector normal to the geometry top and bottom.

III. CROSS SECTIONS

The MCNP code package is incomplete without the associated nuclear data tables. The kinds of tables available and their general features are outlined in this section. The manner in which information contained on nuclear data tables is used in MCNP is described in Sec. IV of this chapter.

There are two broad objectives in preparing nuclear data tables for MCNP. First, it is our responsibility to ensure that the data available to MCNP reproduce the original evaluated data as much as is practical. Second, new data should be brought into the MCNP package in a timely fashion, thereby giving users access to the most recent evaluations.

Eight classes of nuclear data tables exist for MCNP. They are: (1) continuous-energy neutron interaction data, (2) discrete reaction neutron interaction data, (3) photon interaction data, (4) neutron dosimetry cross sections, (5) neutron $S(\alpha, \beta)$ thermal data (6) multigroup neutron, coupled neutron/photon, and charged particles masquerading as neutrons, (7) multigroup photon, and (8) electron interaction data. It is understood that photon and electron data are atomic rather than nuclear. In Mode N problems, one continuous-energy or discrete-reaction neutron interaction table is required for each isotope or element in the problem. Likewise, one photon interaction table is required for each element in a Mode P problem, and one electron interaction table is required for each element in a Mode E problem. Dosimetry and thermal data are optional. Cross sections from dosimetry tables can be used as response functions with the FM card to determine reaction rates. Thermal $S(\alpha, \beta)$ tables are appropriate if the neutrons are transported at sufficiently low energies where molecular binding effects are important.

MCNP can read from data tables in two formats. Data tables are transmitted between computer installations in 80-column card-image BCD format (Type-1 format). An auxiliary processing code, MAKXSF, converts the BCD files to standard unformatted binary files (Type-2 format), allowing more economical access during execution of MCNP. The data contained on

a table for a specific ZAID (10-character name for a nuclear data table) are independent of the format of the table.

The format of nuclear data tables is given in considerable detail in Appendix F. This appendix may be useful for users making extensive modifications to MCNP involving cross sections or for users debugging MCNP at a fairly high level.

The available nuclear data tables are listed in Appendix G. Each nuclear data table is identified by a ZAID. The general form of a ZAID is ZZZAAA.nnX, where ZZZ is the atomic number, AAA is the atomic weight, nn is the evaluation identifier, and X indicates the class of data. For elemental evaluations AAA=000. Nuclear data tables are selected by the user with the Mn and MTn cards.

In the remainder of this section we describe several characteristics of each class of data such as evaluated sources, processing tools, and any differences between data on the original evaluation and on the MCNP data tables. The means of accessing each class of data through MCNP input will be detailed and some hints will be provided on how to select the appropriate data tables.

A. Neutron Interaction Data: Continuous-Energy and Discrete Reaction

In neutron problems, one neutron interaction table is required for each isotope or element in the problem. The form of the ZAIDs is ZZZAAA.nnC for a continuous-energy table and ZZZAAA.nnD for a discrete reaction table. The neutron interaction tables available to MCNP are listed in Table G.2 of Appendix G. (It should be noted that although all nuclear data tables in Appendix G are available to users at Los Alamos, users at other installations will generally have only a subset of the tables available.)

For most materials there are many cross-section sets available (represented by different values of nn in the ZAIDs) because of multiple sources of evaluated data and different parameters used in processing the data. An evaluated nuclear data set is produced by analyzing experimentally measured cross sections and combining those data with the predictions of nuclear model calculations in an attempt to extract the most accurate cross-section information. Preparing evaluated cross-section sets has become a discipline in itself and has developed since the early 1960s. People in most of the national laboratories and several of the commercial reactor design firms are involved in such work. American evaluators joined forces in the mid-1960s to create the national ENDF system.²⁴ The ENDF contributors collaborate through the Cross Section Evaluation Working Group (CSEWG).

In recent years the primary evaluated source of neutron interaction data for MCNP has been the ENDF/B system. Recently evaluated neutron interaction data tables are also extracted from two other sources: Lawrence Livermore National Laboratory's Evaluated Nuclear Data Library (ENDL),²⁵ and supplemental evaluations performed in the Nuclear Theory and Applications Group at Los Alamos.^{26,27,28} Older evaluations come from previous

CHAPTER 2 Cross Sections

versions of ENDF/B and ENDL, the Los Alamos Master Data File,²⁹ and the Atomic Weapons Research Establishment in Great Britain.

MCNP does not access evaluated data directly; these data must first be processed into ACE format. The very complex processing codes used for this purpose include NJOY³⁰ for evaluated data in ENDF/B format and MCPOINT³¹ for ENDL data.

Data on the MCNP neutron interaction tables include cross sections and much more. Cross sections for all reactions given in the evaluated data are specified. For a particular table, the cross sections for each reaction are given on one energy grid that is sufficiently dense that linear-linear interpolation between points reproduces the evaluated cross sections within a specified tolerance that is generally 1% or less. Depending primarily on the number of resolved resonances for each isotope, the resulting energy grid may contain as few as ~ 250 points (for example, H-1) or as many as $\sim 22,500$ points (for example, the ENDF/B-V version of Au-197). Other information, including the total absorption cross section, the total photon production cross section, and the average heating number (for energy deposition calculations), is also tabulated on the same energy grid.

Angular distributions of scattered neutrons are included in the neutron interaction tables for all reactions emitting neutrons. The distributions are given in the center-of-mass system for elastic scattering, discrete-level inelastic scattering, and for some ENDF/B-VI scattering laws, and in the laboratory system for all other inelastic reactions. Angular distributions are given on a reaction-dependent grid of incident neutron energies. These tables are sampled to conserve energy for many collisions but will not necessarily conserve energy for a single collision; that is, energy is conserved on average.

The sampled angle of scattering uniquely determines the secondary energy for elastic scattering and discrete-level inelastic scattering. For other inelastic reactions, energy distributions of the scattered neutrons are provided in the neutron interaction tables. As with angular distributions, the energy distributions are given on a reaction-dependent grid of incident neutron energies.

When evaluations contain data about secondary photon production, that information appears in the MCNP neutron interaction tables. Many processed data sets contain photon production cross sections, photon angular distributions, and photon energy distributions for each neutron reaction that produces secondary photons. The information is given in a manner similar to that described in the last few paragraphs for neutron cross sections and secondary neutron distributions.

Other miscellaneous information on the neutron interaction tables includes the atomic weight ratio of the target nucleus, the Q-values of each reaction, and nubar, $\bar{\nu}$, data (the average number of neutrons per fission) for fissionable isotopes. In many cases both prompt and total $\bar{\nu}$ are given. Prompt $\bar{\nu}$ is the default for all but KCODE criticality problems and total $\bar{\nu}$ is the default for KCODE criticality problems. The TOTNU input card can be used to change the default.

Approximations must be made when processing an evaluated data set into ACE format. As mentioned above, cross sections are reproduced only within a certain tolerance, generally $< 1\%$; to decrease it further would result in excessively large data tables. For many nuclides, a “thinned” neutron interaction table is available with a coarse tolerance, $> 1\%$, that greatly reduces the library size. Smaller library sizes also can be obtained by using discrete reaction tables or higher temperature data. Evaluated angular distributions for secondary neutrons and photons are approximated on MCNP data tables by 32 equally probable cosine bins. This approximation is clearly necessary when contrasted to the alternative that might involve sampling from a 20th-order Legendre polynomial distribution. Secondary neutron energy distributions given in tabular form by evaluators are sometimes approximated on MCNP data tables by 32 equally probable energy bins. Older cross-section tables include a 30x20 matrix approximation of the secondary photon energy spectra (described on page 2–33). On the whole, the approximations are small, and MCNP neutron interaction data tables are extremely faithful representations of evaluated data.

Discrete-reaction tables are identical to continuous-energy tables except that in the discrete reaction tables all cross sections have been averaged into 262 groups. The averaging is done with a flat weighting function. This is not a multigroup representation; the cross sections are simply given as histograms rather than as continuous curves. The remaining data (angular distributions, energy distributions, \bar{v} , etc.) are identical in discrete-reaction and continuous-energy tables. Discrete-reaction tables are provided primarily as a method of shrinking the required data storage to enhance the ability to run MCNP on small machines or in a time-sharing environment. The tables may also be useful for preliminary scoping studies or for isotopes that exist only in trace quantities in a problem. They are not, however, recommended as a substitute for the continuous-energy tables when performing final calculations, particularly for problems involving transport through the resonance region.

The matter of how to select the appropriate neutron interaction tables for your calculation is now discussed. Multiple tables for the same isotope are differentiated by the “nn” portion of the Z Aid. The easiest choice for the user, although by no means the recommended one, is not to enter the nn at all. MCNP will select the first match found in the directory file XSDIR. The default nnX can be changed for all isotopes of a material by the NLIB keyword entry on the Mm card. The default will be overridden by fully specifying the Z Aid. Default continuous-energy neutron interaction tables are accessed by entering ZZZAAA for the Z Aid. Including a DRXS card in the input file will force MCNP to choose the default discrete reaction tables.

Careful users will want to think about what neutron interaction tables to choose. There is, unfortunately, no strict formula for guidance in choosing the tables. The following guidelines and observations are the best that can be offered:

1. Users should be aware of the differences between the “.50C” series of

CHAPTER 2

Cross Sections

data tables and the “.51C” series. Both are derived from ENDF/B-V. The “.50C” series is the most faithful reproduction of the evaluated data. The “.51C” series, also called the “thinned” series, has been processed with a less rigid tolerance than the “.50C” series. As with discrete reaction data tables, although by no means to the same extent, users should be careful when using the “thinned” data for transport through the resonance region.

2. Consider differences in evaluators’ philosophies. The Physical Data Group at Livermore is justly proud of its extensive cross-section efforts; their evaluations manifest a philosophy of reproducing the data with the fewest number of points. Livermore evaluations are available mainly in the “.40C” series. We at Los Alamos are particularly proud of the evaluation work being carried out in the Nuclear Theory and Applications Group T-2; generally, these evaluations are the most complex because they are the most thorough. Recent evaluations from Los Alamos are available in the “.55C” series.

3. Be aware of the neutron energy spectrum in your problem. For high-energy problems, the “thinned” and discrete reaction data are probably not bad approximations. Conversely, it is essential to use the most detailed continuous-energy set available for problems influenced strongly by transport through the resonance region.

4. Check the temperature at which various data tables have been processed. Do not use a set that is Doppler broadened to 12000000 °K for a room temperature calculation.

5. Consider checking the sensitivity of the results to various sets of nuclear data. Try, for example, a calculation with ENDF/B-V cross sections, and then another with ENDL cross sections. If the results of a problem are extremely sensitive to the choice of nuclear data, it is advisable to find out why.

6. For a coupled neutron/photon problem, be careful that the tables you choose have photon production data available. If possible, use the more-recent sets that have been processed into expanded photon production format.

7. Usually, use the best data you can afford. It is understood that the latest evaluations tend to be more complex and therefore require more memory and longer execution times. If you are limited by available memory, try to use smaller data tables such as thinned or discrete reaction for the minor isotopes in the calculation. Discrete reaction data tables might be used for a parameter study, followed by a calculation with the full continuous-energy data tables for confirmation.

To select the neutron interaction data tables, the nn portion of the ZAIDs must be entered on the Mn card(s). For a continuous-energy set, ZZZAAA.nn is equivalent to ZZZAAA.nnC. To use a discrete reaction table (unless there is a DRXS card in the input) the full ZAID, ZZZAAA.nnD, must be entered.

If only the integer portion of the ZAID is entered (ZZZAAA), MCNP will choose the cross-section table that it will use. Based on other cards (i.e., MODE, MGOPT, DRXS), MCNP knows which class of data is required. The code then “reads” the cross-section directory file (XSDIR) and selects

the first table it finds that meets the ZZZAAA and class criteria. Thus, default cross sections are based entirely on the ordering of the entries in the XSDIR file you are using at your installation.

In conclusion, the additional time necessary to choose appropriate neutron interaction data tables rather than simply to accept the defaults often will be well worth it in gaining understanding of your calculation.

B. Photon Interaction Data

Photon interaction cross sections are required for all photon problems. The form of the Z Aid is ZZZ000.nnP. There are two photon interaction data libraries: nn = 01 and nn = 02.

For the Z Aid=ZZZ000.01P library, the photon interaction tables for Z=84, 85, 87, 88, 89, 91, and 93 are based on the compilation of Storm and Israel³² from 1 keV to 15 MeV. For all other elements from Z=1 through Z=94 the photon interaction tables are based on evaluated data from ENDF³³ from 1 keV to 100 MeV. Fluorescence data are taken from work by Everett and Cashwell.³⁴ Energy grids are tailored specifically for each element and contain ~40–60 points.

The Z Aid = ZZZ000.02P library is a superset of the Z Aid = ZZZ000.01P library with pair production thresholds added for the Storm-Israel data. Data above 15 MeV for the Storm-Israel data and above 100 MeV for the ENDF data come from adaptation of the Livermore Evaluated Photon Data Library (EPDL)³⁵ and go up to 100 GeV. However, it usually is impractical to run above 1 GeV with MCNP because electron data only go to 1 GeV. The energy grid for the Z Aid=ZZZ000.02P library contains ~100 points.

For each nuclide the photon interaction libraries contain an energy grid (logarithms of energies), including the photoelectric edges and the pair production threshold. These energies are tailored specifically for each element. The logarithmic energies are followed by tables of incoherent form factors and coherent form factors that are tabulated as a function of momentum transfer. The next tables are logarithms of the incoherent scattering, coherent scattering, photoelectric, and pair production cross sections, followed by the photon heating numbers. The total cross section is not stored, but rather summed from the other cross sections during transport.

The determination of directions and energies of scattered photons requires information different from the sets of angular and energy distributions found on neutron interaction tables. Angular distributions of secondary photons are isotropic for photoelectric effect, fluorescence, and pair production, and come from sampling the well-known Thomson and Klein-Nishina formulas for coherent and incoherent scattering. The energy of an incoherently scattered photon is calculated from the sampled scattering angle. Values of the integrated coherent form factor are tabulated on the photon interaction tables for use with next event estimators such as point detectors.

Very few approximations are made in the various processing codes used to transfer photon data from ENDF into the format of MCNP photon interaction tables. Cross sections are reproduced exactly as given. Form factors

CHAPTER 2

Cross Sections

and scattering functions are reproduced as given; however, the momentum transfer grid on which they are tabulated may be different from that of the original evaluation. Heating numbers are calculated values, not given in evaluated sets, but inferred from them. Fluorescence data are not provided in ENDF; therefore the data for MCNP are extracted from a variety of sources as described in Ref. 32.

To select photon interaction data, specific ZAID identifiers can be used, such as ZAID=ZZZ000.02P, or selections from a library can be used by specifying PLIB=nnP on the M card. The PLIB=specification on the M card is the preferred method because the ZAID entries may already be used to specify neutron libraries and, unlike neutrons, it usually is desirable to pick all photon data from the same library. A specification on the Mn card for a neutron interaction table with ZAID=ZZZAAA.nnC or ZAID=ZZZAAA.nnD immediately causes a photon interaction table with ZAID=ZZZ000.nnP to be accessed as well, where nn is the first photon data encountered for ZZZ000 on the XSDIR cross section directory file or nn comes from PLIB=nn. The data table required for ZAID=ZZZAAA.nnP is identical to that required for ZAID=ZZZ000.nnP; however, the atomic weight used in the calculation will likely be different.

C. Electron Interaction Data

Electron interaction data tables are required both for problems in which electrons are actually transported, and for photon problems in which the thick-target bremsstrahlung model is used. Electron data tables are identified by ZAIDs of the form ZZZ000.nnE, and are selected by default when the problem mode requires them. There is only one electron interaction data library: nn = 01.

The electron library contains data on an element-by-element basis for atomic numbers $Z = 1-94$. As is the case with photons, there is no distinction between isotopes for a given element. The data contain energies for tabulation, bremsstrahlung production cross sections, bremsstrahlung energy distributions, X-ray production probabilities, K-edge energies and fluorescent probabilities, electron stopping powers and ranges, and parameters for the evaluation of the Goudsmit-Saunderson theory for angular deflections and the Landau-Blunck-Leisegang theory of energy-loss fluctuations. Discussions of the theoretical basis for these data and references to the relevant literature are presented in Section IV-E of this chapter.

Only the nn = 01 library is currently available, but to support the use of alternate libraries in the future, MCNP implements a hierarchy of rules identical to that for photons. Thus, one may select a specific ZAID, such as ZZZ000.01E, and that choice will override any defaults. Alternatively, a default electron library for a given material may be chosen by specifying ELIB = nnE on the M card. In the absence of either of these specifications, MCNP will use the first electron data table listed in the XSDIR cross section directory file for the relevant element.

D. Neutron Dosimetry Cross Sections

Dosimetry cross-section tables cannot be used for transport through material. These incomplete cross-section sets provide energy-dependent neutron cross sections to MCNP for use as response functions with the FM tally feature. ZAIDs of dosimetry tables are of the form ZZZAAA.nnY. Remember, dosimetry cross-section tables have no effect on the particle transport of a problem.

The available dosimetry cross sections are from three sources: ENDF/B-V Dosimetry Tape 531, ENDF/B-V Activation Tape 532, and ACTL³⁶—an evaluated neutron activation cross-section library from the Lawrence Livermore National Laboratory. Various codes have been used to process evaluated dosimetry data into the format of MCNP dosimetry tables.

Data on dosimetry tables are simply energy-cross-section pairs for one or more reactions. The energy grids for all reactions are independent of each other. Interpolation between adjacent energy points can be specified as histogram, linear-linear, linear-log, log-linear, or log-log. With the exception of the tolerance involved in any reconstruction of pointwise cross sections from resonance parameters, evaluated dosimetry cross sections can be reproduced on the MCNP data tables with no approximation.

ZAIDs for dosimetry tables must be entered on material cards that are referenced by FM cards, not on Mm cards referenced by cell cards. The complete ZAID, ZZZAAA.nnY, must be given; there are no defaults for dosimetry tables.

E. Neutron Thermal $S(\alpha, \beta)$ Tables

Thermal $S(\alpha, \beta)$ tables are not required, but they are absolutely essential to get correct answers in problems involving neutron thermalization. Thermal tables have ZAIDs of the form XXXXXX.nnT, where XXXXXX is a mnemonic character string. The data on these tables encompass those required for a complete representation of thermal neutron scattering by molecules and crystalline solids. The source of $S(\alpha, \beta)$ data is a special set of ENDF tapes.³⁷ The THERMR and ACER modules of the NJOY³⁰ system have been used to process the evaluated thermal data into a format appropriate for MCNP.

Data are for neutron energies generally less than 4 eV. Cross sections are tabulated on table-dependent energy grids; inelastic scattering cross sections are always given and elastic scattering cross sections are sometimes given. Correlated energy-angle distributions are provided for inelastically scattered neutrons. A set of equally probable final energies is tabulated for each of several initial energies. Further, a set of equally probable cosines or cosine bins is tabulated for each combination of initial and final energies. Elastic scattering data can be derived from either an incoherent or a coherent approximation. In the incoherent case, equally probable cosines or cosine bins are tabulated for each of several incident neutron energies. In the coherent case, scattering cosines are determined from a set of Bragg energies derived

CHAPTER 2

Neutrons

from the lattice parameters. During processing, approximations to the evaluated data are made when constructing equally probable energy and cosine distributions.

ZAIDs for the thermal tables are entered on an MTn card that is associated with an existing Mn card. The thermal table generally will provide data for one component of a material; for example, hydrogen in light water. Thermal ZAIDs may be entered on the MTn card(s) as XXXXXX, XXXXXX.nn, or XXXXXX.nnT.

F. Multigroup Tables

Multigroup cross section libraries are the only libraries allowed in multigroup/adjoint problems. Neutron multigroup problems cannot be supplemented with $S(\alpha, \beta)$ thermal libraries; the thermal effects must be included in the multigroup neutron library. Photon problems cannot be supplemented with electron libraries; the electrons must be part of the multigroup photon library. The form of the ZAID is ZZZAAA.nnM or ZZZAAA.nnG for photons only.

Although continuous-energy data are more accurate than multigroup data, the multigroup option is useful for a number of important applications: (1) comparison of deterministic (S_n) transport codes to Monte Carlo; (2) use of adjoint calculations in problems where the adjoint method is more efficient; (3) generation of adjoint importance functions; (4) cross section sensitivity studies; (5) solution of problems for which continuous-cross sections are unavailable; and (6) charged particle transport using the Boltzmann–Fokker–Planck algorithm in which charged particles masquerade as neutrons.

Multigroup cross sections are very problem dependent. Some multigroup libraries are available from the Transport Methods Group at Los Alamos but must be used with caution. Users are encouraged to generate or get their own multigroup libraries and then use the supplementary code CRSRD³⁸ to convert them to MCNP format. Reference 38 describes the conversion procedure. This report also describes how to use both the multigroup and adjoint methods in MCNP and presents several benchmark calculations demonstrating the validity and effectiveness of the multigroup/adjoint method.

To generate cross-section tables for electron/photon transport problems that will use the multigroup Boltzmann–Fokker–Planck algorithm,³⁹ the CEPXS⁴⁰ code developed by Sandia National Laboratory and available from RSICC can be used. The CEPXS manuals describe the algorithms and physics database upon which the code is based; the physics package is essentially the same as ITS version 2.1. The keyword “MONTE-CARLO” is needed in the CEPXS input file to generate a cross-section library suitable for input into CRSRD; this undocumented feature of the CEPXS code should be approached with caution.

IV. PHYSICS

The physics of neutron, photon, and electron interactions is the very essence of MCNP. This section may be considered a software requirements

document in that it describes the equations MCNP is intended to solve. All the sampling schemes essential to the random walk are presented or referenced. But first, particle weight and particle tracks, two concepts that are important for setting up the input and for understanding the output, are discussed in the following sections.

A. Particle Weight

If MCNP were used only to simulate exactly physical transport, then each MCNP particle would represent one physical particle and would have unit weight. However, for computational efficiency, MCNP allows many techniques that do not exactly simulate physical transport. For instance, each MCNP particle might represent a number w of particles emitted from a source. This number w is the initial weight of the MCNP particle. The w physical particles all would have different random walks, but the one MCNP particle representing these w physical particles will only have one random walk. Clearly this is not an exact simulation; however, the true number of physical particles is preserved in MCNP in the sense of statistical averages and therefore in the limit of large particle numbers (of course including particle production or loss if they occur). Each MCNP particle result is multiplied by the weight so that the full results of the w physical particles represented by each MCNP particle are exhibited in the final results (tallies). This procedure allows users to normalize their calculations to whatever source strength they desire. The default normalization is to weight one per MCNP particle. A second normalization to the number of Monte Carlo histories is made in the results so that the expected means will be independent of the number of source particles actually initiated in the MCNP calculation.

The utility of particle weight, however, goes far beyond simply normalizing the source. Every Monte Carlo biasing technique alters the probabilities of random walks executed by the particles. The purpose of such biasing techniques is to increase the number of particles that sample some part of the problem of special interest (1) without increasing (sometimes actually decreasing) the sampling of less interesting parts of the problem, and (2) without erroneously affecting the expected mean physical result (tally). This procedure, properly applied, increases precision in the desired result compared to an unbiased calculation taking the same computing time. For example, if an event is made $\sqrt{2}$ times as likely to occur (as it would occur without biasing), the tally ought to be multiplied by $1/\sqrt{2}$ so that the expected average tally is unaffected. This tally multiplication can be accomplished by multiplying the particle weight by $1/\sqrt{2}$ because the tally contribution by a particle is always multiplied by the particle weight in MCNP. Note that weights need not be integers.

In short, particle weight is a number carried along with each MCNP particle, representing that particle's relative contribution to the final tallies. Its magnitude is determined to ensure that whenever MCNP deviates from an exact simulation of the physics, the expected physical result nonetheless is preserved in the sense of statistical averages, and therefore in the limit

CHAPTER 2

Neutrons

of large MCNP particle numbers. Its utility is in the manipulation of the number of particles, sampling just a part of the problem to improve the precision of selected results obviating a full unbiased calculation—with its added cost in computing time—to achieve the same results and precision.

B. Particle Tracks

When a particle starts out from a source, a particle track is created. If that track is split 2 for 1 at a splitting surface, a second track is created and there are now two tracks from the original source particle, each with half the single track weight. If one of the tracks has an (n,2n) reaction, one more track is started for a total of three. A track refers to each component of a source particle during its history. Track length tallies use the length of a track in a given cell to determine a quantity of interest, such as fluence, flux, or energy deposition. Tracks crossing surfaces are used to calculate fluence, flux, or pulse-height energy deposition (surface estimators). Tracks undergoing collisions are used to calculate multiplication and criticality (collision estimators).

Within a given cell of fixed composition, the method of sampling a collision along the track is determined using the following theory. The probability of a first collision for a particle between l and $l + dl$ along its line of flight is given by

$$p(l)dl = e^{-\Sigma_t l} \Sigma_t dl,$$

where Σ_t is the macroscopic total cross section of the medium and is interpreted as the probability per unit length of a collision. Setting ξ the random number on $[0,1)$, to be

$$\xi = \int_0^l e^{-\Sigma_t s} \Sigma_t ds = 1 - e^{-\Sigma_t l},$$

it follows that

$$l = -\frac{1}{\Sigma_t} \ln(1 - \xi).$$

But, because $1 - \xi$ is distributed in the same manner as ξ and hence may be replaced by ξ , we obtain the well-known expression for the distance to collision,

$$l = -\frac{1}{\Sigma_t} \ln(\xi).$$

C. Neutron Interactions

When a particle (representing any number of neutrons, depending upon the particle weight) collides with a nucleus, the following sequence occurs:

1. the collision nuclide is identified;
2. either the $S(\alpha, \beta)$ treatment is used or the velocity of the target nucleus is sampled for low-energy neutrons;
3. photons are optionally generated for later transport;
4. neutron capture (that is, neutron disappearance by any process) is modeled;
5. unless the $S(\alpha, \beta)$ treatment is used, either elastic scattering or an inelastic reaction is selected, and the new energy and direction of the outgoing track(s) are determined;
6. if the energy of the neutron is low enough and an appropriate $S(\alpha, \beta)$ table is present, the collision is modeled by the $S(\alpha, \beta)$ treatment instead of by step 5.

1. Selection of Collision Nuclide

If there are n different nuclides forming the material in which the collision occurred, and if ξ is a random number on the unit interval $[0,1)$, then the k^{th} nuclide is chosen as the collision nuclide if

$$\sum_{i=1}^{k-1} \Sigma_{ti} < \xi \sum_{i=1}^n \Sigma_{ti} \leq \sum_{i=1}^k \Sigma_{ti},$$

where Σ_{ti} is the macroscopic total cross section of nuclide i . If the energy of the neutron is low enough (below about 4 eV) and the appropriate $S(\alpha, \beta)$ table is present, the total cross section is the sum of the capture cross section from the regular cross-section table and the elastic and inelastic scattering cross sections from the $S(\alpha, \beta)$ table. Otherwise, the total cross section is taken from the regular cross-section table and is adjusted for thermal effects as described below.

2. Free Gas Thermal Treatment

A collision between a neutron and an atom is affected by the thermal motion of the atom, and in most cases, the collision is also affected by the presence of other atoms nearby. The thermal motion cannot be ignored in many applications of MCNP without serious error. The effects of nearby atoms are also important in some applications. MCNP uses a thermal treatment based on the free gas approximation to account for the thermal motion. It also has an explicit $S(\alpha, \beta)$ capability that takes into account the effects of chemical binding and crystal structure for incident neutron energies below about 4 eV, but is available for only a limited number of substances and temperatures. The $S(\alpha, \beta)$ capability is described later on page 2–49.

The free gas thermal treatment in MCNP assumes that the medium is a free gas and also that, in the range of atomic weight and neutron energy

CHAPTER 2

Neutrons

where thermal effects are significant, the elastic scattering cross section at zero temperature is nearly independent of the energy of the neutron, and that the reaction cross sections are nearly independent of temperature. These assumptions allow MCNP to have a thermal treatment of neutron collisions that runs almost as fast as a completely nonthermal treatment and that is adequate for most practical problems.

With the above assumptions, the free gas thermal treatment consists of adjusting the elastic cross section and taking into account the velocity of the target nucleus when the kinematics of a collision are being calculated. Note that Doppler broadening of the inelastic cross sections is assumed to have already been done in the processing of the cross section libraries. The free gas thermal treatment effectively applies to elastic scattering only.

a. Adjusting the Elastic Cross Section: The first aspect of the free gas thermal treatment is to adjust the zero-temperature elastic cross section by raising it by the factor

$$F = (1 + 0.5/a^2)erf(a) + exp(-a^2)/(a\sqrt{\pi}) ,$$

where $a = \sqrt{AE/kT}$, A = atomic weight, E = neutron energy, and T = temperature. For speed, F is approximated by $F = 1 + 0.5/a^2$ when $a \geq 2$ and by linear interpolation in a table of 51 values of aF when $a < 2$. Both approximations have relative errors less than 0.0001. The total cross section also is increased by the amount of the increase in the elastic cross section.

The adjustment to the elastic and total cross sections is done partly in the setup of a problem and partly during the actual transport calculation. No adjustment is made if the elastic cross section in the data library was already processed to the temperature that is needed in the problem. If all of the cells that contain a particular nuclide have the same temperature, constant in time, that is different from the temperature of the library, the elastic and total cross sections for that nuclide are adjusted to that temperature during the setup so that the transport will run a little faster. Otherwise, these cross sections are reduced, if necessary, to zero temperature during the setup and the thermal adjustment is made when the cross sections are used. For speed, the thermal adjustment is omitted if the neutron energy is greater than $500 kT/A$. At that energy the adjustment of the elastic cross section would be less than 0.1%.

b. Sampling the Velocity of the Target Nucleus: The second aspect of the free gas thermal treatment consists of taking into account the velocity of the target nucleus when the kinematics of a collision are being calculated. The target velocity is sampled and subtracted from the velocity of the neutron to get the relative velocity. The collision is sampled in the target-at-rest frame and the outgoing velocities are transformed to the laboratory frame by adding the target velocity.

There are different schools of thought as to whether the relative energy between the neutron and target, E_r , or the laboratory frame incident neutron energy (target-at-rest), E_o , should be used for all the kinematics of the

collision. E_o is used in MCNP to obtain the distance-to-collision, select the collision nuclide, determine energy cutoffs, generate photons, generate fission sites for the next generation of a KCODE criticality problem, for $S(\alpha, \beta)$ scattering, and for capture. E_r is used for everything else in the collision process, namely elastic and inelastic scattering, including fission and (n,xn) reactions. It is shown in Eqn. 2.1 that E_r is based upon v_{rel} that is based upon the elastic scattering cross section, and, therefore, E_r is truly valid only for elastic scatter. However, the only significant thermal reactions for stable isotopes are absorption, elastic scattering, and fission. ^{181}Ta has a 6 keV threshold inelastic reaction; all other stable isotopes have higher inelastic thresholds. Metastable nuclides like ^{242m}Am have inelastic reactions all the way down to zero, but these inelastic reaction cross sections are neither constant nor $1/v$ cross sections and these nuclides are generally too massive to be affected by the thermal treatment anyway. Furthermore, fission is very insensitive to incident neutron energy at low energies. The fission secondary energy and angle distributions are nearly flat or constant for incident energies below about 500 keV. Therefore, it makes no significant difference if E_r is used only for elastic scatter or for other inelastic collisions as well. At thermal energies, whether E_r or E_o is used only makes a difference for elastic scattering.

If the energy of the neutron is greater than $400 kT$ and the target is not ^1H , the velocity of the target is set to zero. Otherwise, the target velocity is sampled as follows.

The free-gas kernel is a thermal interaction model that results in a good approximation to the thermal flux spectrum in a variety of applications and can be sampled without tables. The effective scattering cross section in the laboratory system for a neutron of kinetic energy E is

$$\sigma_s^{eff}(E) = \frac{1}{v_n} \iint \sigma_s(v_{rel}) v_{rel} p(V) dV \frac{d\mu_t}{2}. \quad (2.1)$$

Here, v_{rel} is the relative velocity between a neutron moving with a scalar velocity v_n and a target nucleus moving with a scalar velocity V , and μ_t is the cosine of the angle between the neutron and the target direction-of-flight vectors. The equation for v_{rel} is

$$v_{rel} = (v_n^2 + V^2 - 2v_n V \mu_t)^{\frac{1}{2}}.$$

The scattering cross section at the relative velocity is denoted by $\sigma_s(v_{rel})$, and $p(V)$ is the probability density function for the Maxwellian distribution of target velocities,

$$p(V) = \frac{4}{\pi^{1/2}} \beta^3 V^2 e^{-\beta^2 V^2}$$

with β defined as

$$\beta = \left(\frac{AM_n}{2kT} \right)^{1/2},$$

CHAPTER 2

Neutrons

where A is the mass of a target nucleus in units of the neutron mass, M_n is the neutron mass in MeV-sh²/cm², and kT is the equilibrium temperature of the target nuclei in MeV.

The most probable scalar velocity V of the target nuclei is $1/\beta$, which corresponds to a kinetic energy of kT for the target nuclei. This is not the average kinetic energy of the nuclei, which is $3kT/2$. The quantity that MCNP expects on the TMPn input card is kT and not just T (see page 3–108). Note that kT is not a function of the particle mass and is therefore the kinetic energy at the most probable velocity for particles of any mass.

Equation (2.1) implies that the probability distribution for a target velocity V and cosine μ_t is

$$P(V, \mu_t) = \frac{\sigma_s(v_{rel})v_{rel}P(V)}{2\sigma_s^{eff}(E)v_n} .$$

It is assumed that the variation of $\sigma_s(v_{rel})$ with target velocity can be ignored. The justification for this approximation is that (1) for light nuclei, $\sigma_s(v_{rel})$ is slowly varying with velocity, and (2) for heavy nuclei, where $\sigma_s(v_{rel})$ can vary rapidly, the moderating effect of scattering is small so that the consequences of the approximation will be negligible. As a result of the approximation, the probability distribution actually used is

$$P(V, \mu_t) \propto \sqrt{v_n^2 + V^2 - 2Vv_n\mu_t} V^2 e^{-\beta^2 V^2} .$$

Note that the above expression can be written as

$$P(V, \mu_t) \propto \frac{\sqrt{v_n^2 + V^2 - 2Vv_n\mu_t}}{v_n + V} (V^3 e^{-\beta^2 V^2} + v_n V^2 e^{-\beta^2 V^2}) .$$

As a consequence, the following algorithm is used to sample the target velocity.

1. With probability $\alpha = 1/(1 + (\sqrt{\pi}\beta v_n/2))$, the target velocity V is sampled from the distribution $P_1(V) = 2\beta^4 V^3 e^{-\beta^2 V^2}$. The transformation $V = \sqrt{y}/\beta$ reduces this distribution to the sampling distribution for $P(y) = ye^{-y}$. MCNP actually codes $1-\alpha$.
2. With probability $1 - \alpha$, the target velocity is sampled from the distribution $P_2(V) = (4\beta^3/\sqrt{\pi})V^2 e^{-\beta^2 V^2}$. Substituting $V = y/\beta$ reduces the distribution to the sampling distribution for y : $P(y) = (4/\sqrt{\pi})y^2 e^{-y^2}$.
3. The cosine of the angle between the neutron velocity and the target velocity is sampled uniformly on the interval $-1 \leq \mu_t \leq +1$.
4. The rejection function $R(V, \mu_t)$ is computed using

$$R(V, \mu_t) = \frac{\sqrt{v_n^2 + V^2 - 2Vv_n\mu_t}}{v_n + V} \leq 1 .$$

With probability $R(V, \mu_t)$, the sampling is accepted; otherwise, the sampling is rejected and the procedure is repeated. The minimum

efficiency of this rejection algorithm averaged over μ_t is 68% and approaches 100% as either the incident neutron energy approaches zero or becomes much larger than kT .

3. Optional Generation of Photons

Photons are generated if the problem is a combined neutron/photon run and if the collision nuclide has a nonzero photon production cross section. The number of photons produced is a function of neutron weight, neutron source weight, photon weight limits (entries on the PWT card), photon production cross section, neutron total cross section, cell importance, and the importance of the neutron source cell. No more than 10 photons may be born from any neutron collision. In a KCODE calculation, secondary photon production from neutrons is turned off during the inactive cycles.

Because of the many low-weight photons typically created by neutron collisions, Russian roulette is played for particles with weight below the bounds specified on the PWT card, resulting in fewer particles, each having a larger weight. The created photon weight before Russian roulette is

$$W_p = \frac{W_n \sigma_\gamma}{\sigma_T},$$

where W_p = photon weight
 W_n = neutron weight
 σ_γ = photon production cross section
 σ_T = total neutron cross section.

Both σ_γ and σ_T are evaluated at the incoming neutron energy without the effects of the thermal free gas treatment because nonelastic cross sections are assumed independent of temperature.

The Russian roulette game is played according to neutron cell importances for the collision and source cell. For a photon produced in cell i where the minimum weight set on the PWT card is W_i^{min} , let I_i be the neutron importance in cell i and let I_s be the neutron importance in the source cell. If $W_p > W_i^{min} * I_s / I_i$, one or more photons will be produced. The number of photons created is N_p , where $N_p = (W_p * I_i) / (5 * W_i^{min} * I_s) + 1$. $N_p \leq 10$. Each photon is stored in the bank with weight W_p / N_p . If $W_p < W_i^{min} * I_s / I_i$, Russian roulette is played and the photon survives with probability $W_p * I_i / (W_i^{min} * I_s)$ and is given the weight $W_i^{min} * I_s / I_i$.

If weight windows are not used and if the weight of the starting neutrons is not unity, setting all the W_i^{min} on the PWT card to negative values will make the photon minimum weight relative to the neutron source weight. This will make the number of photons being created roughly proportional to the biased collision rate of neutrons. It is recommended for most applications that negative numbers be used and be chosen to produce from one to four photons per source neutron. The default values for W_i^{min} on the PWT card are -1 , which should be adequate for most problems using cell importances.

If energy-independent weight windows are used, the entries on the PWT card should be the same as on the WWN1:P card. If energy-dependent

CHAPTER 2

Neutrons

photon weight windows are used, the entries on the PWT card should be the minimum WWNn:P entry for each cell, where n refers to the photon weight window energy group. This will cause most photons to be born within the weight window bounds.

Any photons generated at neutron collision sites are temporarily stored in the bank. There are two methods for determining the exiting energies and directions, depending on the form in which the processed photon production data are stored in a library. The first method has the evaluated photon production data processed into an “expanded format.”⁴¹ In this format, energy-dependent cross sections, energy distributions, and angular distributions are explicitly provided for every photon-producing neutron interaction. In the second method, used with data processed from older evaluations, the evaluated photon production data have been collapsed so that the only information about secondary photons is in a matrix of 20 equally probable photon energies for each of 30 incident neutron energy groups. The sampling techniques used in each method are now described.

a. Expanded Photon Production Method: In the expanded photon production method, the reaction n responsible for producing the photon is sampled from

$$\sum_{i=1}^{n-1} \sigma_i < \xi \sum_{i=1}^N \sigma_i \leq \sum_{i=1}^n \sigma_i ,$$

where ξ is a random number on the interval $[0,1)$, N is the number of photon production reactions, and σ_i is the photon production cross section for reaction i at the incident neutron energy. Note that there is no correlation between the sampling of the type of photon production reaction and the sampling of the type of neutron reaction described on page 2–34.

Just as every neutron reaction (for example, $(n, 2n)$) has associated energy-dependent angular and energy distributions for the secondary neutrons, every photon production reaction (for example, $(n, p\gamma)$) has associated energy-dependent angular and energy distributions for the secondary photons. The photon distributions are sampled in much the same manner as their counterpart neutron distributions.

All nonisotropic secondary photon angular distributions are represented by 32 equiprobable cosine bins. The distributions are given at a number of incident neutron energies. All photon-scattering cosines are sampled in the laboratory system. The sampling procedure is identical to that described for secondary neutrons on page 2–35.

Secondary photon energy distributions are also a function of incident neutron energy. There are two representations of secondary photon energy distributions allowed in ENDF/B format: tabulated spectra and discrete (line) photons. Correspondingly, there are three laws used in MCNP for the determination of secondary photon energies. Law 4 is an exact representation of tabulated photon spectra. Law 2 is used for discrete photons. Law 44 is for discrete photon lines with a continuous background. These laws are

described beginning on page 2–39.

The expanded photon production method has clear advantages over the original 30 x 20 matrix method described below. In coupled neutron/photon problems, users should attempt to specify data sets that contain photon production data in expanded format. Such data sets are identified by “YES P(E)” entries in the GPD column in Table G.2 in Appendix G.

b. 30 x 20 Photon Production Method: For lack of better terminology, we will refer to the photon production data contained on older libraries as “30 x 20 photon production” data. In contrast to expanded photon production data, there is no information about individual photon production reactions in the 30 x 20 data.

The only secondary photon data are a 30 x 20 matrix of photon energies; that is, for each of 30 incident neutron energy groups there are 20 equally probable exiting photon energies. There is no information regarding secondary photon angular distributions; therefore, all photons are taken to be produced isotropically in the laboratory system.

There are several problems associated with 30 x 20 photon production data. The 30 x 20 matrix is an inadequate representation of the actual spectrum of photons produced. In particular, discrete photon lines are not well represented, and the high-energy tail of a photon continuum energy distribution is not well sampled. Also, the multigroup representation is not consistent with the continuous-energy nature of MCNP. Finally, not all photons should be produced isotropically. None of these problems exists for data processed into the expanded photon production format.

4. Capture

Capture is treated in one of two ways: analog or implicit. Either way, the incident incoming neutron energy does not include the relative velocity of the target nucleus from the free gas thermal treatment because nonelastic reaction cross sections are assumed to be nearly independent of temperature. That is, only the scattering cross section is affected by the free gas thermal treatment. In MCNP, “absorption” and “capture” are used interchangeably, both meaning $(n,0n)$, and σ_c and σ_a are used interchangeably also.

a. Analog Capture: In analog capture, the particle is killed with probability σ_a/σ_T , where σ_a and σ_T are the absorption and total cross sections of the collision nuclide at the incoming neutron energy. The absorption cross section is specially defined for MCNP as the sum of all (n, x) cross sections, where x is anything except neutrons. Thus σ_a is the sum of $\sigma_{n,\gamma}$, $\sigma_{n,\alpha}$, $\sigma_{n,d}$, ... etc. For all particles killed by analog capture, the entire particle energy and weight are deposited in the collision cell.

b. Implicit Capture: For implicit capture, the neutron weight W_n is reduced to W'_n as follows:

$$W'_n = \left(1 - \frac{\sigma_a}{\sigma_T}\right) * W_n.$$

CHAPTER 2

Neutrons

If the new weight, W'_n , is below the problem weight cutoff (specified on the CUT card), Russian roulette is played, resulting overall in fewer particles with larger weight.

For implicit capture, a fraction σ_a/σ_T of the incident particle weight and energy is deposited in the collision cell corresponding to that portion of the particle that was captured. Implicit capture is the default method of neutron capture in MCNP.

c. Implicit Capture Along a Flight Path: Implicit capture also can be done continuously along the flight path of a particle trajectory as is the common practice in astrophysics. In this case, the distance to scatter, rather than the distance to collision, is sampled. The distance to scatter is

$$l = -\frac{1}{\Sigma_s} \ln(1 - \xi).$$

The particle weight at the scattering point is reduced by the capture loss,

$$W' = W e^{-\Sigma_a l} \quad ,$$

where W' = reduced weight after capture loss,
 W = weight before capture along flight path,
 σ_a = absorption cross section,
 σ_s = scattering cross section,
 $\sigma_t = \sigma_s + \sigma_a$ = total cross section,
 l = distance to scatter, and
 ξ = random number.

Implicit capture along a flight path is a special form of the exponential transformation coupled with implicit capture at collisions. (See the description of the exponential transform on page 2–128.) The path length is stretched in the direction of the particle, $\mu = 1$, and the stretching parameter is $p = \Sigma_a/\Sigma_t$. Using these values the exponential transform and implicit capture at collisions yield the identical equations as does implicit capture along a flight path.

Implicit capture along a flight path is invoked in MCNP as a special option of the exponential transform variance reduction method. It is most useful in highly absorbing media, that is, Σ_a/Σ_t approaches 1. When almost every collision results in capture, it is very inefficient to sample distance to collision. However, implicit capture along a flight path is discouraged. In highly absorbing media, there is usually a superior set of exponential transform parameters. In relatively nonabsorbing media, it is better to sample the distance to collision than the distance to scatter.

5. Elastic and Inelastic Scattering

If the conditions for the $S(\alpha, \beta)$ treatment are not met, the particle undergoes either an elastic or inelastic collision. The selection of an elastic collision is made with probability

$$\frac{\sigma_{el}}{\sigma_{in} + \sigma_{el}} = \frac{\sigma_{el}}{\sigma_T - \sigma_a}$$

where

σ_{el} is the elastic scattering cross section.

σ_{in} is the inelastic cross section; includes any neutron-out process— (n, n') , (n, f) , (n, np) , etc.

σ_a is the absorption cross section; $\Sigma\sigma(n, x)$, $\neq n$, that is, all neutron disappearing reactions.

σ_T is the total cross section, $\sigma_T = \sigma_{el} + \sigma_{in} + \sigma_a$.

Both σ_{el} and σ_T are adjusted for the free gas thermal treatment at thermal energies.

The selection of an inelastic collision is made with the remaining probability

$$\frac{\sigma_{in}}{\sigma_T - \sigma_a} .$$

If the collision is determined to be inelastic, the type of inelastic reaction, n , is sampled from

$$\sum_{i=1}^{n-1} \sigma_i < \xi \sum_{i=1}^N \sigma_i \leq \sum_{i=1}^n \sigma_i \quad ,$$

where ξ is a random number on the interval $[0,1)$, N is the number of inelastic reactions, and the σ_i 's are the inelastic reaction cross sections at the incident neutron energy.

For both elastic and inelastic scattering, the direction of exiting particles usually is determined by sampling angular distribution tables from the cross-section files. This process is described shortly. For elastic collisions and discrete inelastic scattering from levels, the exiting particle energy is determined from two body kinematics based upon the center-of-mass cosine of the scattering angle. For other inelastic processes, the energy of exiting particles is determined from secondary energy distribution laws from the cross-section files, which vary according to the particular inelastic collision modeled.

a. Sampling of Angular Distributions: The direction of emitted particles is sampled in the same way for most elastic and inelastic collisions. The cosine of the angle between incident and exiting particle directions, μ , is sampled from angular distribution tables in the collision nuclide's cross-section library. The angular distribution tables consist of 32 equiprobable cosine bins and are given at a number of different incident neutron energies. The cosines are either in the center-of-mass or target-at-rest system, depending on the type of reaction. If E is the incident neutron energy, if E_n is the energy of table n , and if E_{n+1} is the energy of table $n + 1$, then a value of μ is sampled from table $n + 1$ with probability $(E - E_n)/(E_{n+1} - E_n)$ and from table n with probability $(E_{n+1} - E)/(E_{n+1} - E_n)$. A random number ξ on

CHAPTER 2

Neutrons

the interval $[0,1)$ is then used to select the i^{th} cosine bin such that $i = 32\xi + 1$. The value of μ is then computed as

$$\mu = \mu_i + (32\xi - i)(\mu_{i+1} - \mu_i) \quad .$$

If, for some incident neutron energy, the emitted angular distribution is isotropic, μ is chosen from $\mu = \xi'$, where ξ' is a random number on the interval $[-1,1)$. (Strictly, in MCNP random numbers are always furnished on the interval $[0,1)$. Thus, to compute ξ' on $[-1,1)$ we calculate $\xi' = 2\xi - 1$, where ξ is a random number on $[0,1)$.)

For elastic scattering, inelastic level scattering, and some ENDF/B-VI inelastic reactions, the scattering cosine is chosen in the center-of-mass system. Conversion must then be made to μ_{lab} , the cosine in the target-at-rest system. For other inelastic reactions, the scattering cosine is sampled directly in the target-at-rest system.

The incident particle direction cosines, (u_o, v_o, w_o) , are rotated to new outgoing target-at-rest system cosines, (u, v, w) , through a polar angle whose cosine is μ_{lab} , and through an azimuthal angle sampled uniformly. For random numbers ξ_1 and ξ_2 on the interval $[-1,1)$ with rejection criterion $\xi_1^2 + \xi_2^2 \leq 1$, the rotation scheme is (Ref. 2, pg. 54):

$$\begin{aligned} u &= u_o\mu_{lab} + \frac{\sqrt{1 - \mu_{lab}^2}(\xi_1 u_o w_o - \xi_2 v_o)}{\sqrt{(\xi_1^2 + \xi_2^2)(1 - w_o^2)}} \\ v &= v_o\mu_{lab} + \frac{\sqrt{1 - \mu_{lab}^2}(\xi_1 v_o w_o + \xi_2 u_o)}{\sqrt{(\xi_1^2 + \xi_2^2)(1 - w_o^2)}} \\ w &= w_o\mu_{lab} - \frac{\xi_1 \sqrt{(1 - \mu_{lab}^2)(1 - w_o^2)}}{\sqrt{(\xi_1^2 + \xi_2^2)}} \quad . \end{aligned}$$

If $1 - w_o^2 \sim 0$, then

$$\begin{aligned} u &= u_o\mu_{lab} + \frac{\sqrt{1 - \mu_{lab}^2}(\xi_1 u_o v_o + \xi_2 w_o)}{\sqrt{(\xi_1^2 + \xi_2^2)(1 - v_o^2)}} \\ v &= v_o\mu_{lab} - \frac{\xi_1 \sqrt{(1 - \mu_{lab}^2)(1 - v_o^2)}}{\sqrt{(\xi_1^2 + \xi_2^2)}} \\ w &= w_o\mu_{lab} + \frac{\sqrt{1 - \mu_{lab}^2}(\xi_1 w_o v_o - \xi_2 u_o)}{\sqrt{(\xi_1^2 + \xi_2^2)(1 - v_o^2)}} \quad . \end{aligned}$$

If the scattering distribution is isotropic in the target-at-rest system, it is possible to use an even simpler formulation that takes advantage of the

exiting direction cosines, (u, v, w) , being independent of the incident direction cosines, (u_o, v_o, w_o) . In this case,

$$\begin{aligned} u &= 2\xi_1^2 + 2\xi_2^2 - 1 \\ v &= \xi_1 \sqrt{\frac{1-u^2}{\xi_1^2 + \xi_2^2}} \\ w &= \xi_2 \sqrt{\frac{1-u^2}{\xi_1^2 + \xi_2^2}} \quad , \end{aligned}$$

where ξ_1 and ξ_2 are rejected if $\xi_1^2 + \xi_2^2 > 1$.

b. Elastic Scattering: The particle direction is sampled from the appropriate angular distribution tables, and the exiting energy, E_{out} , is dictated by two-body kinematics:

$$\begin{aligned} E_{out} &= \frac{1}{2} E_{in} [(1 - \alpha)\mu_{cm} + 1 + \alpha] \\ &= E_{in} \left[\frac{1 + A^2 + 2A\mu_{cm}}{(1 + A)^2} \right] \quad , \end{aligned}$$

where E_{in} = incident neutron energy

μ_{cm} = center-of-mass cosine of the angle between incident and exiting particle directions

$$\alpha = \left(\frac{A - 1}{A + 1} \right)^2$$

and A = mass of collision nuclide in units of the mass of a neutron
(atomic weight ratio)

c. Inelastic Scattering: The treatment of inelastic scattering depends upon the particular inelastic reaction chosen. Inelastic reactions are defined as (n, y) reactions such as (n, n') , $(n, 2n)$, (n, f) , $(n, n'\alpha)$ in which y includes at least one neutron.

For many inelastic reactions, such as $(n, 2n)$, more than one neutron can be emitted for each incident neutron. The weight of each exiting particle is always the same as the weight of the incident particle minus any implicit capture. The energy of exiting particles is governed by various scattering laws that are sampled independently from the cross-section files for each exiting particle. Which law is used is prescribed by the particular cross-section evaluation used. In fact, more than one law can be specified, and the particular one used at a particular time is decided with a random number. In an $(n, 2n)$ reaction, for example, the first particle emitted may have an energy sampled from one or more laws, but the second particle emitted may have an energy sampled from one or more different laws, depending upon specifications in the nuclear data library. Because emerging energy and scattering angle is sampled independently for each particle, there is no correlation between the emerging particles. Hence energy is not conserved in an individual

CHAPTER 2

Neutrons

reaction because, for example, a 14-MeV particle could conceivably produce two 12-MeV particles in a single reaction. But the net effect of many particle histories is unbiased because on the average the correct amount of energy is emitted. Results are biased only when quantities that depend upon the correlation between the emerging particles are being estimated.

Users should note that MCNP follows a very particular convention. The exiting particle energy and direction are always given in the target-at-rest (laboratory) coordinate system. For the kinematical calculations in MCNP to be performed correctly, the angular distributions for elastic, discrete inelastic level scattering, and some ENDF/B-VI inelastic reactions *must* be given in the center-of-mass system, and the angular distributions for all other reactions *must* be given in the target-at-rest system. MCNP does not stop if this convention is not adhered to, but the results will be erroneous. In the checking of the cross-section libraries prepared for MCNP at Los Alamos, however, careful attention has been paid to ensure that these conventions are followed.

The exiting particle energy and direction in the target-at-rest (laboratory) coordinate system are related to the center-of-mass energy and direction as follows:¹

$$E' = E'_{cm} + \left[\frac{E + 2\mu_{cm}(A+1)\sqrt{E E'_{cm}}}{(A+1)^2} \right]; \text{ and}$$

$$\mu_{lab} = \mu_{cm} \sqrt{\frac{E'_{cm}}{E'}} + \frac{1}{A+1} \sqrt{\frac{E}{E'}} \quad ,$$

where

- E' = exiting particle energy (laboratory),
- E'_{cm} = exiting particle energy (center-of-mass),
- E = incident particle energy (laboratory),
- μ_{cm} = cosine of center-of-mass scattering angle,
- μ_{lab} = cosine of laboratory scattering angle,
- A = atomic weight ratio (mass of nucleus divided by mass of incident particle.)

For point detectors it is necessary to convert

$$p(\mu_{lab}) = p(\mu_{cm}) \frac{d\mu_{cm}}{d\mu_{lab}},$$

where

$$\mu_{cm} = \mu_{lab} \sqrt{\frac{E'}{E'_{cm}}} - \frac{1}{A+1} \sqrt{\frac{E}{E'_{cm}}} \quad \text{and}^1$$

$$\frac{d\mu_{cm}}{d\mu_{lab}} = \frac{E'/E'_{cm}}{\sqrt{\frac{E'}{E'_{cm}} - \frac{\mu_{lab}}{A+1} \sqrt{\frac{E}{E'_{cm}}}}}$$

$$= \frac{\sqrt{\frac{E'}{E'_{cm}}}}{1 - \frac{\mu_{lab}}{A+1} \sqrt{\frac{E}{E'}}}.$$

d. Nonfission Inelastic Scattering and Emission Laws: Nonfission inelastic reactions are handled differently from fission inelastic reactions. For each nonfission reaction N_p particles are emitted, where N_p is an integer quantity specified for each reaction in the cross-section data library of the collision nuclide. The direction of each emitted particle is independently sampled from the appropriate angular distribution table, as was described earlier. The energy of each emitted particle is independently sampled from one of the following scattering or emission laws. Energy and angle are correlated only for ENDF/B-VI laws 44 and 67. For completeness and convenience we list all the laws together, regardless of whether the law is appropriate for nonfission inelastic scattering (for example, Law 3), fission spectra (for example, Law 11), both (for example, Law 9), or neutron-induced photon production (for example, Law 2). The conversion from center-of-mass to target-at-rest (laboratory) coordinate systems is as above.

Law 1 (ENDF law 1): Equiprobable energy bins.

The index i and the interpolation fraction r are found on the incident energy grid for the incident energy E_{in} such that

$$E_i < E_{in} < E_{i+1} \quad \text{and}$$

$$E_{in} = E_i + r(E_{i+1} - E_i).$$

A random number on the unit interval ξ_1 is used to select an equiprobable energy bin k from the K equiprobable outgoing energies E_{ik}

$$k = \xi_1 K + 1 .$$

Then scaled interpolation is used with random numbers ξ_2 and ξ_3 on the unit interval. Let

$$E_1 = E_{i,1} + r(E_{i+1,1} - E_{i,1}) \quad \text{and}$$

$$E_K = E_{i,K} + r(E_{i+1,K} - E_{i,K}); \quad \text{and}$$

$$l = i \text{ if } \xi_3 > r \quad \text{or}$$

$$l = i + 1 \text{ if } \xi_3 < r \quad \text{and}$$

$$E' = E_{l,k} + \xi_2(E_{l,k+1} - E_{l,k}); \quad \text{then}$$

$$E_{out} = E_1 + \frac{(E' - E_{l,1})(E_K - E_1)}{E_{l,K} - E_{l,1}}.$$

Law 2 Discrete photon energy.

The value provided in the library is E_g . The secondary photon energy

CHAPTER 2

Neutrons

E_{out} is either

$E_{out} = E_g$ for non-primary photons or

$E_{out} = E_g + [A/(A + 1)]E_{in}$ for primary photons,

where A is the atomic weight to neutron weight ratio of the target and E_{in} is the incident neutron energy.

Law 3 (ENDF law 3): Inelastic scattering (n, n') from nuclear levels. The value provided in the library is Q .

$$E_{out} = \left(\frac{A}{A + 1} \right)^2 \left[E_{in} - \frac{Q(A + 1)}{A} \right]$$

Law 4 Tabular distribution (ENDF law 4).

For each incident neutron energy E_i there is a pointer to a table of secondary energies $E_{i,k}$, probability density functions $p_{i,k}$, and cumulative density functions $c_{i,k}$. The index i and the interpolation fraction r are found on the incident energy grid for the incident energy E_{in} such that

$$E_i < E_{in} < E_{i+1} \quad \text{and}$$

$$E_{in} = E_i + r(E_{i+1} - E_i).$$

A random number on the unit interval ξ_1 is used to sample a secondary energy bin k from the cumulative density function

$$c_{i,k} + r(c_{i+1,k} - c_{i,k}) < \xi_1 < c_{i,k+1} + r(c_{i+1,k+1} - c_{i,k+1}).$$

If these are discrete line spectra, then the sampled energy E' is interpolated between incident energy grids as

$$E' = E_{i,k} + r(E_{i+1,k} - E_{i,k}).$$

It is possible to have all discrete lines, all continuous spectra, or a mixture of discrete lines superimposed on a continuous background. For continuous distributions, the secondary energy bin k is sampled from

$$c_{l,k} < \xi_1 < c_{l,k+1},$$

where $l = i$ if $\xi_2 > r$ and $l = i + 1$ if $\xi_2 < r$, and ξ_2 is a random number on the unit interval. For histogram interpolation the sampled energy is

$$E' = E_{l,k} + \frac{(\xi_1 - c_{l,k})}{p_{l,k}}.$$

For linear-linear interpolation the sampled energy is

$$E' = E_{l,k} + \left\{ \frac{\sqrt{p_{l,k}^2 + 2 \left[\frac{p_{l,k+1} - p_{l,k}}{E_{l,k+1} - E_{l,k}} \right] (\xi_1 - c_{l,k}) - p_{l,k}}}{\left[\frac{p_{l,k+1} - p_{l,k}}{E_{l,k+1} - E_{l,k}} \right]} \right\}.$$

For neutron-induced photons, $E_{out} = E'$ and the angle is selected as described on page 2-35. That is, the photon secondary energy is sampled from either of the two bracketing incident energy bins, $l = i$ or $l = i + 1$.

The neutron secondary energy must be interpolated between the incident energy bins i and $i + 1$ to properly preserve thresholds. Let

$$E_1 = E_{i,1} + r(E_{i+1,1} - E_{i,1}) \quad \text{and}$$

$$E_K = E_{i,K} + r(E_{i+1,K} - E_{i,K}); \quad \text{then}$$

$$E_{out} = E_1 + \frac{(E' - E_{l,1})(E_K - E_1)}{(E_{l,K} - E_{l,1})}.$$

The outgoing neutron energy is then adjusted to the laboratory system, if it is in the center-of-mass system, and the outgoing angle is selected as described on page 2-35.

Law 5 (ENDF law 5): General evaporation spectrum.

The function $g(x)$ is tabulated versus χ and the energy is tabulated versus incident energy E_{in} . The law is then

$$f(E_{in} \rightarrow E_{out}) = g \left(\frac{E_{out}}{T(E_{in})} \right).$$

This density function is sampled by

$$E_{out} = \chi(\xi)T(E_{in}),$$

where $T(E_{in})$ is a tabulated function of the incident energy and

$\chi(\xi)$ is a table of equiprobable χ values.

Law 7 (ENDF law 7): Simple Maxwell Fission Spectrum.

$$f(E_{in} \rightarrow E_{out}) = C * \sqrt{E_{out}} e^{-E_{out}/T(E_{in})}.$$

The nuclear temperature $T(E_{in})$ is a tabulated function of the incident energy. The normalization constant C is given by

$$C^{-1} = T^{3/2} \left[\left(\frac{\sqrt{\pi}}{2} \right) \operatorname{erf} \left(\sqrt{\frac{(E_{in} - U)}{T}} \right) - \sqrt{\frac{(E_{in} - U)}{T}} e^{-(E_{in} - U)/T} \right].$$

CHAPTER 2

Neutrons

U is a constant provided in the library and limits E_{out} to $0 \leq E_{out} \leq E_{in} - U$. In MCNP this density function is sampled by the rejection scheme

$$E_{out} = -T(E_{in}) \left[\frac{\xi_1^2 \ln \xi_3}{\xi_1^2 + \xi_2^2} + \ln \xi_4 \right] \quad ,$$

where ξ_1 , ξ_2 , ξ_3 , and ξ_4 are random numbers on the unit interval. ξ_1 and ξ_2 are rejected if $\xi_1^2 + \xi_2^2 > 1$.

Law 9 (ENDF law 9): Evaporation spectrum.

$$f(E_{in} \rightarrow E_{out}) = C E_{out} e^{-E_{out}/T(E_{in})} \quad ,$$

where the nuclear temperature $T(E_{in})$ is a tabulated function of the incident energy. The energy U is provided in the library and is assigned so that E_{out} is limited by $0 \leq E_{out} \leq E_{in} - U$. The normalization constant C is given by

$$C^{-1} = T^2 \left[1 - e^{-(E_{in}-U)/T} (1 + (E_{in} - U)/T) \right] \quad .$$

In MCNP this density function is sampled by

$$E_{out} = -T(E_{in}) \ln(\xi_1 \xi_2) \quad ,$$

where ξ_1 and ξ_2 are random numbers on the unit interval, and ξ_1 and ξ_2 are rejected if $E_{out} > E_{in} - U$.

Law 11 (ENDF law 11): Energy Dependent Watt Spectrum.

$$f(E_{in} \rightarrow E_{out}) = C e^{-E_{out}/a(E_{in})} \sinh \sqrt{b(E_{in}) E_{out}} \quad .$$

The constants a and b are tabulated functions of incident energy and U is a constant from the library. The normalization constant C is given by

$$C^{-1} = \frac{1}{2} \sqrt{\frac{\pi a^3 b}{4}} \exp\left(\frac{ab}{4}\right) \left[\operatorname{erf}\left(\sqrt{\frac{(E_{in}-U)}{a}} - \sqrt{\frac{ab}{4}}\right) + \operatorname{erf}\left(\sqrt{\frac{(E_{in}-U)}{a}} + \sqrt{\frac{ab}{4}}\right) \right] \\ - a \exp\left[-\frac{(E_{in}-U)}{a}\right] \sinh \sqrt{b(E_{in}-U)} \quad ,$$

where the constant U limits the range of outgoing energy so that $0 \leq E_{out} \leq E_{in} - U$. This density function is sampled as follows. Let

$$g = \sqrt{\left(1 + \frac{ab}{8}\right)^2 - 1 + \left(1 + \frac{ab}{8}\right)} \quad . \quad \text{Then} \quad E_{out} = -ag \ln \xi_1 .$$

E_{out} is rejected if

$$[(1 - g)(1 - \ln \xi_1) - \ln \xi_2]^2 > bE_{out},$$

where ξ_1 and ξ_2 are random numbers on the unit interval.

Law 22 (UK law 2): Tabular linear functions of incident energy out. Tables of P_{ij} , C_{ij} , and T_{ij} are given at a number of incident energies E_i . If $E_i \leq E_{in} < E_{i+1}$ then the i^{th} P_{ij} , C_{ij} , and T_{ij} tables are used.

$$E_{out} = C_{ik}(E_{in} - T_{ik}),$$

where k is chosen according to

$$\sum_{j=1}^k P_{ij} < \xi \leq \sum_{j=1}^{k+1} P_{ij} \quad ,$$

where ξ is a random number on the unit interval $[0,1)$.

Law 24 (UK law 6): Equiprobable energy multipliers. The law is

$$E_{out} = E_{in}T(E_{in}) \quad .$$

The library provides a table of K equiprobable energy multipliers $T_{i,k}$ for a grid of incident neutron energies E_i . For incident energy E_{in} such that

$$E_i < E_{in} < E_{i+1} \quad ,$$

the random numbers ξ_1 and ξ_2 on the unit interval are used to find T :

$$k = \xi_1 K + 1$$

$$T = T_{i,k} + \xi_2(T_{i,k+1} - T_{i,k}) \quad \text{and then}$$

$$E_{out} = E_{in} T \quad .$$

Law 44 Tabular Distribution (ENDF/B-VI file 6 law=1 lang=2, Kalbach-87 correlated energy-angle scattering). Law 44 is a generalization of law 4. For each incident neutron energy E_i there is a pointer to a table of secondary energies $E_{i,k}$, probability density functions $p_{i,k}$, cumulative density functions $c_{i,k}$, precompound fractions $R_{i,k}$, and angular distribution slope values $A_{i,k}$. The index i and the interpolation fraction r are found on the incident energy grid for the incident energy E_{in} such that

$$E_i < E_{in} < E_{i+1} \quad \text{and}$$

$$E_{in} = E_i + r(E_{i+1} - E_i).$$

CHAPTER 2

Neutrons

A random number on the unit interval ξ_1 is used to sample a secondary energy bin k from the cumulative density function

$$c_{i,k} + r(c_{i+1,k} - c_{i,k}) < \xi_1 < c_{i,k+1} + r(c_{i+1,k+1} - c_{i,k+1}).$$

If these are discrete line spectra, then the sampled energy E' is interpolated between incident energy grids as

$$E' = E_{i,k} + r(E_{i+1,k} - E_{i,k}).$$

It is possible to have all discrete lines, all continuous spectra, or a mixture of discrete lines superimposed on a continuous background. For continuous distributions, the secondary energy bin k is sampled from

$$c_{l,k} < \xi_1 < c_{l,k+1},$$

where $l = i$ if $\xi_2 > r$ and $l = i+1$ if $\xi_2 < r$, and ξ_2 is a random number on the unit interval. For histogram interpolation the sampled energy is

$$E' = E_{l,k} + \frac{(\xi_1 - c_{l,k})}{p_{l,k}}.$$

For linear-linear interpolation the sampled energy is

$$E' = E_{l,k} + \left\{ \frac{\sqrt{p_{l,k}^2 + 2 \left[\frac{p_{l,k+1} - p_{l,k}}{E_{l,k+1} - E_{l,k}} \right] (\xi_1 - c_{l,k}) - p_{l,k}}}{\left[\frac{p_{l,k+1} - p_{l,k}}{E_{l,k+1} - E_{l,k}} \right]} \right\}.$$

Unlike Law 4, the sampled energy is interpolated between the incident energy bins i and $i+1$ for both neutron-induced photons and neutrons. Let

$$E_1 = E_{i,1} + r(E_{i+1,1} - E_{i,1}) \quad \text{and}$$

$$E_K = E_{i,K} + r(E_{i+1,K} - E_{i,K}); \quad \text{then}$$

$$E_{out} = E_1 + \frac{(E' - E_{l,1})(E_K - E_1)}{(E_{l,K} - E_{l,1})}.$$

For neutron-induced photons, the outgoing angle is selected as described on page 2–35. For neutrons, E_{out} is always in the center-of-mass system and must be adjusted to the laboratory system. The outgoing neutron center-of-mass scattering angle μ is sampled from the Kalbach-87 density function

$$p(\mu, E_{in}, E_{out}) = \frac{1}{2} \frac{A}{\sinh(A)} [\cosh(A\mu) + R \sinh(A\mu)]$$

using the random numbers ξ_3 and ξ_4 on the unit interval as follows. If $\xi_3 > R$, then let

$$T = (2\xi_4 - 1) \sinh(A) \quad \text{and}$$

$$\mu = \ln(T + \sqrt{T^2 + 1})/A,$$

or if $\xi_3 < R$, then

$$\mu = \ln \left[\xi_4 e^A + (1 - \xi_4) e^{-A} \right] / A.$$

R and A are interpolated on both the incident and outgoing energy grids. For discrete spectra,

$$A = A_{i,k} + r(A_{i+1,k} - A_{i,k}),$$

$$R = R_{i,k} + r(R_{i+1,k} - R_{i,k}).$$

For continuous spectra with histogram interpolation,

$$A = A_{l,k},$$

$$R = R_{l,k}.$$

For continuous spectra with linear-linear interpolation,

$$A = A_{l,k} + (A_{l,k+1} - A_{l,k})(E' - E_{l,k}) / (E_{l,k+1} - E_{l,k}),$$

$$R = R_{l,k} + (R_{l,k+1} - R_{l,k})(E' - E_{l,k}) / (E_{l,k+1} - E_{l,k}).$$

The Kalbach-87 formalism (Law 44) is also characterized by an energy-dependent multiplicity in which the number of neutrons emerging from a collision varies. If the number is less than one, Russian roulette is played and the collision can result in a capture. If the number is greater than one, the usual MCNP approach is taken whereby the additional particles are banked and only the first one contributes to detectors and DXTRAN.

Law 66 N-body phase space distribution (ENDF/B-VI file 6 law 6).

The phase space distribution for particle i in the center-of-mass coordinate system is:

$$P_i(\mu, E_{in}, T) = C_n \sqrt{T} (E_i^{max} - T)^{3n/2-4} \quad ,$$

where all energies and angles are also in the center-of-mass system and E_i^{max} is the maximum possible energy for particle i , μ and T . T is used for calculating E_{out} . The C_n normalization constants for $n = 3, 4, 5$ are:

CHAPTER 2
Neutrons

$$C_3 = \frac{4}{\pi(E_i^{max})^2} \quad ,$$

$$C_4 = \frac{105}{32(E_i^{max})^{7/2}} \quad , \quad \text{and}$$

$$C_5 = \frac{256}{14\pi(E_i^{max})^5} \quad .$$

E_i^{max} is a fraction of the energy available, E_a ,

$$E_i^{max} = \frac{M - m_i}{M} E_a \quad ,$$

where M is the total mass of the n particles being treated, m_i is the mass of particle i , and

$$E_a = \frac{m_T}{m_p + m_T} E_{in} + Q \quad ,$$

where m_T is the target mass and m_p is the projectile mass. For neutrons,

$$\frac{m_T}{m_p + m_T} = \frac{A}{A + 1}$$

and for a total mass ratio $A_p = M/m_i$,

$$\frac{M - m_i}{M} = \frac{A_p - 1}{A_p} \quad .$$

Thus,

$$E_i^{max} = \frac{A_p - 1}{A_p} \left(\frac{A}{A + 1} E_{in} + Q \right) \quad .$$

The total mass A_p and the number of particles in the reaction n are provided in the data library. The outgoing energy is sampled as follows.

Let ξ_i , $i = 1, 9$ be random numbers on the unit interval. Then from rejection technique R28 from the Monte Carlo Sampler,³ accept ξ_1 and ξ_2 if

$$\xi_1^2 + \xi_2^2 \leq 1$$

and accept ξ_3 and ξ_4 if

$$\xi_3^2 + \xi_4^2 \leq 1 \quad .$$

Then let

$$p = \xi_5 \quad \text{if} \quad n = 3 \quad ,$$

$$p = \xi_5 \xi_6 \quad \text{if } n = 4 \quad , \quad \text{and}$$

$$p = \xi_5 \xi_6 \xi_7 \xi_8 \quad \text{if } n = 5 \quad ,$$

and let

$$x = \frac{-\xi_1 \ln(\xi_1^2 + \xi_2^2)}{(\xi_1^2 + \xi_2^2)} - \ln \xi_9 \quad ,$$

$$y = \frac{-\xi_3 \ln(\xi_3^2 + \xi_4^2)}{(\xi_3^2 + \xi_4^2)} - \ln p \quad , \quad \text{and}$$

$$T = \frac{x}{x + y} \quad ;$$

then

$$E_{out} = T E_i^{max} \quad .$$

The cosine of the scattering angle is always sampled isotropically in the center-of-mass system using another random number ξ_2 on the unit interval:

$$\mu = 2\xi_2 - 1 \quad .$$

Law 67 Correlated energy-angle scattering (ENDF/B-VI file 6 law 7).

For each incident neutron energy, first the exiting particle direction μ is sampled as described on page 2–35. In other Law data, first the exiting particle energy is sampled and then the angle is sampled. The index i and the interpolation fraction r are found on the incident energy grid for the incident energy E_{in} , such that

$$E_i < E_{in} < E_{i+1} \quad \text{and}$$

$$E_{in} = E_i + r(E_{i+1} - E_i).$$

For each incident energy E_i there is a table of exiting particle direction cosines $\mu_{i,j}$ and locators $L_{i,j}$. This table is searched to find which ones bracket μ , namely,

$$\mu_{i,j} < \mu < \mu_{i,j+1}.$$

Then the secondary energy tables at $L_{i,j}$ and $L_{i,j+1}$ are sampled for the outgoing particle energy. The secondary energy tables consist of a secondary energy grid $E_{i,j,k}$, probability density functions $p_{i,j,k}$, and cumulative density functions $c_{i,j,k}$. A random number ξ_1 on the unit interval is used to pick between incident energy indices: if $\xi_1 < r$ then $l = i + 1$; otherwise, $l = i$. Two more random numbers ξ_2 and

CHAPTER 2

Neutrons

ξ_3 on the unit interval are used to determine interpolation energies. If $\xi_2 < (\mu - \mu_{i,j})/(\mu_{i,j+1} - \mu_{i,j})$, then

$$E_{i,k} = E_{i,j+1,k} \quad \text{and} \quad m = j + 1, \quad \text{if} \quad l = i.$$

Otherwise,

$$E_{i,k} = E_{i,j,k} \quad \text{and} \quad m = j, \quad \text{if} \quad l = i.$$

If $\xi_3 < (\mu - \mu_{i+1,j})/(\mu_{i+1,j+1} - \mu_{i+1,j})$, then

$$E_{i+1,k} = E_{i+1,j+1,k} \quad \text{and} \quad m = j + 1, \quad \text{if} \quad l = i + 1.$$

Otherwise,

$$E_{i+1,k} = E_{i+1,j,k} \quad \text{and} \quad m = j, \quad \text{if} \quad l = i + 1.$$

A random number ξ_4 on the unit interval is used to sample a secondary energy bin k from the cumulative density function

$$c_{l,m,k} < \xi_4 < c_{l,m,k+1}.$$

For histogram interpolation the sampled energy is

$$E' = E_{l,m,k} + \frac{(\xi_4 - c_{l,m,k})}{p_{l,m,k}}.$$

For linear-linear interpolation the sampled energy is

$$E' = E_{l,m,k} + \left\{ \frac{\sqrt{p_{l,m,k}^2 + 2 \left[\frac{p_{l,m,k+1} - p_{l,m,k}}{E_{l,m,k+1} - E_{l,m,k}} \right] (\xi_4 - c_{l,m,k}) - p_{l,m,k}}}{\left[\frac{p_{l,m,k+1} - p_{l,m,k}}{E_{l,m,k+1} - E_{l,m,k}} \right]} \right\}.$$

The final outgoing energy E_{out} uses scaled interpolation. Let

$$E_1 = E_{i,1} + r(E_{i+1,1} - E_{i,1})$$

$$\text{and} \quad E_K = E_{i,K} + r(E_{i+1,K} - E_{i,K}).$$

$$\text{Then} \quad E_{out} = E_1 + \frac{(E' - E_{l,1})(E_K - E_1)}{(E_{l,K} - E_{l,1})}.$$

e. Fission Inelastic Scattering: For any fission reaction a number of neutrons, N_p , are emitted according to the value of $\bar{\nu}(E_{in})$. The average number of neutrons per fission, $\bar{\nu}(E_{in})$, is either a tabulated function of energy or a polynomial function of energy. If I is the largest integer less than $\nu(E_{in})$, then

$$\begin{aligned} N_p &= I + 1 && \text{if } \xi \leq \bar{\nu}(E_{in}) - I \\ N_p &= I && \text{if } \xi > \bar{\nu}(E_{in}) - I, \text{ where } \xi \text{ is a random number.} \end{aligned}$$

The direction of each emitted neutron is sampled independently from the appropriate angular distribution table by the procedure described on page 2–35.

The energy of each fission neutron is determined from the appropriate (that is, as specified in the evaluation) emission law. The three laws used for fission neutron spectra are 7, 9, and 11. These laws are discussed in the preceding section, starting on page 2–41. MCNP then models the transport of the first neutron out after storing all other neutrons in the bank.

6. The $S(\alpha, \beta)$ treatment

The $S(\alpha, \beta)$ thermal scattering treatment is a complete representation of thermal neutron scattering by molecules and crystalline solids. Two processes are allowed: (1) inelastic scattering with cross section σ_{in} and a coupled energy-angle representation derived from an ENDF/B $S(\alpha, \beta)$ scattering law, and (2) elastic scattering with no change in the outgoing neutron energy for solids with cross section σ_{el} and an angular treatment derived from lattice parameters. The elastic scattering treatment is chosen with probability $\sigma_{el}/(\sigma_{el} + \sigma_{in})$. This thermal scattering treatment also allows the representation of scattering by multiatomic molecules (for example, BeO).

For the inelastic treatment, the distribution of secondary energies is represented by a set of equally probable final energies (typically 16 or 32) for each member of a grid of initial energies from an upper limit of typically 4 eV down to 10^{-5} eV, along with a set of angular data for each initial and final energy. The selection of a final energy E' given an initial energy E can be characterized by sampling from the distribution

$$p(E' | E_i < E < E_{i+1}) = \frac{1}{N} \sum_{i=1}^N \delta [E' - \rho E_{i,j} - (1 - \rho)E_{i+1,j}] \quad ,$$

where E_i and E_{i+1} are adjacent elements on the initial energy grid,

$$\rho = \frac{E_{i+1} - E}{E_{i+1} - E_i} \quad ,$$

N is the number of equally probable final energies, and E_{ij} is the j^{th} discrete final energy for incident energy E_i .

There are two allowed schemes for the selection of a scattering cosine following selection of a final energy and final energy index j . In each case, the $(i, j)^{th}$ set of angular data is associated with the energy transition $E = E_i \rightarrow E' = E_{i,j}$.

- (1) The data consist of sets of equally probable discrete cosines $\mu_{i,j,k}$ for $k = 1, \dots, \nu$ with ν typically 4 or 8. An index k is selected with probability $1/\nu$, and μ is obtained by the relation

$$\mu = \rho \mu_{i,j,k} + (1 - \rho) \mu_{i+1,j,k} \quad .$$

CHAPTER 2

Photons

- (2) The data consist of bin boundaries of equally probable cosine bins. In this case, random linear interpolation is used to select one set or the other, with ρ being the probability of selecting the set corresponding to incident energy E_i . The subsequent procedure consists of sampling for one of the equally probable bins and then choosing μ uniformly in the bin.

For elastic scattering, the above two angular representations are allowed for data derived by an incoherent approximation. In this case, one set of angular data appears for each incident energy and is used with the interpolation procedures on incident energy described above.

For elastic scattering, when the data have been derived in the coherent approximation, a completely different representation occurs. In this case, the data actually stored are the set of parameters D_k , where

$$\begin{aligned}\sigma_{el} &= D_k/E && \text{for } E_{Bk} \leq E < E_{Bk+1} \\ \sigma_{el} &= 0 && \text{for } E < E_{B1}\end{aligned}$$

and E_{Bk} are Bragg energies derived from the lattice parameters. For incident energy E such that $E_{Bk} \leq E \leq E_{Bk+1}$,

$$P_i = D_i/D_k \text{ for } i = 1, \dots, k$$

represents a discrete cumulative probability distribution that is sampled to obtain index i , representing scattering from the i^{th} Bragg edge. The scattering cosine is then obtained from the relationship

$$\mu = 1 - 2E_{Bi}/E \quad .$$

Using next event estimators such as point detectors with $S(\alpha, \beta)$ scattering cannot be done exactly because of the discrete scattering angles. MCNP uses an approximate scheme^{42,43} that in the next event estimation calculation replaces discrete lines with histograms of width

$$\delta\mu < .1 \quad .$$

See also page 2–84.

D. Photon Interactions

Sampling of a collision nuclide, analog capture, implicit capture, and many other aspects of photon interactions such as variance reduction, are the same as for neutrons. The collision physics are completely different.

MCNP has two photon interaction models: simple and detailed.

The simple physics treatment ignores coherent (Thomson) scattering and fluorescent photons from photoelectric absorption. It is intended for high-energy photon problems or problems where electrons are free and is also important for next event estimators such as point detectors, where scattering can be nearly straight ahead with coherent scatter. The simple physics treatment uses implicit capture unless overridden with the CUT:P card, in which case it uses analog capture.

The detailed physics treatment includes coherent (Thomson) scattering and accounts for fluorescent photons after photoelectric absorption. Form factors are used to account for electron binding effects. Analog capture is always used. The detailed physics treatment is used below energy EMCPF on the PHYS:P card, and because the default value of EMCPF is 100 MeV, that means it is almost always used by default. It is the best treatment for most applications, particularly for high Z nuclides or deep penetration problems.

The generation of electrons from photons is handled three ways. These three ways are the same for both the simple and detailed photon physics treatments. (1) If electron transport is turned on (Mode P E), then all photon collisions except coherent scatter can create electrons that are banked for later transport. (2) If electron transport is turned off (no E on the Mode card), then a thick-target bremsstrahlung model (TTB) is used. This model generates electrons, but assumes that they travel in the direction of the incident photon and that they are immediately annihilated. Any bremsstrahlung photons produced by the nontransported electrons are then banked for later transport. Thus electron-induced photons are not neglected, but the expensive electron transport step is omitted. (3) If $IDES = 1$ on the PHYS:P card, then all electron production is turned off, no electron-induced photons are created, and all electron energy is assumed to be locally deposited.

The TTB approximation cannot be used in Mode P E problems, but it is the default for Mode P problems.

1. Simple Physics Treatment

The simple physics treatment is intended primarily for higher energy photons. It is inadequate for high Z nuclides or deep penetration problems. The physical processes treated are photoelectric effect, pair production, and Compton scattering on free electrons. The photoelectric effect is regarded as an absorption (without fluorescence), scattering (Compton) is regarded to be on free electrons (without use of form factors), and the highly forward coherent Thomson scattering is ignored. Thus the total cross section σ_t is regarded as the sum of three components:

$$\sigma_t = \sigma_{pe} + \sigma_{pp} + \sigma_s \quad .$$

a. Photoelectric effect: This is treated as a pure absorption by implicit capture with a corresponding reduction in the photon weight WGT , and hence does not result in the loss of a particle history except for Russian roulette played on the weight cutoff. The noncaptured weight $WGT(1 - \sigma_{pe}/\sigma_t)$ is then forced to undergo either pair production or Compton scattering. The captured weight either is assumed to be locally deposited or becomes a photoelectron for electron transport or for the TTB approximation.

CHAPTER 2

Photons

b. Pair production: In a collision resulting in pair production [probability $\sigma_{pp}/(\sigma_t - \sigma_{pe})$], either an electron-positron pair are created for further transport (or the TTb treatment) and the photon disappears, or it is assumed that the kinetic energy $WGT(E - 1.022)$ MeV of the electron-positron pair produced is deposited as thermal energy at the time and point of collision, with isotropic production of one photon of energy 0.511 MeV headed in one direction and another photon of energy 0.511 MeV headed in the opposite direction. The rare single 1.022-MeV annihilation photon is ignored. The simple physics treatment for pair production is the same as the detailed physics treatment that is described in detail below.

c. Compton scattering: The alternative to pair production is Compton scattering on a free electron, with probability $\sigma_s/(\sigma_t - \sigma_{pe})$. In the event of such a collision, the objective is to determine the energy E' of the scattered photon, and $\mu = \cos \theta$ for the angle θ of deflection from the line of flight. This yields at once the energy $WGT(E - E')$ deposited at the point of collision and the new direction of the scattered photon. The energy deposited at the point of collision can then be used to make a Compton recoil electron for further transport or for the TTb approximation.

The differential cross section for the process is given by the Klein-Nishina formula¹

$$K(\alpha, \mu)d\mu = \pi r_o^2 \left(\frac{\alpha'}{\alpha} \right)^2 \left[\frac{\alpha'}{\alpha} + \frac{\alpha}{\alpha'} + \mu^2 - 1 \right] d\mu \quad , \quad (2.2)$$

where r_o is the classical electron radius 2.817938×10^{-13} cm, α and α' are the incident and final photon energies in units of 0.511 MeV [$\alpha = E/(mc^2)$], where m is the mass of the electron and c is the speed of light], and $\alpha' = \alpha/[1 + \alpha(1 - \mu)]$.

The Compton scattering process is sampled exactly by Kahn's method⁴⁴ below 1.5 MeV and by Koblinger's method⁴⁵ above 1.5 MeV as analyzed and recommended by Blomquist and Gelbard.⁴⁶

For next event estimators such as detectors and DXTRAN, the probability density for scattering toward the detector point must be calculated:

$$p(\mu) = \frac{1}{\sigma_1^K(Z, \alpha)} K(\alpha, \mu) \quad ,$$

where $\sigma_1^K(Z, \alpha)$ is the total Klein-Nishina cross section obtained by integrating $K(\alpha, \mu)$ over all angles for energy α . This is a difficult integration, so the empirical formula of Hastings² is used:

$$\sigma_1^K(Z, \alpha) = \pi r_o^2 \frac{c_1 \eta^2 + c_2 \eta + c_3}{\eta^3 + d_1 \eta^2 + d_2 \eta + d_3} \quad ,$$

where $\eta = 1 + .222037\alpha$, $c_1 = 1.651035$, $c_2 = 9.340220$, $c_3 = -8.325004$, $d_1 = 12.501332$, $d_2 = -14.200407$, and $d_3 = 1.699075$. Thus,

$$p(\mu) = \frac{\eta^3 + d_1\eta^2 + d_2\eta + d_3}{c_1\eta^2 + c_2\eta + c_3} \left(\frac{\alpha'}{\alpha}\right)^2 \left(\frac{\alpha}{\alpha'} + \frac{\alpha'}{\alpha} + \mu^2 - 1\right) \quad .$$

Above 100 MeV, where the Hastings fit is no longer valid, the approximation

$$\sigma_1^K(Z, \alpha) = \sigma_1(Z, \alpha)/Z$$

is made so that

$$p(\mu) = \frac{Z\pi r_o^2}{\sigma_1(Z, \alpha)} \left(\frac{\alpha'}{\alpha}\right)^2 \left(\frac{\alpha}{\alpha'} + \frac{\alpha'}{\alpha} + \mu^2 - 1\right) \quad .$$

2. Detailed Physics Treatment

The detailed physics treatment includes coherent (Thomson) scattering and accounts for fluorescent photons after photoelectric absorption. Form factors are used with coherent and incoherent scattering to account for electron binding effects. Analog capture is always used, as described below under photoelectric effect. The detailed physics treatment is used below energy EMCPF on the PHYS:P card, and because the default value of EMCPF is 100 MeV, that means it is almost always used by default. It is the best treatment for most applications, particularly for high Z nuclides or deep penetration problems.

The detailed physics treatment for next event estimators such as point detectors is inadvisable, as explained on page 2-57, unless the NOCOH=1 option is used on the PHYS:P card to turn off coherent scattering.

a. Incoherent (Compton) scattering: To model Compton scattering it is necessary to determine the angle θ of scattering from the incident line of flight (and thus the new direction), the new energy E' of the photon, and the recoil kinetic energy of the electron, $E - E'$. The recoil kinetic energy can be deposited locally, can be transported in Mode P E problems, or (default) can be treated with the TTB approximation.

Incoherent scattering is assumed to have the differential cross section $\sigma_1(Z, \alpha, \mu)d\mu = I(Z, v)K(\alpha, \mu)d\mu$, where $I(Z, v)$ is an appropriate scattering factor modifying the Klein-Nishina cross section in Eq. (2.2).

Qualitatively, the effect of $I(Z, v)$ is to decrease the Klein-Nishina cross section (per electron) more extremely in the forward direction, for low E and for high Z independently. For any Z , $I(Z, v)$ increases from $I(Z, 0) = 0$ to $I(Z, \infty) = Z$. The parameter v is the inverse length $v = \sin(\theta/2)/\lambda = \kappa\alpha\sqrt{1-\mu}$ where $\kappa = 10^{-8}m_0c/(h\sqrt{2}) = 29.1445cm^{-1}$. The maximum value of v is $v_{max} = \kappa\alpha\sqrt{2} = 41.2166\alpha$ at $\mu = -1$. The essential features of $I(Z, v)$ are indicated in Fig. 2.4.

For hydrogen, an exact expression for the form factor is used:⁴⁷

$$I(1, v) = 1 - \frac{1}{\left(1 + \frac{1}{2}f^2v^2\right)^4} \quad ,$$

CHAPTER 2
Photons

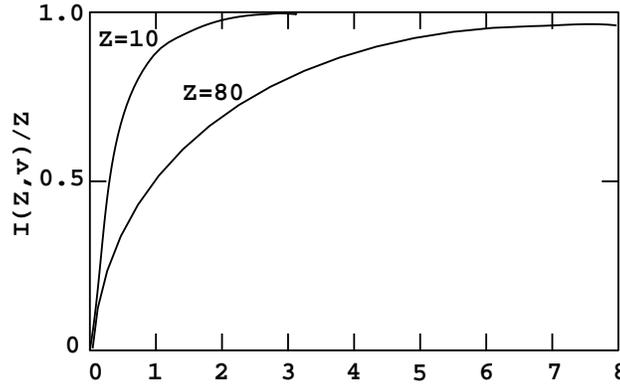


Figure 2.4

where f is the inverse fine structure constant, $f = 137.0393$, and $f/\sqrt{2} = 96.9014$.

The Klein-Nishina formula is sampled exactly by Kahn's method⁴⁴ below 1.5 MeV and by Koblinger's method⁴⁵ above 1.5 MeV as analyzed and recommended by Blomquist and Gelbard.⁴⁶ The outgoing energy E' and angle μ are rejected according to the form factors.

For next event estimators such as detectors and DXTRAN, the probability density for scattering toward the detector point must be calculated:

$$p(\mu) = \frac{1}{\sigma_1(Z, \alpha)} I(Z, v) K(\alpha, \mu) = \frac{\pi r_o^2}{\sigma_1(Z, \alpha)} I(Z, v) \left(\frac{\alpha'}{\alpha}\right)^2 \left(\frac{\alpha}{\alpha'} + \frac{\alpha'}{\alpha} + \mu^2 - 1\right) \quad ,$$

where $\pi r_o^2 = .2494351$ and $\sigma_1(Z, \alpha)$ and $I(Z, v)$ are looked up in the data library.

b. Coherent (Thomson) scattering: Thomson scattering involves no energy loss, and thus is the only photon process that cannot produce electrons for further transport and that cannot use the TTB approximation. Only the scattering angle θ is computed, and then the transport of the photon continues.

The differential cross section is $\sigma_2(Z, \alpha, \mu) d\mu = C^2(Z, v) T(\mu) d\mu$, where $C(Z, v)$ is a form factor modifying the energy-independent Thomson cross section $T(\mu) = \pi r_o^2 (1 + \mu^2) d\mu$.

The general effect of $C^2(Z, v)/Z^2$ is to decrease the Thomson cross section more extremely for backward scattering, for high E , and low Z . This effect is opposite in these respects to the effect of $I(Z, v)/Z$ on $K(\alpha, \mu)$ in incoherent (Compton) scattering. For a given Z , $C(Z, v)$ decreases from $C(Z, 0) = Z$ to $C(Z, \infty) = 0$. For example, $C(Z, v)$ is a rapidly decreasing function of μ as μ varies from $+1$ to -1 , and therefore the coherent cross section is peaked in the forward direction. At high energies of the incoming photon, coherent scattering is strongly forward and can be ignored. The parameter v is the inverse length $v = \sin(\theta/2)/\lambda = \kappa\alpha\sqrt{1-\mu}$ where $\kappa = 10^{-8} m_o c / (h\sqrt{2}) = 29.1445 \text{ cm}^{-1}$. The maximum value of v is $v_{max} = \kappa\alpha\sqrt{2} = 41.2166\alpha$ at

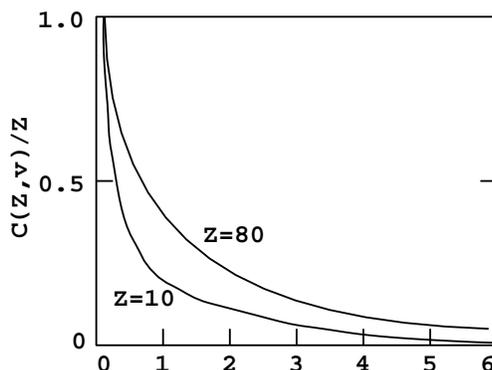


Figure 2.5

$\mu = -1$. The square of the maximum value is $v_{max}^2 = 1698.8038\alpha^2$. The qualitative features of $C(Z, v)$ are shown in Fig. 2.5.

For next event estimators, one must evaluate the probability density function $p(\mu) = \pi r_0^2(1 + \mu^2)C^2(Z, v)/\sigma_2(Z, \alpha)$ for given μ . Here $\sigma_2(Z, \alpha)$ is the integrated coherent cross section. The value of $C^2(Z, v)$ at $v = \kappa\alpha\sqrt{1 - \mu}$ must be interpolated in the original $C^2(Z, v_i)$ tables separately stored on the cross-section library for this purpose.

Note that at high energies, coherent scattering is virtually straight ahead with no energy loss; thus, it appears from a transport viewpoint that no scattering took place. For a point detector to sample this scattering, the point must lie on the original track ($\mu \simeq 1$), which is seldom the case. Thus, photon point detector variances generally will be much greater with detailed photon physics than with simple physics unless coherent scattering is turned off with $\text{NOCOH} = 1$ on the PHYS:P card, as explained on page 2–57.

c. Photoelectric effect: The photoelectric effect consists of the absorption of the incident photon of energy E , with the consequent emission of several fluorescent photons and the ejection (or excitation) of an orbital electron of binding energy $e < E$, giving the electron a kinetic energy of $E - e$. Zero, one, or two fluorescent photons are emitted. These three cases are now described.

(1) Zero photons greater than 1 keV are emitted. In this event, the cascade of electrons that fills up the orbital vacancy left by the photoelectric ejection produces electrons and low-energy photons (Auger effect). These particles can be followed in Mode P E problems, or be treated with the TTB approximation, or be assumed to deposit energy locally. Because no photons are emitted by fluorescence (some may be produced by electron transport or the TTB model), the photon track is terminated. This photoelectric “capture” of the photon is scored like analog capture in the summary table of the output file. Implicit capture is not possible.

(2) One fluorescent photon of energy greater than 1 keV is emitted. The photon energy E' is the difference in incident photon energy E , less the ejected electron kinetic energy $E - e$, less a residual excitation energy e' that is ultimately dissipated by further Auger processes. This dissipation leads to additional electrons or photons of still lower energy. The ejected

CHAPTER 2

Photons

electron and any Auger electrons can be transported or treated with the TTB approximation. In general,

$$E' = E - (E - e) - e' = e - e'$$

These primary transactions are taken to have the full fluorescent yield from all possible upper levels e' , but are apportioned among the x-ray lines $K\alpha_1$, ($L_3 \rightarrow K$); $K\alpha_2$, ($L_2 \rightarrow K$); $K\beta'_1$, (mean $M \rightarrow K$); and $k\beta'_2$, (mean $N \rightarrow K$).

(3) Two fluorescence photons can occur if the residual excitation e' of process (2) exceeds 1 keV. An electron of binding energy e'' can fill the orbit of binding energy e' , emitting a second fluorescent photon of energy $E'' = e' - e''$. As before, the residual excitation e'' is dissipated by further Auger events and electron production that can be modeled with electron transport in Mode P E calculations, approximated with the TTB model, or assumed to deposit all energy locally. These secondary transitions come from all upper shells and go to L shells. Thus the primary transitions must be $K\alpha_1$ or $K\alpha_2$ to leave an L shell vacancy.

Each fluorescent photon born as discussed above is assumed to be emitted isotropically and is transported, provided that $E', E'' > 1$ keV. The binding energies $e, e',$ and e'' are very nearly the x-ray absorption edges because the x-ray absorption cross section takes an abrupt jump as it becomes energetically possible to eject (or excite) the electron of energy first $E \cong e'$, then e' , then e , etc. The jump can be as much as a factor of 20 (for example, K-carbon).

A photoelectric event is terminal for elements $Z < 12$ because the possible fluorescence energy is below 1 keV. The event is only a single fluorescence of energy above 1 keV for $31 > Z \geq 12$, but double fluorescence (each above 1 keV) is possible for $Z \geq 31$. For $Z \geq 31$, primary lines $K\alpha_1$, $K\alpha_2$, and $K\beta'_1$ are possible and, in addition, for $Z \geq 37$, the $K\beta'_2$ line is possible.

In all photoelectric cases where the photon track is terminated because either no fluorescent photons are emitted or the ones emitted are below the energy cutoff, the termination is considered to be caused by analog capture in the output file summary table (and not energy cutoff).

d. Pair Production: This process is considered only in the field of a nucleus. The threshold is $2mc^2[1 + (m/M)] \cong 1.022$ MeV, where M is the nuclear mass and m is the mass of the electron. There are three cases:

(1) In the case of electron transport (Mode P E), the electron and positron are created and banked and the photon track terminates.

(2) For Mode P problems with the TTB approximation, both an electron and positron are produced but not transported. Both particles can make TTB approximation photons. If the positron is below the electron energy cutoff, then it is not created and a photon pair is created as in case (3).

(3) For Mode P problems when positrons are not created by the TTB approximation, the incident photon of energy E vanishes. The kinetic energy of the created positron/electron pair, assumed to be $E - 2mc^2$, is deposited locally at the collision point. The positron is considered to be annihilated

with an electron at the point of collision, resulting in a pair of photons, each with the incoming photon weight, and each with an energy of $mc^2 = 0.511$ MeV. The first photon is emitted isotropically, and the second is emitted in the opposite direction.. The very rare single-annihilation photon of 1.022 MeV is omitted.

e. Caution for detectors and coherent scattering: The use of the detailed photon physics treatment is not recommended for photon next event estimators (such as point detectors and ring detectors) nor for DXTRAN, unless coherent scatter is turned off with the NOCOH = 1 option on the PHYS:P card. Alternatively, the simple physics treatment (EMCPF < .001 on the PHYS:P card) can be used. Turning off coherent scattering can improve the figure of merit (see page 2–96) by more than a factor of 10 for tallies with small relative errors because coherent scattering is highly peaked in the forward direction. Consequently, coherent scattering becomes under-sampled because the photon must be traveling directly at the detector point and undergo a coherent scattering event. When the photon is traveling nearly in the direction of the point detector or the chosen point on a ring detector or DXTRAN sphere, the PSC term, $p(\mu)$, of the point detector (see page 2–76) becomes very large, causing a huge score for the event and severely affecting the tally. Remember that $p(\mu)$ is not a probability (that can be no larger than unity); it is a probability density function (the derivative of the probability) and can approach infinity for highly forward peaked scattering. Thus the undersampled coherent scattering event is characterized by many low scores to the detector when the photon trajectory is away from the detector ($p(\mu) = \textit{small}$) and a very few very large scores ($p(\mu) = \textit{huge}$) when the trajectory is nearly aimed at the detector. Such undersampled events cause a sudden increase in both the tally and the variance, a sudden drop in the figure of merit, and a failure to pass the statistical checks for the tally as described on page 2–109.

E. Electron Interactions

The transport of electrons and other charged particles is fundamentally different from that of neutrons and photons. The interaction of neutral particles is characterized by relatively infrequent isolated collisions, with simple free flight between collisions. By contrast, the transport of electrons is dominated by the long-range Coulomb force, resulting in large numbers of small interactions. As an example, a neutron in aluminum slowing down from 0.5 MeV to 0.0625 MeV will have about 30 collisions, while a photon in the same circumstances will experience fewer than ten. An electron accomplishing the same energy loss will undergo about 10^5 individual interactions. This great increase in computational complexity makes a single-collision Monte Carlo approach to electron transport unfeasible for most situations of practical interest.

Considerable theoretical work has been done to develop a variety of analytic and semi-analytic multiple-scattering theories for the transport of

CHAPTER 2

Electrons

charged particles. These theories attempt to use the fundamental cross sections and the statistical nature of the transport process to predict probability distributions for significant quantities, such as energy loss and angular deflection. The most important of these theories for the algorithms in MCNP are the Goudsmit-Saunderson⁴⁸ theory for angular deflections, the Landau⁴⁹ theory of energy-loss fluctuations, and the Blunck-Leisegang⁵⁰ enhancements of the Landau theory. These theories rely on a variety of approximations that restrict their applicability, so that they cannot solve the entire transport problem. In particular, it is assumed that the energy loss is small compared to the kinetic energy of the electron.

In order to follow an electron through a significant energy loss, it is necessary to break the electron's path into many steps. These steps are chosen to be long enough to encompass many collisions (so that multiple-scattering theories are valid) but short enough that the mean energy loss in any one step is small (so that the approximations necessary for the multiple-scattering theories are satisfied). The energy loss and angular deflection of the electron during each of the steps can then be sampled from probability distributions based on the appropriate multiple-scattering theories. This subsumption of the effects of many individual collisions into single steps that are sampled probabilistically constitutes the "condensed history" Monte Carlo method.

The most influential reference for the condensed history method is the 1963 paper by Martin J. Berger.⁵¹ Based on the techniques described in that work, Berger and Stephen M. Seltzer developed the ETRAN series of electron/photon transport codes.⁵² These codes have been maintained and enhanced for many years at the National Bureau of Standards (now the National Institute of Standards and Technology). The ETRAN codes are also the basis for the Integrated TIGER Series,⁵³ a system of general-purpose, application-oriented electron/photon transport codes developed and maintained by John A. Halbleib and his collaborators at Sandia National Laboratories in Albuquerque, New Mexico. The electron physics in MCNP is essentially that of the Integrated TIGER Series.

1. Electron Steps and Substeps

The condensed random walk for electrons can be considered in terms of a sequence of sets of values

$$(0, E_0, t_0, \mathbf{u}_0, \mathbf{r}_0) , (s_1, E_1, t_1, \mathbf{u}_1, \mathbf{r}_1) , (s_2, E_2, t_2, \mathbf{u}_2, \mathbf{r}_2) , \dots$$

where s_n , E_n , t_n , \mathbf{u}_n , and \mathbf{r}_n are the total path length, energy, time, direction, and position of the electron at the end of n steps. On the average, the energy and path length are related by

$$E_{n-1} - E_n = - \int_{s_{n-1}}^{s_n} \frac{dE}{ds} ds , \quad (2.3)$$

where $-dE/ds$ is the total stopping power in energy per unit length. This quantity depends on energy and on the material in which the electron is moving. ETRAN-based codes customarily choose the sequence of path lengths $\{s_n\}$ such that

$$\frac{E_n}{E_{n-1}} = k, \quad (2.4)$$

for a constant k . The most commonly used value is $k = 2^{-1/8}$, which results in an average energy loss per step of 8.3%.

Electron steps with (energy-dependent) path lengths $s = s_n - s_{n-1}$ determined by Eqs. 2.3-2.4 are called *major steps* or *energy steps*. The condensed random walk for electrons is structured in terms of these energy steps. For example, all precalculated and tabulated data for electrons are stored on an energy grid whose consecutive energy values obey the ratio in Eq. 2.4. In addition, the Landau and Blunck-Leisegang theories for energy straggling are applied once per energy step. For a single step, the angular scattering could also be calculated with satisfactory accuracy, since the Goudsmit-Saunderson theory is valid for arbitrary angular deflections. However, the representation of the electron's trajectory as the result of many small steps will be more accurate if the angular deflections are also required to be small. Therefore, the ETRAN codes and MCNP further break the electron steps into smaller substeps. A major step of path length s is divided into m substeps, each of path length s/m . Angular deflections and the production of secondary particles are sampled at the level of these substeps. The integer m depends only on material (average atomic number Z). Appropriate values for m have been determined empirically, and range from $m = 2$ for $Z < 6$ to $m = 15$ for $Z > 91$.

In some circumstances, it may be desirable to increase the value of m for a given material. In particular, a very small material region may not accommodate enough substeps for an accurate simulation of the electron's trajectory. In such cases, the user can increase the value of m with the ESTEP option on the material card. The user can gain some insight into the selection of m by consulting Print Table 85 in the MCNP output. Among other information, this table presents a quantity called DRANGE as a function of energy. DRANGE is the size of an energy step in g/cm^2 . Therefore, DRANGE/m is the size of a substep in the same units, and if ρ is the material density in g/cm^3 , then $\text{DRANGE}/(m\rho)$ is the length of a substep in cm. This quantity can be compared with the smallest dimension of a material region. A reasonable rule of thumb is that an electron should make at least ten substeps in any material of importance to the transport problem.

2. Condensed Random Walk

In the initiation phase of a transport calculation involving electrons, all relevant data are either precalculated or read from the electron data file and processed. These data include the electron energy grid, stopping powers, electron ranges, energy step ranges, substep lengths, and probability

CHAPTER 2

Electrons

distributions for angular deflections and the production of secondary particles. Although the energy grid and electron steps are selected according to Eqs. 2.3-2.4, energy straggling, the analog production of bremsstrahlung, and the intervention of geometric boundaries and the problem time cutoff will cause the electron's energy to depart from a simple sequence $\{s_n\}$ satisfying Eq. 2.4. Therefore, the necessary parameters for sampling the random walk will be interpolated from the points on the energy grid.

At the beginning of each major step, the collisional energy loss rate is sampled. In the absence of energy straggling, this will be a simple average value based on the nonradiative stopping power described in the next section. In general, however, fluctuations in the energy loss rate will occur. The number of substeps m per energy step will have been preset, either from the empirically-determined default values, or by the user, based on geometric considerations. At most m substeps will be taken in the current major step, i. e., with the current value for the energy loss rate. The number of substeps may be reduced if the electron's energy falls below the boundary of the current major step, or if the electron reaches a geometric boundary. In these circumstances, or upon the completion of m substeps, a new major step is begun, and the energy loss rate is resampled.

Except for the energy loss and straggling calculation, the detailed simulation of the electron history takes place in the sampling of the substeps. The Goudsmit-Saunderson⁴⁸ theory is used to sample from the distribution of angular deflections, so that the direction of the electron can change at the end of each substep. Based on the current energy loss rate and the substep length, the projected energy for the electron at the end of the substep is calculated. Finally, appropriate probability distributions are sampled for the production of secondary particles. These include electron-induced fluorescent X-rays, "knock-on" electrons (from electron-impact ionization), and bremsstrahlung photons.

Note that the length of the substep ultimately derives from the total stopping power used in Eq. 2.3, but the projected energy loss for the substep is based on the nonradiative stopping power. The reason for this difference is that the sampling of bremsstrahlung photons is treated as an essentially analog process. When a bremsstrahlung photon is generated during a substep, the photon energy is subtracted from the projected electron energy at the end of the substep. Thus the radiative energy loss is explicitly taken into account, in contrast to the collisional (nonradiative) energy loss, which is treated probabilistically and is not correlated with the energetics of the substep. Two biasing techniques are available to modify the sampling of bremsstrahlung photons for subsequent transport. However, these biasing methods do not alter the linkage between the analog bremsstrahlung energy and the energetics of the substep.

MCNP uses identical physics for the transport of electrons and positrons, but distinguishes between them for tallying purposes, and for terminal processing. Electron and positron tracks are subject to the usual collection of terminal conditions, including escape (entering a region of zero importance),

loss to time cutoff, loss to a variety of variance-reduction processes, and loss to energy cutoff. The case of energy cutoff requires special processing for positrons, which will annihilate at rest to produce two photons, each with energy $mc^2 = 0.511008$ MeV.

3. Collisional Stopping Power

Berger⁵¹ gives the restricted electron collisional stopping power, i. e., the energy loss per unit path length to collisions resulting in fractional energy transfers ϵ less than an arbitrary maximum value ϵ_m , in the form

$$-\left(\frac{dE}{ds}\right)_{\epsilon_m} = NZC \left\{ \ln \frac{E^2(\tau + 2)}{2I^2} + f^-(\tau, \epsilon_m) - \delta \right\}, \quad (2.5)$$

where

$$f^-(\tau, \epsilon_m) = -1 - \beta^2 + \left(\frac{\tau}{\tau + 1}\right)^2 \frac{\epsilon_m^2}{2} + \frac{2\tau + 1}{(\tau + 1)^2} \ln(1 - \epsilon_m) \\ + \ln[4\epsilon_m(1 - \epsilon_m)] + \frac{1}{1 - \epsilon_m}. \quad (2.6)$$

Here ϵ and ϵ_m represent energy transfers as fractions of the electron kinetic energy E ; I is the mean ionization potential in the same units as E ; β is v/c ; τ is the electron kinetic energy in units of the electron rest mass; δ is the density effect correction (related to the polarization of the medium); Z is the average atomic number of the medium; N is the atom density of the medium in cm^{-3} ; and the coefficient C is given by

$$C = \frac{2\pi e^4}{mv^2}, \quad (2.7)$$

where m , e , and v are the rest mass, charge, and speed of the electron, respectively.

The ETRAN codes and MCNP do not make use of restricted stopping powers, but rather treat all collisional events in an uncorrelated, probabilistic way. Thus, only the total energy loss to collisions is needed, and Eqs. 2.5-2-6 can be evaluated for the special value $\epsilon_m = 1/2$. The reason for the $1/2$ is the indistinguishability of the two outgoing electrons. The electron with the larger energy is, by definition, the primary. Therefore, only the range $\epsilon < 1/2$ is of interest. With $\epsilon_m = 1/2$, Eq. 2.6 becomes

$$f^-(\tau, \epsilon_m) = -\beta^2 + (1 - \ln 2) + \left(\frac{1}{8} + \ln 2\right) \left(\frac{\tau}{\tau + 1}\right)^2. \quad (2.8)$$

On the right side of Eq. 2.5, we can express both E and I in units of the electron rest mass. Then E can be replaced by τ on the right side of the equation. We also introduce supplementary constants

CHAPTER 2
Electrons

$$\begin{aligned}
 C2 &= \ln(2I^2), \\
 C3 &= 1 - \ln 2, \\
 C4 &= \frac{1}{8} + \ln 2,
 \end{aligned} \tag{2.9}$$

so that Eq. 2.5 becomes

$$\begin{aligned}
 - \left(\frac{dE}{ds} \right) &= NZ \frac{2\pi e^4}{mv^2} \left\{ \ln[\tau^2(\tau + 2)] - C2 + C3 \right. \\
 &\quad \left. - \beta^2 + C4 \left(\frac{\tau}{\tau + 1} \right)^2 - \delta \right\}.
 \end{aligned} \tag{2.10}$$

This is the collisional energy loss rate in MeV/cm in a particular medium. In MCNP, we are actually interested in the energy loss rate in units of MeV·barns (so that different cells containing the same material need not have the same density). Therefore, we divide Eq. 2.10 by N and multiply by the conversion factor 10^{24} barns/cm². We also use the definition of the fine structure constant

$$\alpha = \frac{2\pi e^2}{hc},$$

where h is Planck's constant, to eliminate the electronic charge e from Eq. 2.10. The result is as follows:

$$\begin{aligned}
 - \left(\frac{dE}{ds} \right) &= \frac{10^{24} \alpha^2 h^2 c^2}{2\pi m c^2} Z \left\{ \ln[\tau^2(\tau + 2)] \right. \\
 &\quad \left. - C2 + C3 - \beta^2 + C4 \left(\frac{\tau}{\tau + 1} \right)^2 - \delta \right\} \frac{1}{\beta^2}.
 \end{aligned} \tag{2.11}$$

This is the form actually used in MCNP to preset the collisional stopping powers at the energy boundaries of the major energy steps.

4. Energy Straggling

Because an energy step represents the cumulative effect of many individual random collisions, fluctuations in the energy loss rate will occur. Thus the energy loss will not be a simple average $\bar{\Delta}$; rather there will be a probability distribution $f(s, \Delta)d\Delta$ from which the energy loss Δ for the step of length s can be sampled. Landau⁴⁹ studied this situation under the simplifying assumptions that the mean energy loss for a step is small compared with the electron's energy, that the energy parameter ξ defined below is large

compared with the mean excitation energy of the medium, that the energy loss can be adequately computed from the Rutherford⁵⁴ cross section, and that the formal upper limit of energy loss can be extended to infinity. With these simplifications, Landau found that the energy loss distribution can be expressed as

$$f(s, \Delta)d\Delta = \phi(\lambda)d\lambda ,$$

in terms of $\phi(\lambda)$, a universal function of a single scaled variable

$$\lambda = \frac{\Delta}{\xi} - \ln \left[\frac{2\xi m v^2}{(1 - \beta^2)I^2} \right] + \delta + \beta^2 - 1 + \gamma .$$

Here m and v are the mass and speed of the electron, δ is the density effect correction, β is v/c , I is the mean excitation energy of the medium, and γ is Euler's constant ($\gamma = 0.5772157\dots$). The parameter ξ is defined by

$$\xi = \frac{2\pi e^4 N Z}{m v^2} s ,$$

where e is the charge of the electron and NZ is the number density of atomic electrons, and the universal function is

$$\phi(\lambda) = \frac{1}{2\pi i} \int_{x-i\infty}^{x+i\infty} e^{\mu \ln \mu + \lambda \mu} d\mu ,$$

where x is a positive real number specifying the line of integration.

For purposes of sampling, $\phi(\lambda)$ is negligible for $\lambda < -4$, so that this range is ignored. Börsch-Supan⁵⁵ originally tabulated $\phi(\lambda)$ in the range $-4 \leq \lambda \leq 100$, and derived for the range $\lambda > 100$ the asymptotic form

$$\phi(\lambda) \approx \frac{1}{w^2 + \pi^2} ,$$

in terms of the auxiliary variable w , where

$$\lambda = w + \ln w + \gamma - \frac{3}{2} .$$

Recent extensions⁵⁶ of Börsch-Supan's tabulation have provided a representation of the function in the range $-4 \leq \lambda \leq 100$ in the form of five thousand equally probable bins in λ . In MCNP, the boundaries of these bins are saved in the array **eqlm(mlam)**, where **mlam** = 5001. Sampling from this tabular distribution accounts for approximately 98.96% of the cumulative probability for $\phi(\lambda)$. For the remaining large- λ tail of the distribution, MCNP uses the approximate form $\phi(\lambda) \approx w^{-2}$, which is easier to sample than $(w^2 + \pi^2)^{-1}$, but is still quite accurate for $\lambda > 100$.

Blunck and Leisegang⁵⁰ have extended Landau's result to include the second moment of the expansion of the cross section. Their result can be expressed as a convolution of Landau's distribution with a Gaussian distribution:

CHAPTER 2

Electrons

$$f^*(s, \Delta) = \frac{1}{\sqrt{2\pi}\sigma} \int_{-\infty}^{+\infty} f(s, \Delta') \exp \left[-\frac{(\Delta - \Delta')^2}{2\sigma^2} \right] d\Delta' .$$

Blunck and Westphal⁵⁷ provided a simple form for the variance of the Gaussian:

$$\sigma_{BW}^2 = 10eV \cdot Z^{4/3} \bar{\Delta} .$$

Subsequently, Chechin and Ermilova⁵⁸ investigated the Landau/Blunck-Leisegang theory, and derived an estimate for the relative error

$$\epsilon_{CE} \approx \left[\frac{10\xi}{I} \left(1 + \frac{\xi}{10I} \right)^3 \right]^{-\frac{1}{2}}$$

caused by the neglect of higher-order moments. Based on this work, Seltzer⁵⁹ describes and recommends a correction to the Blunck-Westphal variance:

$$\sigma = \frac{\sigma_{BW}}{1 + 3\epsilon_{CE}} .$$

This value for the variance of the Gaussian is used in MCNP.

Examination of the asymptotic form for $\phi(\lambda)$ shows that unrestricted sampling of λ will not result in a finite mean energy loss. Therefore, a material- and energy-dependent cutoff λ_c is imposed on the sampling of λ . In the initiation phase of an MCNP calculation, the code makes use of two preset arrays, **flam(mlanc)** and **avlm(mlanc)**, with **mlanc** = 1591. The array **flam** contains candidate values for λ_c in the range $-4 \leq \lambda_c \leq 50000$; the array **avlm** contains the corresponding expected mean values for the sampling of λ . For each material and electron energy, the code uses the known mean collisional energy loss $\bar{\Delta}$, interpolating in this tabular function to select a suitable value for λ_c , which is then stored in the dynamically-allocated array **flc**. During the transport phase of the calculation, the value of **flc** applicable to the current material and electron energy is used as an upper limit, and any sampled value of λ greater than the limit is rejected. In this way, the correct mean energy loss is preserved.

5. Angular Deflections

The ETRAN codes and MCNP rely on the Goudsmit-Saunderson⁴⁸ theory for the probability distribution of angular deflections. The angular deflection of the electron is sampled once per substep according to the distribution

$$F(s, \mu) = \sum_{\ell=0}^{\infty} \left(\ell + \frac{1}{2} \right) \exp(-sG_\ell) P_\ell(\mu) ,$$

where s is the length of the substep, $\mu = \cos \theta$ is the angular deflection from the direction at the beginning of the substep, $P_\ell(\mu)$ is the ℓ^{th} Legendre polynomial, and G_ℓ is

$$G_\ell = 2\pi N \int_{-1}^{+1} \frac{d\sigma}{d\Omega} [1 - P_\ell(\mu)] d\mu ,$$

in terms of the microscopic cross section $d\sigma/d\Omega$, and the atom density N of the medium.

For electrons with energies below 0.256 MeV, the microscopic cross section is taken from numerical tabulations developed from the work of Riley.⁶⁰ For higher-energy electrons, the microscopic cross section is approximated as a combination of the Mott⁶¹ and Rutherford⁵⁴ cross sections, with a screening correction. Seltzer⁵² presents this “factored cross section” in the form

$$\frac{d\sigma}{d\Omega} = \frac{Z^2 e^2}{p^2 v^2 (1 - \mu + 2\eta)^2} \left[\frac{(d\sigma/d\Omega)_{\text{Mott}}}{(d\sigma/d\Omega)_{\text{Rutherford}}} \right] ,$$

where e , p , and v are the charge, momentum, and speed of the electron, respectively. The screening correction η was originally given by Molière⁶² as

$$\eta = \frac{1}{4} \left(\frac{\alpha mc}{0.885p} \right)^2 Z^{2/3} [1.13 + 3.76(\alpha Z/\beta)^2] ,$$

where α is the fine structure constant, m is the rest mass of the electron, and $\beta = v/c$. MCNP now follows the recommendation of Seltzer,⁵² and the implementation in the Integrated TIGER Series, by using the slightly modified form

$$\eta = \frac{1}{4} \left(\frac{\alpha mc}{0.885p} \right)^2 Z^{2/3} \left[1.13 + 3.76(\alpha Z/\beta)^2 \sqrt{\frac{\tau}{\tau + 1}} \right] .$$

where τ is the electron energy in units of electron rest mass. The multiplicative factor in the final term is an empirical correction which improves the agreement at low energies between the factored cross section and the more accurate partial-wave cross sections of Riley.

6. Bremsstrahlung

For the sampling of bremsstrahlung photons, MCNP relies primarily on the Bethe-Heitler⁶³ Born-approximation results that have been used until rather recently⁶⁴ in ETRAN. A comprehensive review of bremsstrahlung formulas and approximations relevant to the present level of the theory in MCNP can be found in the paper of Koch and Motz.⁶⁵ Particular prescriptions appropriate to Monte Carlo calculations have been developed by Berger and Seltzer.⁶⁶ For the ETRAN-based codes, this body of data has been converted to tables including bremsstrahlung production probabilities, photon energy distributions, and photon angular distributions.

MCNP addresses the sampling of bremsstrahlung photons at each electron substep. The tables of production probabilities are used to determine whether a bremsstrahlung photon will be created. If so, the new photon energy is sampled from the energy distribution tables. By default, the angular

CHAPTER 2

Electrons

deflection of the photon from the direction of the electron is also sampled from the tabular data. The direction of the electron is unaffected by the generation of the photon, because the angular deflection of the electron is controlled by the multiple scattering theory. However, the energy of the electron at the end of the substep is reduced by the energy of the sampled photon, because the treatment of electron energy loss, with or without straggling, is based only on nonradiative processes.

There is an alternative to the use of tabular data for the angular distribution of bremsstrahlung photons. If the fourth entry on the PHYS:E card is 1, then the simple, material-independent probability distribution

$$p(\mu) d\mu = \frac{1 - \beta^2}{2(1 - \beta\mu)^2} d\mu , \quad (2.12)$$

where $\mu = \cos \theta$ and $\beta = v/c$, will be used to sample for the angle of the photon relative to the direction of the electron according to the formula

$$\mu = \frac{2\xi - 1 - \beta}{2\xi\beta - 1 - \beta} ,$$

where ξ is a random number. This sampling method is of interest only in the context of detectors and DXTRAN spheres. A set of source contribution probabilities $p(\mu)$ consistent with the tabular data is not available. Therefore, detector and DXTRAN source contributions are made using Eq. 2.12. Specifying that the generation of bremsstrahlung photons rely on Eq. 2.12 allows the user to force the actual transport to be consistent with the source contributions to detectors and DXTRAN.

7. Knock-On Electrons

The Møller cross section⁶⁷ for scattering of an electron by an electron is

$$\frac{d\sigma}{d\epsilon} = \frac{C}{E} \left\{ \frac{1}{\epsilon^2} + \frac{1}{(1 - \epsilon)^2} + \left(\frac{\tau}{\tau + 1} \right)^2 - \frac{2\tau + 1}{(\tau + 1)^2} \frac{1}{\epsilon(1 - \epsilon)} \right\} , \quad (2.13)$$

where ϵ , τ , E , and C have the same meanings as in Eqs. 2.5-2.7. When calculating stopping powers, one is interested in all possible energy transfers. However, for the sampling of transportable secondary particles, one wants the probability of energy transfers greater than some ϵ_c representing an energy cutoff, below which secondary particles will not be followed. This probability can be written

$$\sigma(\epsilon_c) = \int_{\epsilon_c}^{1/2} \frac{d\sigma}{d\epsilon} d\epsilon .$$

The reason for the upper limit of 1/2 is the same as in the discussion of Eq. 2.8. Explicit integration of Eq. 2.13 leads to

$$\sigma(\epsilon_c) = \frac{C}{E} \left\{ \frac{1}{\epsilon_c} - \frac{1}{1 - \epsilon_c} + \left(\frac{\tau}{\tau + 1} \right)^2 \left(\frac{1}{2} - \epsilon_c \right) - \frac{2\tau + 1}{(\tau + 1)^2} \ln \frac{1 - \epsilon_c}{\epsilon_c} \right\} .$$

Then the normalized probability distribution for the generation of secondary electrons with $\epsilon > \epsilon_c$ is given by

$$g(\epsilon, \epsilon_c)d\epsilon = \frac{1}{\sigma(\epsilon_c)} \frac{d\sigma}{d\epsilon} d\epsilon . \quad (2.14)$$

At each electron substep, MCNP uses $\sigma(\epsilon_c)$ to determine randomly whether knock-on electrons will be generated. If so, the distribution of Eq. 2.14 is used to sample the energy of each secondary electron. Once an energy has been sampled, the angle between the primary direction and the direction of the newly generated secondary particle is determined by momentum conservation. This angular deflection is used for the subsequent transport of the secondary electron. However, neither the energy nor the direction of the primary electron is altered by the sampling of the secondary particle. On the average, both the energy loss and the angular deflection of the primary electron have been taken into account by the multiple scattering theories.

8. Multigroup Boltzmann–Fokker–Planck Electron Transport

The electron physics described above can be implemented into a multigroup form using a hybrid multigroup/continuous–energy method for solving the Boltzmann–Fokker–Planck equation as described by Morel.³⁹ The multigroup formalism for performing charged particle transport was pioneered by Morel and Lorence⁴⁰ for use in deterministic transport codes. With a first order treatment for the continuous slowing down approximation (CSDA) operator, this formalism is equally applicable to a standard Monte Carlo multigroup transport code as discussed by Sloan.⁶⁸ Unfortunately, a first order treatment is not adequate for many applications. Morel, et.al. have addressed this difficulty by developing a hybrid multigroup/continuous–energy algorithm for charged particles that retains the standard multigroup treatment for large–angle scattering, but treats exactly the CSDA operator. As with standard multigroup algorithms, adjoint calculations are performed readily with the hybrid scheme.

The process for performing an MCNP/MGBFP calculation for electron/photon transport problems involves executing three codes. First the CEPXS⁴⁰ code is used to generate coupled electron–photon multigroup cross sections. Next the CRSRD code casts these cross sections into a form suitable for use in MCNP by adjusting the discrete ordinate moments into a Radau quadrature form that can be used by a Monte Carlo code. CRSRD also generates a set of multigroup response functions for dose or charge deposition that can be used for response estimates for a forward calculation or sources in an adjoint calculation. Finally, MCNP is executed using these adjusted multigroup cross sections. Some applications of this capability for electron/photon transport have been presented in reference 69.

CHAPTER 2

Tallies

V. TALLIES

MCNP provides seven standard neutron tallies, six standard photon tallies, and four standard electron tallies. These basic tallies can be modified by the user in many ways. All tallies are normalized to be per starting particle except in KCODE criticality problems.

Tally Mnemonic			Description
F1:N	or F1:P	or F1:E	Surface current
F2:N	or F2:P	or F2:E	Surface flux
F4:N	or F4:P	or F4:E	Track length estimate of cell flux
F5a:N	or F5a:P		Flux at a point or ring detector
F6:N	or F6:P		Track length estimate of energy
	or F6:N,P		deposition
F7:N			Track length estimate of fission energy
			deposition
F8:N	or F8:P	or F8:E	Pulse height tally
		or F8:P,E	

The above seven tally categories represent the basic MCNP tally types. To have many tallies of a given type, add multiples of 10 to the tally number. For example, F1, F11, F21...F981, F991 are all type F1 tallies. Particle type is specified by appending a colon and the particle designator. For example, F11:N and F96:N are neutron tallies and F2:P and F25:P are photon tallies. F6 tallies can be for both neutrons and photons—F16:N,P. F8 tallies are for both photons and electrons: F8:P, F8:E, and F8:P,E are all identical. F8:N is also allowed, though not advised, because MCNP neutron transport does not currently sample joint collision exit densities in an analog way.

Thought should be given to selecting a tally and to comparing one tally with another. For example, if the flux is varying as $1/R^2$ in a cell, an average flux in the cell determined by the F4 tally will be higher than the flux at a point in the center of the cell determined by a detector. This same consideration applies to the average flux provided by DXTRAN spheres (see page 2–136).

Standard summary information that gives the user a better insight into the physics of the problem and the adequacy of the Monte Carlo simulation includes a complete accounting of the creation and loss of all tracks and their energy; the number of tracks entering and reentering a cell plus the track population in the cell; the number of collisions in a cell; the average weight, mean free path, and energy of tracks in a cell; the activity of each nuclide in a cell; and a complete weight balance for each cell.

The quantities actually scored in MCNP before the final normalization per starting particle are presented in Table 2.1. Note that adding an asterisk (*Fn) changes the units and multiplies the tally as indicated in the last column of Table 2.1. For a pulse height tally, F8, the asterisk changes the tally from deposition of pulses to an energy deposition tally. Table 2.1 also defines much of the notation used in the remainder of this section.

Extensive statistical analysis of tally convergence also is applied to one bin of each tally. Ten statistical checks are made, including the variance of the variance and the Pareto slope of the tally density function. These are described in detail starting on page 2–88.

Table 2.1
Tally Quantities Scored

Tally	F _n Quantity	F _n Units	*F _n Multiplier	*F _n Units
F1	W		E	MeV
F2	$W/(\mu * A)$	1/cm ²	E	MeV/cm ²
F4	$W * T_l/V$	1/cm ²	E	MeV/cm ²
F5	$W * p(\mu) * \exp(-\lambda)/(2\pi R^2)$	1/cm ²	E	MeV/cm ²
F6	$W * T_l * \sigma_T(E) * H(E) * \rho_a/m$	MeV/gm	1.60219E-22	jerks/gm
F7	$W * T_l * \sigma_f(E) * Q * \rho_a/m$	MeV/gm	1.60219E-22	jerks/gm
F8	W_s put in bin $E * W/W_s$	pulses	E	MeV

W = particle weight

W_s = source weight

E = particle energy (MeV)

$|\mu|$ = absolute value of cosine of angle between surface normal and particle trajectory. If $|\mu| < .1$, set $|\mu| = .05$.

A = surface area (cm²)

T_l = track length (cm) = transit time * velocity

V = volume (cm³)

$p(\mu)$ = probability density function: μ = cosine of angle between particle trajectory and detector

λ = total mean free path to detector

R = distance to detector (cm)

$\sigma_T(E)$ = microscopic total cross section (barns)

$H(E)$ = heating number (MeV/collision)

ρ_a = atom density (atoms/barn-cm)

m = cell mass (gm)

$\sigma_f(E)$ = microscopic fission cross section (barns)

Q = fission heating Q-value (MeV)

The following MCNP definitions of current and flux come from reactor theory but are related to similar quantities in radiative transfer theory. The MCNP particle angular flux multiplied by the particle energy is the same as the intensity in radiative transfer theory. The MCNP particle total flux at energy E multiplied by the particle energy equals the integrated energy density times the speed of light in radiative transfer theory. The MCNP particle current multiplied by the particle energy is analogous to the radiative flux crossing an area in radiative transfer theory. The MCNP particle current uses $|\mu|$ in the definition, whereas the radiative transfer flux uses μ in its definition. MCNP current is neither net nor positive nor negative current;

CHAPTER 2

Tallies

it is the number of particles crossing a surface in a particular direction. The MCNP particle fluence multiplied by the particle energy is the same as the fluence in radiative transfer theory.

A. Surface Current Tally

The F1 surface current tally estimates the following quantity:

$$\begin{aligned} F1 &= \int_A \int_\mu \int_t \int_E J(\vec{r}, E, t, \mu) dE dt d\mu dA \\ *F1 &= \int_A \int_\mu \int_t \int_E E * J(\vec{r}, E, t, \mu) dE dt d\mu dA \end{aligned} .$$

This tally is the number of particles (quantity of energy for *F1) crossing a surface. The scalar current is related to the flux as $J(\vec{r}, E, t, \mu) = |\mu|\Phi(\vec{r}, E, t)A$. The range of integration over area, energy, time, and angle (A, E, t, μ) can be controlled by FS, E, T, and C cards, respectively. The FT card can be used to change the vector relative to which μ is calculated (FRV option) or to segregate electron current tallies by charge (ELC option).

B. Flux Tallies

The F2, F4 and F5 flux tallies are estimates of

$$\begin{aligned} F_2 &= \int_A \int_t \int_E \Phi(\vec{r}, E, t) dE dt \frac{dA}{A} \\ *F_2 &= \int_A \int_t \int_E E * \Phi(\vec{r}, E, t) dE dt \frac{dA}{A} \\ F_4 &= \int_V \int_t \int_E \Phi(\vec{r}, E, t) dE dt \frac{dV}{V} \\ *F_4 &= \int_V \int_t \int_E E * \Phi(\vec{r}, E, t) dE dt \frac{dV}{V} \\ F_5 &= \int_t \int_E \Phi(\vec{r}, E, t) dE dt \\ *F_5 &= \int_t \int_E E * \Phi(\vec{r}, E, t) dE dt \end{aligned}$$

The range of integration over energy and time is controlled by E and T cards. The F2 surface flux and F4 cell flux tallies are discussed below. The F5 detector flux tally, a major topic, is discussed on page 2–75.

The units of the flux tally are the units of the source. If the source has units of particles per unit time, the tally is also particles per unit time. When the source has units of particles, this tally represents a fluence tally. A steady-state flux solution can be obtained by having a source with units of particles per unit time and integrating over all time (that is, omitting the Tn card). The flux can be obtained from the fluence tally for a time-dependent

source by dividing the tally by the time bin width. These tallies can all be made per unit energy by dividing by the energy bin width.

1. Track Length Estimate of Cell Flux (F4)

The definition of particle flux is $\Phi(\vec{r}, E, t) = vN(\vec{r}, E, t)$, where v = particle velocity and N = particle density = particle weight/unit volume. Roughly speaking, the time integrated flux is

$$\int_V \int_t \int_E \Phi(\vec{r}, E, t) dE dt \frac{dV}{V} = Wv t/V = WT_l/V \quad .$$

More precisely, let $ds = vdt$. Then the time integrated flux is

$$\int_V \int_E \int_t \Phi(\vec{r}, E, t) dt dE \frac{dV}{V} = \int_v \int_E \int_s N(\vec{r}, E, t) ds dE \frac{dV}{V}.$$

Because $N(\vec{r}, E, t)ds$ is a track length density, MCNP estimates this integral by summing WT_l/V for all particle tracks in the cell, time range, and energy range. Because of the track length term T_l in the numerator, this tally is known as a track length estimate of the flux. It is generally quite reliable because there are frequently many tracks in a cell (compared to the number of collisions), leading to many contributions to this tally.

2. Surface Flux (F2)

The surface flux is a surface estimator but can be thought of as the limiting case of the cell flux or track length estimator when the cell becomes infinitely thin as illustrated in Fig. 2.6.

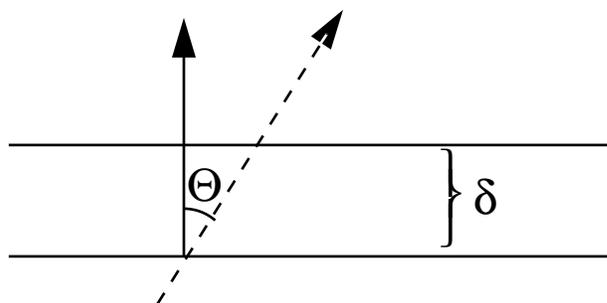


Figure 2.6

$$\begin{aligned} F2 &= \lim_{\delta \rightarrow \infty} WT_l/V \\ &= (W\delta/|\cos \theta|)/(A\delta) = W/(A|\mu|) \quad . \end{aligned}$$

As the cell thickness δ approaches zero, the volume approaches $A\delta$ and the track length approaches $\delta/|\mu|$, where $\mu = \cos \theta$, the angle between the surface normal and the particle trajectory. This definition of flux also follows directly from the relation between flux and current, $J(\vec{r}, E, t, \mu) = |\mu|\Phi(\vec{r}, E, t)A$. MCNP sets $|\mu| = .05$ when $|\mu| < .1$. The F2 tally is essential for stochastic calculation of surface areas when the normal analytic procedure fails.

CHAPTER 2

Tallies

C. Track Length Cell Energy Deposition Tallies

The F6 and F7 cell heating and energy deposition tallies are the following track length estimates

$$F_{6,7} = \rho_a / \rho_g \int_V \int_t \int_E H(E) \Phi(\vec{r}, E, t) dE dt \frac{dV}{V} \quad ,$$

where ρ_a = atom density (atoms/barn-cm)

ρ_g = gram density (grams/cm³)

$H(E)$ = heating response

The units of the heating tally are MeV/gm. An asterisk (*F_{6,7}) changes the units to jerks/gm (1 MeV = 1.60219E-22 jerks). The asterisk causes the F_{6,7} tally to be modified by a constant rather than by energy as in other tallies. Note that the heating tallies are merely flux tallies (F4) multiplied by an energy-dependent multiplier (FM card).

Energy deposition for photons and electrons can be computed with the *F8 tally, which is a surface estimator rather than a track length estimator. See page 2-74.

The F7 tally includes the gamma heating because the photons are deposited locally. The F6 tally deposits the photons elsewhere, so it does not include gamma heating. Thus for fissionable materials, the F7 result often will be greater than the F6 result even though F7 includes only fission and F6 includes all reactions. The true heating is found by summing the neutron and photon F6 tallies in a coupled neutron/photon calculation. In a neutron-only problem, F6 will give the right heating of light materials only if all photons escape the geometry. F7 will give about the right heating of fissionable materials only if no photons come from elsewhere, all fission photons are immediately captured, and nonfission reactions can be ignored. The F7 tally cannot be used for photons. Examples of combining the neutron and photon F6 tallies are F6:N,P and F516:P,N

The heating response $H(E)$ has different meanings, depending upon context as follows:

1. F6 Neutrons

$H(E) = \sigma_T(E) H_{avg}(E)$, where the heating number is

$$H_{avg}(E) = E - \sum_i p_i(E) [\bar{E}_{out_i}(E) - Q_i + \bar{E}_{\gamma_i}(E)] \quad ,$$

and σ_T = total neutron cross section,

E = incident neutron energy,

$p_i(E)$ = probability of reaction i ,

E_{out_i} = average exiting neutron energy for reaction i ,

Q_i = Q-value of reaction i ,

\bar{E}_{γ_i} = average energy of exiting gammas for reaction i .

2. F6 Photons

$H(E) = \sigma_T(E)H_{avg}(E)$, where the heating number is

$$H_{avg}(E) = \sum_{i=1}^3 p_i(E) * (E - \bar{E}_{out}).$$

i=1 incoherent (Compton) scattering with form factors

i=2 pair production ($\bar{E}_{out} = 1.022016 = 2m_0c^2$)

i=3 photoelectric.

All energy transferred to electrons is assumed to be deposited locally.

3. F7 Neutrons

$$H(E) = \sigma_f(E)Q,$$

where $\sigma_f(E)$ = total fission cross section and

Q = fission Q-value (MeV).

The Q-values as tabulated represent the total prompt energy release per fission and are printed in optional PRINT TABLE 98.

4. F7 Photons

$H(E)$ is undefined because photofission is not included in MCNP.

5. Equivalence of F4, F6, and F7 Tallies

The F6 and F7 heating tallies are special cases of the F4 track length estimate of cell flux with energy-dependent multipliers. The following F4 and FM4 combinations give exactly the same results as the F6 and F7 tallies. In this example, material 9 in cell 1 is ^{235}U with an atom density of .02 atoms/barn-cm and a gram density of 7.80612 g/cm³ for an atom/gram ratio of .0025621.

F4:N 1

FM4 .0025621 9 1 -4 gives the same result as F6:N 1

F14:N 1

FM14 .0025621 9 -6 -8 gives the same result as F17:N 1

F24:P 1

FM24 .0025621 9 -5 -6 gives the same result as F26:P 1

For the photon results to be identical, both electron transport and the thick target bremsstrahlung approximation must be turned off by PHYS:P j 1.

The photon heating tally also can be checked against the *F8 energy deposition tally (divided by cell mass to give answers in MeV per gram). Results will not be identical because the tallies are totally independent and use different estimators.

The FM card can be used to make the the surface flux tally (F2) and point and ring detector tallies (F5) calculate heating as well.

CHAPTER 2

Tallies

D. Pulse Height Tallies

The pulse height tally provides the energy distribution of pulses created in a cell that models a physical detector. It also can provide the energy deposition in a cell. Although the entries on the F8 card are cells, this is not a track length cell tally. F8 tallies are made at source points and at surface crossings.

The pulse height tally is analogous to a physical detector. The F8 energy bins correspond to the total energy deposited in a detector in the specified channels by each physical particle. All the other MCNP tallies record the energy of a scoring track in the energy bin.

In an experimental configuration, suppose a source emits 100 photons at 10 MeV, and ten of these get to the detector cell. Further, suppose that the first photon (and any of its progeny created in the cell) deposits 1 keV in the detector before escaping, the second deposits 2 keV, and so on up to the tenth photon which deposits 10 keV. Then the pulse height measurement at the detector would be one pulse in the 1 keV energy bin, 1 pulse in the 2 keV energy bin, and so on up to 1 pulse in the 10 keV bin.

In the analogous MCNP pulse height tally, the source cell is credited with the energy times the weight of the source particle. When a particle crosses a surface, the energy times the weight of the particle is subtracted from the account of the cell that it is leaving and is added to the account of the cell that it is entering. The energy is the kinetic energy of the particle plus $2m_0c^2 = 1.022016$ if the particle is a positron. At the end of the history, the account in each tally cell is divided by the source weight. The resulting energy determines which energy bin the score is put in. The value of the score is the source weight for an F8 tally and the source weight times the energy in the account for a *F8 tally. The value of the score is zero if no track entered the cell during the history.

The pulse height tally is an inherently analog process. Therefore, it does not work well with neutrons, which are inherently non-analog, and it does not work at all with most variance reduction schemes. The pulse height tally depends on sampling the joint density of all particles exiting a collision event. MCNP does not currently sample this joint density for neutron collisions. Thus neutron F8 tallies must be done with extreme caution when more than one neutron can exit a collision. Suppose in the above example, the photon that deposited 10 keV in the detector cell underwent a 2-for-1 split. Then if only one of the split halves entered the cell, the tally would be incorrectly put in the 5 keV bin rather than the 10 keV bin. Or if the particle survived a Russian roulette event, its weight would be double and the score would be put into the 20 keV bin. Similar scenarios can be given for other variance reduction methods. The MCNP pulse height tally will not work with any variance reduction other than source biasing. It doesn't work well with neutrons even without variance reduction because the MCNP neutron physics is nonanalog (in the joint density sampling), particularly in the way that multiple neutrons exiting a collision are totally uncorrelated and don't even conserve energy except in an average sense over many neutron histories.

Another aspect of the pulse height tally that is different from other MCNP tallies is that F8:P, F8:E and F8:P,E are all equivalent. All the energy from both photons and electrons, if present, will be deposited in the cell, no matter which tally is specified.

When the pulse height tally is used with energy bins, care must be taken because of negative scores from nonanalog processes and zero scores caused by particles passing through the pulse height cell without depositing energy. In some codes, like the Integrated Tiger Series, these events cause large contributions to the lowest energy bin pulse height score. In other codes no contribution is made. MCNP compromises by counting these events in a zero bin and an epsilon bin so that these scores can be segregated out. It is recommended that your energy binning for an F8 tally be something like

```
F8  0  1E-5  E1  E2  E3  E4  E5  ...
```

Knock-on electrons in MCNP are nonanalog in that the energy loss is included in the multiple scattering energy loss rate rather than subtracted out at each knock-on event. Thus knock-ons can cause negative energy pulse height scores. These scores will be caught in the 0 energy bin. If they are a large fraction of the total F8 tally, then the tally is invalid because of nonanalog events. Another situation is differentiating zero contributions from particles not entering the cell and particles entering the cell but not depositing any energy. These are differentiated in MCNP by causing an arbitrary 1.E-12 energy loss for particles just passing through the cell. These will appear in the 0-epsilon bin.

When the *F8 energy deposition tally is used and no energy bins are specified, variance reduction of all kinds is allowed. The analog requirement to put a score in the proper energy bin is removed in this special case of *F8 with no energy binning. If the tally had energy bins, the total energy deposition is correct even though the tallies in the energy bins are wrong. When Russian roulette is played at a surface bounding a pulse height tally, the variance can become large because the roulette is played after the energy-times-weight entering the cell is recorded. Particles terminated by roulette deposit all their energy in the cell. Particles surviving the roulette have increased weight that can now record more energy-times-weight leaving the cell than entered. On average, the total energy deposition is correct, but the negative and positive scores cause an unbounded variance. Therefore, do not play roulette at pulse height cell boundaries.

E. Flux at a Detector

Flux can be estimated at a point with either point or ring detector next event estimators. Detectors can yield anomalous statistics and must be used with caution. Detectors also have special variance reduction features, such as a highly advantageous DD card Russian roulette game. Whenever a user-supplied source is specified, a user-supplied source angle probability density function must be provided.

CHAPTER 2

Tallies

1. Point Detector

A point detector is a deterministic estimate (from the current event point) of the flux at a point in space. Contributions to the point detector tally are made at source and collision events throughout the random walk. Suppose $p(\mu, \varphi)d\Omega$ is the probability of the particle's scattering or being born into the solid angle $d\Omega$ about the direction (μ, φ) , where φ is the azimuthal angle and μ is the cosine of the angle between the incident particle direction and the direction from the collision point to the detector. If R is the distance to the detector from the collision or source point, then

$$p(\mu, \varphi)d\Omega \cdot e^{-\int_0^R \Sigma_t(s)ds}$$

yields the probability of scattering into $d\Omega$ about (μ, φ) and arriving at the detector point with no further collisions. The attenuation of a beam of monoenergetic particles passing through a material medium is given by $\exp[-\int_0^R \Sigma_t(s)ds]$ where s is measured along the direction from the collision or source point to the detector and $\Sigma_t(s)$ is the macroscopic total cross section at s . If dA is an element of area normal to the scattered line of flight to the detector, $d\Omega = dA/R^2$ and therefore

$$p(\mu, \varphi) \frac{dA}{R^2} e^{-\int_0^R \Sigma_t(s)ds}$$

is the expression giving the probability of scattering toward the detector and passing through the element of area dA normal to the line of flight to the detector. Because the flux is by definition the number of particles passing through a unit area normal to the scattered direction, the general expression for the contribution to the flux is given by

$$\frac{p(\mu, \varphi)}{R^2} e^{-\int_0^R \Sigma_t(s)ds} .$$

In all the MCNP scattering distributions and in the standard sources, we assume azimuthal symmetry. Therefore,

$$p(\mu) = \int_0^{2\pi} p(\mu, \varphi) d\varphi$$

and φ is sampled uniformly on $(0, 2\pi)$. That is, $p(\mu, \varphi) = p(\mu)/2\pi$.

If $p(\mu, \varphi) = p(\mu)/2\pi$ is substituted in the expression for the flux, the expression used in MCNP is arrived at:

$$\Phi(\vec{r}, E, t, \mu) = Wp(\mu)e^{-\lambda}/(2\pi R^2) \quad ,$$

when W = particle weight;

$\lambda = \int_0^R \Sigma_t(s)ds$ = total number of mean free paths integrated over the trajectory from the source or collision point to the detector;

R = distance from source or collision event to detector; and

$p(\mu)$ = value of probability density function at μ , the cosine of the angle between the particle trajectory and the direction to the detector.

A point detector is known as a “next event estimator” because it is a tally of the flux at a point if the next event is a trajectory without further collision directly to the point detector.

A contribution to the point detector is made at every source or collision event. The $e^{-\lambda}$ term accounts for attenuation between the present event and the detector point. The $1/2\pi R^2$ term accounts for the solid angle effect. The $p(\mu)$ term accounts for the probability of scattering toward the detector instead of the direction selected in the random walk. For an isotropic source or scatter, $p(\mu) = 0.5$ and the solid angle terms reduce to the expected $1/4\pi R^2$. (Note that $p(\mu)$ can be larger than unity, because it is the value of a density function and not a probability.) Each contribution to the detector can be thought of as the transport of a pseudoparticle to the detector.

The R^2 term in the denominator of the point detector causes a singularity that makes the theoretical variance of this estimator infinite. That is, if a source or collision event occurs near the detector point, R approaches zero and the flux approaches infinity. The technique is still valid and unbiased, but convergence is slower and often impractical. If the detector is not in a source or scattering medium, a source or collision close to the detector is impossible. For problems where there are many scattering events near the detector, a cell or surface estimator should be used instead of a point detector tally. If there are so few scattering events near the detector that cell and surface tallies are impossible, a point detector can still be used with a specified average flux region close to the detector. This region is defined by a fictitious sphere of radius R_o surrounding the point detector. R_o can be specified either in centimeters or in mean free paths. If R_o is specified in centimeters and if $R < R_o$, the point detector estimation inside R_o is assumed to be the average flux uniformly distributed in volume.

$$\begin{aligned}\Phi(R < R_o) &= \frac{\int \Phi dV}{\int dV} \\ &= Wp(\mu) \frac{\int_0^{R_o} e^{(-\Sigma_t r)} 4\pi r^2 dr}{\frac{4}{3}\pi R_o^3} \\ &= \frac{Wp(\mu)(1 - e^{-\Sigma_t R_o})}{\frac{2}{3}\pi R_o^3 \Sigma_t} .\end{aligned}$$

If $\Sigma_t=0$, the detector is not in a scattering medium, no collision can occur, and

$$\Phi(R < R_o, \Sigma_t = 0) = \frac{Wp(\mu)R_o}{\frac{2}{3}\pi R_o^3} .$$

If the fictitious sphere radius is specified in mean free paths λ_0 , then $\lambda_0 = \Sigma_t R_o$ and

$$\Phi(\lambda < \lambda_0) = \frac{Wp(\mu)(1 - e^{-\lambda_0})\Sigma_t^2}{\frac{2}{3}\pi \lambda_0^3} .$$

CHAPTER 2

Tallies

The choice of R_o may require some experimentation. For a detector in a void region or a region with very few collisions (such as air), R_o can be set to zero. For a typical problem, setting R_o to a mean free path or some fraction thereof is usually adequate. If R_o is in centimeters, it should correspond to the mean free path for some average energy in the sphere. Be certain when defining R_o that the sphere it defines does not encompass more than one material unless you understand the consequences. This is especially true when defining R_o in terms of mean free path because R_o becomes a function of energy and can vary widely. In particular, if R_o is defined in terms of mean free paths and if a detector is on a surface that bounds a void on one side and a material on the other, the contribution to the detector from the direction of the void will be zero even though the importance of the void is nonzero. The reason is simply that the volume of the artificial sphere is infinite in a void. Contributions to the detector from the other direction (that is, across the material) will be accounted for.

Detectors differing only in R_o are coincident detectors (see page 2–83), and there is little cost incurred by experimenting with several detectors that differ only by R_o in a single problem.

2. Ring Detector⁷⁰

A ring detector tally is a point detector tally in which the point detector location is not fixed but rather sampled from some location on a ring. Most of the previous section on point detectors applies to ring detectors as well. In MCNP three ring detector tallies FX, FY, and FZ correspond to rings located rotationally symmetric about the x , y , and z coordinate axes. A ring detector usually enhances the efficiency of point detectors for problems that are rotationally symmetric about a coordinate axis. Ring detectors also can be used for problems where the user is interested in the average flux at a point on a ring about a coordinate axis.

Although the ring detector is based on the point detector that has a $1/R^2$ singularity and an unbounded variance, the ring detector has a finite variance and only a $1/R_{min}$ singularity, where R_{min} is the minimum distance between the contributing point and the detector ring.⁷¹

In a cylindrically symmetric system, the flux is constant on a ring about the axis of symmetry. Hence, one can sample uniformly for positions on the ring to determine the flux at any point on the ring. The ring detector efficiency is improved by biasing the selection of point detector locations to favor those near the contributing collision or source point. This bias results in the same total number of detector contributions, but the large contributions are sampled more frequently, reducing the relative error.

For isotropic scattering in the lab system, experience has shown that a good biasing function is proportional to $e^{-P}R^{-2}$, where P is the number of mean free paths and R is the distance from the collision point to the detector point. For most practical applications, using a biasing function involving P presents prohibitive computational complexity except for homogeneous medium problems. For air transport problems, a biasing function resem-

bling e^{-P} has been used with good results. A biasing function was desired that would be applicable to problems involving dissimilar scattering media and would be effective in reducing variance. The function R^{-2} meets these requirements.

In Fig. 2.7, consider a collision point, (x_o, y_o, z_o) at a distance R from a point detector location (x, y, z) . The point (x, y, z) is to be selected from points on a ring of radius r that is symmetric about the y -axis in this case.

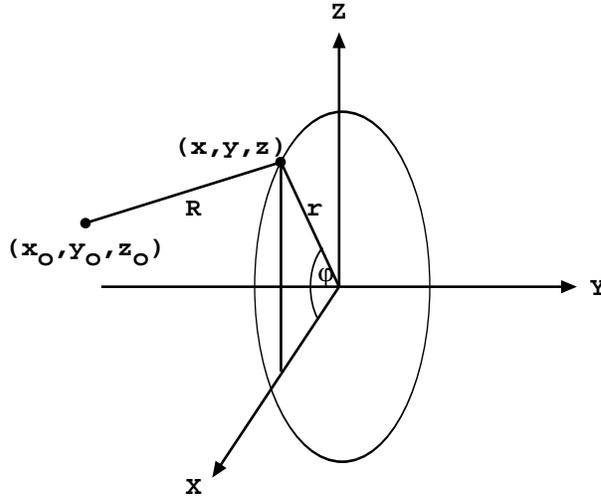


Figure 2.7

To sample a position (x, y, z) on the ring with a $1/R^2$ bias, we pick φ from the density function $p(\varphi) = C/(2\pi R^2)$, where C is a normalization constant. To pick φ from $p(\varphi)$, let ξ be a random number on the unit interval. Then

$$\begin{aligned} \xi &= \frac{C}{2\pi} \int_{-\pi}^{\varphi} \frac{d\varphi'}{R^2} \\ &= \frac{C}{2\pi} \int_{-\pi}^{\varphi} \frac{d\varphi'}{(x_o - r \cos \varphi')^2 + (y_o - y)^2 + (z_o - r \sin \varphi')^2} \\ &= \frac{C}{2\pi} \int_{-\pi}^{\varphi} \frac{d\varphi'}{a + b \cos \varphi' + c \sin \varphi'} \\ &= \frac{1}{\pi} \tan^{-1} \left\{ \frac{1}{C} \left[(a - b) \tan \frac{\varphi}{2} + c \right] \right\} + \frac{1}{2} \quad , \end{aligned}$$

$$\begin{aligned} \text{where } a &= r^2 + x_o^2 + (y - y_o)^2 + z_o^2 \\ b &= -2rx_o \\ c &= -2rz_o \\ C &= (a^2 - b^2 - c^2)^{1/2}. \end{aligned}$$

The above expression is valid if $a^2 > b^2 + c^2$, which is true except for collisions exactly on the ring.

Solving for $\tan \frac{\varphi}{2}$,

$$\tan \frac{\varphi}{2} = \frac{1}{a - b} \left\{ C \tan \left[\pi \left(\xi - \frac{1}{2} \right) \right] - c \right\} \quad .$$

CHAPTER 2

Tallies

Letting $t = \tan \varphi/2$,
then $x = r \cos \varphi = r(1 - t^2)/(1 + t^2)$
 $y = y$ (fixed)
 $z = r \sin \varphi = 2rt/(1 + t^2)$.

For ring detectors, the $1/R^2$ biasing has been supplemented when it is weak to include a biasing based on angle to select the point on the ring. This angle is in the plane of the ring and is relative to the shortest line from the collision point to the detector ring. The angle that would most likely be selected would pick the same point on the ring as a straight line through the axis of the problem, the collision point, and the ring. The angle least likely to be picked would choose the point on the opposite side of the ring. This approach will thus make scores with smaller attenuations more often. This supplemental biasing is achieved by requiring that $a \leq 3/2(b^2 + c^2)^{1/2}$ in the above equation.

If the radius of the ring is very large compared to the dimensions of the scattering media (such that the detector sees essentially a point source in a vacuum), the ring detector is still more efficient than a point detector. The reason for this unexpected behavior is that the individual scores to the ring detector for a specific history have a mean closer to the true mean than to the regular point detector contributions. That is, the point detector contributions from one history will tend to cluster about the wrong mean because the history will not have collisions uniformly in volume throughout the problem, whereas the ring detector will sample many paths through the problem geometry to get to different points on the ring.

3. General Considerations of Point Detector Estimators

a. Pseudoparticles and detector reliability: Point and ring detectors are Monte Carlo methods wherein the simulation of particle transport from one place to another is deterministically short-circuited. Transport from the source or collision point to the detector is replaced by a deterministic estimate of the potential contribution to the detector. This transport between the source or collision point and the detector can be thought of as being via “pseudoparticles.” Pseudoparticles undergo no further collisions. These particles do not reduce the weight or otherwise affect the random walk of the particles that produced them. They are merely estimates of a potential contribution. The only resemblance to Monte Carlo particles is that the quantity they estimate requires an attenuation term that must be summed over the trajectory from the source or collision to the detector. Thus most of the machinery for transporting particles can also be used for the pseudoparticles. No records (for example, tracks entering) are kept about pseudoparticle passage.

Because detectors rely on pseudoparticles rather than particle simulation by random walk, they should be considered only as a very useful last resort. Detectors are unbiased estimators, but their use can be tricky, misleading, and occasionally unreliable. Consider the problem illustrated in Fig. 2.8.

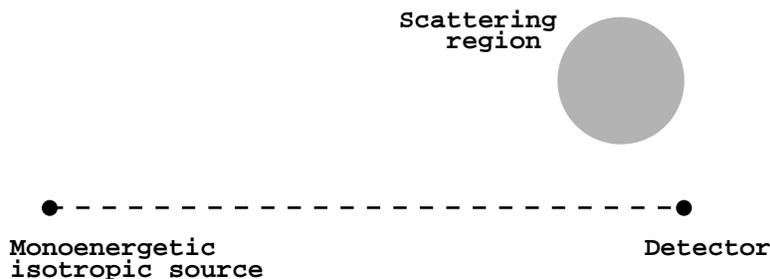


Figure 2.8

The monoenergetic isotropic point source always will make the same contribution to the point detector, so the variance of that contribution will be zero. If no particles have yet collided in the scattering region, the detector tally will be converged to the source contribution, which is wrong and misleading. But as soon as a particle collides in the scattering region, the detector tally and its variance will jump. Then the detector tally and variance will steadily decrease until the next particle collides in the scattering region, at which time there will be another jump.

These jumps in the detector score and variance are characteristic of undersampling important regions. Next event estimators are prone to undersampling as already described on page 2–57 for the $p(\mu)$ term of photon coherent scattering. The jump discussed here is from the sudden change in the R and possibly λ terms. Jumps in the tally caused by undersampling can be eliminated only by better sampling of the undersampled scattering region that caused them.

Biasing Monte Carlo particles toward the tally region would cause the scattering region to be sampled better, thus eliminating the jump problem. It is recommended that detectors be used with caution and with a complete understanding of the nature of next event estimators. When detectors are used, the tally fluctuation charts printed in the output file should be examined closely to see the degree of the fluctuations. Also the detector diagnostic print tables should be examined to see if any one pseudoparticle trajectory made an unusually large contribution to the tally. Detector results should be viewed suspiciously if the relative error is greater than 5%. Close attention should be paid to the tally statistical analysis and the ten statistical checks described on page 2–109.

b. Detectors and reflecting, white or periodic surfaces: Detectors used with reflecting, white, or periodic surfaces give wrong answers because pseudoparticles travel only in straight lines. Consider Fig. 2.9, with a point detector and eight source cells. The imaginary cells and point detector are also shown on the other side of the mirror. The solid line shows the source contribution from the indicated cell. MCNP does not allow for the dashed-line contribution on the other side of the reflecting surface. The result is that contributions to the detector will always be from the solid path instead of from a mixture of solid and dashed contributions. This same situation occurs at every collision. Therefore, the detector tally will be lower (with the

CHAPTER 2
Tallies

same starting weight) than the correct answer and should not be used with reflecting, white, or periodic surfaces. The effect is even worse for problems with multiple reflecting, white or periodic surfaces.

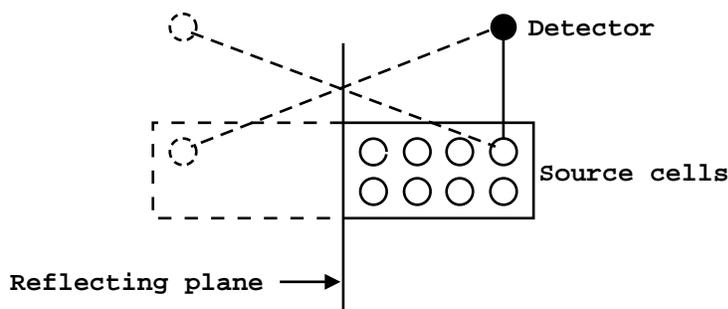


Figure 2.9

c. Variance reduction schemes for detectors: Pseudoparticles of point detectors are not subject to the variance reduction schemes applied to particles of the random walk. They do not split according to importances, weight windows, etc., although they are terminated by entering zero importance cells. However, two Russian roulette games are available specifically for detector pseudoparticles.

The PD card can be used to specify the pseudoparticle generation probability for each cell. The entry for each cell i is p_i where $0 \leq p_i \leq 1$. Pseudoparticles are created with probability p_i and weight $1/p_i$. If $p_i = 1$, which is the default, every source or collision event produces a pseudoparticle. If $p_i = 0$, no pseudoparticle is produced. Setting $p_i = 0$ in a cell that can actually contribute to a detector erroneously biases the detector tally by eliminating such contributions. Thus $p_i = 0$ should be used only if the true probability of scoring is zero or if the score from cell i is unwanted for some legitimate reason such as problem diagnostics. Fractional entries of p_i should be used with caution because the PD card applies equally to all pseudoparticles. The DD card can be used to Russian roulette just the unimportant pseudoparticles. However, the DD card roulette game often requires particles to travel some distance along their trajectory before being killed. When cells are many mean free paths from the detector, the PD card may be preferable.

The DD card controls both the detector diagnostic printing and a Russian roulette game played on pseudoparticles in transit to detectors. The Russian roulette game is governed by the input parameter k that controls a comparison weight w_c internal to MCNP, such that

$$\begin{aligned}
 w_c &= -k \text{ if } k < 0; \\
 w_c &= 0 \text{ if } k = 0; \\
 w_c &= 0 \text{ if } k > 0 \text{ and } N \leq 200; \\
 w_c &= (k/N) \sum_i^I \varphi_i \text{ if } k > 0 \text{ and } N > 200, \\
 &\text{where } N = \text{number of histories run so far,} \\
 &\quad I = \text{number of pseudoparticles started so far,}
 \end{aligned}$$

$$\begin{aligned}\varphi_i &= Wp(\mu)e^{-\lambda}/(2\pi R^2), \\ &= \text{contribution of the } i^{\text{th}} \text{ pseudoparticle to the detector tally.}\end{aligned}$$

When each pseudoparticle is generated, W , $p(\mu)$, and R are already known before the expensive tracking process is undertaken to determine λ . If $Wp(\mu)/(2\pi R^2) < w_c$, the pseudoparticle contribution to the detector φ_i will be less than the comparison weight. Playing Russian roulette on all pseudoparticles with $\varphi_i < w_c$ avoids the expensive tracking of unimportant pseudoparticles. Most are never started. Some are started but are rouletted as soon as λ has increased to the point where $Wp(\mu)e^{-\lambda}/(2\pi R^2) < w_c$. Rouletting pseudoparticles whose expected detector contribution is small also has the added benefit that those pseudoparticles surviving Russian roulette now have larger weights, so the disparity in particle weights reaching the detector is reduced. Typically, using the DD card will increase the efficiency of detector problems by a factor of ten. This Russian roulette is so powerful that it is one of two MCNP variance reduction options that is turned on by default. The default value of k is 0.1. The other default variance reduction option is implicit capture.

The DD card Russian roulette game is almost foolproof. Performance is relatively insensitive to the input value of k . For most applications the default value of $k = 0.1$ is adequate. Usually, choose k so that there are 1–5 transmissions (pseudoparticle contributions) per source history. If k is too large, too few pseudoparticles are sampled; thus $k \geq 1$ is a fatal error.

Because a random number is used for the Russian roulette game invoked by $k > 0$, the addition of a detector tally affects the random walk tracking processes. Detectors are the only tallies that affect results. If any other tally type is added to a problem, the original problem tallies remain unchanged. Because detectors use the default DD card Russian roulette game, and that game affects the random number sequence, the whole problem will track differently and the original tallies will agree only to within statistics. Because of this tracking difference, it is recommended that $k < 0$ be used once a good guess at w_c can be made. This is especially important if a problem needs to be debugged by starting at some history past the first one. Also, $k < 0$ makes the first 200 histories run faster.

There are two cases when it is beneficial to turn off the DD card Russian roulette game by setting $k = 0$. First, when looking at the tail of a spectrum or some other low probability event, the DD card roulette game will preferentially eliminate small scores and thus eliminate the very phenomenon of interest. For example, if energy bias is used to preferentially produce high energy particles, these biased particles will have a lower weight and thus preferentially will be rouletted by the DD card game. Second, in very deep penetration problems, pseudoparticles will sometimes go a long way before being rouletted. In this rare case it is wasteful to roulette a pseudoparticle after a great deal of time has been spent following it and perhaps a fractional PD card should be used or, if possible, a cell or surface tally.

d. Coincident detectors: Because tracking pseudoparticles is very expensive, MCNP uses a single pseudoparticle for multiple detectors, known

CHAPTER 2

Tallies

as coincident detectors, that must be identical in:

- geometric location,
- particle type (that is, neutron or photon),
- upper time bin limit,
- DD card Russian Roulette control parameter, k , and
- PD card entries, if any.

Energy bins, time bins, tally multipliers, response functions, fictitious sphere radii, user-supplied modifications (TALLYX), etc., can all be different. Coincident detectors require little additional computational effort because most detector time is spent in tracking a pseudoparticle. Multiple detectors using the same pseudoparticle are almost “free.”

e. Direct vs total contribution: Unless specifically turned off by the user, MCNP automatically prints out both the direct and total detector contribution. Recall that pseudoparticles are generated at source and collision events. The direct contribution is that portion of the tally from pseudoparticles born at source events. The total contribution is the total tally from both source and collision events. For Mode N P problems with photon detectors, the direct contribution is from pseudophotons born in neutron collisions. The direct contributions for detailed photon physics will be smaller than the simple physics direct results because coherent scattering is included in the detailed physics total cross section and omitted in the simple physics treatment.

f. Angular distribution functions for point detectors: All detector estimates require knowledge of the $p(\mu)$ term, the value of the probability density function at an angle θ , where $\mu = \cos \theta$. This quantity is available to MCNP for the standard source and for all kinds of collisions. For user-supplied source subroutines, MCNP assumes an isotropic distribution

$$p(\mu)d\mu = \frac{d\Omega}{4\pi} = \int_0^{2\pi} \frac{d\mu d\varphi}{4\pi} = \frac{1}{2}d\mu \quad .$$

Therefore, the variable $PSC=p(\mu) = 1/2$. If the source distribution is not isotropic in a user-supplied source subroutine, the user must also supply a subroutine SRCDX if there are any detectors or DXTRAN spheres in the problem. In subroutine SRCDX, the variable PSC must be set for each detector and DXTRAN sphere. An example of how this is done and also a description of several other source angular distribution functions is in Chapter 4.

g. Detectors and the $S(\alpha, \beta)$ thermal treatment: The $S(\alpha, \beta)$ thermal treatment poses special challenges to next event estimators because the probability density function for angle has discrete lines to model Bragg scattering and other molecular effects. Therefore, MCNP has an approximate model⁴² that, for the PSC calculation (not the transport calculation), replaces the discrete lines with finite histograms of width $\mu < .1$

This approximation has been demonstrated to accurately model the discrete line $S(\alpha, \beta)$ data. In cases where continuous data is approximated with

discrete lines, the approximate scheme cancels the errors and models the scattering better than the random walk.⁴³ Thus the $S(\alpha, \beta)$ thermal treatment can be used with confidence with next event estimators like detectors and DXTRAN.

F. Additional Tally Features

The standard MCNP tally types can be controlled, modified, and beautified by other tally cards. These cards are described in detail in Chapter 3; an overview is given here.

1. Bin limit control

The integration limits of the various tally types are controlled by E, T, C, and FS cards. The E card establishes energy bin ranges; the T card establishes time bin ranges; the C card establishes cosine bin ranges; and the FS card segments the surface or cell of a tally into subsurface or subcell bins.

2. Flagging

Cell and surface flagging cards, CF and SF, determine what portion of a tally comes from where.

Example: F4 1
CF4 2 3 4

The flux tally for cell 1 is output twice: first, the total flux in cell 1; and second, the flagged tally, or that portion of the flux caused by particles having passed through cells 2, 3, or 4.

3. Multipliers and modification

MCNP tallies can be modified in many different ways. The EM, TM, and CM cards multiply the quantities in each energy, time, or cosine bin by a different constant. This capability is useful for modeling response functions or changing units. For example, a surface current tally can have its units changed to per steradian by entering the inverse steradian bin sizes on the CM card.

The DE and DF cards allow modeling of an energy-dependent dose function that is a continuous function of energy from a table whose data points need not coincide with the tally energy bin structure (E card). An example of such a dose function is the flux-to-radiation dose conversion factor given in Appendix H.

The FM card multiplies the F1, F2, F4, and F5 tallies by any continuous-energy quantity available in the data libraries. For example, average heating numbers $H_{avg}(E)$ and total cross section $\sigma_T(E)$ are stored on the MCNP data libraries. An F4 tally multiplied by $\sigma_T H_{avg}(E) \rho_a / \rho_g$ converts it to an F6 tally, or an F5 detector tally multiplied by the same quantity calculates heating at a point (see page 2–73). The FM card can modify any flux or current tally of the form $\int \varphi(E) dE$ into $\int R(E) \varphi(E) dE$, where $R(E)$ is any combination of sums and products of energy-dependent quantities known to MCNP.

CHAPTER 2

Tallies

The FM card can also model attenuation. Here the tally is converted to $\int \varphi(E) e^{-\sigma_t(E) \rho_a x} dE$, where x is the thickness of the attenuator, ρ_a is its atom density, and σ_t is its total cross section. Double parentheses allow the calculation of $\int \varphi(E) e^{-\sigma_t(E) \rho_a x} R(E) dE$. More complex expressions of $\sigma_t(E) \rho_a x$ are allowed so that many attenuators may be stacked. This is useful for calculating attenuation in line-of-sight pipes and through thin foils and detector coatings, particularly when done in conjunction with point and ring detector tallies. Beware, however, that attenuation assumes that the attenuated portion of the tally is lost from the system by capture or escape and cannot be scattered back in.

Two special FM card options are available. The first option sets $R(E) = 1/\varphi(E)$ to score tracks or collisions. The second option sets $R(E) = 1/\text{velocity}$ to score population or prompt removal lifetime.

4. Special Treatments

A number of special tally treatments are available using the FT tally card. A brief description of each one follows.

a. Change current tally reference vector: F1 current tallies measure bin angles relative to the surface normal. They can be binned relative to any arbitrary vector with the FRV option.

b. Gaussian energy broadening: The GEB option can be used to better simulate a physical radiation detector in which energy peaks exhibit Gaussian energy broadening. The tallied energy is broadened by sampling from the Gaussian:

$$f(E) = C e^{-\left(\frac{E-E_o}{A}\right)^2},$$

where E = the broadened energy;

E_o = the unbroadened energy of the tally;

C = a normalization constant; and

A = the Gaussian width.

The Gaussian width is related to the full width half maximum (FWHM) by

$$A = \frac{FWHM}{2\sqrt{\ln 2}} = .60056120439322 * FWHM.$$

The desired FWHM is specified by the user-provided constants, a, b, and c, where

$$FWHM = a + b\sqrt{E + cE^2}.$$

The FWHM is defined as $FWHM = 2(E_{FWHM} - E_o)$,

where E_{FWHM} is such that $f(E_{FWHM}) = \frac{1}{2}f(E_o)$

and $f(E_o)$ is the maximum value of $f(E)$.

c. Time convolution: Because the geometry and material compositions are independent of time, except in the case of time-dependent temperatures, the expected tally $T(t, t + \tau)$ at time $t + \tau$ from a source particle emitted at time t is identical to the expected tally $T(0, \tau)$ from a source particle emitted at time 0. Thus, if a calculation is performed with all source particles started at $t = 0$, one has an estimate of $T(0, \tau)$ and the tallies T_{Q_i} from a number of time-distributed sources. $Q_i(t)$ can be calculated at time η as

$$T_{Q_i}(\eta) = \int_a^b Q_i(t)T(t, \eta)dt = \int_a^b Q_i(t)T(0, \eta - t)dt \quad ,$$

by sampling t from $Q_i(t)$ and recording each particle's tally (shifted by t), or after the calculation by integrating $Q_i(t)$ multiplied by the histogram estimate of $T(0, \eta - t)$. The latter method is used in MCNP to simulate a source as a square pulse starting at time a and ending at time b , where a and b are supplied by the TMC option.

d. Binning by the number of collisions: Tallies can be binned by the number of collisions that caused them with the INC option and an FU card. A current tally, for example, can be subdivided into the portions of the total current coming from particles that have undergone zero, one, two, three, ... collisions before crossing the surface. In a point detector tally, the user can determine what portion of the score came from particles having their 1st, 2nd, 3rd, ... collision. Collision binning is particularly useful with the exponential transform because the transform reduces variance by reducing the number of collisions. If particles undergoing many collisions are the major contributor to a tally, then the exponential transform is ill-advised. When the exponential transform is used, the portion of the tally coming from particles having undergone many collisions should be small.

e. Binning by detector cell: The ICD option with an FU card is used to determine what portion of a detector tally comes from what cells. This information is similar to the detector diagnostics print, but the FT card can be combined with energy and other binning cards. The contribution to the normalized rather than unnormalized tally is printed.

f. Binning by source distribution: The SCX and SCD options are used to bin a tally score according to what source distribution caused it.

g. Binning by multigroup particle type: The PTT option with an FU card is used to bin multigroup tallies by particle type. The MCNP multigroup treatment is available for neutron, coupled neutron/photon, and photon problems. However, charged particles or any other combinations of particles can be run with the various particles masquerading as neutrons and are printed out in the OUTF file as if they were neutrons. With the PTT option, the tallies can be segregated into particle types by entering atomic weights in units of MeV on the FU card. The FU atomic weights must be specified to within 0.1% of the true atomic weight in MeV units: thus FU .511 specifies an electron, but .510 is not recognized.

CHAPTER 2

Errors

h. Binning by particle charge: The ELC option allows binning F1 current tallies by particle charge. There are three ELC options:

1. cause negative electrons to make negative scores and positrons to make positive scores. Note that by tallying positive and negative numbers the relative error is unbounded and this tally may be difficult to converge;

2. segregate electrons and positrons into separate bins plus a total bin. There will be three bins (positron, electron, and total) all with positive scores. The total bin will be the same as the single tally bin without the ELC option.

3. segregate electrons and positrons into separate bins plus a total bin, with the electron bin scores being all negative to reflect their charge. The bins will be for positrons (positive scores), electrons (negative scores), and total. The total bin will be the same as the single bin with the first ELC option above (usually with negative scores because there are more electrons than positrons).

5. User modification

If the above capabilities do not provide the user with exactly what is desired, tallies can be modified by a user-supplied TALLYX subroutine (FU card). As with a user-supplied SOURCE subroutine, which lets the user provide his own specialized source, the TALLYX subroutine lets the user modify any tally, with all the programming changes conveniently located in a single subroutine.

6. Tally output format

Not only can users change the contents of MCNP tallies, the output format can be modified as well. Any desired descriptive comment can be added to the tally title by the tally comment (FC) card. The printing order can be changed (FQ card) so that instead of, for instance, getting the default output blocks in terms of time vs energy, they could be printed in blocks of segment vs cosine. The tally bin that is monitored for the tally fluctuation chart printed at the problem end and used in the statistical analysis of the tally can be selected (TF card). Detector tally diagnostic prints are controlled with the DD card. Finally, the PRINT card controls what optional tables are displayed in the output file.

VI. ESTIMATION OF THE MONTE CARLO PRECISION

Monte Carlo results represent an average of the contributions from many histories sampled during the course of the problem. An important quantity equal in stature to the Monte Carlo answer (or tally) itself is the statistical error or uncertainty associated with the result. The importance of this error and its behavior vs the number of histories cannot be overemphasized because the user not only gains insight into the quality of the result, but also can determine if a tally appears statistically well behaved. If a tally is not well behaved, the estimated error associated with the result generally will not reflect the true confidence interval of the result and, thus, the answer could

be completely erroneous. MCNP contains several quantities that aid the user in assessing the quality of the confidence interval.¹¹⁰

The purpose of this section is to educate MCNP users about the proper interpretation of the MCNP estimated mean, relative error, variance of the variance, and history score probability density function. Carefully check tally results and the associated tables in the tally fluctuation charts to ensure a well-behaved and properly converged tally.

A. Monte Carlo Means, Variances, and Standard Deviations

Monte Carlo results are obtained by sampling possible random walks and assigning a score x_i (for example, x_i = energy deposited by the i^{th} random walk) to each random walk. Random walks typically will produce a range of scores depending on the tally selected and the variance reduction chosen.

Suppose $f(x)$ is the history score probability density function for selecting a random walk that scores x to the tally being estimated. The true answer (or mean) is the expected value of x , $E(x)$, where

$$E(x) = \int x f(x) dx = \text{true mean.}$$

The function $f(x)$ is seldom explicitly known; thus, $f(x)$ is implicitly sampled by the Monte Carlo random walk process. The true mean then is estimated by the sample mean \bar{x} where

$$\bar{x} = \frac{1}{N} \sum_{i=1}^N x_i \quad , \quad (2.15)$$

where x_i is the value of x selected from $f(x)$ for the i^{th} history and N is the number of histories calculated in the problem. The Monte Carlo mean \bar{x} is the average value of the scores x_i for all the histories calculated in the problem. The relationship between $E(x)$ and \bar{x} is given by the Strong Law of Large Numbers¹ that states that if $E(x)$ is finite, \bar{x} tends to the limit $E(x)$ as N approaches infinity.

The variance of the population of x values is a measure of the spread in these values and is given by¹

$$\sigma^2 = \int (x - E(x))^2 f(x) dx = E(x^2) - (E(x))^2 \quad .$$

The square root of the variance is σ , which is called the standard deviation of the population of scores. As with $E(x)$, σ is seldom known but can be estimated by Monte Carlo as S , given by (for large N)

$$S^2 = \frac{\sum_{i=1}^N (x_i - \bar{x})^2}{N - 1} \sim \overline{x^2} - \bar{x}^2 \quad (2.16a)$$

and

$$\overline{x^2} = \frac{1}{N} \sum_{i=1}^N x_i^2 \quad . \quad (2.16b)$$

CHAPTER 2

Errors

The quantity S is the estimated standard deviation of the population of x based on the values of x_i that were actually sampled.

The estimated variance of \bar{x} is given by

$$S_{\bar{x}}^2 = \frac{S^2}{N} \quad . \quad (2.17)$$

These formulae do not depend on any restriction on the distribution of x or \bar{x} (such as normality) beyond requiring that $E(x)$ and σ^2 exist and are finite. The estimated standard deviation of the mean \bar{x} is given by $S_{\bar{x}}$.

It is important to note that $S_{\bar{x}}$ is proportional to $1/\sqrt{N}$, which is the inherent drawback to the Monte Carlo method. To halve $S_{\bar{x}}$, four times the original number of histories must be calculated, a calculation that can be computationally expensive. The quantity $S_{\bar{x}}$ can also be reduced for a specified N by making S smaller, reducing the inherent spread of the tally results. This can be accomplished by using variance reduction techniques such as those discussed in section VII of this chapter.

B. Precision and Accuracy

There is an extremely important difference between precision and accuracy of a Monte Carlo calculation. As illustrated in Fig. 2.10, precision is the uncertainty in \bar{x} caused by the statistical fluctuations of the x_i 's for the portion of physical phase space sampled by the Monte Carlo process. Important portions of physical phase space might not be sampled because of problem cutoffs in time or energy, inappropriate use of variance reduction techniques, or an insufficient sampling of important low-probability events. Accuracy is a measure of how close the expected value of \bar{x} , $E(x)$, is to the true physical quantity being estimated. The difference between this true value and $E(x)$ is called the systematic error, which is seldom known. Error or uncertainty estimates for the results of Monte Carlo calculations refer only to the precision of the result and not to the accuracy. It is quite possible to calculate a highly precise result that is far from the physical truth because nature has not been modeled faithfully.

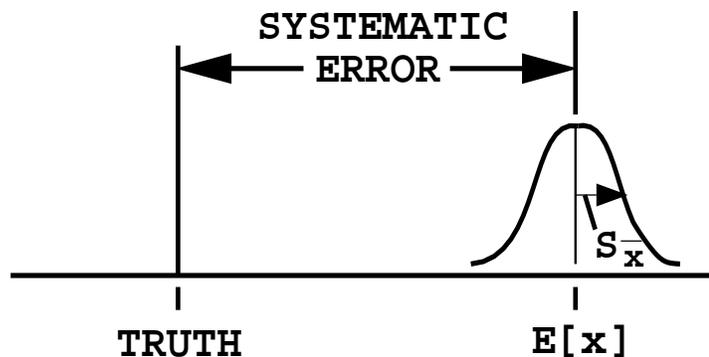


Figure 2.10

1. Factors Affecting Problem Accuracy

Three factors affect the accuracy of a Monte Carlo result: (1) the code, (2) problem modeling, and (3) the user. Code factors encompass: the physics features included in a calculation as well as the mathematical models used; uncertainties in the data, such as the transport and reaction cross sections, Avogadro's number, atomic weights, etc.; the quality of the representation of the differential cross sections in energy and angle; and coding errors (bugs). All of the applicable physics must be included in a calculation to produce accurate results. Even though the evaluations are not perfect, more faithful representation of the evaluator's data should produce more accurate results. The descending order of preference for Monte Carlo data for calculations is continuous energy, thinned continuous energy, discrete reaction, and multi-group. Coding errors can always be a problem because no large code is bug-free. MCNP, however, is a very mature, heavily used production code. With steadily increasing use over the years, the likelihood of a serious coding error continues to diminish.

The second area, problem-modeling factors, can quite often contribute to a decrease in the accuracy of a calculation. Many calculations produce seemingly poor results because the model of the energy and angular distribution of the radiation source is not adequate. Two other problem-modeling factors affecting accuracy are the geometrical description and the physical characteristics of the materials in the problem.

The third general area affecting calculational accuracy involves user errors in the problem input or in user-supplied subroutines and patches to MCNP. The user can also abuse variance reduction techniques such that portions of the physical phase space are not allowed to contribute to the results. Checking the input and output carefully can help alleviate these difficulties. A last item that is often overlooked is a user's thorough understanding of the relationship of the Monte Carlo tallies to any measured quantities being calculated. Factors such as detector efficiencies, data reduction and interpretation, etc., must be completely understood and included in the calculation, or the comparison is not meaningful.

2. Factors Affecting Problem Precision

The precision of a Monte Carlo result is affected by four user-controlled choices: (1) forward vs adjoint calculation, (2) tally type, (3) variance reduction techniques, and (4) number of histories run.

The choice of a forward vs adjoint calculation depends mostly on the relative sizes of the source and detector regions. Starting particles from a small region is easy to do, whereas transporting particles to a small region is generally hard to do. Because forward calculations transport particles from source to detector regions, forward calculations are preferable when the detector (or tally) region is large and the source region is small. Conversely, because adjoint calculations transport particles backward from the detector region to the source region, adjoint calculations are preferable when the source (or tally) region is large and the detector region is small. MCNP can

CHAPTER 2

Errors

be run in multigroup adjoint mode. There is no continuous-energy adjoint capability.

As alluded to above, the smaller the tally region, the harder it becomes to get good tally estimates. An efficient tally will average over as large a region of phase space as practical. In this connection, tally dimensionality is extremely important. A one-dimensional tally is typically 10 to 100 times easier to estimate than a two-dimensional tally, which is 10 to 100 times easier than a three-dimensional tally. This fact is illustrated in Fig. 2.15 later in this section.

Variance reduction techniques can be used to improve the precision of a given tally by increasing the nonzero tallying efficiency and by decreasing the spread of the nonzero history scores. These two components are depicted in a hypothetical $f(x)$ shown in Fig. 2.11. See page 2–101 for more discussion about the empirical $f(x)$ for each tally fluctuation chart bin. A calculation will be more precise when the history-scoring efficiency is high and the variance of the nonzero scores is low. The user should strive for these conditions in difficult Monte Carlo calculations. Examples of these two components of precision are given on page 2–97.

More histories can be run to improve precision (see section *C* following). Because the precision is proportional to $1/\sqrt{N}$, running more particles is often costly in computer time and therefore is viewed as the method of last resort for difficult problems.

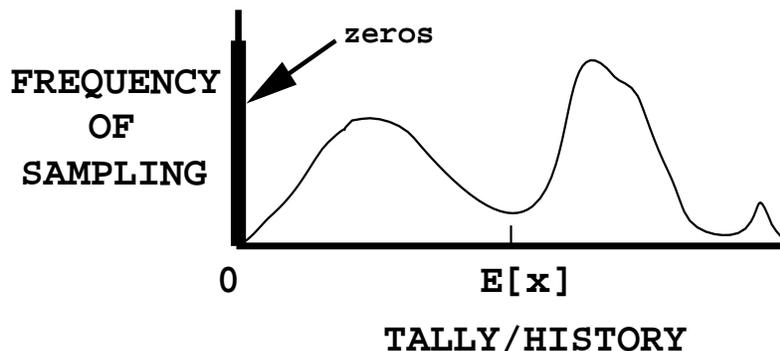


Figure 2.11

C. The Central Limit Theorem and Monte Carlo Confidence Intervals

To define confidence intervals for the precision of a Monte Carlo result, the Central Limit Theorem¹ of probability theory is used, stating that

$$\lim_{N \rightarrow \infty} \Pr \left[E(x) + \alpha \frac{\sigma}{\sqrt{N}} < \bar{x} < E(x) + \beta \frac{\sigma}{\sqrt{N}} \right] = \frac{1}{\sqrt{2\pi}} \int_{\alpha}^{\beta} e^{-t^2/2} dt \quad ,$$

where α and β can be any arbitrary values and $\Pr[Z]$ means the probability of Z . In terms of the estimated standard deviation of \bar{x} , $S_{\bar{x}}$, this may be rewritten in the following approximation for large N :

$$\Pr \left[\alpha S_{\bar{x}} < \frac{\bar{x} - E(x)}{\sigma\sqrt{N}} < \beta S_{\bar{x}} \right] \sim \frac{1}{\sqrt{2\pi}} \int_{\alpha}^{\beta} e^{-t^2/2} dt \quad .$$

This crucial theorem states that for large values of N (that is, as N tends to infinity) and identically distributed independent random variables x_i with finite means and variances, the distribution of the \bar{x} 's approaches a normal distribution. Therefore, for any distribution of tallies (an example is shown in Fig. 2.11), the distribution of resulting \bar{x} 's will be approximately normally distributed, as shown in Fig. 2.10, with a mean of $E(x)$. If S is approximately equal to σ , which is valid for a statistically significant sampling of a tally (i.e, N has tended to infinity), then

$$\bar{x} - S_{\bar{x}} < E(x) < \bar{x} + S_{\bar{x}}, \sim 68\% \text{ of the time} \quad (2.18a)$$

and

$$\bar{x} - 2S_{\bar{x}} < E(x) < \bar{x} + 2S_{\bar{x}}, \sim 95\% \text{ of the time} \quad (2.18b)$$

from standard tables for the normal distribution function. Eq. (2.18a) is a 68% confidence interval and Eq. (2.18b) is a 95% confidence interval.

The key point about the validity of these confidence intervals is that the physical phase space must be adequately sampled by the Monte Carlo process. If an important path in the geometry or a window in the cross sections, for example, has not been well sampled, both \bar{x} and $S_{\bar{x}}$ will be unknowingly incorrect and the results will be wrong, usually tending to be too small. The user must take great care to be certain that adequate sampling of the source, transport, and any tally response functions have indeed taken place. Additional statistical quantities to aid in the assessment of proper confidence intervals are described in later portions of section VI.

D. Estimated Relative Errors in MCNP

All standard MCNP tallies are normalized to be per starting particle history (except for some criticality calculations) and are printed in the output with a second number, which is the estimated relative error defined as

$$R \equiv S_{\bar{x}}/\bar{x} \quad . \quad (2.19a)$$

The relative error is a convenient number because it represents statistical precision as a fractional result with respect to the estimated mean.

Combining Eqs. (2.15), (2.16), and (2.17), R can be written (for large N) as

$$R = \left[\frac{1}{N} \left(\frac{\overline{x^2}}{\bar{x}^2} - 1 \right) \right]^{1/2} = \left[\frac{\sum_{i=1}^N x_i^2}{\left(\sum_{i=1}^N x_i \right)^2} - \frac{1}{N} \right]^{1/2} \quad . \quad (2.19b)$$

CHAPTER 2
Errors

Several important observations about the relative error can be made from Eq. (2.19b). First, if all the x_i 's are nonzero and equal, R is zero. Thus, low-variance solutions should strive to reduce the spread in the x_i 's. If the x_i 's are all zero, R is defined to be zero. If only one nonzero score is made, R approaches unity as N becomes large. Therefore, for x_i 's of the same sign, $S_{\bar{x}}$ can never be greater than \bar{x} because R never exceeds unity. For positive and negative x_i 's, this is not true. The range of R values for x_i 's of the same sign is therefore between zero and unity.

To determine what values of R lead to results that can be stated with confidence using Eqs. (2.6), consider Eq. (2.19b) for a difficult problem in which nonzero scores occur very infrequently. In this case,

$$\frac{1}{N} \ll \frac{\sum_{i=1}^N x_i^2}{\left(\sum_{i=1}^N x_i\right)^2} \quad . \quad (2.20a)$$

For clarity, assume that there are n out of N ($n \ll N$) nonzero scores that are identical and equal to x . With these two assumptions, R for “difficult problems” becomes

$$R_{D.P.} \sim \left[\frac{nx^2}{n^2x^2} \right]^{1/2} = \frac{1}{\sqrt{n}}, n \ll N \quad , \quad (2.20b)$$

This result is expected because the limiting form of a binomial distribution with infrequent nonzero scores and large N is the Poisson distribution, which is the form in Eq. (2.20b) used in detector “counting statistics.”

Table 2.2

Estimated Relative Error R vs Number of Identical Tallies n for Large N

n	1	4	16	25	100	400
R	1.0	0.5	0.25	0.20	0.10	0.05

Through use of Eqs. (2.8), a table of R values versus the number of tallies or “counts” can be generated as shown in Table 2.2. A relative error of 0.5 is the equivalent of four counts, which is hardly adequate for a statistically significant answer. Sixteen counts is an improvement, reducing R to 0.25, but still is not a large number of tallies. The same is true for n equals 25. When n is 100, R is 0.10, so the results should be much improved. With 400 tallies, an R of 0.05 should be quite good indeed.

Based on this qualitative analysis and the experience of Monte Carlo practitioners, Table 2.3 presents the recommended interpretation of the estimated 1σ confidence interval $\bar{x}(1 \pm R)$ for various values of R associated with an MCNP tally. These guidelines were determined empirically, based on years of experience using MCNP on a wide variety of problems. Just before the tally fluctuation charts, a “Status of Statistical Checks” table prints how many tally bins of each tally have values of R exceeding these recommended guidelines.

Table 2.3
Guidelines for Interpreting the Relative Error R^a

Range of R	Quality of the Tally
0.5 to 1	Garbage
0.2 to 0.5	Factor of a few
0.1 to 0.2	Questionable
< 0.10	Generally reliable except for point detector
< 0.05	Generally reliable for point detector

^a $R = S_{\bar{x}}/\bar{x}$ and represents the estimated statistical relative error at the 1σ level. These interpretations of R assume that all portions of the problem phase space have been well sampled by the Monte Carlo process.

Point detector tallies generally require a smaller value of R for valid confidence interval statements because some contributions, such as those near the detector point, are usually extremely important and may be difficult to sample well. Experience has shown that for R less than 0.05, point detector results are generally reliable. For an R of 0.10, point detector tallies may only be known within a factor of a few and sometimes not that well (see the pathological example on page 2–111.)

MCNP calculates the relative error for each tally bin in the problem using Eq. (2.19b). Each x_i is defined as the total contribution from the i^{th} starting particle and all resulting progeny. This definition is important in many variance reduction methods, multiplying physical processes such as fission or (n, xn) neutron reactions that create additional neutrons, and coupled neutron/photon/electron problems. The i^{th} source particle and its offspring may thus contribute many times to a tally and all of these contributions are correlated because they are from the same source particle.

Figure 2.12 represents the MCNP process of calculating the first and second moments of each tally bin and relevant totals using three tally storage blocks of equal length for each tally bin. The hypothetical grid of tally bins in the bottom half of Fig. 2.12 has 24 tally bins including the time and energy totals. During the course of the i^{th} history, sums are performed in the first MCNP tally storage block. Some of the tally bins receive no contributions and others receive one or more contributions. At the conclusion of the i^{th} history, the sums are added to the second MCNP tally storage block. The sums in the first MCNP tally storage block are squared and added to the third tally storage block. The first tally storage block is then filled with zeros and history $i + 1$ begins. After the last history N , the estimated tally means are computed using the second MCNP tally storage block and Eq. (2.15). The estimated relative errors are calculated using the second and third MCNP tally storage blocks and Eq. (2.19b). This method of estimating

CHAPTER 2

Errors

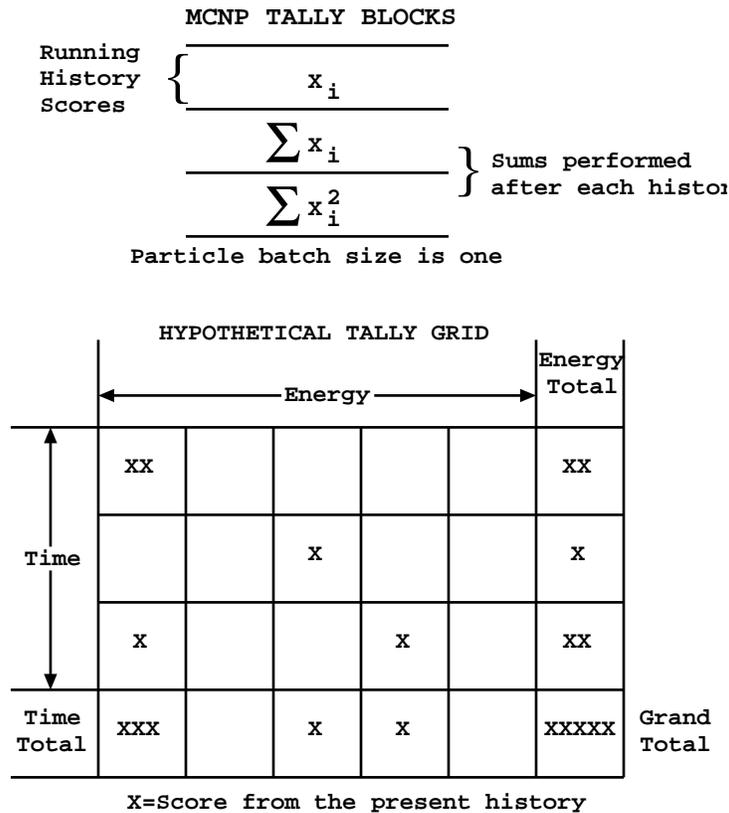


Figure 2.12

the statistical uncertainty of the result produces the best estimate because the batch size is one, which minimizes the variance of the variance.^{72,73}

Note that there is no guarantee that the estimated relative error will decrease inversely proportional to the \sqrt{N} as required by the Central Limit Theorem because of the statistical nature of the tallies. Early in the problem, R will generally have large statistical fluctuations. Later, infrequent large contributions may cause fluctuations in $S_{\bar{x}}$ and to a lesser extent in \bar{x} and therefore in R . MCNP calculates a *FOM* for one bin of each numbered tally to aid the user in determining the statistical behavior as a function of N and the efficiency of the tally.

E. MCNP Figure of Merit

The estimated relative error squared R^2 should be proportional to $1/N$, as shown by Eq. (2.19a). The computer time T used in an MCNP problem should be directly proportional to N ; therefore, R^2T should be approximately a constant within any one Monte Carlo run. It is convenient to define a figure of merit (*FOM*) of a tally to be

$$FOM \equiv \frac{1}{R^2T} \quad . \quad (2.21a)$$

MCNP prints the *FOM* for one bin of each numbered tally as a function of N , where the unit of computer time T is minutes. The table is printed

in particle increments of 1000 up to 20 000 histories. Between 20 000 and 40 000 histories, the increment is doubled to 2000. This trend continues, producing a table of up to 20 entries. The default increment can be changed by the 5th entry on the PRDMP card.

The *FOM* is a very important statistic about a tally bin and should be studied by the user. It is a tally reliability indicator in the sense that if the tally is well behaved, the *FOM* should be approximately a constant with the possible exception of statistical fluctuations very early in the problem. An order-of-magnitude estimate of the expected fractional statistical fluctuations in the *FOM* is $2R$. This result assumes that both the relative statistical uncertainty in the relative error is of the order of the relative error itself and the relative error is small compared to unity. The user should always examine the tally fluctuation charts at the end of the problem to check that the *FOM*s are approximately constant as a function of the number of histories for each tally.

The numerical value of the *FOM* can be better appreciated by considering the relation

$$R = 1/\sqrt{FOM * T} \tag{2.21b}$$

Table 2.4 shows the expected value of R that would be produced in a one-minute problem ($T = 1$) as a function of the value of the *FOM*. It is clearly advantageous to have a large *FOM* for a problem because the computer time required to reach a desired level of precision is proportionally reduced. Examination of Eq. (2.21b) shows that doubling the *FOM* for a problem will reduce the computer time required to achieve the same R by a factor of two.

Table 2.4
R Values as a Function of the *FOM* for $T = 1$ Minute

<i>FOM</i>	1	10	100	1000	10000
<i>R</i>	1.0	0.32	0.10	0.032	0.010

In summary, the *FOM* has three uses. The most important use is as a tally reliability indicator. If the *FOM* is not approximately a constant (except for statistical fluctuations early in the problem), the confidence intervals may not overlap the expected score value, $E(x)$, the expected fraction of the time. A second use for the *FOM* is to optimize the efficiency of the Monte Carlo calculation by making several short test runs with different variance reduction parameters and then selecting the problem with the largest *FOM*. Remember that the statistical behavior of the *FOM* (i.e., R) for a small number of histories may cloud the selection of techniques competing at the same level of efficiency. A third use for the *FOM* is to estimate the computer time required to reach a desired value of R by using $T \sim 1/R^2 FOM$.

F. Separation of Relative Error into Two Components

Three factors that affect the efficiency of a Monte Carlo problem are (1) history-scoring efficiency, (2) dispersions in nonzero history scores, and

CHAPTER 2

Errors

(3) computer time per history. All three factors are included in the *FOM*. The first two factors control the value of R ; the third is T .

The relative error can be separated into two components: the nonzero history-scoring efficiency component R_{eff}^2 and the intrinsic spread of the nonzero x_i scores R_{int}^2 . Defining q to be the fraction of histories producing nonzero x_i 's, Eq. 2.19b can be rewritten as

$$R = \frac{\sum_{i=1}^N x_i^2}{\left(\sum_{i=1}^N x_i\right)^2} - \frac{1}{N} = \frac{\sum_{x_i \neq 0} x_i^2}{\left(\sum_{x_i \neq 0} x_i\right)^2} - \frac{1}{N} = \frac{\sum_{x_i \neq 0} x_i^2}{\left(\sum_{x_i \neq 0} x_i\right)^2} - \frac{1}{qN} + \frac{1-q}{qN} . \quad (2.22a)$$

Note by Eq. 2.19b that the first two terms are the relative error of the qN nonzero scores. Thus defining,

$$R_{int}^2 = \frac{\sum_{x_i \neq 0} x_i^2}{\left(\sum_{x_i \neq 0} x_i\right)^2} - \frac{1}{qN} \quad \text{and} \quad (2.22b)$$

$$R_{eff}^2 = (1-q)/(qN) \quad \text{yields} \quad (2.22c)$$

$$R^2 = R_{eff}^2 + R_{int}^2 \quad . \quad (2.22d)$$

For identical nonzero x_i 's, R_{int}^2 is zero and for a 100% scoring efficiency, R_{eff}^2 is zero. It is usually possible to increase q for most problems using one or more of the MCNP variance reduction techniques. These techniques alter the random walk sampling to favor those particles that produce a nonzero tally. The particle weights are then adjusted appropriately so that the expected tally is preserved. This topic is described in Sec. VII (Variance Reduction) beginning on page 2-114. The sum of the two terms of Eq. (2.22d) produces the same result as Eq. (2.19b). Both R_{int}^2 and R_{eff}^2 are printed for the tally fluctuation chart bin of each tally so that the dominant component of R can be identified as an aid to making the calculation more efficient.

These equations can be used to better understand the effects of scoring inefficiency; that is, those histories that do not contribute to a tally. Table 2.5 shows the expected values of R_{eff} as a function of q and the number of histories N . This table is appropriate for identical nonzero scores and represents the theoretical minimum relative error possible for a specified q and N . It is no surprise that small values of q require a compensatingly large number of particles to produce precise results.

Table 2.5
Expected Values of R_{eff} as a Function of q and N

q	0.001	0.01	0.1	0.5
10^3	0.999	0.315	0.095	0.032
10^4	0.316	0.099	0.030	0.010
10^5	0.100	0.031	0.009	0.003
10^6	0.032	0.010	0.003	0.001

A practical example of scoring inefficiency is the case of infrequent high-energy particles in a down-scattering-only problem. If only a small fraction of all source particles has an energy in the highest energy tally bin, the dominant component of the relative error will probably be the scoring efficiency because only the high-energy source particles have a nonzero probability of contributing to the highest energy bin. For problems of this kind, it is often useful to run a separate problem starting only high-energy particles from the source and to raise the energy cutoff. The much-improved scoring efficiency will result in a much larger *FOM* for the high-energy tally bins.

To further illustrate the components of the relative error, consider the five examples of selected discrete probability density functions shown in Fig. 2.13. Cases I and II have no dispersion in the nonzero scores, cases III and IV have 100% scoring efficiency, and case V contains both elements contributing to R . The most efficient problem is case III. Note that the scoring inefficiency contributes 75% to R in case V, the second worst case of the five.

G. Variance of the Variance

Previous sections have discussed the relative error R and figure of merit *FOM* as measures of the quality of the mean. A quantity called the relative variance of the variance (*VOV*) is another useful tool that can assist the user in establishing more reliable confidence intervals. The *VOV* is the estimated relative variance of the estimated R . The *VOV* involves the estimated third and fourth moments of the empirical history score probability density function (PDF) $f(x)$ and is much more sensitive to large history score fluctuations than is R . The magnitude and NPS behavior of the *VOV* are indicators of tally fluctuation chart (TFC) bin convergence. Early work was done by Estes and Cashwell⁷² and Pederson⁷⁴ later reinvestigated this statistic to determine its usefulness.

The *VOV* is a quantity that is analogous to the square of the R of the mean, except it is for R instead of the mean. The estimated relative *VOV* of the mean is defined as

$$VOV = S^2(S_{\bar{x}}^2)/S_{\bar{x}}^4$$

where $S_{\bar{x}}^2$ is the estimated variance of \bar{x} and $S^2(S_{\bar{x}}^2)$ is the estimated variance in $S_{\bar{x}}^2$. The *VOV* is a measure of the relative statistical uncertainty in the

CHAPTER 2
Errors

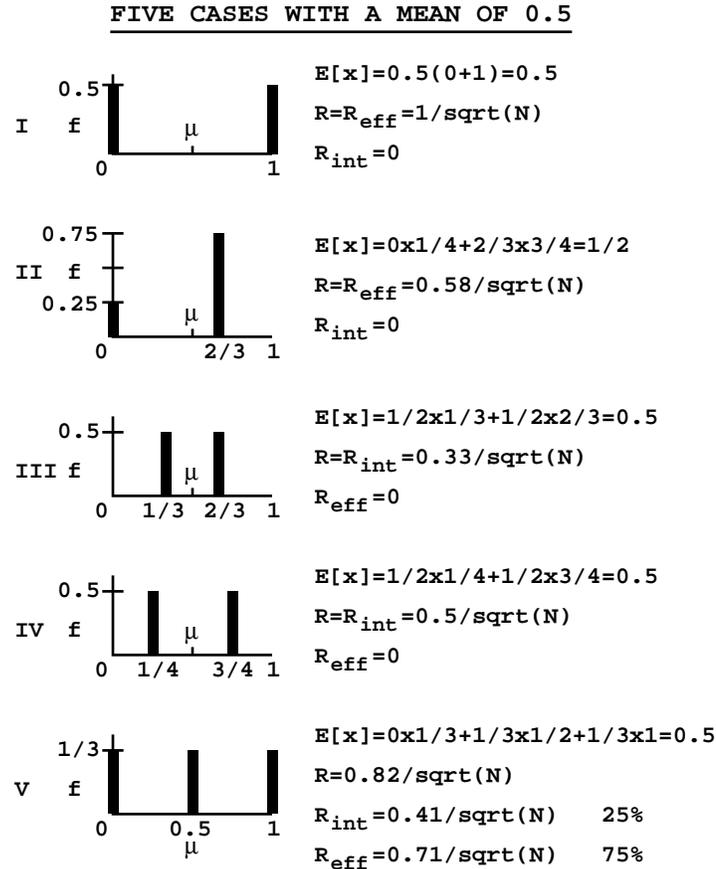


Figure 2.13

estimated R and is important because S must be a good approximation of σ to use the Central Limit Theorem to form confidence intervals.

The VOV for a tally bin⁷⁴ is

$$VOV = \sum (x_i - \bar{x})^4 / (\sum (x_i - \bar{x})^2)^2 - 1/N. \quad (2.23)$$

This is the fourth central moment minus the second central moment squared normed by the product of N and the second central moment squared.

When Eq. (2.23) is expanded in terms of sums of powers of x_i , it becomes

$$VOV = \frac{\sum x_i^4 - 4 \sum x_i \sum x_i^3/N + 6 \sum x_i^2 (\sum x_i)^2/N^2 - 3 (\sum x_i)^4/N^3}{(\sum x_i^2 - (\sum x_i)^2/N)^2} - \frac{1}{N}$$

or

$$VOV = \frac{\sum x_i^4 - 4 \sum x_i \sum x_i^3/N + 8 \sum x_i^2 (\sum x_i)^2/N^2 - 4 (\sum x_i)^4/N^3 - (\sum x_i^2)^2/N}{(\sum x_i^2 - (\sum x_i)^2/N)^2} \quad (2.24)$$

Now consider the truncated Cauchy formula for the following analysis. The truncated Cauchy is similar in shape to some difficult Monte Carlo tallies. After numerous statistical experiments on sampling a truncated positive

Cauchy distribution

$$\text{Cauchy}f(x) = 2/\pi(1 + x^2), 0 \leq x \leq x_{max}, \quad (2.25)$$

it is concluded that the VOV should be below 0.1 to improve the probability of forming a reliable confidence interval. The quantity 0.1 is a convenient value and is why the VOV is used for the statistical check and not the square root of the VOV (R of the R). Multiplying numerator and denominator of Eq. (2.24) by $1/N$ converts the terms into \bar{x}^n averages and shows that the VOV is expected to decrease as $1/N$.

It is interesting to examine the VOV for the n identical history scores x ($n \ll N$) that were used to analyze R in Table 2.2, page 2–94. The VOV behaves as $1/n$ in this limit. Therefore, ten identical history scores would be enough to satisfy the VOV criterion, a factor of at least ten less than the R criterion. There are two reasons for this phenomenon: 1) it is more important to know R well than the VOV in forming confidence intervals; and 2) the history scores will ordinarily not be identical and thus the fourth moment terms in the VOV will increase rapidly over the second moment terms in R.

The behavior of the VOV as a function of N for the TFC bin is printed in the OUTF file. Because the VOV involves third and fourth moments, the VOV is a much more sensitive indicator to large history scores than the R, which is based on first and second moments. The desired VOV behavior is to decrease inversely with N . This criterion is deemed to be a necessary, but not sufficient, condition for a statistically well-behaved tally result. A tally with a VOV that matches this criteria is NOT guaranteed to produce a high quality confidence interval because undersampling of high scores will also underestimate the higher score moments.

To optionally calculate the VOV of every tally bin, put a nonzero 15th entry on the DBCN card. This option creates two additional history score moment tables each of length MXF in the TAL array to sum x_i^3 and x_i^4 (see Fig. 2.12). This option is not the default because the amount of tally storage will increase by 2/5, which could be prohibitive for a problem with many tally bins. The magnitude of the VOV in each tally bin is reported in the “Status of Statistical Checks” table. History-dependent checks of the VOV of all tally bins can be done by printing the tallies to the output file at some frequency using the PRDMP card.

H. Empirical History Score Probability Density Function $f(x)$

1. Introduction

This section discusses another statistic that is useful in assessing the quality of confidence intervals from Monte Carlo calculations. Consider a generic Monte Carlo problem with difficult to sample, but extremely important, large history scores. This type of problem produces three possible scenarios.¹¹⁰

The first, and obviously desired, case is a correctly converged result that produces a statistically correct confidence interval. The second case is the

CHAPTER 2

Errors

sampling of an infrequent, but very large, history score that causes the mean and R to increase and the FOM to decrease significantly. This case is easily detectable by observing the behavior of the FOM and the R in the TFCs.

The third and most troublesome case yields an answer that appears statistically converged based on the accepted guidelines described previously, but in fact may be substantially smaller than the correct result because the large history tallies were not well sampled. This situation of too few large history tallies is difficult to detect. The following sections discuss the use of the empirical history score probability density function (PDF) $f(x)$ to gain insight into the TFC bin result. A pathological example to illustrate the third case follows.

2. The History Score Probability Density Function $f(x)$

A history score posted to a tally bin can be thought of as having been sampled from an underlying and generally unknown history score PDF $f(x)$, where the random variable x is the score from one complete particle history to a tally bin. The history score can be either positive or negative. The quantity $f(x)dx$ is the probability of selecting a history score between x and $x + dx$ for the tally bin. Each tally bin will have its own $f(x)$.

The most general form for expressing $f(x)$ mathematically is

$$f(x) = f_c(x) + \sum_{i=1}^n p_i \delta(x - x_i),$$

where $f_c(x)$ is the continuous nonzero part and $\sum_{i=1}^n p_i \delta(x - x_i)$ represents the n different discrete components occurring at x_i with probability p_i . An $f(x)$ could be composed of either or both parts of the distribution. A history score of zero is included in $f(x)$ as the discrete component $\delta(x - 0)$.

By the definition of a PDF,

$$\int_{-\infty}^{\infty} f(x)dx \equiv 1.$$

As discussed on page 2–89, $f(x)$ is used to estimate the mean, variance, and higher moment quantities such as the VOV.

3. The Central Limit Theorem and $f(x)$

As discussed on page 2–92, the Central Limit Theorem (CLT) states that the estimated mean will appear to be sampled from a normal distribution with a KNOWN standard deviation σ/\sqrt{N} when N approaches infinity. In practice, σ is NOT known and must be approximated by the estimated standard deviation S . The major difficulty in applying the CLT correctly to a Monte Carlo result to form a confidence interval is knowing when N has approached infinity.

The CLT requires the first two moments of $f(x)$ to exist. Nearly all MCNP tally estimators (except point detectors with zero neighborhoods in

a scattering material and some exponential transform problems) satisfy this requirement. Therefore, the history score PDF $f(x)$ also exists. One can also examine the behavior of $f(x)$ for large history scores to assess if $f(x)$ appears to have been “completely” sampled. If “complete” sampling has occurred, the largest values of the sampled x 's should have reached the upper bound (if such a bound exists) or should decrease faster than $1/x^3$ so that $E(x^2) = \int_{-\infty}^{\infty} x^2 f(x) dx$ exists (σ is assumed to be finite in the CLT). Otherwise, N is assumed not to have approached infinity in the sense of the CLT. This is the basis for the use of the empirical $f(x)$ to assess Monte Carlo tally convergence.

The argument should be made that since S must be a good estimate of σ , the expected value of the fourth history score moment $E(x^4) = \int_{-\infty}^{\infty} x^4 f(x) dx$ should exist. It will be assumed that only the second moment needs to exist so that the $f(x)$ convergence criterion will be relaxed somewhat. Nevertheless, this point should be kept in mind.

4. Analytic Study of $f(x)$ for Two-State Monte Carlo Problems

Booth^{75,76} examined the distribution of history scores analytically for both an analog two-state splitting problem and two exponential transform problems. This work provided the theoretical foundation for statistical studies⁷⁷ on relevant analytic functions to increase understanding of confidence interval coverage rates for Monte Carlo calculations.

It was found that the two-state splitting problem $f(x)$ decreases geometrically as the score increases by a constant increment. This is equivalent to a negative exponential behavior for a continuous $f(x)$. The $f(x)$ for the exponential transform problem decreases geometrically with geometrically increasing x . Therefore, the splitting problem produces a linearly decreasing $f(x)$ for the history score on a lin-log plot of the score probability versus score. The exponential transform problem generates a linearly decreasing score behavior (with high score negative exponential roll off) on a log-log plot of the score probability versus score plot. In general, the exponential transform problem is the more difficult to sample because of the larger impact of the low probability high scores.

The analytic shapes were compared with a comparable problem calculated with a modified version of MCNP. These shapes of the analytic and empirical $f(x)$ s were in excellent agreement.⁷⁷

5. Proposed Uses for the Empirical $f(x)$ in Each TFC Bin

Few papers discuss the underlying or empirical $f(x)$ for Monte Carlo transport problems.^{78,110} MCNP provides a visual inspection and analysis of the empirical $f(x)$ for the TFC bin of each tally. This analysis helps to determine if there are any unsampled regions (holes) or spikes in the empirical history score PDF $f(x)$ at the largest history scores.

The most important use for the empirical $f(x)$ is to help determine if N has approached infinity in the sense of the CLT so that valid confidence intervals can be formed. It is assumed that the underlying $f(x)$ satisfies the

CHAPTER 2

Errors

CLT requirements; therefore, so should the empirical $f(x)$. Unless there is a largest possible history score, the empirical $f(x)$ must eventually decrease more steeply than x^{-3} for the second moment ($\int_{-\infty}^{\infty} x^2 f(x) dx$) to exist. It is postulated⁷⁹ that if such decreasing behavior in the empirical $f(x)$ with no upper bound has not been observed, then N is not large enough to satisfy the CLT because $f(x)$ has not been completely sampled. Therefore, a larger N is required before a confidence interval can be formed. It is important to note that this convergence criterion is NOT affected by any correlations that may exist between the estimated mean and the estimated R. In principle, this lack of correlation should make the $f(x)$ diagnostic robust in assessing “complete” sampling.

Both the analytic and empirical history score distributions suggest that large score fill-in and one or more extrapolation schemes for the high score tail of the $f(x)$ could provide an estimate of scores not yet sampled to help assess the impact of the unsampled tail on the mean. The magnitude of the unsampled tail will surely affect the quality of the tally confidence interval.

6. Creation of $f(x)$ for TFC Bins

The creation of the empirical $f(x)$ in MCNP automatically covers nearly all TFC bin tallies that a user might reasonably be expected to make, including the effect of large and small tally multipliers. A logarithmically spaced grid is used for accumulating the empirical $f(x)$ because the tail behavior is assumed to be of the form $1/x^n$, $n > 3$ (unless an upper bound for the history scores exists). This grid produces an equal width histogram straight line for $f(x)$ on a log-log plot that decreases n decades in $f(x)$ per decade increase in x .

Ten bins per x decade are used and cover the unnormalized tally range from 10^{-30} to 10^{30} . The term “unnormalized” indicates that normalizations that are not performed until the end of the problem, such as cell volume or surface area, are not included in $f(x)$. The user can multiply this range at the start of the problem by the 16th entry on the DBCN card when the range is not sufficient. Both history score number and history score for the TFC bin are tallied in the x grid.

With this x grid in place, the average empirical $f(\bar{x}_i)$ between x_i and x_{i+1} is defined to be

$$f(\bar{x}_i) = (\text{number of history scores in } i^{\text{th}} \text{ score bin}) / (N(x^{i+1} - x^i)),$$

where $x^{i+1} = 1.2589x^i$. The quantity 1.2589 is $10^{0.1}$ and comes from 10 equally spaced log bins per decade. The calculated $f(\bar{x}_i)$ s are available on printed plots or by using the “z” plot option (MCPLOT) with the TFC command mnemonics. Any history scores that are outside the x grid are counted as either above or below to provide this information to the user.

Negative history scores can occur for some electron charge deposition tallies. The MCNP default is that any negative history score will be lumped into one bin below the lowest history score in the built-in grid (the default is 1×10^{-30}). If DBCN(16) is negative, $f(-x)$ will be created from the

negative scores and the absolute DBCN(16) value will be used as the score grid multiplier. Positive history scores then will be lumped into the lowest bin because of the sign change.

Figures 2.14 and 2.15 show two simple examples of empirical $f(x)$ s from MCNP for 10 million histories each. Figure 2.14 is from an energy leakage tally directly from a source that is uniform in energy from 0 to 10 MeV. The analytic $f(x)$ is a constant 0.1 between 0 and 10 MeV. The empirical $f(x)$ shows the sampling, which is 0.1 with statistical noise at the lower x bins where fewer samples are made in the smaller bins.

Figure 2.15 shows the sampled distance to first collision in a material that has a macroscopic cross section of about 0.1 cm^{-1} . This analytic function is a negative exponential given by $f(x) = \Sigma \exp^{-\Sigma x}$ (see page 2–26) with a mean of 10. The empirical $f(x)$ transitions from a constant 0.1 at values of x less than unity to the expected negative exponential behavior.

7. Pareto Fit to the Largest History Scores for the TFC Bin

The slope n in $1/x^n$ of the largest history tallies x must be estimated to determine if and when the largest history scores decrease faster than $1/x^3$. The 201 largest history scores for each TFC bin are continuously updated and saved during the calculation. A generalized Pareto function⁸⁰

$$\text{Pareto } f(x) = a^{-1}(1 + kx/a)^{-(1/k)-1}$$

is used to fit the largest x 's. This function fits a number of extreme value distributions including $1/x^n$, exponential ($k = 0$), and constant ($k = -1$). The large history score tail fitting technique uses the robust “simplex” algorithm,⁸¹ which finds the values of a and k that best fit the largest history scores by maximum likelihood estimation.

The number of history score tail points used for the Pareto fit is a maximum of 201 points because this provides about 10% precision⁸⁰ in the slope estimator at $n = 3$. The precision increases for smaller values of n and vice versa. The number of points actually used in the fit is the lesser of 5% of the nonzero history scores or 201. The minimum number of points used for a Pareto fit is 25 with at least two different values, which requires 500 nonzero history scores with the 5% criterion. If less than 500 history scores are made in the TFC bin, no Pareto fit is made.

From the Pareto fit, the slope of $f(x_{large})$ is defined to be

$$\text{SLOPE} \equiv (1/k) + 1.$$

A SLOPE value of zero is defined to indicate that not enough $f(x_{large})$ tail information exists for a SLOPE estimate. The SLOPE is not allowed to exceed a value of 10 (a “perfect score”), which would indicate an essentially negative exponential decrease. If the 100 largest history scores all have values with a spread of less than 1%, an upper limit is assumed to have been reached and the SLOPE is set to 10. The SLOPE should be greater than 3 to satisfy the second moment existence requirement of the CLT. Then, $f(x)$ will appear

CHAPTER 2
Errors

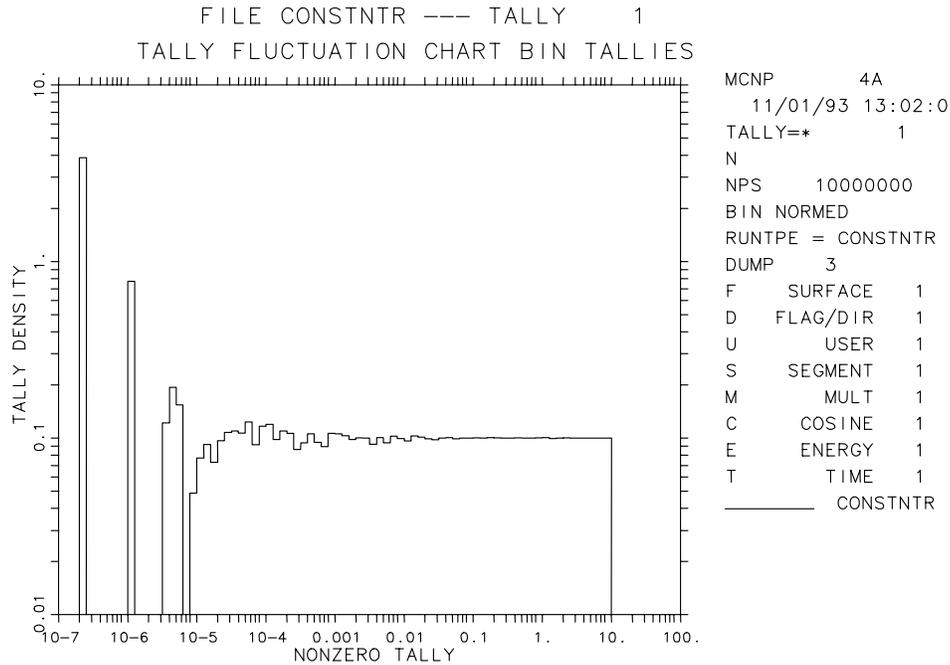


Figure 2.14

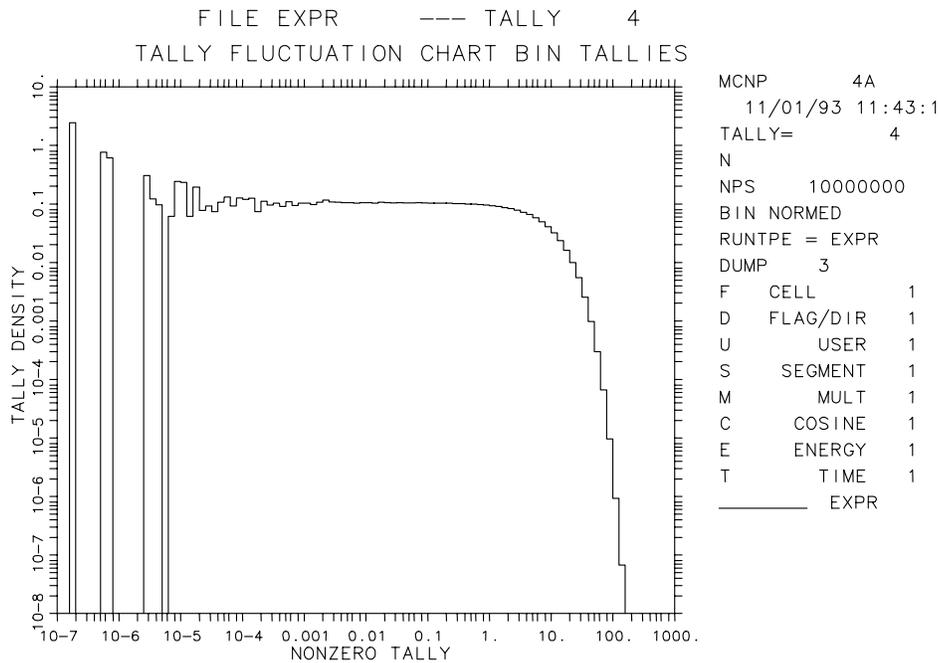


Figure 2.15

to be “completely” sampled and hence N will appear to have approached infinity.

A printed plot of $f(x)$ is automatically generated in the OUTP file if the SLOPE is less than 3 (or if any of the other statistical checks described in the next section do not pass). If $0 < \text{SLOPE} < 10$, several “S’s” appear on

the printed plot to indicate the Pareto fit, allowing the quality of the fit to the largest history scores to be assessed visually. If the largest scores are not Pareto in shape, the SLOPE value may not reflect the best estimate of the largest history score decrease. A new SLOPE can be estimated graphically. A blank or 162 on the PRINT card also will cause printed plots of the first two cumulative moments of the empirical $f(x)$ to be made. Graphical plots of various $f(x)$ quantities can be made using the “z” plot option (MCPLLOT) with the TFC plot command. These plots should be examined for unusual behavior in the empirical $f(x)$, including holes or spikes in the tail. MCNP tries to assess both conditions and prints a message if either condition is found.

I. Forming Statistically Valid Confidence Intervals

The ultimate goal of a Monte Carlo calculation is to produce a valid confidence interval for each tally bin. Section VI has described different statistical quantities and the recommended criteria to form a valid confidence interval. Detailed descriptions of the information available in the output for all tally bins and the TFC bins are now discussed.

1. Information Available for Forming Statistically Valid Confidence Intervals for All Tally Bins

The R is calculated for every user-specified tally bin in the problem. The VOV and the shifted confidence interval center, discussed below, can be obtained for all bins with a nonzero entry for the 15th entry on the DBCN card at problem initiation.

a. R Magnitude Comparisons With MCNP Guidelines: The quality of MCNP Monte Carlo tallies historically has been associated with two statistical checks that have been the responsibility of the user: 1) for all tally bins, the estimated relative error magnitude rules-of-thumb that are shown in Fig. 2.3 (i.e., $R < 0.1$ for nonpoint detector tallies and $R < 0.05$ for point detector tallies); and 2) a statistically constant FOM in the user-selectable (TFn card) TFC bin so that the estimated R is decreasing by $1/\sqrt{N}$ as required by the CLT.

In an attempt to make the user more aware of the seriousness of checking these criteria, MCNP provides checks of the R magnitude for all tally bins. A summary of the checks is printed in the “Status of Statistical Checks” table. Messages are provided to the user giving the results of these checks.

b. Asymmetric Confidence Intervals: A correlation exists between the estimated mean and the estimated uncertainty in the mean.⁷⁴ If the estimated mean is below the expected value, the estimated uncertainty in the mean $S_{\bar{x}}$ will most likely be below its expected value. This correlation is also true for higher moment quantities such as the VOV. The worst situation for forming valid confidence intervals is when the estimated mean is much smaller than the expected value, resulting in smaller than predicted coverage rates. To correct for this correlation and improve coverage rates,

CHAPTER 2

Errors

one can estimate a statistic shift in the midpoint of the confidence interval to a higher value. The estimated mean is unchanged.

The shifted confidence interval midpoint is the estimated mean plus a term proportional to the third central moment. The term arises from an Edgeworth expansion⁷⁴ to attempt to correct the confidence interval for non-normality effects in the estimate of the mean. The adjustment term is given by

$$SHIFT = \sum (x_i - \bar{x})^3 / (2S^2N).$$

Substituting for the estimated mean and expanding produces

$$SHIFT = (\sum x_i^3 - 3 \sum x_i^2 \sum x_i / N + 2(\sum x_i)^3 / N^2) / (2(N \sum x_i^2 - (\sum x_i)^2)).$$

The *SHIFT* should decrease as $1/N$. This term is added to the estimated mean to produce the midpoint of the now asymmetric confidence interval about the mean. This value of the confidence interval midpoint can be used to form the confidence interval about the estimated mean to improve coverage rates of the true, but unknown, mean $E(x)$. The estimated mean plus the *SHIFT* is printed automatically for the TFC bin for all tallies. A nonzero entry for the 15th DBCN card entry produces the shifted value for all tally bins.

This correction approaches zero as N approaches infinity, which is the condition required for the CLT to be valid. Kalos⁸² uses a slightly modified form of this correction to determine if the requirements of the CLT are “substantially satisfied”. His relation is

$$| \sum (x_i - \bar{x})^3 | \ll S^3 \sqrt{N},$$

which is equivalent to

$$SHIFT \ll S_{\bar{x}}/2.$$

The user is responsible for applying this check.

c. Forming Valid Confidence Intervals for Non-TFC Bins: The amount of statistical information available for non-TFC bins is limited to the mean and R. The VOV and the center of the asymmetric confidence can be obtained for all tally bins with a nonzero 15th entry on the DBCN card in the initial problem. The magnitude criteria for R (and the VOV, if available) should be met before forming a confidence interval. If the shifted confidence interval center is available, it should be used to form asymmetric confidence intervals about the estimated mean.

History dependent information about R (and the VOV, if available) for non-TFC bins can be obtained by printing out the tallies periodically during a calculation using the PRDMP card. The N -dependent behavior of R can then be assessed. The complete statistical information available can be obtained by creating a new tally and selecting the desired tally bin with the TFn card.

2. Information Available for Forming Statistically Valid Confidence Intervals for TFC Bins

Additional information about the statistical behavior of each TFC bin result is available. A TFC bin table is produced by MCNP after each tally to provide the user with detailed information about the apparent quality of the TFC bin result. The contents of the table are discussed in the following subsections, along with recommendations for forming valid confidence intervals using this information.

a. TFC Bin Tally Information: The first part of the TFC bin table contains information about the TFC bin result including the mean, R , scoring efficiency, the zero and nonzero history score components of R (see page 2–97), and the shifted confidence interval center. The two components of R can be used to improve the problem efficiency by either improving the history scoring efficiency or reducing the range of nonzero history scores.

b. The Largest TFC Bin History Score Occurs on the Next History: There are occasions when the user needs to make a conservative estimate of a tally result. Conservative is defined so that the results will not be less than the expected result. One reasonable way to make such an estimate is to assume that the largest observed history score would occur again on the very next history, $N + 1$.

MCNP calculates new estimated values for the mean, R , VOV, FOM, and shifted confidence interval center for the TFC bin result for this assumption. The results of this proposed occurrence are summarized in the TFC bin information table. The user can assess the impact of this hypothetical happening and act accordingly.

c. Description of the 10 Statistical Checks for the TFC Bin: MCNP prints the results of ten statistical checks of the tally in the TFC bin at each print. In a “Status of Statistical Checks” table, the results of these ten checks are summarized at the end of the output for all TFC bin tallies. The quantities involved in these checks are the estimated mean, R , VOV, FOM, and the large history score behavior of $f(x)$. Passing all of the checks should provide additional assurance that any confidence intervals formed for a TFC bin result will cover the expected result the correct fraction of the time. At a minimum, the results of these checks provide the user with more information about the statistical behavior of the result in the TFC bin of each tally.

The following 10 statistical checks are made on the TFCs printed at the end of the output for desirable statistical properties of Monte Carlo solutions:

MEAN

- (1) a nonmonotonic behavior (no up or down trend) in the estimated mean as a function of the number histories N for the last half of the problem;

R

- (2) an acceptable magnitude of the estimated R of the estimated mean (< 0.05 for a point detector tally or < 0.10 for a non-point detector tally);

CHAPTER 2

Errors

- (3) a “monotonically” decreasing R as a function of the number histories N for the last half of the problem;
- (4) a $1/\sqrt{N}$ decrease in the R as a function of N for the last half of the problem;

VOV

- (5) the magnitude of the estimated VOV should be less than 0.10 for all types of tallies;
- (6) a “monotonically” decreasing VOV as a function of N for the last half of the problem;
- (7) a $1/N$ decrease in the VOV as a function of N for the last half of the problem;

FOM

- (8) a statistically constant value of the FOM as a function of N for the last half of the problem;
- (9) a non-monotonic behavior in the FOM as a function of N for the last half of the problem; and

$f(x)$

- (10) the SLOPE (see page 2–105) of the 25 to 201 largest positive (negative with a negative DBCN(16) entry) history scores x should be greater than 3.0 so that the second moment $\int_{-\infty}^{\infty} x^2 f(x) dx$ will exist if the SLOPE is extrapolated to infinity.

The seven N -dependent checks for the TFC bin are for the last half of the problem. The last half of the problem should be well behaved in the sense of the CLT to form the most valid confidence intervals. “Monotonically decreasing” in checks 3 and 5 allows for some increases in both R and the VOV. Such increases in adjacent TFC entries are acceptable and usually do not, by themselves, cause poor confidence intervals. A TFC bin R that does not pass check 3, by definition in MCNP, does not pass check 4. Similarly, a TFC bin VOV that does not pass check 6, by definition, does not pass check 7.

A table is printed after each tally for the TFC bin result that summarizes the results and the pass or no pass status of the checks. Both asymmetric and symmetric confidence intervals are printed for the one, two, and three σ levels when all of the statistical checks are passed. These intervals can be expected to be correct with improved probability over historical rules of thumb. This is NOT A GUARANTEE, however; there is always a possibility that some as-yet-unsampled portion of the problem would change the confidence interval if more histories were calculated. A WARNING is printed if one or more of these ten statistical checks is not passed, and one page of printed plot information about $f(x)$ is produced for the user to examine.

An additional information-only check is made on the largest five $f(x)$ score grid bins to determine if there are bins that have no samples or if there is a spike in an $f(x)$ that does not appear to have an upper limit. The result of the check is included in the TFC summary table for the user to consider. This check is not a pass or no pass test because a hole in the tail may be appropriate for a discrete $f(x)$ or an exceptional sample occurred with so

little impact that none of the ten checks was affected. The empirical $f(x)$ should be examined to assess the likelihood of “complete” sampling.

d. Forming Valid TFC Bin Confidence Intervals: For TFC bin results, the highest probability of creating a valid confidence interval occurs when all of the statistical checks are passed. Not passing several of the checks is an indication that the confidence interval is less likely to be correct. A monotonic trend in the mean for the last half of the problem is a strong indicator that the confidence interval is likely to produce incorrect coverage rates. The magnitudes of R and the VOV should be less than the recommended values to increase the likelihood of a valid confidence interval. Small jumps in the R, VOV, and/or the FOM as a function of N are not threatening to the quality of a result. The slope of $f(x)$ is an especially strong indicator that N has not approached infinity in the sense of the CLT. If the slope appears too shallow (< 3), check the printed plot of $f(x)$ to see that the estimated Pareto fit is adequate. The use of the shifted confidence interval is recommended, although it will be a small effect for a well-converged problem.

The last half of the problem is determined from the TFC. The more information available about the last half of the problem, the better the N -dependent checks will be. Therefore, a problem that has run 40,000 histories will have 20 TFC N entries, which is more N entries than a 50,000 history problem with 13 entries. It is possible that a problem that passes all tests at 40,000 may not pass all the tests at 40,001. As is always the case, the user is responsible for deciding when a confidence interval is valid. These statistical diagnostics are designed to aid in making this decision.

J. A Statistically Pathological Output Example

A statistically pathological test problem is discussed in this section. The problem calculates the surface neutron leakage flux above 12 MeV from an isotropic 14 MeV neutron point source of unit strength at the center of a 30 cm thick concrete shell with an outer radius of 390 cm. Point and ring detectors were deliberately used to estimate the surface neutron leakage flux with highly inefficient, long-tailed $f(x)$ s. The input is shown on page 5–50 if you want to run this problem yourself.

The variance reduction methods used were implicit capture with weight cutoff, low-score point detector Russian roulette, and a 0.5 mean free path (4 cm) neighborhood around the detectors to produce large, but finite, higher moments. Other tallies or variance reduction methods could be used to make this calculation much more efficient, but that is not the object of this example. A surface flux estimator would have been over a factor of 150 to 30,000 times more efficient than ring and point detectors, respectively.

Figure 2.16 shows MCNP plots of the estimated mean, R, VOV and slope of the history score PDF as a function of N values of 20,000 (left column) and 5 million (right column). The ring detector results are shown as the solid line and the point detector result is the dashed line.

CHAPTER 2

Errors

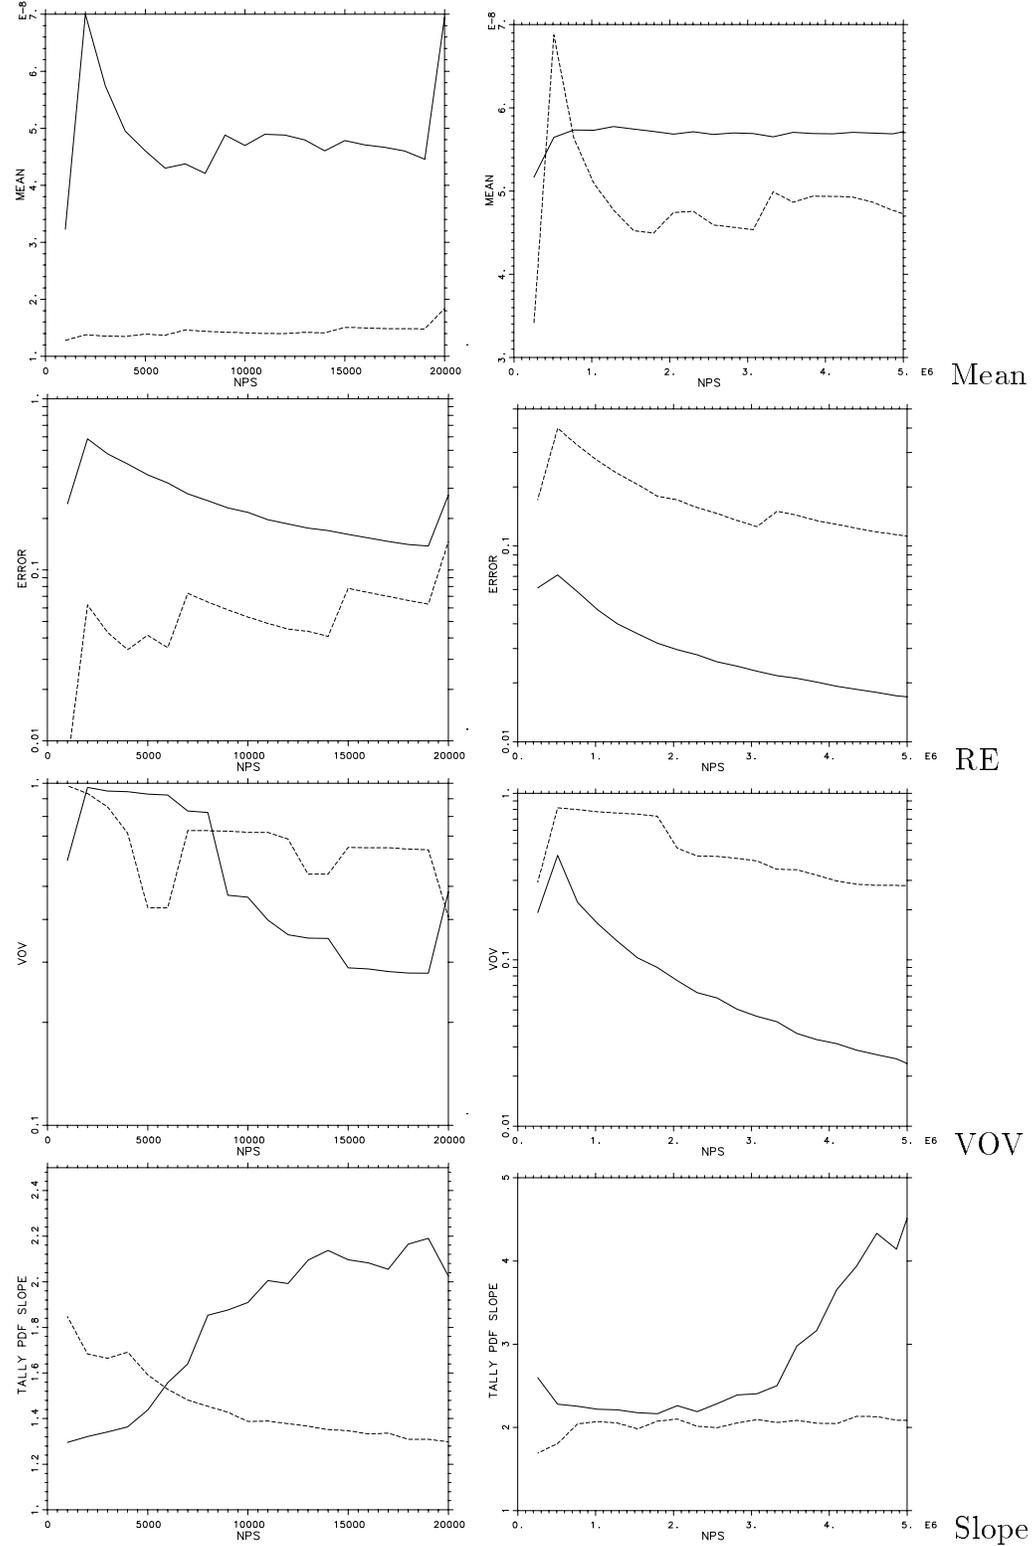


Figure 2.16

Column 1 shows the results as a function of N for 20,000 histories. The point detector result at 14,000 histories (not shown) was 1.41×10^{-8} n/cm²/s (R=0.041). The FOM varied somewhat randomly between about 800 and 1160 for the last half of the problem. With no other information, this result could be accepted by even a careful Monte Carlo practitioner. However, the VOV never gets close to the required 0.1 value and the slope of the unbounded $f(x)$ is less than 1.4. This slope could not continue indefinitely because even the mean of $f(x)$ would not exist. Therefore, a confidence interval should not be formed for this tally. At 20,000 histories, R increases substantially and the FOM crashes, indicating serious problems with the result.

The ring detector result is having problems of its own. The ring detector result for 14,000 histories was 4.60×10^{-8} n/cm²/s (R=0.17, VOV=0.35, slope=2.1, FOM=67). None of the plotted quantities satisfies the required convergence criteria.

The correct detector result, obtained from a 5 million history ring detector tally, is 5.72×10^{-8} n/cm²/s (R=0.0169, VOV=0.023, slope=4.6, FOM=19). The apparently converged 14,000 history point detector result is a factor of four below the correct result!

If you were to run 200,000 histories, you would see the point detector result increasing to 3.68×10^{-8} n/cm²/s (R=0.20, VOV=0.30, slope=1.6, FOM=1.8). The magnitudes of R and the VOV are much too large for the point detector result to be accepted. The slope of $f(x)$ is slowly increasing, but has only reached a value of 1.6. This slope is still far too shallow compared to the required value of 3.0.

The ring detector result of 5.06×10^{-8} n/cm²/s (R=0.0579, VOV=0.122, slope=2.8, FOM=22) at 192,000 histories is interesting. All of these values are close to being acceptable, but just miss the requirements. The ring detector result is more than two estimated standard deviations below the correct result.

Column 2 shows the results as a function of N for 5 million histories. The ring detector result of 5.72×10^{-8} n/cm²/s (R=0.0169, VOV=0.023, slope=4.6, FOM=19) now appears very well behaved in all categories. This tally passed all 10 statistical checks. There appears to be no reason to question the validity of this tally. The point detector result is 4.72×10^{-8} n/cm²/s (R=0.11, VOV=0.28, slope=2.1, FOM=0.45). The result is clearly improving, but does not meet the acceptable criteria for convergence. This tally did not pass 3 out of 10 statistical checks.

When you compare the empirical point detector $f(x)$ s for 14,000 and 200 million histories you see that the 14,000 history $f(x)$ clearly has unsampled regions in the tail, indicating incomplete $f(x)$ sampling.⁷⁹ For the point detector, seven decades of x have been sampled by 200 million histories compared to only three decades for 14,000 histories. The largest x 's occur from the extremely difficult to sample histories that have multiple small energy loss collisions close to the detector. The 200 million history point detector result is 5.41×10^{-8} n/cm²/s (R=0.035, VOV=0.60, slope=2.4, FOM=0.060). The point detector $f(x)$ slope is increasing, but still is not yet completely

CHAPTER 2

Variance Reduction

sampled. This tally did not pass 6 of 10 checks with 200 million histories. The result is about 1.5 estimated standard deviations below the correct answer. It is important to note that calculating a large number of histories DOES NOT guarantee a precise result. The more compact empirical ring $f(x)$ for 20 million histories appears to be completely sampled because of the large slope. The results for 1 billion histories are shown in Ref. 110.

For difficult to sample problems such as this example, it is possible that an even larger history score could occur that would cause the VOV and possibly the slope to have unacceptable values. The mean and RE will be much less affected than the VOV. The additional running time required to reach acceptable values for the VOV and the slope could be prohibitive. The large history score should NEVER be discarded from the tally result. It is important that the cause for the large history score be completely understood. If the score was created by a poorly sampled region of phase space, the problem should be modified to provide improved phase space sampling. It is also possible that the large score was created by an extremely unlikely set of circumstances that occurred “early” in the calculation. In this situation, if the RE is within the guidelines, the empirical $f(x)$ appears to be otherwise completely sampled, and the largest history score appears to be a once in a lifetime occurrence, a good confidence interval can still be formed. If a conservative (large) answer is required, the printed result that assumes the largest history score occurs on the very next history can be used.

Comparing several empirical $f(x)$ s for the above problem with 200 million histories that have been normalized so that the mean of each $f(x)$ is unity, you see that the point detector at 390 cm clearly is quite Cauchy-like (see Eq. (2.25) for many decades.⁷⁸ The point detector at 4000 cm is a much easier tally (by a factor of 10,000) as exhibited by the much more compact empirical $f(x)$. The large-score tail decreases in a manner similar to the negative exponential $f(x)$. The surface flux estimator is the most compact $f(x)$ of all. The blip on the high-score tail is caused by the average cosine approximation of 0.05 between cosines of 0 and 0.1 (see page 2–71). This tally is 30,000 times more efficient than the point detector tally.

VII. VARIANCE REDUCTION

A. General Considerations

1. Variance Reduction and Accuracy

Variance-reducing techniques in Monte Carlo calculations reduce the computer time required to obtain results of sufficient precision. Note that precision is only one requirement for a good Monte Carlo calculation. Even a zero variance calculation cannot accurately predict natural behavior if other sources of error are not minimized. Factors affecting accuracy were discussed in Section VI beginning on page 2–88.

2. Two Choices That Affect Efficiency

The efficiency of a Monte Carlo calculation is affected by two choices, tally type and random walk sampling. The tally choice (for example, point detector flux tally vs surface crossing flux tally) amounts to trying to obtain the best results from the random walks sampled. The chosen random walk sampling amounts to preferentially sampling “important” random walks at the expense of “unimportant” random walks. (A random walk is important if it has a large affect on a tally.) These two choices usually affect the time per history and the history variance as described in Sec. 3 below.

MCNP estimates tallies of the form

$$\langle T \rangle = \int d\vec{r} \int d\vec{v} \int dt N(\vec{r}, \vec{v}, t) T(\vec{r}, \vec{v}, t)$$

by sampling particle histories that statistically produce the correct particle density $N(\vec{r}, \vec{v}, t)$. The tally function $T(\vec{r}, \vec{v}, t)$ is zero except where a tally is required. For example, for a surface crossing tally ($F1$), T will be one on the surface and zero elsewhere. MCNP variance reduction techniques allow the user to try to produce better statistical estimates of N where T is large, usually at the expense of poorer estimates where T is zero or small.

There are many ways to statistically produce $N(\vec{r}, \vec{v}, t)$. Analog Monte Carlo simply samples the events according to their natural physical probabilities. In this way, an analog Monte Carlo calculation estimates the number of physical particles executing any given random walk. Nonanalog techniques do not directly simulate nature. Instead, nonanalog techniques are free to do anything if N , hence $\langle T \rangle$, is preserved. This preservation is accomplished by adjusting the weight of the particles. The weight can be thought of as the number of physical particles represented by the MCNP particle (see page 2–25). Every time a decision is made, the nonanalog techniques require that the expected weight associated with each outcome be the same as in the analog game. In this way, the expected number of physical particles executing any given random walk is the same as in the analog game.

For example, if an outcome “A” is made q times as likely as in the analog game, when a particle chooses outcome “A,” its weight must be multiplied by q^{-1} to preserve the expected weight for outcome “A.” Let p be the analog probability for outcome “A”; then pq is the nonanalog probability for outcome “A.” If w_0 is the current weight of the particle, then the expected weight for outcome “A” in the analog game is $w_0 * p$ and the expected weight for outcome “A” in the nonanalog game is $(w_0/q) * pq$.

MCNP uses three basic types of nonanalog games: (1) splitting, (2) Russian roulette, and (3) sampling from nonanalog probability density functions. The previous paragraph discusses type 3. Splitting refers to dividing the particle’s weight among two or more daughter particles and following the daughter particles independently. Usually the weight is simply divided evenly among k identical daughter particles whose characteristics are identical to the parent except for a factor $1/k$ in weight (for example, splitting in the weight window). In this case the expected weight is clearly conserved be-

CHAPTER 2

Variance Reduction

cause the analog technique has one particle of weight w_0 at (\vec{r}, \vec{v}, t) , whereas the splitting results in k particles of weight w_0/k at (\vec{r}, \vec{v}, t) . In both cases the outcome is weight w_0 at (\vec{r}, \vec{v}, t) .

Other splitting techniques split the parent particle into k , typically two, differing daughter particles. The weight of the j^{th} daughter represents the expected number of physical particles that would select outcome j from a set of k mutually exclusive outcomes. For example, the MCNP forced collision technique considers two outcomes: (1) the particle reaches a cell boundary before collision, or (2) the particle collides before reaching a cell boundary. The forced collision technique divides the parent particle representing w_0 physical particles into two daughter particles, representing w_1 physical particles that are uncollided and w_2 physical particles that collide. The uncollided particle of weight w_1 is then put on the cell boundary. The collision site of the collided particle of weight w_2 is selected from a conditional distance-to-collision probability density, the condition being that the particle must collide in the cell. This technique preserves the expected weight colliding at any point in the cell as well as the expected weight not colliding. A little simple mathematics is required to demonstrate this.

Russian roulette takes a particle at (\vec{r}, \vec{v}, t) of weight w_0 and turns it into a particle of weight $w_1 > w_0$ with probability w_0/w_1 and kills it (that is, weight=0) with probability $(1 - (w_0/w_1))$. The expected weight at (\vec{r}, \vec{v}, t) is $w_1 * (w_0/w_1) + (1 - (w_0/w_1)) * 0 = w_0$, the same as in the analog game.

Some techniques use a combination of these basic games and DXTRAN uses all three.

3. Efficiency, Time per History, and History Variance

Recall from page 2–96 that the measure of efficiency for MCNP calculations is the *FOM*: $FOM = 1/(R^2T)$, where

R^2 = sample relative standard deviation of the mean and

T = computer time for the calculation (in minutes).

Recall from Eqns. 2.17 and 2.19a that $R = (S/\sqrt{N})/\bar{x}$, where

S^2 = sample history variance,

N = number of particles, and

\bar{x} = sample mean.

Generally we are interested in obtaining the smallest R in a given time T . The equation above indicates that to decrease R it is desirable to: 1) decrease S and 2) increase N ; that is, decrease the time per particle history. Unfortunately, these two goals usually conflict. Decreasing S normally requires more time because better information is required. Increasing N normally increases S because there is less time per history to obtain information. However, the situation is not hopeless. It is often possible either to decrease S substantially without decreasing N too much or to increase N substantially without increasing S too much, so that R decreases.

Many variance reduction techniques in MCNP attempt to decrease R by either producing or destroying particles. Some techniques do both. In general, techniques that produce tracks work by decreasing S (we hope much

faster than N decreases) and techniques that destroy tracks work by increasing N (we hope much faster than S increases).

4. Strategy

Successful use of MCNP variance reduction techniques is often difficult, tending to be more art than science. The introduction of the weight window generator has improved things, but the user is still fundamentally responsible for the choice and proper use of variance reducing techniques. Each variance reduction technique has its own advantages, problems, and peculiarities. However, there are some general principles to keep in mind while developing a variance reduction strategy.

Not surprisingly, the general principles all have to do with understanding both the physical problem and the variance reduction techniques available to solve the problem. If an analog calculation will not suffice to calculate the tally, there must be something special about the particles that tally. The user should understand the special nature of those particles that tally. Perhaps, for example, only particles that scatter in particular directions can tally. After the user understands why the tallying particles are special, MCNP techniques can be selected (or developed by the user) that will increase the number of special particles followed.

After the MCNP techniques are selected the user typically has to supply appropriate parameters to the variance reduction techniques. This is probably more difficult than is the selection of techniques. The first guess at appropriate parameters typically comes either from experience with similar problems or from experience with an analog calculation of the current problem. It is usually better to err on the conservative side; that is, too little biasing rather than too much biasing. After the user has supplied parameters for the variance reduction techniques, a short Monte Carlo run is done so that the effectiveness of the techniques and parameters can be monitored with the MCNP output.

The MCNP output contains much information to help the user understand the sampling. This information should be examined to ensure that

- (1) the variance reduction techniques are improving the sampling of the particles that tally;
- (2) the variance reduction techniques are working cooperatively; that is, one is not destructively interfering with another;
- (3) the *FOM* table is not erratic, which would indicate poor sampling; and
- (4) there is nothing that looks obviously ridiculous.

Unfortunately, analyzing the output information requires considerable thought and experience. Reference 83 shows in detail strategies and analysis for a particular problem.

After ascertaining that the techniques are improving the calculation, the user makes a few more short runs to refine the parameters until the sampling no longer improves. The weight window generator can also be turned on to supply information about the importance function in different regions of the phase space. This rather complex subject is described on page 2–126.

CHAPTER 2 Variance Reduction

5. Erratic Error Estimates

Erratic error estimates are sometimes observed in MCNP calculations. In fact, the primary reason for the Tally Fluctuation Chart (TFC) table in the MCNP output is to allow the user to monitor the *FOM* and the relative error as a function of the number of histories. With few exceptions, such as an analog point detector embedded in a scattering medium with $R_o = 0$ (a practice highly discouraged), MCNP tallies are finite variance tallies. For finite variance tallies the relative error should decrease roughly as \sqrt{N} so the *FOM* should be roughly constant and the ten statistical checks of the tallies (see page 2–109) should all be passed. If the statistical checks are not passed, the error estimates should be considered erratic and unreliable, no matter how small the relative error estimate is.

Erratic error estimates occur typically because a high-weight particle tallies from an important region of phase space that has not been well sampled. A high-weight particle in a given region of phase space is a particle whose weight is some nontrivial fraction of all the weight that has tallied from that region because of all previous histories. A good example is a particle that collides very close to a point or ring detector. If not much particle weight has previously collided that close to the detector, the relative error estimate will exhibit a jump for that history. Another example is coherent photon scattering towards a point detector (see page 2–57).

To avoid high-weight particles in important regions, the user should try to ensure that these regions are well sampled by many particles and try to minimize the weight fluctuation among these particles. Thus the user should try to use biasing techniques that preferentially push particles into important regions without introducing large weight fluctuations in these regions. The weight window can often be very useful in minimizing weight fluctuations caused by other variance reduction techniques.

If, despite a user's efforts, an erratic error estimate occurs, the user should obtain event logs for those particles causing the estimate to be erratic. The event logs should be studied to learn what is special about these particles. When the special nature of these particles is understood, the user can adjust the variance reduction techniques to sample these particles more often. Thus their weight will be smaller and they will not be as likely to cause erratic estimates. *Under absolutely no circumstances should these particles be discarded or ignored!* The fact that these particles contribute very heavily to the tally indicates that they are important to the calculation and the user should try to sample more of them.

6. Biasing Against Random Walks of Presumed Low Importance

It was mentioned earlier that one should be cautious and conservative when applying variance reduction techniques. Many more people get into trouble by overbiasing than by underbiasing. Note that preferentially sampling some random walks means that some walks will be sampled (for a given computer time) less frequently than they would have been in an analog calculation. Sometimes these random walks are so heavily biased against that

very few, or even none, are ever sampled in an actual calculation because not enough particles are run.

Suppose that (on average) for every million histories only one track enters cell 23. Further suppose that a typical run is 100 000 histories. On any given run it is unlikely that a track enters cell 23. Now suppose that tracks entering cell 23 turn out to be much more important than a user thought. Maybe 10% of the answer should come from tracks entering cell 23. The user could run 100 000 particles and get 90% of the true tally with an estimated error of 1%, with absolutely no indication that anything is amiss. However, suppose the biasing had been set such that (on average) for every 10 000 particles, one track entered cell 23, about 10 tracks total. The tally probably will be severely affected by at least one high weight particle and will hover closer to the true tally with a larger and perhaps erratic error estimate. The essential point is this: following ten tracks into cell 23 does not cost much computer time and it helps ensure that the estimated error cannot be low when the tally is seriously in error. Always make sure that all regions of the problem are sampled enough to be certain that they are unimportant.

B. Variance Reduction Techniques

There are four classes of variance reduction techniques⁸⁴ that range from the trivial to the esoteric.

Truncation Methods are the simplest of variance reduction methods. They speed up calculations by truncating parts of phase space that do not contribute significantly to the solution. The simplest example is geometry truncation in which unimportant parts of the geometry are simply not modeled. Specific truncation methods available in MCNP are energy cutoff and time cutoff.

Population Control Methods use particle splitting and Russian roulette to control the number of samples taken in various regions of phase space. In important regions many samples of low weight are tracked, while in unimportant regions few samples of high weight are tracked. A weight adjustment is made to ensure that the problem solution remains unbiased. Specific population control methods available in MCNP are geometry splitting and Russian roulette, energy splitting/roulette, weight cutoff, and weight windows.

Modified Sampling Methods alter the statistical sampling of a problem to increase the number of tallies per particle. For any Monte Carlo event it is possible to sample from any arbitrary distribution rather than the physical probability as long as the particle weights are then adjusted to compensate. Thus with modified sampling methods, sampling is done from distributions that send particles in desired directions or into other desired regions of phase space such as time or energy, or change the location or type of collisions. Modified sampling methods in MCNP include the exponential transform, implicit capture, forced collisions, source biasing, and neutron-induced photon production biasing.

Partially-Deterministic Methods are the most complicated class of variance reduction methods. They circumvent the normal random walk process

CHAPTER 2

Variance Reduction

by using deterministic-like techniques, such as next event estimators, or by controlling of the random number sequence. In MCNP these methods include point detectors, DXTRAN, and correlated sampling.

The available MCNP variance reduction techniques now are described.

1. Energy Cutoff

The energy cutoff in MCNP is either a single user-supplied, problem-wide energy level or a cell-dependent energy level. Particles are terminated when their energy falls below the energy cutoff. The energy cutoff terminates tracks and thus decreases the time per history. The energy cutoff should be used only when it is known that low-energy particles are either of zero or almost zero importance. An energy cutoff is like a Russian roulette game with zero survival probability. A number of pitfalls exist.

- a. Remember that low-energy particles can often produce high-energy particles (for example, fission or low-energy neutrons inducing high-energy photons). Thus, even if a detector is not sensitive to low-energy particles, the low-energy particles may be important to the tally.
- b. The CUT card energy cutoff is the same throughout the entire problem. Often low-energy particles have zero importance in some regions and high importance in others, and so a cell-dependent energy cutoff is also available with the ELPT card.
- c. The answer will be biased (low) if the energy cutoff is killing particles that might otherwise have contributed. Furthermore, as $N \rightarrow \infty$ the apparent error will go to zero and therefore mislead the unwary. Serious consideration should be given to two techniques (discussed later), energy roulette and space-energy weight window, that are always unbiased.

The energy cutoff has one advantage not directly related to variance reduction. A lower energy cutoff requires more cross sections so that computer memory requirements go up and interactive computing with a timesharing system is degraded.

2. Time Cutoff

The time cutoff in MCNP is a single user-supplied, problem-wide time value. Particles are terminated when their time exceeds the time cutoff. The time cutoff terminates tracks and thus decreases the computer time per history. A time cutoff is like a Russian roulette game with zero survival probability. The time cutoff should only be used in time-dependent problems where the last time bin will be earlier than the cutoff.

Although the energy and time cutoffs are similar, more caution must be exercised with the energy cutoff because low energy particles can produce high energy particles, whereas a late time particle cannot produce an early time particle.

3. Geometry Splitting with Russian Roulette

Geometry splitting/Russian roulette is one of the oldest and most widely used variance-reducing techniques in Monte Carlo codes. When used judiciously, it can save substantial computer time. As particles migrate in an

important direction, they are increased in number to provide better sampling, but if they head in an unimportant direction, they are killed in an unbiased manner to avoid wasting time on them. However, do not over-split; this can lead to a substantial wasting of computer time.

Each cell in the problem geometry setup is assigned an importance I by the user on the IMP input card. The number I should be proportional to the estimated value that particles in the cell have for the quantity being scored. When a particle of weight W passes from a cell of importance I to one of higher importance I' , the particle is split into a number of identical particles of lower weight according to the following recipe. If I'/I is an integer n ($n \geq 2$), the particle is split into n identical particles, each weighing W/n . Weight is preserved in the integer splitting process. If I'/I is not an integer but still greater than 1, splitting is done probabilistically so that the expected number of splits is equal to the importance ratio. Denoting $n = [I'/I]$ to be the largest integer in I'/I , $p = I'/I - n$ is defined. Then with probability p , $n + 1$ particles are used, and with probability $1 - p$, n particles are used. For example, if I'/I is 2.75, 75% of the time split 3 for 1 and 25% of the time split 2 for 1. The weight assigned to each particle is $W \cdot I/I'$, which is the expected weight, to minimize dispersion of weights.

On the other hand, if a particle of weight W passes from a cell of importance I to one of lower importance I' , so that $I'/I < 1$, Russian roulette is played and the particle is killed with probability $1 - (I'/I)$, or followed further with probability I'/I and weight $W \cdot I/I'$.

Geometry splitting with Russian roulette is very reliable. It can be shown that the weights of all particle tracks are the same in a cell no matter which geometrical path the tracks have taken to get to the cell, assuming that no other biasing techniques, e.g. implicit capture, are used. The variance of any tally is reduced when the possible contributors all have the same weight.

The assigned cell importances can have any value—they are not limited to integers. However, adjacent cells with greatly different importances place a greater burden on reliable sampling. Once a sample track population has deteriorated and lost some of its information, large splitting ratios (like 20 to 1) can build the population back up, but nothing can regain the lost information. It is generally better to keep the ratio of adjacent importances small (for example, a factor of a few) and have cells with optical thicknesses in the penetration direction less than about two mean free paths. MCNP prints a warning message if adjacent importances or weight windows have a ratio greater than 4. PRINT TABLE 120 in the OUTF file lists the affected cells and ratios.

Generally, in a deep penetration shielding problem the sample size (number of particles) diminishes to almost nothing in an analog simulation, but splitting helps keep the size built up. A good rule is to keep the population of tracks traveling in the desired direction more or less constant—that is, approximately equal to the number of particles started from the source. A good initial approach is to split the particles 2 for 1 wherever the track population drops by a factor of 2. Near-optimum splitting usually can be achieved with

CHAPTER 2

Variance Reduction

only a few iterations and additional iterations show strongly diminishing returns. Note that in a combined neutron/photon problem, importances will probably have to be set individually for neutrons and for photons.

MCNP never splits into a void, although Russian roulette can be played entering a void. Splitting into a void accomplishes nothing except extra tracking because all the split particles must be tracked across the void and they all make it to the next surface. The split should be done according to the importance ratio of the last nonvoid cell departed and the first nonvoid cell entered.

Finally, splitting generally decreases the history variance but increases the time per history, whereas Russian roulette generally increases the history variance but decreases the time per history.

Note four more items:

- a. Geometry splitting/Russian roulette works well only in problems that do not have extreme angular dependence. In the extreme case, splitting/Russian roulette can be useless if no particles ever enter an important cell where the particles can be split.
- b. Geometry splitting/Russian roulette will preserve weight variations. The technique is “dumb” in that it never looks at the particle weight before deciding appropriate action. An example is geometry splitting/Russian roulette used with source biasing.
- c. Geometry splitting/Russian roulette are turned on or off together.
- d. Particles are killed immediately upon entering a zero importance cell, acting as a geometry cutoff.

4. Energy Splitting/Roulette

Energy splitting and roulette typically are used together, but the user can specify only one if desired. Energy splitting/roulette is independent of spatial cell. If the problem has a space-energy dependence, the space-energy dependent weight window is normally a better choice.

a. Splitting: In some cases, particles are more important in some energy ranges than in others. For example, it may be difficult to calculate the number of ^{235}U fissions because the thermal neutrons are also being captured and not enough thermal neutrons are available for a reliable sample. In this case, once a neutron falls below a certain energy level it can be split into several neutrons with an appropriate weight adjustment. A second example involves the effect of fluorescent emission after photoelectric absorption. With energy splitting, the low-energy photon track population can be built up rather than rapidly depleted, as would occur naturally with the high photoelectric absorption cross section.

Particles can be split as they move up or down in energy at up to five different energy levels.

Energy splitting can increase as well as decrease tally variances. Currently, the MCNP weight cutoff game does not take into account whether a particle has undergone energy splitting or not. Consequently, particles un-

dergoing energy splitting may then be rouletted by the weight cutoff game, defeating any advantages of the energy splitting.

With only a minor modification to MCNP, the mechanics for energy splitting can be used for time splitting.

b. Russian roulette: In many cases the number of tracks increases with decreasing energy, especially neutrons near the thermal energy range. These tracks can have many collisions requiring appreciable computer time. They may be important to the problem and cannot be completely eliminated with an energy cutoff, but their number can be reduced by playing a Russian roulette game to reduce their number and computer time.

If a track's energy drops through a prescribed energy level, the roulette game is played, based on the input value of the survival probability. If the game is won, the track's history is continued, but its weight is increased by the reciprocal of the survival probability to conserve weight.

5. Weight Cutoff

In weight cutoff, Russian roulette is played if a particle's weight drops below a user-specified weight cutoff. The particle is either killed or its weight is increased to a user-specified level. The weight cutoff was originally envisioned for use with geometry splitting/Russian roulette and implicit capture, see page 2–130. Because of this intent,

1. The weight cutoffs in cell j depend not only on $WC1$ and $WC2$ on the CUT card, but also on the cell importances.
2. Implicit capture is always turned on (except in detailed photon physics) whenever a nonzero $WC1$ is specified.

Referring to item 1 above, the weight cutoff is applied when the particle's weight falls below $R_j * WC2$, where R_j is the ratio of the source cell importance (IMP card) to cell j 's importance. With probability $W/(WC1 * R_j)$ the particle survives with new weight $WC1 * R_j$; otherwise the particle is killed. When $WC1$ and $WC2$ on the CUT card are negative, the weight cutoff is scaled to the minimum source weight of a particle so that source particles are not immediately killed by falling below the cutoff.

As mentioned earlier, the weight cutoff game was originally envisioned for use with geometry splitting and implicit capture. To illustrate the need for a weight cutoff when using implicit capture, consider what can happen without a weight cutoff. Suppose a particle is in the interior of a very large medium and there are neither time nor energy cutoffs. The particle will go from collision to collision, losing a fraction of its weight at each collision. Without a weight cutoff, a particle's weight would eventually be too small to be representable in the computer, at which time an error would occur. If there are other loss mechanisms (for example, escape, time cutoff, or energy cutoff), the particle's weight will not decrease indefinitely, but the particle may take an unduly long time to terminate.

Weight cutoff's dependence on the importance ratio can be easily understood if one remembers that the weight cutoff game was originally designed to solve the low-weight problem sometimes produced by implicit capture. In

CHAPTER 2
 Variance Reduction

a high-importance region, the weights are low by design, so it makes no sense to play the same weight cutoff game in high- and low-importance regions.

Comments: Many techniques in MCNP cause weight change. The weight cutoff was really designed with geometry splitting and implicit capture in mind. Care should be taken in the use of other techniques.

Weight cutoff games are unlike time and energy cutoffs. In time and energy cutoffs, the random walk is always terminated when the threshold is crossed. Potential bias may result if the particle's importance was not zero. A weight cutoff (weight roulette would be a better name) does not bias the game because the weight is increased for those particles that survive.

Setting the weight cutoff is not typically an easy task and requires thought and experimentation. Essentially the user must guess what weight is worth following and start experimenting with weight cutoffs in that vicinity.

6. Weight Window

The weight window (Fig. 2.17) is a space-energy-dependent splitting and Russian roulette technique. For each space-energy phase space cell, the user supplies a lower weight bound. The upper weight bound is a user-specified multiple of the lower weight bound. These weight bounds define a window of acceptable weights. If a particle is below the lower weight bound, Russian roulette is played and the particle's weight is either increased to a value within the window or the particle is terminated. If a particle is above the upper weight bound, it is split so that all the split particles are within the window. No action is taken for particles within the window.

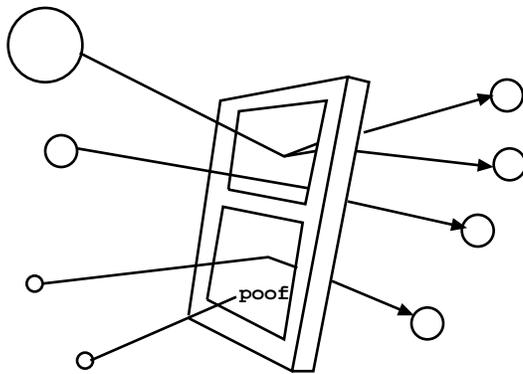


Figure 2.17

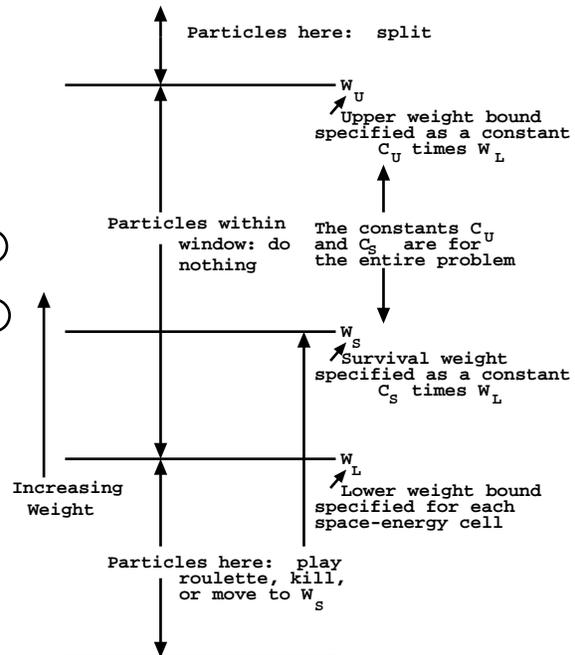


Figure 2.18

Figure 2.18 is a more detailed picture of the weight window. Three important weights define the weight window in a space-energy cell

1. W_L , the lower weight bound,
2. W_S , the survival weight for particles playing roulette, and
3. W_U , the upper weight bound.

The user specifies W_L for each space-energy cell on WWN cards. W_S and W_U are calculated using two problem-wide constants, C_S and C_U (entries on the WWP card), as $W_S = C_S W_L$ and $W_U = C_U W_L$. Thus all cells have an upper weight bound C_U times the lower weight bound and a survival weight C_S times the lower weight bound.

Although the weight window can be effective when used alone, it was designed for use with other biasing techniques that introduce a large variation in particle weight. In particular, a particle may have several “unpreferred” samplings, each of which will cause the particle weight to be multiplied by a weight factor substantially larger than one. Any of these weight multiplications by itself is usually not serious, but the cumulative weight multiplications can seriously degrade calculational efficiency. Worse, the error estimates may be misleading until enough extremely high-weight particles have been sampled. Monte Carlo novices are prone to be misled because they do not have enough experience reading and interpreting the summary information on the sampling supplied by MCNP. Hence, a novice may put more faith in an answer than is justified.

Although it is impossible to eliminate all pathologies in Monte Carlo calculations, a properly specified weight window goes far toward eliminating the pathology referred to in the preceding paragraph. As soon as the weight gets above the weight window, the particle is split and subsequent weight multiplications will thus be multiplying only a fraction of the particle’s weight (before splitting). Thus, it is hard for the tally to be severely perturbed by a particle of extremely large weight. In addition, low-weight particles are rouletted, so time is not wasted following particles of trivial weight.

One cannot ensure that every history contribute the same score (a zero variance solution), but by using a window inversely proportional to the importance, one can ensure that the mean score from any track in the problem be roughly constant. (A weight window generator exists to estimate these importance reciprocals; see page 2–126.) In other words, the window is chosen so that the track weight times the mean score (for unit track weight) is approximately constant. Under these conditions, the variance is due mostly to the variation in the number of contributing tracks rather than the variation in track score.

Thus far, two things remain unspecified about the weight window: the constant of inverse proportionality and the width of the window. It has been observed empirically that an upper weight bound five times the lower weight bound works well, but the results are reasonably insensitive to this choice anyway. The constant of inverse proportionality is chosen so that the lower weight bound in some reference cell is chosen appropriately. In most instances the constant should be chosen so that the source particles start

CHAPTER 2

Variance Reduction

within the window.

a. Weight Window Compared to Geometry Splitting: Although both techniques use splitting and Russian roulette, there are some important differences.

1. The weight window is space-energy dependent. Geometry splitting is only space dependent.
2. The weight window discriminates on particle weight before deciding appropriate action. Geometry splitting is done regardless of particle weight.
3. The weight window works with absolute weight bounds. Geometry splitting is done on the ratio of the importance across a surface.
4. The weight window can be applied at surfaces, collision sites, or both. Geometry splitting is applied only at surfaces.
5. The weight window can control weight fluctuations introduced by other biasing techniques by requiring all particles in a cell to have weight $W_L < W < W_U$. The geometry splitting will preserve any weight fluctuations because it is weight independent.
6. In the rare case where no other weight modification schemes are present, importances will cause all particles in a given cell to have the same weight. Weight windows will merely bound the weight.
7. The weight windows can be turned off for a given cell or energy regime by specifying a zero lower bound. This is useful in long or large regions where no single importance function applies. Care should be used because when the weight window is turned off at collisions, the weight cutoff game is turned on, sometimes causing too many particles to be killed.

b. The Weight Window Generator: The generator is a method that automatically generates weight window importance functions.⁸⁵ The task of choosing importances by guessing, intuition, experience, or trial and error is simplified and insight into the Monte Carlo calculation is provided.

Although the window generator has proved very useful, two caveats are appropriate. The generator is by no means a panacea for all importance sampling problems and certainly is not a substitute for thinking on the user's part. In fact, in most instances, the user will have to decide when the generator's results look reasonable and when they do not. After these disclaimers, one might wonder what use to make of a generator that produces both good and bad results. To use the generator effectively, it is necessary to remember that the generated parameters are only statistical estimates and that these estimates can be subject to considerable error. Nonetheless, practical experience indicates that a user can learn to use the generator effectively to solve some very difficult transport problems.

Examples of the weight window generator are given in references 83 and 85 and should be examined before using the generator. Note that this importance estimation scheme works regardless of what other variance reduction techniques (except DXTRAN) are used in the calculation.

c. Theory: The importance of a particle at a point P in phase space equals the expected score a unit weight particle will generate. Imagine di-

viding the phase space into a number of phase space “cells” or regions. The importance of a cell then can be defined as the expected score generated by a unit weight particle after entering the cell. Thus, with a little bookkeeping, the cell’s importance can be estimated as

$$\text{Importance (expected score)} = \frac{\text{total score because of particles (and their progeny) entering the cell}}{\text{total weight entering the cell}}$$

After the importances have been generated, MCNP assigns weight windows inversely proportional to the importances. Then MCNP supplies card images of the weight windows for use in the input file of a subsequent calculation. The WWGE card defines the energy ranges or phase space division used to generate the weight windows. The constant of proportionality is specified on the WWG card.

d. Limitations of the Weight-Window Generator: The principal problem encountered when using the generator is bad estimates of the importance function because of the statistical nature of the generator. In particular, unless a phase space region is sampled adequately, there will be either no generator importance estimate or an unreliable one. The generator often needs a very crude importance guess just to get any tally; that is, the generator needs an initial importance function to estimate a (we hope) better one for subsequent calculations.

Fortunately, in most problems the user can guess some crude importance function sufficient to get enough tallies for the generator to estimate a new set of weight windows. Because the weight windows are statistical, several iterations usually are required before the optimum importance function is found for a given tally. The first set of generated weight windows should be used in a subsequent calculation, which generates a better set of windows, etc.

In addition to iterating on the generated weight windows, the user must exercise some degree of judgment. Specifically, in a typical generator calculation, some generated windows will look suspicious and will have to be reset. In MCNP, this task is simplified by an algorithm that automatically scrutinizes importance functions, either input by the user or generated by a generator. By flagging the generated windows that are more than a factor of 4 different from those in adjacent spatial regions, often it is easy to determine which generated weight windows are likely to be statistical flukes that should be revised before the next generator iteration. For example, suppose the lower weight bounds in adjacent cells were 0.5, 0.3, 0.9, 0.05, 0.03, 0.02, etc.; here the user would probably want to change the 0.9 to something like 0.1 to fit the pattern, reducing the 18:1 ratio between cells 3 and 4.

The weight window generator also will fail when phase space is not sufficiently subdivided and no single set of weight window bounds is representative of the whole region. It is necessary to turn off the weight windows

CHAPTER 2

Variance Reduction

(by setting a lower bound of zero) or to further subdivide the geometry or energy phase space.

7. Exponential Transform

The exponential transform samples the distance to collision from a nonanalog probability density function. Although many impressive results are claimed for the exponential transform, it should be remembered that these results are usually obtained for one-dimensional geometries and quite often for energy-independent problems. A review article by Clark⁸⁶ gives theoretical background and sample results for the exponential transform. Sarkar and Prasad⁸⁷ have done a purely analytical analysis for the optimum transform parameter for an infinite slab and one energy group.

The exponential transform allows particle walks to move in a preferred direction by artificially reducing the macroscopic cross section in the preferred direction and increasing the cross section in the opposite direction according to

$$\Sigma_t^* = \Sigma_t(1 - p\mu) \quad ,$$

where Σ_t^* = fictitious transformed cross section,

Σ_t = true total cross section,

Σ_a = absorption cross section,

Σ_s = scattering cross section,

p = the exponential transform parameter used to vary the degree of biasing $|p| < 1$. Can be a constant or $p = \Sigma_a/\Sigma_t$, in which case $\Sigma_t^* = \Sigma_s$, and

μ = cosine of the angle between the preferred direction and the particle's direction. $|\mu| \leq 1$. The preferred direction can be specified on a VECT card.

At a collision a particle's weight is multiplied by a factor w_c (derived below) so that the expected weight colliding at any point is preserved. The particle's weight is adjusted such that the weight multiplied by the probability that the next collision is in ds about s remains constant.

The probability of colliding in ds about s is

$$\Sigma e^{-\Sigma s} ds \quad ,$$

where Σ is either Σ_t or Σ_t^* , so that preserving the expected collided weight requires

$$\Sigma_t e^{-\Sigma_t s} ds = w_c \Sigma_t^* e^{-\Sigma_t^* s} ds \quad ,$$

or

$$w_c = \frac{\Sigma_t e^{-\Sigma_t s}}{\Sigma_t^* e^{-\Sigma_t^* s}} = \frac{e^{-p\Sigma_t \mu s}}{1 - p\mu} \quad .$$

If the particle reaches a cell surface, time cutoff, DXTRAN sphere, or tally segment instead of colliding, the particle's weight is adjusted so that

the weight, multiplied by the probability that the particle travels a distance s to the surface, remains constant. The probability of traveling a distance s without collision is

$$e^{-\Sigma s} \quad ,$$

so that preserving the expected uncollided weight requires

$$e^{-\Sigma_t s} = w_s e^{-\Sigma_t^* s} \quad ,$$

or

$$w_s = \frac{e^{-\Sigma_t s}}{e^{-\Sigma_t^* s}} = e^{-p \Sigma_t \mu s} \quad .$$

For one-dimensional deep penetration through highly absorbing media, the variance typically will decrease as p goes from zero to some p' , and then increase as p goes from p' to one. For $p < p'$, the solution is “underbiased” and for $p > p'$, the solution is “overbiased.”

Choosing p' is usually a matter of experience, although some insight may be gleaned by understanding what happens in severely underbiased and severely overbiased calculations. For illustration, apply the variance analysis of page 2–97 to a deep penetration problem when the exponential transform is the only nonanalog technique used. In a severely underbiased calculation ($p \rightarrow 0$), very few particles will score, but those that do will all contribute unity. Thus the variance in an underbiased system is caused by a low scoring efficiency rather than a large dispersion in the weights of the penetrating particles. In a severely overbiased system ($p \rightarrow 1$) particles will score, but there will be a large dispersion in the weights of the penetrating particles with a resulting increase in variance.

Comments: MCNP gives a warning message if the exponential transform is used without a weight window. There are numerous examples where an exponential transform without a weight window gives unreliable means and error estimates. However, with a good weight window both the means and errors are well behaved. The exponential transform works best on highly absorbing media and very poorly on highly scattering media. For neutron penetration of concrete or earth, experience indicates that a transform parameter $p = 0.7$ is about optimal. For photon penetration of high-Z material, even higher values such as $p = 0.9$ are justified.

The following explains what happens with an exponential transform without a weight window. For simplicity consider a slab of thickness T with constant Σ_t . Let the tally be a simple count (F1 tally) of the weight penetrating the slab and let the exponential transform be the only nonanalog technique used. Suppose for a given penetrating history that there are k flights, m that collide and n that do not collide. The penetrating weight is thus:

CHAPTER 2
Variance Reduction

$$w_p = \prod_{i=1}^m \frac{e^{-p\Sigma_t\mu_i s_i}}{(1 - p\mu_i)} \prod_{j=m+1}^k e^{-p\Sigma_t\mu_j s_j} \quad .$$

However, the particle's penetration of the slab means that

$$\sum_{l=1}^k \mu_l s_l = T \quad \text{and hence}$$

$$w_p = e^{-p\Sigma_t T} \prod_{i=1}^m (1 - p\mu_i)^{-1} \quad .$$

The only variation in w_p is because of the $(1 - p\mu)^{-1}$ factors that arise only from collisions. For a perfectly absorbing medium, every particle that penetrates scores exactly $e^{-p\Sigma_t T}$. If a particle has only a few collisions, the weight variation will be small compared to a particle that has many collisions. The weight window splits the particle whenever the weight gets too large, depriving the particle of getting a whole series of weight multiplications upon collision that are substantially greater than one.

By setting $p = \Sigma_a/\Sigma_t$ and $\mu = 1$ so that $\Sigma^* = \Sigma_s$, we sample distance to scatter rather than distance to collision. It is preferable to sample distance to scatter in highly absorbing media — in fact, this is the standard procedure for astrophysics problems. Sampling distance to scatter is also equivalent to implicit capture along a flight path (see page 2–34). However, in such highly absorbing media there is usually a more optimal choice of transform parameter, p , and it is usually preferable to take advantage of the directional component by not fixing $\mu = 1$.

8. Implicit Capture

“Implicit capture,” “survival biasing,” and “absorption by weight reduction” are synonymous. Implicit capture is a variance reduction technique applied in MCNP after the collision nuclide has been selected. Let

σ_{ti} = total microscopic cross section for nuclide i and

σ_{ai} = microscopic absorption cross section for nuclide i .

When implicit capture is used rather than sampling for absorption with probability σ_{ai}/σ_{ti} , the particle always survives the collision and is followed with new weight: $W * (1 - \sigma_{ai}/\sigma_{ti})$. Implicit capture is a splitting process where the particle is split into absorbed weight (which need not be followed further) and surviving weight.

Implicit capture can also be done along a flight path rather than at collisions when a special form of the exponential transform is used. See page 2–34 for details.

Two advantages of implicit capture are

1. a particle that has finally, against considerable odds, reached the tally region is not absorbed just before a tally is made, and

2. the history variance, in general, decreases when the surviving weight (that is, 0 or W) is not sampled, but an expected surviving weight is used instead (see weight cutoff, page 2–123).

Two disadvantages are

1. a fluctuation in particle weight is introduced, and
2. the time per history is increased (see weight cutoff, page 2–123).

9. Forced Collisions

The forced collision method is a variance reduction scheme that increases sampling of collisions in specified cells. Because detector contributions and DXTRAN particles arise only from collisions and at the source, it is often useful in certain cells to increase the number of collisions that can produce large detector contributions or large weight DXTRAN particles. Sometimes we want to sample collisions in a relatively thin cell (a fraction of a mean free path) to improve the estimate of quantities like a reaction rate or energy deposition or to cause collisions that are important to some other part of the problem.

The forced collision method splits particles into collided and uncollided parts. The collided part is forced to collide within the current cell. The uncollided part exits the current cell without collision and is stored in the bank until later when its track is continued at the cell boundary. Its weight is

$$W = W_o e^{-\Sigma_t d} \quad ,$$

where W_o = current particle weight before forced collision,
 d = distance to cell surface in the particle's direction, and
 Σ_t = macroscopic total cross section of the cell material.

That is, the uncollided part is the current particle weight multiplied by the probability of exiting the cell without collision.

The collided part has weight $W = W_o(1 - e^{-\Sigma_t d})$, which is the current particle weight multiplied by the probability of colliding in the cell. The uncollided part is always produced. The collided part may be produced only a fraction f of the time, in which case the collided weight is $W = W_o(1 - e^{-\Sigma_t d})/f$. This is useful when several forced collision cells are adjacent or when too much time is spent producing and following forced collision particles.

The collision distance is sampled as follows. If $P(x)$ is the unconditional probability of colliding within a distance x , $P(x)/P(d)$ is the conditional probability of colliding within a distance x given that a collision is known to occur within a distance d . Thus the position x of the collision must be sampled on the interval $0 < x < d$ within the cell according to $\xi = P(x)/P(d)$, where $P(x) = 1 - e^{-x\Sigma_t}$ and ξ is a random number. Solving for x , one obtains

$$x = -\frac{1}{\Sigma_t} \ln \left[1 - \xi \left(1 - e^{-d\Sigma_t} \right) \right] \quad .$$

CHAPTER 2

Variance Reduction

Because a forced collision usually yields a collided particle having a relatively small weight, care must be taken with the weight-cutoff game (page 2–123), the weight-window game (page 2–124), and subsequent collisions of the particle within the cell. The weight window game is not played on the surface of a forced collision cell that the particle is entering. For collisions inside the cell the user has two options.

Option 1: (negative entry for the cell on the forced collision card.) After the forced collision, subsequent collisions of the particle are sampled normally. The weight cutoff game is turned off and detector contributions and DXTRAN particles are made before the weight window game is played. If weight windows are used, they should be set to the weight of the collided particle weight or set to zero if detector contributions or DXTRAN particles are desired.

Option 2: (positive entry for the cell on the forced collision card.) After the forced collision, detector contributions or DXTRAN particles are made and either the weight cutoff or weight window game is played. Surviving collided particles undergo subsequent forced collisions. If weight windows are used, they should bracket the weight of particles entering the cell.

10. Source Variable Biasing

Provision is made for biasing the MCNP sources in any or all of the source variables specified. MCNP's source biasing, although not completely general, allows the production of more source particles, with suitably reduced weights, in the more important regimes of each variable. For example, one may start more "tracks" at high energies and in strategic directions in a shielding problem while correcting the distribution by altering the weights assigned to these tracks. Sizable variance reductions may result from such biasing of the source. Source biasing samples from a nonanalog probability density function.

If negative weight cutoff values are used on the CUT card, the weight cutoff is made relative to the lowest value of source particle weight generated by the biasing schemes.

Source biasing is the only variance reduction scheme allowed with F8 tallies having energy binning (see page 2–74).

a. Biasing by Specifying Explicit Sampling Frequencies: The SB input card determines source biasing for a particular variable by specifying the frequency at which source particles will be produced in the variable regime. If this fictitious frequency does not correspond to the fraction of actual source particles in a variable bin, the corrected weight of the source particles in a particular bin is determined by the ratio of the actual frequency (defined on the SP card) divided by the fictitious frequency (defined on the SB card) except for the lin-lin interpolation where it is defined to be the ratio of the actual to fictitious frequency evaluated at the exact value of the interpolated variable. The total weight of particles started in a given SI bin interval is thus conserved.

b. Biasing by Standard Prescription: Source biasing can use certain built-in prescriptions similar in principle to built-in analytic source distributions. These biasing options are detailed in the sections below for the appropriate source variables. The SB card input is analogous to that of an SP card for an analytic source distribution; that is, the first entry is a negative prescription number for the type of biasing required, followed by one or more optional user-specified parameters, which are discussed in the following sections.

1) *Direction Biasing*: The source direction can be biased by sampling from a continuous exponential function or by using cones of fixed size and starting a fixed fraction of particles within each cone. The user can bias particles in any arbitrary direction or combination of directions.

In general, continuous biasing is preferable to fixed cone biasing because cone biasing can cause problems from the discontinuities of source track weight at the cone boundaries. However, if the cone parameters (cone size and fraction of particles starting in the cone) are optimized through a parameter study and the paths that tracks take to contribute to tallies are understood, fixed cone biasing sometimes can outperform continuous biasing. Unfortunately, it is usually time consuming (both human and computer) and difficult to arrive at the necessary optimization.

Source directional biasing can be sampled from an exponential probability density function $p(\mu) = Ce^{K\mu}$, where C is a norming constant equal to $K/(e^K - e^{-K})$ and $\mu = \cos \theta$, where θ is an angle relative to the biasing direction. K is typically about 1; $K = 3.5$ defines the ratio of weight of tracks starting in the biasing direction to tracks starting in the opposite direction to be 1/1097. This ratio is equal to e^{-2K} .

Table 2.6 may help to give you a feel for the biasing parameter K .

Table 2.6
Exponential Biasing Parameter

<u>K</u>	<u>Cumulative Probability</u>	<u>Theta</u>	<u>Weight</u>	<u>K</u>	<u>Cumulative Probability</u>	<u>Theta</u>	<u>Weight</u>
.01	0	0	0.990	2.0	0	0	.245
	.25	60	0.995		.25	31	.325
	.50	90	1.000		.50	48	.482
	.75	120	1.005		.75	70	.931
	1.00	180	1.010		1.00	180	13.40
1.0	0	0	.432	3.5	0	0	.143
	.25	42	.552		.25	23	.190
	.50	64	.762		.50	37	.285
	.75	93	1.230		.75	53	.569
	1.00	180	3.195		1.00	180	156.5

From this table for $K = 1$, we see that half the tracks start in a cone of 64° opening about the axis, and the weight of tracks at 64° is 0.762 times

CHAPTER 2
Variance Reduction

the unbiased weight of source particles. $K = 0.01$ is almost equivalent to no biasing, and $K = 3.5$ is very strong.

Cone directional biasing can be invoked by specifying cone cosines on the SI card, the true distribution on the SP card, and the desired biasing probabilities on the SB card. Both histogram and linear interpolation can be used. For example, consider the following case in which the true distribution is isotropic:

```

SI n -1  $\nu$  1
SP n 0  $\frac{1+\nu}{2}$   $\frac{1-\nu}{2}$ 
SB n 0  $p_1$   $p_2$ 

```

The direction cosine relative to the reference direction, say v , is sampled uniformly within the cone $\nu < v < 1$ with probability p_2 and within $-1 < v < \nu$ with the complementary probability p_1 . The weights assigned are $W(1 - \nu)/(2p_2)$ and $W(1 + \nu)/(2p_1)$, respectively. Note that for a very small cone defined by ν and a high probability $p_2 \gg p_1$ for being within the cone, the few source particles generated outside the cone will have a very high weight that can severely perturb a tally. The sampling of the direction cosines azimuthal to the reference axis is not biased.

2) *Covering Cylinder Extent Biasing*: This biasing prescription for the SDEF EXT variable allows the automatic spatial biasing of source particles in a cylindrical-source-covering-volume along the axis of the cylinder. Such biasing can aid in the escape of source particles from optically thick source regions and thus represents a variance reduction technique.

3) *Covering Cylinder or Sphere Radial Biasing*: This biasing prescription for the SDEF RAD variable allows for the radial spatial biasing of source particles in either a spherical or cylindrical source covering volume. Like the previous example of extent biasing, this biasing can be used to aid in the escape of source particles from optically thick source regions.

c. Biasing Standard Analytic Source Functions:⁸⁸ The preceding examples discuss the biasing of source variables by either input of specific sampling frequencies corresponding to SP card entries or by standard analytic biasing functions. A third biasing category can be used in conjunction with standard analytic source probability functions (for example, a Watt fission spectrum).

A negative entry on an SP card, that is,

```
SP n -i a b
```

causes MCNP to sample source distribution n from probability function i with input variables a, b, \dots . Sampling schemes are typically unbiased. For example, for

```
SP n -5 a
```

the evaporation spectrum $f(E) = CE \exp(-E/a)$ is sampled according to the sampling prescription $E = -a \log(\xi_1 * \xi_2)$, where ξ_1 and ξ_2 are random numbers. Biasing this sampling scheme is usually very difficult or impossible. Fortunately, there is an approximate method available in MCNP for biasing

any arbitrary probability function.⁸⁸ The code approximates the function as a table, then uses the usual SB card biasing scheme to bias this approximate table function. The user inputs a coarse bin structure to govern the bias and the code adds up to 300 additional equiprobable bins to assure accuracy. For example, suppose we wish to sample the function

$$f(E) = CE \exp(-E/a)$$

and suppose that we want half the source to be in the range $.005 < E < .1$ and the other half to be in the range $.1 < E < 20$. Then the input is

```
SPn -5 a
SIn .005 .1 20
SBn C 0 .5 1 .
```

MCNP breaks up the function into 150 equiprobable bins below $E = .1$ and 150 more equiprobable bins above $E = .1$. Half the time E is chosen from the upper set of bins and half the time it is chosen from the lower set. Particles starting from the upper bins have a different weight than that of particles starting from the lower bins to adjust for the bias, and a detailed summary is provided when the PRINT option is used.

Note that in the above example the probability distribution function is truncated below $E = .005$ and above $E = 20$. MCNP prints out how much of the distribution is lost in this manner and reduces the weight accordingly.

It is possible for the user to choose a foolish biasing scheme. For example,

```
SPn -5 a
SIn .005 297I .1 20
SBn 0 1 298R
```

causes each of the 299 bins to be chosen with equal probability. This would be all right except that since there are never more than 300 equiprobable bins, this allocates only 1 equiprobable bin per user-supplied bin. The single equiprobable bin for $.1 < E < 20$ is inadequate to describe the distribution function over this range. Thus the table no longer approximates the function and the source will be sampled erroneously. MCNP issues an error message whenever too much of the source distribution is allocated to a single equiprobable bin, alerting users to a poor choice of binning which might inadequately represent the function. The coarse bins used for biasing should be chosen so that the probability function is roughly equally distributed among them.

11. Point Detector Tally

The point detector is a tally and does not bias random walk sampling. Recall from Section VI, however, that the tally choice affects the efficiency of a Monte Carlo calculation. Thus, a little will be said here in addition to the discussion in the tally section.

Although flux is a point quantity, flux at a point cannot be estimated by either a track-length tally (F4) or a surface flux tally (F2) because the probability of a track entering the volume or crossing the surface of a point is zero. For very small volumes, a point detector tally can provide a good

CHAPTER 2

Variance Reduction

estimate of the flux where it would be almost impossible to get either a track-length or surface-crossing estimate because of the low probability of crossing into the small volume.

It is interesting that a DXTRAN sphere of vanishingly small size with a surface-crossing tally across the diameter normal to the particle's trajectory is equivalent to a point detector. Thus, many of the comments on DXTRAN are appropriate and the DXC cards essentially are identical to the PD cards.

For a complete discussion of point detectors, see page 2–75.

12. DXTRAN

DXTRAN typically is used when a small region is being inadequately sampled because particles have a very small probability of scattering toward that region. To ameliorate this situation, the user can specify in the input file a DXTRAN sphere that encloses the small region. Upon collision (or exiting the source) outside the sphere, DXTRAN creates a special “DXTRAN particle” and deterministically scatters it toward the DXTRAN sphere and deterministically transports it, without collision, to the surface of the DXTRAN sphere. The collision itself is otherwise treated normally, producing a non-DXTRAN particle that is sampled in the normal way, with no reduction in weight. However, the non-DXTRAN particle is killed if it tries to enter the DXTRAN sphere. DXTRAN uses a combination of splitting, Russian roulette, and sampling from a nonanalog probability density function.

The subtlety about DXTRAN is how the extra weight created for the DXTRAN particles is balanced by the weight killed as non-DXTRAN particles cross the DXTRAN sphere. The non-DXTRAN particle is followed without any weight correction, so if the DXTRAN technique is to be unbiased, the extra weight put on the DXTRAN sphere by DXTRAN particles must somehow (on average) balance the weight of non-DXTRAN particles killed on the sphere.

a. DXTRAN Viewpoint 1: One can view DXTRAN as a splitting process (much like the forced collision technique) wherein each particle is split upon departing a collision (or source point) into two distinct pieces:

1. the weight that does not enter the DXTRAN sphere on the next flight either because the particle is not pointed toward the DXTRAN sphere or because the particle collides before reaching the DXTRAN sphere, and
2. the weight that enters the DXTRAN sphere on the next flight.

Let w_o be the weight of the particle before exiting the collision, let p_1 be the analog probability that the particle does not enter the DXTRAN sphere on its next flight, and let p_2 be the analog probability that the particle does enter the DXTRAN sphere on its next flight. The particle must undergo one of these mutually exclusive events, thus $p_1 + p_2 = 1$. The expected weight not entering the DXTRAN sphere is $w_1 = w_o p_1$, and the expected weight entering the DXTRAN sphere is $w_2 = w_o p_2$. Think of DXTRAN as deterministically splitting the original particle with weight w_o into two particles, a non-DXTRAN (particle 1) particle of weight w_1 and a DXTRAN

(particle 2) particle of weight w_2 . Unfortunately, things are not quite that simple.

Recall that the non-DXTRAN particle is followed with unreduced weight w_o rather than weight $w_1 = w_o p_1$. The reason for this apparent discrepancy is that the non-DXTRAN particle (#1) plays a Russian roulette game. Particle 1's weight is increased from w_1 to w_o by playing a Russian roulette game with survival probability $p_1 = w_1/w_o$. The reason for playing this Russian roulette game is simply that p_1 is not known, so assigning weight $w_1 = p_1 w_o$ to particle 1 is impossible. However, it is possible to play the Russian roulette game without explicitly knowing p_1 . It is not magic, just slightly subtle.

The Russian roulette game is played by sampling particle 1 normally and keeping it only if it does not enter (on its next flight) the DXTRAN sphere; that is, particle 1 survives (by definition of p_1) with probability p_1 . Similarly, the Russian roulette game is lost if particle 1 enters (on its next flight) the DXTRAN sphere; that is, particle 1 loses the roulette with probability p_2 . To restate this idea, with probability p_1 , particle 1 has weight w_o and does not enter the DXTRAN sphere and with probability p_2 , the particle enters the DXTRAN sphere and is killed. Thus, the expected weight not entering the DXTRAN sphere is $w_o p_1 + 0 * p_2 = w_1$, as desired.

So far, this discussion has concentrated on the non-DXTRAN particle and ignored exactly what happens to the DXTRAN particle. The sampling of the DXTRAN particle will be discussed after a second viewpoint on the non-DXTRAN particle.

b. DXTRAN Viewpoint 2: This second way of viewing DXTRAN does not see DXTRAN as a splitting process but as an accounting process in which weight is both created and destroyed on the surface of the DXTRAN sphere. In this view, DXTRAN estimates the weight that should go to the DXTRAN sphere upon collision and creates this weight on the sphere as DXTRAN particles. If the non-DXTRAN particle does not enter the sphere, its next flight will proceed exactly as it would have without DXTRAN, producing the same tally contributions and so forth. However, if the non-DXTRAN particle's next flight attempts to enter the sphere, the particle must be killed or there would be (on average) twice as much weight crossing the DXTRAN sphere as there should be because the weight crossing the sphere has already been accounted for by the DXTRAN particle.

c. The DXTRAN Particle: Although the DXTRAN particle does not confuse people nearly as much as the non-DXTRAN particle, the DXTRAN particle is nonetheless subtle.

The most natural approach for scattering particles toward the DXTRAN sphere would be to sample the scattering angle Ω proportional to the analog density. This approach is not used because it is too much work to sample proportional to the analog density and because it is sometimes useful to bias the sampling.

To sample Ω in an unbiased fashion when it is known that Ω points to

CHAPTER 2

Variance Reduction

the DXTRAN sphere, one samples the conditional density

$$P_{con}(\Omega) = P(\Omega) / \int_{S(\Omega)} P(\Omega) d\Omega \quad (\text{the set } S(\Omega) \text{ points toward the sphere})$$

and multiplies the weight by $\int_{S(\Omega)} P(\Omega) d\Omega$, the probability of scattering into the cone (see Fig. 2.19). However, it is too much work to calculate the above integral for each collision. Instead, an arbitrary density function $P_{arb}(\Omega)$ is sampled and the weight is multiplied by

$$\frac{P_{con}(\Omega)}{P_{arb}(\Omega)} = \frac{P(\Omega)}{P_{arb}(\Omega) \int_{S(\Omega)} P(\Omega) d\Omega}.$$

The total weight multiplication is the product of the fraction of the weight scattering into the cone, $\int_{S(\Omega)} P(\Omega) d\Omega$, and the weight correction for sampling $P_{arb}(\Omega)$ instead of $P_{con}(\Omega)$. Thus, the weight correction on scattering is

$$P(\Omega) / P_{arb}(\Omega).$$

If μ is the cosine of the angle between the scattering direction and the particle's incoming direction, then $P(\Omega) = P(\mu) / (2\pi)$ because the scattering is symmetric in the azimuthal angle. If η is the cosine of the angle with respect to the cone axis (see Fig. 2.19) and if the azimuthal angle about the cone axis is uniformly sampled, then $P_{arb}(\Omega) = P_{arb}(\eta) / (2\pi)$. Thus

$$\frac{P(\mu)}{P_{arb}(\eta)} = \text{weight multiplier for DXTRAN particle.}$$

This result can be obtained more directly, but the other derivation does not explain why $P_{con}(\Omega)$ is not sampled.

Because $P_{arb}(\eta)$ is arbitrary, MCNP can choose a scheme that samples η from a two-step density that favors particles within the larger η interval. In fact, the inner DXTRAN sphere has to do only with this arbitrary density and is not essential to the DXTRAN concept. The DXTRAN particles are always created on the outside DXTRAN sphere, with the inner DXTRAN sphere defining only the boundary between the two steps in the density function.

After $\eta = \cos \theta$ has been chosen, the azimuthal angle φ is sampled uniformly on $[0, 2\pi]$; this completes the scattering. Recall, however, that the DXTRAN particle arrives at the DXTRAN sphere without collision. Thus the DXTRAN particle also has its weight multiplied by the negative exponential of the optical path between the collision site and the sphere.

d. Inside the DXTRAN Sphere: So far, only collisions outside the DXTRAN sphere have been discussed. At collisions inside the DXTRAN sphere, the DXTRAN game is not played because first, the particle is already in the desired region, and second, it is impossible to define the angular cone of Fig. 2.19. If there are several DXTRAN spheres and the collision occurs in sphere i , DXTRAN will be played for all spheres except sphere i .

e. Terminology—Real particle and Pseudoparticle: Sometimes the DXTRAN particle is called a pseudoparticle and the non-DXTRAN particle is called the original or real particle. The terms “real particle” and “pseudoparticle” are potentially misleading. Both particles are equally real: both execute random walks, both carry nonzero weight, and both contribute to tallies. The only sense in which the DXTRAN particle should be considered “pseudo” or “not real” is during creation. A DXTRAN particle is created on the DXTRAN sphere, but creation involves determining what weight the DXTRAN particle should have upon creation. Part of this weight determination requires calculating the optical path between the collision site and the DXTRAN sphere. This is done in the same way as point detectors (see point detector pseudoparticles on page 2–80.) MCNP determines the optical path by tracking a pseudoparticle from the collision site to the DXTRAN sphere. This pseudoparticle is deterministically tracked to the DXTRAN sphere simply to determine the optical path. No distance to collision is sampled, no tallies are made, and no records of the pseudoparticle’s passage are kept (for example, tracks entering). In contrast, once the DXTRAN particle is created at the sphere’s surface, the particle is no longer a pseudoparticle. The particle has real weight, executes random walks, and contributes to tallies.

f. DXTRAN Details: To explain how the scheme works, consider the neighborhood of interest to be a spherical region surrounding a designated point in space. In fact, consider two spheres of arbitrary radii about the point $P_o = (x_o, y_o, z_o)$. Further, assume that the particle having direction (u, v, w) collides at the point $P_1 = (x, y, z)$, as shown in Fig. 2.19.

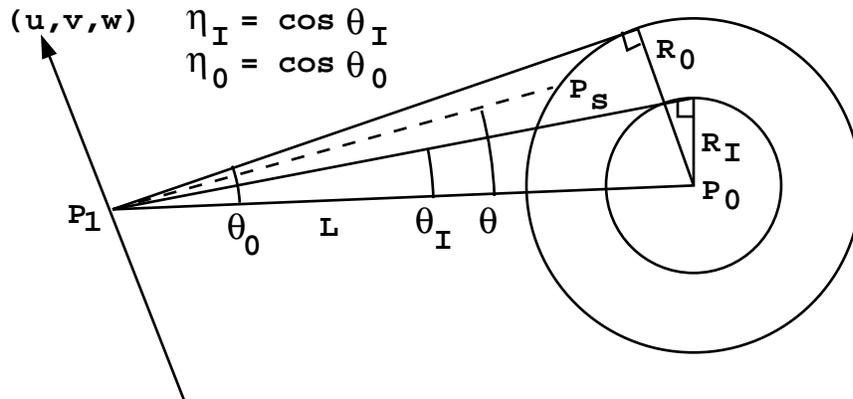


Figure 2.19

The quantities θ_I , θ_O , η_I , η_O , R_I , and R_o are defined in the figure. Thus L , the distance between the collision point and center of the spheres, is

$$L = \sqrt{(x - x_o)^2 + (y - y_o)^2 + (z - z_o)^2} \quad .$$

On collision, a DXTRAN particle is placed at a point on the outer sphere of radius R_o as described below. Provision is made for biasing the contributions of these DXTRAN particles on the outer sphere within the cone defined by the inner sphere. The weight of the DXTRAN particle is adjusted to account

CHAPTER 2

Variance Reduction

for the probability of scattering in the direction of the point on the outer sphere and traversing the distance with no further collision.

The steps in sampling the DXTRAN particles are outlined:

$$\eta_I = \cos \theta_I = (L^2 - R_I^2)^{1/2}/L$$

$$\eta_O = \cos \theta_O = (L^2 - R_o^2)^{1/2}/L$$

Sample $\eta = \eta_I + \xi(1 - \eta_I)$ uniformly in $(\eta_I, 1)$ with probability

$$Q(1 - \eta_I)/[Q(1 - \eta_I) + \eta_I - \eta_O]$$

and with probability

$$(\eta_I - \eta_O)/[Q(1 - \eta_I) + \eta_I - \eta_O]$$

sample $\eta = \eta_O + \xi(\eta_I - \eta_O)$ uniformly in (η_O, η_I) . The quantity Q (equal to 5 in MCNP) is a factor that measures the importance assigned to scattering in the inner cone relative to the outer cone. Therefore, Q is also the ratio of weights for particles put in the two different cones.

With $\eta = \cos \theta$ chosen, a new direction (u', v', w') is computed by considering the rotation through the polar angle θ (and a uniform azimuthal angle φ) from the reference direction

$$\left(\frac{x_o - x}{L}, \frac{y_o - y}{L}, \frac{z_o - z}{L} \right) .$$

The particle is advanced in the direction (u', v', w') to the surface of the sphere of radius R_o . The new DXTRAN particle with appropriate direction and coordinates is banked. The weight of the DXTRAN particle is determined by multiplying the weight of the particle at collision by

$$\nu \cdot \frac{P(\mu) \{Q(1 - \eta_I) + \eta_I - \eta_O\} e^{-\int_{P_I}^{P_S} \sigma_t(s) ds}}{Q}, \eta_I \leq \eta \leq 1$$

and

$$\nu \cdot P(\mu) \{Q(1 - \eta_I) + \eta_I - \eta_O\} e^{-\int_{P_I}^{P_S} \sigma_t(s) ds}, \eta_O \leq \eta \leq \eta_I$$

where

$$\begin{aligned} \mu &= uu' + vv' + ww', \\ P(\mu) &= \text{scattering probability density function for scattering} \\ &\quad \text{through the angle } \cos^{-1} \mu \text{ in the lab system for the event} \\ &\quad \text{sampled at } (x, y, z), \\ \nu &= \text{number of particles emitted from the event, and} \\ e^{-\int_{P_I}^{P_S} \Sigma_t(s) ds} &= \text{the attenuation along the line between } P_1(x, y, z) \text{ and } P_s, \\ &\quad \text{the point on the sphere where the particle is placed.} \end{aligned}$$

In arriving at the weight factor, note that the density function for sampling η is given by

$$\begin{aligned} & Q/[Q(1 - \eta_I) + \eta_I - \eta_O], \eta_I < \eta \leq 1 \\ & 1/[Q(1 - \eta_I) + \eta_I - \eta_O], \eta_O \leq \eta \leq \eta_I \end{aligned} \quad .$$

Thus the weight of the DXTRAN particle is the weight of the incoming particle at P_1 modified by the ratio of the probability density function for actually scattering from P_1 and arriving at P_s without collision to the density function actually sampled in choosing P_s . Therefore, particles in the outer cone have weights $Q = 5$ times higher than the weights of similar particles in the inner cone.

The attenuation is calculated at the energy obtained by scattering through the angle μ . The energy is uniquely determined from μ in elastic scattering (and also in level scattering), whereas for other nonelastic events, the energy is sampled from the corresponding probability density function for energy, and may not depend on μ .

g. Auxiliary Games for DXTRAN: The major disadvantage to DXTRAN is the extra time consumed following DXTRAN particles with low weights. Three special games can control this problem:

1. DXTRAN weight cutoffs,
2. DXC games, and
3. DD game.

Particles inside a DXTRAN sphere are not subject to the normal MCNP weight cutoff or weight window game. Instead DXTRAN spheres have their own weight cutoffs, allowing the user to roulette DXTRAN particles that, for one reason or another, do not have enough weight to be worth following.

Sometimes low-weighted DXTRAN particles occur because of collisions many free paths from the DXTRAN sphere. The exponential attenuation causes these particles to have extremely small weights. The DXTRAN weight cutoff will roulette these particles only after much effort has been spent producing them. The DXC cards are cell dependent and allow DXTRAN contributions to be taken only some fraction of the time. They work just like the PD cards for detectors (see page 2-82). The user specifies a probability p_i that a DXTRAN particle will be produced at a given collision or source sampling in cell i . The DXTRAN result remains unbiased because when a DXTRAN particle is produced its weight is multiplied by p_i^{-1} . (The non-DXTRAN particle is treated exactly as before, unaffected unless it enters the DXTRAN sphere, whereupon it is killed.) To see the utility, suppose that the DXTRAN weight cutoff was immediately killing 99% of the DXTRAN particles from cell i . Only 1% of the DXTRAN particles survive anyway, so it might be appropriate to produce only 1% ($p_i = .01$) and have these not be killed immediately by the DXTRAN weight cutoff. Or the p_i 's can often be set such that all DXTRAN particles from all cells are created on the DXTRAN sphere with roughly the same weight. Choosing the p_i 's is often

CHAPTER 2

Variance Reduction

difficult and the method works well typically when the material exponential attenuation is the major source of the weight fluctuation.

Often the weight fluctuation arises because the probability $P(\mu)$ of scattering toward the DXTRAN sphere varies greatly, depending on what nuclide is hit and what the collision orientation is with respect to the DXTRAN sphere. For example, consider a highly forward-peaked scattering probability density. If the DXTRAN sphere were close to the particle's precollision direction, $P(\mu)$ will be large; if the DXTRAN sphere were at 105° to the precollision direction, $P(\mu)$ will be small. The DD game can be used to reduce the weight fluctuation on the DXTRAN sphere caused by these geometry effects, as well as the material exponential attenuation effects.

The DD game selectively roulettes the DXTRAN pseudoparticles during creation, depending on the DXTRAN particles' weight compared to some reference weight. This is the same game that is played on detector contributions, and is described on page 2–82. The reference weight can be either a fraction of the average of previous DXTRAN particle weights or a user input reference weight. Recall that a DXTRAN particle's weight is computed by multiplying the exit weight of the non-DXTRAN particle by a weight factor having to do with the scattering probability and the negative exponential of the optical path between collision site and DXTRAN sphere. The optical path is computed by tracking a pseudoparticle from collision to DXTRAN sphere. The weight of the pseudoparticle is monotonically decreasing, so the DD game compares the pseudoparticle's weight at the collision site and, upon exiting each cell, against the reference weight. A roulette game is played when the pseudoparticle's weight falls below the reference weight. The DD card stops tracking a pseudoparticle as soon as the weight becomes inconsequential, saving time by eliminating subsequent tracking.

h. Final Comments:

1. DXTRAN should be used carefully in optically thick problems. Do not rely on DXTRAN to do penetration.
2. If the source is user supplied, some provision must be made for obtaining the source contribution to particles on the DXTRAN sphere.
3. Extreme care must be taken when more than one DXTRAN sphere is in a problem. Cross-talk between spheres can result in extremely low weights and an excessive growth in the number of particle tracks.
4. Never put a zero on the DXC card. A zero will bias the calculation by not creating DXTRAN particles but still killing the non-DXTRAN particle if it enters the DXTRAN sphere.
5. Usually there should be a rough balance in the summary table of weight created and lost by DXTRAN.
6. DXTRAN cannot be used with reflecting surfaces for the same reasons that point detectors cannot be used with reflecting surfaces. See page 2–81 for further explanation.
7. Both DXTRAN and point detectors track pseudoparticles to a point. Therefore, most of the discussion about detectors applies to DXTRAN. Refer to the section on detectors, page 2–75, for more information.

13. Correlated Sampling

Correlated sampling estimates the change in a quantity resulting from a small perturbation of any type in the problem. This technique enables the evaluation of small quantities that would otherwise be masked by the statistical errors of uncorrelated calculations. MCNP correlates a pair of runs by providing each new history in the unperturbed and perturbed problems with the same initial pseudorandom number. The same sequence of subsequent numbers is used, until a perturbation causes the sequences to diverge. This sequencing is done by incrementing the random number generator at the beginning of each history by a stride S of random numbers from the beginning of the previous history. The default value of S is 152917. The stride should be a quantity greater than would be needed by most histories (see page 2–169).

MCNP does not provide an estimate of the error in the difference. Reference 83 shows how the error in the difference between two correlated runs can be estimated. A postprocessor code would have to be written to do this.

Correlated sampling should not be confused with more elaborate Monte Carlo perturbation schemes that calculate differences and their variances directly. MCNP has no such scheme at present.

VIII. CRITICALITY CALCULATIONS

Nuclear criticality, the ability to sustain a chain reaction by fission neutrons, is characterized by k_{eff} , the eigenvalue to the neutron transport equation. In reactor theory, k_{eff} is thought of as the ratio between the number of neutrons in successive generations, with the fission process regarded as the birth event that separates generations of neutrons.⁸⁹ For critical systems, $k_{eff} = 1$ and the chain reaction will just sustain itself. For subcritical systems, $k_{eff} < 1$ and the chain reaction will not sustain itself. For supercritical systems, $k_{eff} > 1$ and the number of fissions in the chain reaction will increase with time. In addition to the geometry description and material cards, all that is required to run a criticality problem is a KCODE card, described below, and an initial spatial distribution of fission points using either the KSRC card, the SDEF card, or an SRCTP file.

Calculating k_{eff} consists of estimating the mean number of fission neutrons produced in one generation per fission neutron started. A generation is the life of a neutron from birth in fission to death by escape, parasitic capture, or absorption leading to fission. In MCNP, the computational equivalent of a fission generation is a k_{eff} cycle; i.e., a cycle is a computed estimate of an actual fission generation. Processes such as $(n, 2n)$ and $(n, 3n)$ are considered internal to a cycle and do not act as termination. Because fission neutrons are terminated in each cycle to provide the fission source for the next cycle, a single history can be viewed as continuing from cycle to cycle. The effect of the delayed neutrons is included by using the total $\bar{\nu}$. The spectrum of delayed neutrons is assumed to be the same as neutrons from prompt fission. In a Mode N,P problem, secondary photon production from neutrons is turned

CHAPTER 2

KCODE

off during inactive cycles. MCNP uses three different estimators for k_{eff} . We recommend using, for the final k_{eff} result, the statistical combination of all three.⁹⁰

It is extremely important to emphasize that the result from a criticality calculation is a confidence interval for k_{eff} that is formed using the final estimated k_{eff} and the estimated standard deviation. A properly formed confidence interval from a valid calculation should include the true answer the fraction of time used to define the confidence interval. There will always be some probability that the true answer lies outside of a confidence interval.

Reference 91 is an introduction to using MCNP for criticality calculations, focusing on the unique aspects of setting up and running a criticality problem and interpreting the results. A quickstart chapter gets the new MCNP user on the computer running a simple criticality problem as quickly as possible.

A. Criticality Program Flow

Because the calculation of k_{eff} entails running successive fission cycles, criticality calculations have a different program flow than MCNP fixed source problems. They require a special criticality source that is incompatible with the surface source and user-supplied sources. Unlike fixed source problems, where the source being sampled throughout the problem never changes, the criticality source changes from cycle to cycle.

1. Criticality Problem Definition

To set up a criticality calculation, the user initially supplies an INP file that includes the KCODE card with the following information:

- a) the nominal number of source histories, N , per k_{eff} cycle;
- b) an initial guess of k_{eff} ;
- c) the number of source cycles, I_c , to skip before k_{eff} accumulation;
- d) the total number of cycles, I_t , in the problem.

Other KCODE entries are discussed in Chapter 3, page 3–59. The initial spatial distribution of fission neutrons can be entered by using (1) the KSRC card with sets of x, y, z point locations, (2) the SDEF card to define points uniformly in volume, or (3) a file (SRCTP) from a previous MCNP criticality calculation. If the SDEF card is used, the default WGT value should not be changed. Any KSRC points in geometric cells that are void or have zero importance are rejected. The remaining KSRC points are duplicated or rejected enough times so the total number of points M in the source spatial distribution is approximately the nominal source size N . The energy of each source particle for the first k_{eff} cycle is selected from a generic Watt thermal fission distribution if it is not available from the SRCTP file.

2. Particle Transport for Each k_{eff} Cycle

In each k_{eff} cycle, M (varying with cycle) source particles are started isotropically. For the first cycle, these M points come from one of three

user-selected source possibilities. For subsequent cycles, these points are the ones written at collision sites from neutron transport in the previous cycle. The total source weight of each cycle is a constant N . That is, the weight of each source particle is N/M , so all normalizations occur as if N rather than M particles started in each cycle.

Source particles are transported through the MCNP geometry by the standard random walk process, except that fission is treated as capture, either analog or implicit as defined on the PHYS:N or CUT:N card. At each collision point the following four steps are performed for the cycle:

- 1) the three prompt neutron lifetime estimates are accumulated;
- 2) if fission is possible, the three k_{eff} estimates are accumulated; and
- 3) if fission is possible, $n \geq 0$ fission sites (including the sampled outgoing energy of the fission neutron) at each collision are stored for use as source points in the next cycle,

where $n = W\bar{\nu}(\sigma_f/\sigma_t)(1/k_{eff}) + \text{random number}$;
 $W = \text{particle weight (before implicit capture weight reduction or analog capture)}$;
 $\bar{\nu} = \text{average number of neutrons produced by fission at the incident energy of this collision, with either prompt } \bar{\nu} \text{ or total } \bar{\nu} \text{ (default) used}$;
 $\sigma_f = \text{microscopic material fission cross section}$;
 $\sigma_t = \text{microscopic material total cross section}$; and
 $k_{eff} = \text{estimated collision } k_{eff} \text{ from previous cycle.}$
 For first cycle, the second KCODE card entry.

$M = \sum n = \text{number of fission source points to be used in next cycle.}$ The number of fission sites n stored at each collision is rounded up or down to an integer (including zero) with a probability proportional to its closeness to that integer. If the initial guess of k_{eff} is too low or too high, the number of fission sites written as source points for the next cycle will be, respectively, too high or too low relative to the desired nominal number N . A bad initial guess of k_{eff} causes only this consequence.

A very poor initial guess for the spatial distribution of fissions can cause the first cycle estimate of k_{eff} to be extremely low. This situation can occur when only a fraction of the fission source points enter a cell with a fissionable material. As a result, one of two error messages can be printed: (1) no new source points were generated, or (2) the new source has overrun the old source. The second message occurs when the MCNP storage for the fission source points is exceeded because the small k_{eff} that results from a poor initial source causes n to become very large.

The fission energy of the next-cycle neutron is sampled separately for each source point and stored for the next cycle. It is sampled from the same distributions as fissions would be sampled in the random walk based on the incident neutron energy and fissionable isotope. The geometric coordinates and cell of the fission site are also stored.

CHAPTER 2

KCODE

- 4) The collision nuclide and reaction are sampled (after steps 1, 2, and 3) but the fission reaction is not allowed to occur because fission is treated as capture. The fission neutrons that would have been created are accrued in three different ways to estimate k_{eff} for this cycle.

3. k_{eff} Cycle Termination

At the end of each k_{eff} cycle, a new set of M source particles has been written from fissions in that cycle. The number M varies from cycle to cycle but the total starting weight in each cycle is a constant N . These M particles are written to the SRCTP file at certain cycle intervals. The SRCTP file can be used as the initial source in a subsequent criticality calculation with a similar, though not necessarily identical, geometry. Also, k_{eff} quantities are accumulated, as is described below.

The first I_c cycles in a criticality calculation are inactive cycles, where the spatial source changes from the initial definition to the correct distribution for the problem. No k_{eff} accumulation, summary table, activity table, or tally information is accrued for inactive cycles. Photon production, perturbations, and DXTRAN are turned off during inactive cycles. I_c is an input parameter on the KCODE card for the number of k_{eff} cycles to be skipped before k_{eff} and tally accumulation. After the first I_c cycles, the fission source spatial distribution is assumed to have achieved equilibrium, active cycles begin, and k_{eff} and tallies are accumulated. Cycles are run until either a time limit is reached or the total cycles on the KCODE card in the problem have been completed.

B. Estimation of k_{eff} Confidence Intervals and Prompt Neutron Lifetimes

The criticality eigenvalue k_{eff} and various prompt neutron lifetimes, along with their standard deviations, are automatically estimated in every criticality calculation in addition to any user-requested tallies. k_{eff} and the lifetimes are estimated for every active cycle, as well as averaged over all active cycles. k_{eff} and the lifetimes are estimated in three different ways. These estimates are combined⁹⁰ using observed statistical correlations to provide the optimum final estimate of k_{eff} and its standard deviation.

It is known⁹² that the power iteration method with a fixed source size produces a very small negative bias Δk_{eff} in k_{eff} that is proportional to $1/N$. This bias is negligible⁹² for all practical problems where N is greater than about 200 neutrons per cycle and as long as too many active cycles are not used. It has been shown⁹² that this bias is less, probably much less, than one-half of one standard deviation for 400 active cycles when the ratio of the true k_{eff} standard deviation to k_{eff} is 0.0025 at the problem end.

In MCNP the definition of k_{eff} is:

$$k_{eff} = \frac{\text{fission neutrons in generation } i + 1}{\text{fission neutrons in generation } i}$$

$$= \frac{\rho_a \int_V \int_0^\infty \int_E \int_\Omega \nu \sigma_f \Phi dV dt dE d\Omega}{\int_V \int_0^\infty \int_E \int_\Omega \nabla \bullet J dV dt dE d\Omega + \rho_a \int_V \int_0^\infty \int_E \int_\Omega (\sigma_c + \sigma_f + \sigma_m) \Phi dV dt dE d\Omega},$$

where the phase-space variables are t , E , and Ω for time, energy, direction, and implicitly r for position with incremental volume dV around r . The denominator is the loss rate, which is the sum of leakage, capture (n,0n), fission, and multiplicity (n,xn) terms. By particle balance, the loss rate is also the source rate, which is unity in a criticality calculation. If the number of fission neutrons produced in one generation is equal to the number in the previous generation, then the system is critical. If it is greater, the system is supercritical. If it is less, then the system is subcritical. The multiplicity term is:

$$\begin{aligned} & \rho_a \int_V \int_0^\infty \int_E \int_\Omega \sigma_m \Phi dV dt dE d\Omega \\ &= \rho_a \int_V \int_0^\infty \int_E \int_\Omega \sigma_{n,2n} \Phi dV dt dE d\Omega - 2\rho_a \int_V \int_0^\infty \int_E \int_\Omega \sigma_{n,2n} \Phi dV dt dE d\Omega \\ &+ \rho_a \int_V \int_0^\infty \int_E \int_\Omega \sigma_{n,3n} \Phi dV dt dE d\Omega - 3\rho_a \int_V \int_0^\infty \int_E \int_\Omega \sigma_{n,3n} \Phi dV dt dE d\Omega + \dots \end{aligned}$$

The above definition of k_{eff} comes directly from the time-integrated Boltzmann transport equation (without external sources):

$$\begin{aligned} & \int_V \int_0^\infty \int_E \int_\Omega \nabla \bullet J dV dt dE d\Omega + \rho_a \int_V \int_0^\infty \int_E \int_\Omega \sigma_T \Phi dV dt dE d\Omega \\ &= \frac{1}{k_{eff}} \rho_a \int_V \int_0^\infty \int_E \int_\Omega \nu \sigma_f \Phi dV dt dE d\Omega + \rho_a \int_V \int_0^\infty \int_E \int_\Omega \int_{E'} \sigma'_s \Phi' dE' dV dt dE d\Omega, \end{aligned}$$

which may be rewritten to look more like the definition of k_{eff} as:

$$\begin{aligned} & \int_V \int_0^\infty \int_E \int_\Omega \nabla \bullet J dV dt dE d\Omega \\ &+ \rho_a \int_V \int_0^\infty \int_E \int_\Omega (\sigma_c + \sigma_f + \sigma_{n,2n} + \sigma_{n,3n} + \dots) \Phi dV dt dE d\Omega \\ &= \frac{1}{k_{eff}} \rho_a \int_V \int_0^\infty \int_E \int_\Omega \nu \sigma_f \Phi dV dt dE d\Omega \\ &+ \rho_a \int_V \int_0^\infty \int_E \int_\Omega (2\sigma_{n,2n} + 3\sigma_{n,3n} + \dots) \Phi dV dt dE d\Omega. \end{aligned}$$

The loss rate is on the left and the production rate is on the right.

The neutron prompt removal lifetime is the average time from the emission of a prompt neutron in fission to the removal of the neutron by some physical process such as escape, capture, or fission. In MCNP “absorption”

CHAPTER 2
KCODE

and “capture” are used interchangeably, both meaning (n,0n), and σ_c and σ_a are used interchangeably. Also, even with the TOTNU card to produce delayed neutrons as well as prompt neutrons (KCODE default), the neutrons are all born at time zero, so the removal lifetimes calculated in MCNP are prompt removal lifetimes, even if there are delayed neutrons.

The definition of the prompt removal lifetime⁹³ is

$$\tau_r = \frac{\int_V \int_0^\infty \int_E \int_\Omega \eta dV dt dE d\Omega}{\int_V \int_0^\infty \int_E \int_\Omega \nabla \cdot J dV dt dE d\Omega + \rho_a \int_V \int_0^\infty \int_E \int_\Omega (\sigma_c + \sigma_f + \sigma_m) \Phi dV dt dE d\Omega},$$

where η is the population per unit volume per unit energy per unit solid angle. In a multiplying system in which the population is increasing or decreasing on an asymptotic period, the population changes in accordance with

$$\eta = \eta_0 e^{(k_{eff}-1)t/\tau_r^+},$$

where τ_r^+ is the adjoint-weighted removal lifetime. MCNP calculates the nonadjoint-weighted prompt removal lifetime τ_r that can be significantly different in a multiplying system. In a nonmultiplying system, $k_{eff} = 0$ and $\tau_r \rightarrow \tau_r^+$, the population decays as

$$\eta = \eta_0 e^{-t/\tau_r},$$

where the nonadjoint-weighted removal lifetime τ_r is also the relaxation time.

Noting that the flux is defined as

$$\Phi = \eta v,$$

where v is the speed, the MCNP nonadjoint-weighted prompt removal lifetime τ_r is defined as

$$\tau_r = \frac{\int_V \int_0^\infty \int_E \int_\Omega \frac{\Phi}{v} dV dt dE d\Omega}{\int_V \int_0^\infty \int_E \int_\Omega \nabla \cdot J dV dt dE d\Omega + \rho_a \int_V \int_0^\infty \int_E \int_\Omega (\sigma_c + \sigma_f + \sigma_m) \Phi dV dt dE d\Omega}.$$

The prompt removal lifetime is a fundamental quantity in the nuclear engineering point kinetics equation. It is also useful in nuclear well-logging calculations and other pulsed source problems because it gives the population time-decay constant.

1. Collision Estimators

The collision estimate for k_{eff} for any active cycle is:

$$k_{eff}^C = \frac{1}{N} \sum_i W_i \left[\frac{\sum_k f_k \bar{v}_k \sigma_{fk}}{\sum_k f_k \sigma_{Tk}} \right],$$

where i is summed over all collisions in a cycle where fission is possible;
 k is summed over all nuclides of the material involved in

the i^{th} collision;
 σ_{T_k} = total microscopic cross section;
 σ_{f_k} = microscopic fission cross section;
 $\bar{\nu}_k$ = average number of prompt or total neutrons produced per fission by the collision nuclide at the incident energy;
 f_k = atomic fraction for nuclide k ;
 N = nominal source size for cycle; and
 W_i = weight of particle entering collision.

Because W_i represents the number of neutrons entering the i^{th} collision,

$$W_i \left[\frac{\sum_k f_k \bar{\nu}_k \sigma_{f_k}}{\sum_k f_k \sigma_{T_k}} \right]$$

is the expected number of neutrons to be produced from all fission processes in the collision. Thus k_{eff}^C is the mean number of fission neutrons produced per cycle. The collision estimator tends to be best, sometimes only marginally so, in very large systems.

The collision estimate of the prompt removal lifetime for any active cycle is the average time required for a fission source neutron to be removed from the system by either escape, capture (n,0n), or fission.

$$\tau_r^C = \frac{\sum W_e T_e + \sum (W_c + W_f) T_x}{\sum W_e + \sum (W_c + W_f)} \quad ,$$

where T_e and T_x are the times from the birth of the neutron until escape or collision. W_e is the weight lost at each escape. $W_c + W_f$ is the weight lost to (n,0n) and fission at each collision,

$$W_c + W_f = W_i \frac{\sum_k f_k (\sigma_{c_k} + \sigma_{f_k})}{\sum_k f_k \sigma_{T_k}} \quad ,$$

where σ_{c_k} is the microscopic capture (n,0n) cross section, and W_i is the weight entering the collision.

2. Absorption Estimators

The absorption estimator for k_{eff} for any active cycle is made when a neutron interacts with a fissionable nuclide. The estimator differs for analog capture and implicit capture. For analog capture,

$$k_{eff}^A = \frac{1}{N} \sum_i W_i \bar{\nu}_k \frac{\sigma_{f_k}}{\sigma_{c_k} + \sigma_{f_k}} \quad ,$$

where i is summed over each analog capture event in the k^{th} nuclide. Note that in analog capture, the weight is the same both before and after the collision. Because analog capture includes fission in criticality calculations, the frequency of analog capture at each collision with nuclide k is $(\sigma_{c_k} + \sigma_{f_k})/\sigma_{T_k}$. The analog absorption k_{eff} estimate is very similar to the collision estimator of k_{eff} except that only the k^{th} absorbing nuclide, as sampled in the collision, is used rather than averaging over all nuclides.

CHAPTER 2
KCODE

For implicit capture, the following is accumulated:

$$k_{eff}^A = \frac{1}{N} \sum_i W_i' \bar{v}_k \frac{\sigma_{fk}}{\sigma_{ck} + \sigma_{fk}} \quad ,$$

where i is summed over all collisions in which fission is possible and $W_i' = W_i(\sigma_{ck} + \sigma_{fk})/\sigma_{T_k}$ is the weight absorbed in the implicit capture. The difference between the implicit absorption estimator k_{eff}^A and the collision estimator k_{eff}^C is that only the nuclide involved in the collision is used for the absorption k_{eff} estimate rather than an average of all nuclides in the material for the collision k_{eff} estimator.

The absorption estimator with analog capture is likely to produce the smallest statistical uncertainty of the three for systems where the ratio $\bar{v}_k \sigma_{fk}/(\sigma_{ck} + \sigma_{fk})$ is nearly constant. Such would be the case for a thermal system with a dominant fissile nuclide such that the 1/velocity cross section variation would tend to cancel.

The absorption estimate differs from the collision estimate in that the collision estimate is based upon the expected value at each collision, whereas the absorption estimate is based upon the events actually sampled at a collision. Thus all collisions will contribute to the collision estimate of k_{eff}^C and τ_r^C by the probability of fission (or capture for τ_r^C) in the material. Contributions to the absorption estimator will only occur if an actual fission (or capture for τ_r^A) event occurs for the sampled nuclide in the case of analog capture. For implicit capture, the contribution to the absorption estimate will only be made for the nuclide sampled.

The absorption estimate of the prompt removal lifetime for any active cycle is again the average time required for a fission source neutron to be removed from the system by either escape, capture (n,0n), or fission.

For implicit capture,

$$\tau_r^A = \frac{\sum W_e T_e + \sum (W_c + W_f) T_x}{\sum W_e + \sum (W_c + W_f)} \quad ,$$

where

$$W_c + W_f = W_i \frac{\sigma_{ck} + \sigma_{fk}}{\sigma_{T_k}} \quad .$$

For analog capture,

$$\tau_r^A = \frac{\sum W_e T_e + \sum W_c T_c + \sum W_f T_f}{\sum W_e + \sum W_c + \sum W_f} \quad ,$$

where T_e , T_c , T_f , and T_x are the times from the birth of the neutron until escape, capture (n,0n), fission, or collision. W_e is the weight lost at each escape. W_c and W_f are the weights lost to capture (n,0n) and fission at each capture (n,0n) or fission event with the nuclide sampled for the collision.

3. Track Length Estimators

The track length estimator of k_{eff} is accumulated every time the neutron traverses a distance d in a fissionable material cell:

$$k_{eff}^{TL} = \frac{1}{N} \sum_i W_i \rho d \sum_k f_k \bar{\nu}_k \sigma_{f_k} \quad ,$$

where i is summed over all neutron trajectories,

ρ is the atomic density in the cell, and

d is the trajectory track length from the last event.

Because $\rho d \sum_k f_k \bar{\nu}_k \sigma_{f_k}$ is the expected number of fission neutrons produced along trajectory d , k_{eff}^{TL} is a third estimate of the mean number of fission neutrons produced in a cycle per nominal fission source neutron.

The track length estimator tends to display the lowest variance for optically thin fuel cells (e.g., plates) and fast systems where large cross-section variations because of resonances may cause high variances in the other two estimators.

The track length estimator for the prompt removal lifetime for each cycle is accumulated every time the neutron traverses a distance d in any material in any cell:

$$\tau_r^{TL} = \frac{\sum_i W_i d/v}{W_s} \quad ,$$

where W_s is the source weight summed over all histories in the cycle and v is the velocity. Note that d/v is the time span of the track. Note further that:

$$\sum_i W_i d/v = \rho_a \int_V \int_0^\infty \int_E \int_\Omega \frac{\Phi}{v} dV dt dE d\Omega \quad ,$$

and in criticality problems:

$$\begin{aligned} W_s &= \frac{1}{k_{eff}} \rho_a \int_V \int_0^\infty \int_E \int_\Omega \nu \sigma_f \Phi dV dt dE d\Omega \\ &= \int_V \int_0^\infty \int_E \int_\Omega \nabla \cdot J dV dt dE d\Omega + \rho_a \int_V \int_0^\infty \int_E \int_\Omega (\sigma_c + \sigma_f + \sigma_m) \Phi dV dt dE d\Omega \quad . \end{aligned}$$

These relationships show how τ_r^{TL} is related to the definition of τ_r on page 2–148.

4. Other Lifetime Estimators

In addition to the collision, absorption, and track length estimators of the prompt removal lifetime τ_r , MCNP provides the escape, capture (n,0n), and fission prompt lifespans and lifetimes for all KCODE problems having a sufficient number of settle cycles. Further, the “average time of” printed in the problem summary table is related to the lifespans, and track-length estimates of many lifetimes can be computed using the $1/v$ tally multiplier option on the FM card for track-length tallies.

CHAPTER 2
KCODE

In KCODE problems, MCNP calculates the lifespan of escape l_e , capture (n,0n) l_c , fission l_f , and removal l_r :

$$l_e = \frac{\sum W_e T_e}{\sum W_e} \quad ,$$

$$l_c = \frac{\sum W_c T_c}{\sum W_c} \quad ,$$

$$l_f = \frac{\sum W_f T_f}{\sum W_f} \quad , \quad \text{and}$$

$$l_r = \frac{\sum W_e T_e + \sum W_c T_c + \sum W_f T_f}{\sum W_e + \sum W_c + \sum W_f} \quad .$$

These sums are taken over all the active histories in the calculation. (If KC8 = 0 on the KCODE card, then the sums are over both active and inactive cycle histories, but KC8 = 1 is the default, and will be assumed for the remainder of this discussion.) The capture (n,0n) and fission contributions are accumulated at each collision with a nuclide, so these are absorption estimates. Thus,

$$l_r \approx \tau_r^A \quad .$$

The difference is that τ_r^A is the average of the τ_r^A for each cycle and l_r is the average over all histories. $l_r = \tau_r^A$ if there is precisely one active cycle, but then neither τ_r^A nor l_r is printed out because there are too few cycles. The cycle average τ_r^A does not precisely equal the history average l_r because they are ratios.

l_e and l_c are the “average time to” escape and capture (n,0n) that is printed in the problem summary table for all neutron and photon problems. $\frac{1}{N} \sum W_e$, $\frac{1}{N} \sum W_c$, and $\frac{1}{N} \sum W_f$ are the weight lost to escape, capture (n,0n), and fission in the problem summary table.

The “fractions” F_x printed out below the lifespan in the KCODE summary table are, for $x = e, c, f$, or r ,

$$F_x = \frac{W_x}{\sum W_e + \sum W_c + \sum W_f} \quad .$$

The prompt lifetimes⁹³ for the various reactions τ_x are then

$$\tau_x = \frac{\tau_r}{F_x} = \rho_a \frac{\int_V \int_0^\infty \frac{\Phi}{v} dV dt}{\int_V \int_0^\infty \sigma_x \Phi dV dt} \quad .$$

Both τ_r^A and the covariance-weighted combined estimator $\tau_r^{(C/A/T)}$ are used. Note again that the slight differences between similar quantities are because l_x and F_x are averaged over all active histories whereas τ_r^A and $\tau_r^{(C/A/T)}$ are averaged within each active cycle, and then the final values are the averages of the cycle values, i.e., history-averages vs batch-averages.

The prompt removal lifetime can also be calculated using the F4 track-length tally with the $1/v$ multiplier option on the FM card and using the volume divided by the average source weight W_s as the multiplicative constant. The standard track length tally is then converted from

$$F4 = \int \Phi dt$$

to

$$F4 = \frac{V}{W_s} \int \frac{\Phi}{v} dt \quad .$$

Remember to multiply by volume, either by setting the FM card constant to the volume or overriding the F4 volume divide by using segment divisors of unity on the SD card. W_s should be unity for KCODE calculations. The only difference between τ_r^{TL} and the modified F4 tally will be any variations from unity in W_s and the error estimation, which will be batch-averaged for τ_r^{TL} and history-averaged for the F4 tally.

Lifetimes for all other processes also can be estimated by using the FM multiplier to calculate reaction rates as well (the numerator and denominator are separate tallies that must be divided by the user — see the examples in Chapter 4 and 5):

$$\tau_x^{TL} = \frac{(1/v \text{ multiplier})}{\text{reaction rate multiplier}} = \rho_a \frac{\int_V \int_0^\infty \frac{\Phi}{v} dV dt}{\int_V \int_0^\infty \sigma_x \Phi dV dt} \quad .$$

Note that the lifetimes are inversely additive:

$$\frac{1}{\tau_r} = \frac{1}{\tau_e} + \frac{1}{\tau_c} + \frac{1}{\tau_f} \quad .$$

5. Combined k_{eff} and τ_r Estimators

MCNP provides a number of combined k_{eff} and τ_r estimators that are combinations of the three individual k_{eff} and τ_r estimators using two at a time or all three. The combined k_{eff} 's and τ_r 's are computed by using a maximum likelihood estimate, as outlined by Halperin⁹⁴ and discussed further by Urbatsch.⁹⁰ This technique, which is a generalization of the inverse variance weighting for uncorrelated estimators, produces the maximum likelihood estimate for the combined average k_{eff} and τ_r , which, for multivariate normality, is the almost-minimum variance estimate. It is “almost” because the covariance matrix is not known exactly and must be estimated. The three-combined k_{eff} and τ_r estimators are the best final estimates from an MCNP calculation.⁹⁰

This method of combining estimators can exhibit one feature that is disconcerting: sometimes (usually with highly positively correlated estimators) the combined estimate will lie outside the interval defined by the two or three

CHAPTER 2
KCODE

individual average estimates. Statisticians at Los Alamos have shown⁹⁰ that this is the best estimate to use for a final k_{eff} and τ_r value. Reference 90 shows the results of one study of 500 samples from three highly positively correlated normal distributions, all with a mean of zero. In 319 samples, all three estimators fell on the same side of the expected value. This type of behavior occurs with high positive correlation because if one estimator is above or below the expected value, the others have a good probability of being on the same side of the expected value. The advantage of the three-combined estimator is that the Halperin algorithm correctly predicts that the true value will lie outside of the range.

6. Error Estimation and Estimator Combination

After the first I_c inactive cycles, during which the fission source spatial distribution is allowed to come into spatial equilibrium, MCNP begins to accumulate the estimates of k_{eff} and τ_r with those estimates from previous active (after the inactive) cycles. The relative error R of each quantity is estimated in the usual way as

$$R = \frac{1}{\bar{x}} \sqrt{\frac{x^2 - \bar{x}^2}{M - 1}}$$

where M = the number of active cycles,

$$\bar{x} = \frac{1}{M} \sum_m x_m, \quad \text{and} \quad \overline{x^2} = \frac{1}{M} \sum_m x_m^2,$$

where x_m = a quantity, such as k_{eff}^C , from cycle m . This assumes that the cycle-to-cycle estimates of each k_{eff} are uncorrelated. This assumption generally is good for k_{eff} , but not for the eigenfunction (fluxes) of optically large systems.⁹⁵

MCNP also combines the three estimators in all possible ways and determines the covariance and correlations. The simple average of two estimators is defined as $x^{ij} = (1/2)(x^i + x^j)$, where, for example, x^i may be the collision estimator k_{eff}^C and x^j may be the absorption estimator k_{eff}^A .

The “combined average” of two estimators is weighted by the covariances as

$$x^{ij} = x^i - \frac{(x^i - x^j)(C_{ii} - C_{ij})}{(C_{ii} + C_{jj} - 2C_{ij})} = \frac{(C_{jj} - C_{ij})x^i + (C_{ii} - C_{ij})x^j}{(C_{ii} + C_{jj} - 2C_{ij})},$$

where the covariance C_{ij} is

$$C_{ij} = \frac{1}{M} \sum_m x_m^i x_m^j - \left(\frac{1}{M} \sum_m x_m^i \right) \left(\frac{1}{M} \sum_m x_m^j \right).$$

Note that $C_{ii} = \overline{x^2} - \bar{x}^2$ for estimator i .

The “correlation” between two estimators is a function of their covariances and is given by

$$\text{correlation} = \frac{C_{ij}}{\sqrt{|C_{ii}C_{jj}|}} \quad .$$

The correlation will be between unity (perfect positive correlation) and minus one (perfect anti or negative correlation). If the correlation is one, no new information has been gained by the second estimator. If the correlation is zero, the two estimators appear statistically independent and the combined estimated standard deviation should be significantly less than either. If the correlation is negative one, even more information is available because the second estimator will tend to be low, relative to the expected value, when the first estimator is high and vice versa. Even larger improvements in the combined standard deviation should occur.

The combined average estimator (k_{eff} or τ_r) and the estimated standard deviation of all three estimators are based on the method of Halperin⁹⁴ and is much more complicated than the two combination case. The improvements to the standard deviation of the three combined estimator will depend on the magnitude and sign of the correlations as discussed above. The details and analysis of this method are given in Ref. 90.

For many problems, all three estimators are positively correlated. The correlation will depend on what variance reduction (e.g., implicit or analog capture) is used. Occasionally, the absorption estimator may be only weakly correlated with either the collision or track length estimator. It is possible for the absorption estimator to be significantly anticorrelated with the other two estimators for some fast reactor compositions and large thermal systems. Except in the most heterogeneous systems, the collision and track length estimators are likely to be strongly positively correlated.

There may be a negative bias⁹² in the estimated standard deviation of k_{eff} for systems with dominance ratios (second largest to largest eigenvalue) close to unity. These systems are typically large with small neutron leakage. The magnitude of this effect can be estimated by batching the cycle k_{eff} values in batch sizes much greater than one cycle,⁹² which MCNP provides automatically. For problems where there is a reason to suspect the results, a more accurate calculation of this effect can be done by making several independent calculations of the same problem (using different random number sequences) and observing the variance of the population of independent k_{eff} s. The larger the number of independent calculations that can be made, the better the distribution of k_{eff} values can be assessed.

7. Creating and Interpreting k_{eff} Confidence Intervals

The result of a Monte Carlo criticality calculation (or any other type of Monte Carlo calculation) is a confidence interval. For criticality, this means that the result is not just k_{eff} , but k_{eff} plus and minus some number of estimated standard deviations to form a confidence interval (based on the

CHAPTER 2 KCODE

Central Limit Theorem) in which the true answer is expected to lie a certain fraction of the time. The number of standard deviations used (e.g., from a Student's t Table) determines the fraction of the time that the confidence interval will include the true answer, for a selected confidence level. For example, a valid 99% confidence interval should include the true result 99% of the time. There is always some probability (in this example, 1%) that the true result will lie outside of the confidence interval. To reduce this probability to an acceptable level, either the confidence interval must be increased according to the desired Student's t percentile, or more histories need to be run to get a smaller estimated standard deviation.

MCNP uses three different estimators for k_{eff} . The advantages of each estimator vary with the problem: no one estimator will be the best for all problems. All estimators and their estimated standard deviations are valid under the assumption that they are unbiased and consistent, therefore representative of the true parameters of the population. This statement has been validated empirically⁹⁰ for all MCNP estimators for small dominance ratios. The batched k_{eff} results table should be used to estimate if the calculated batch-size-of-one k_{eff} standard deviation appears to be adequate.

The confidence interval based on the three statistically combined k_{eff} estimator is the recommended result to use for all final k_{eff} confidence interval quotations because all of the available information has been used in the final result. This estimator often has a lower estimated standard deviation than any of the three individual estimators and therefore provides the smallest valid confidence interval as well. The final estimated k_{eff} value, estimated standard deviation, and the estimated 68%, 95%, and 99% confidence intervals (using the correct number of degrees of freedom) are presented in the box on the k_{eff} results summary page of the output. If other confidence intervals are wanted, they can be formed from the estimated standard deviation of k_{eff} . At least 30 active cycles need to be run for the final k_{eff} results box to appear. Thirty cycles are required so that there are enough degrees of freedom to form confidence intervals using the well known estimated standard deviation multipliers. (When constructing a confidence interval using any single k_{eff} estimator, its standard deviation, and a Student's t Table, there are $I_t - I_c - 1$ degrees of freedom. For the two and three combined k_{eff} estimators, there are $I_t - I_c - 2$ and $I_t - I_c - 3$ degrees of freedom, respectively.)

All of the k_{eff} estimators and combinations by two or three are provided in MCNP so that the user can make an alternate choice of confidence interval if desired. Based on statistical studies, using the individual k_{eff} estimator with the smallest estimated standard deviation is not recommended. Its use can lead to confidence intervals that do not include the true result the correct fraction of the time.⁹⁰ The studies have shown that the standard deviation of the three combined k_{eff} estimator provides the correct coverage rates, assuming that the estimated standard deviations in the individual k_{eff} estimators are accurate. This accuracy can be verified by checking the batched k_{eff} results table. When significant anti-correlations occur among

the estimators, the resultant much smaller estimated standard deviation of the three combined average has been verified⁹⁰ by analyzing a number of independent criticality calculations.

8. Analysis to Assess the Validity of a Criticality Calculation

The two most important requirements for producing a valid criticality calculation for a specified geometry are sampling all of the fissionable material well and ensuring that the fundamental spatial mode was achieved before and maintained during the active k_{eff} cycles. MCNP has checks to assess the fulfillment of both of these conditions.

MCNP verifies that at least one fission source point was generated in each cell containing fissionable material. A WARNING message is printed on the k_{eff} results summary page that includes a list of cells that did not have any particles entering, and/or no collisions, and/or no fission source points. For repeated structures geometries, a source point in any one cell that is repeated will satisfy this test. For example, assume a problem with a cylinder and a cube that are both filled with the same universe, namely a sphere of uranium and the space outside the sphere. If a source point is placed in the sphere inside the cylinder but not in the sphere inside the cube, the test will be satisfied.

One basic assumption that is made for a good criticality calculation is that the normal spatial mode for the fission source has been achieved after I_c cycles were skipped. MCNP attempts to assess this condition in several ways. The estimated combined k_{eff} and its estimated standard deviation for the first and second active cycle halves of the problem are compared. A WARNING message is issued if either the difference of the two values of combined col/abs/track-length k_{eff} does not appear to be zero or the ratio of the larger to the smaller estimated standard deviations of the two col/abs/track-length k_{eff} is larger than expected. Failure of either or both checks implies that the two active halves of the problem do not appear to be the same and the output from the calculation should be inspected carefully.

MCNP checks to determine which number of cycles skipped produces the minimum estimated standard deviation for the combined k_{eff} estimator. If this number is larger than I_c , it may indicate that not enough inactive cycles were skipped. The table of combined k_{eff} -by-number-of-cycles skipped should be examined to determine if enough inactive cycles were skipped.

It is assumed that N is large enough so that the collection of active cycle k_{eff} estimates for each estimator will be normally distributed if the fundamental spatial mode has been achieved in I_c cycles and maintained for the rest of the calculation. To test this assumption, MCNP performs normality checks^{96,97} on each of the three k_{eff} estimator cycle data at the 95% and 99% confidence levels. A WARNING message is issued if an individual k_{eff} data set does not appear to be normally distributed at the 99% confidence level. This condition will happen to good data about 1% of the time. Unless there is a high positive correlation among the three estimators, it is expected to be rare that all three k_{eff} estimators will not appear normally distributed

CHAPTER 2 KCODE

at the 99% confidence level when the normal spatial mode has been achieved and maintained. When the condition that all three sets of k_{eff} estimators do not appear to be normal at the 99% confidence level occurs, the box with the final k_{eff} will not be printed. The final confidence interval results are available elsewhere in the output. Examine the calculation carefully to see if the normal mode was achieved before the active cycles began. The normality checks are also made for the batched- k_{eff} and k_{eff} -by- cycles-skipped tables so that normality behavior can be studied by batch size and I_c .

These normality checks test the assumption that the individual cycle k_{eff} values behave in the assumed way. Even if the underlying individual cycle k_{eff} values are not normally distributed, the three *average* k_{eff} values and the combined k_{eff} estimator will be normally distributed if the conditions required by the Central Limit Theorem are met for the average. If required, this assumption can be tested by making several independent calculations to verify empirically that the population of average k_{eff} s appears to be normally distributed with the same population variance as estimated by MCNP.

MCNP tests for a monotonic trend of the three combined k_{eff} estimator over the last ten active cycles. This type of behavior is not expected in a well converged solution for k_{eff} and could indicate a problem with achieving or maintaining the normal spatial mode. A WARNING message is printed if such a monotonic trend is observed.

9. Normalization of Standard Tallies in a Criticality Calculation

Track length fluxes, surface currents, surface fluxes, heating and detectors—all the standard MCNP tallies—can be made during a criticality calculation. The tallies are for one fission neutron generation. Biases may exist in these criticality results, but appear to be smaller than statistical uncertainties.⁹² These tallied quantities are accumulated only after the I_c inactive cycles are finished. The tally normalization is per active source weight w , where $w = N * (I_t - I_c)$, and N is the nominal source size (from the KCODE card); I_t is the total number of cycles in the problem; and I_c is the number of inactive cycles (from KCODE card). The number w is appropriately adjusted if the last cycle is only partially completed. If the tally normalization flag (on the KCODE card) is turned on, the tally normalization is the actual number of starting particles during the active cycles rather than the nominal weight above. Bear in mind, however, that the source particle weights are all set to $W = N/M$ so that the source normalization is based upon the nominal source size N for each cycle.

An MCNP tally in a criticality calculation is for one fission neutron being born in the system at the start of a cycle. The tally results must be scaled either by the total number of neutrons in a burst or by the neutron birth rate to produce, respectively, either the total result or the result per unit time of the source. The scaling factor is entered on the Fm card.

The statistical errors that are calculated for the tallies assume that all the neutron histories are independent. They are not independent because

of the cycle-to-cycle correlations that become worse as the dominance ratio approaches one. In this limit, each k_{eff} cycle effectively provides no new source information. For extremely large systems (dominance ratio ≥ 0.995), the estimated standard deviation for a tally that involves only a portion of the problem could be underestimated by a factor of five or more (see Ref. 95, page 42–44). This value also is a function of the size of the tally region. In the Ref. 95 slab reactor example, the entire problem (i.e., k_{eff}) standard deviation was not underestimated at all. An MCNP study⁹⁸ of the FFTF fast reactor with a smaller dominance ratio indicates that 90% coverage rates for flux tallies are good, but that 2 out of 300 tallies were beyond four estimated standard deviations. Independent runs can be made to study the real eigenfunction distribution (i.e., tallies) and the estimated standard deviations for difficult criticality calculations. This method is the only way to determine accurately these confidence intervals for large dominance ratio problems.

10. Neutron Tallies and the MCNP Net Multiplication Factor

The MCNP net multiplication factor M printed out on the problem summary page differs from the k_{eff} from the criticality code. We will examine a simple model to illustrate the approximate relationship between these quantities and compare the tallies between standard and criticality calculations.

Assume we run a standard MCNP calculation using a fixed neutron source distribution identical in space and energy to the source distribution obtained from the solution of an eigenvalue problem with $k_{eff} < 1$. Each generation will have the same space and energy distribution as the source. The contribution to an estimate of any quantity from one generation is reduced by a factor of k_{eff} from the contribution in the preceding generation. The estimate E_k of a tally quantity obtained in a criticality eigenvalue calculation is the contribution for one generation produced by a unit source of fission neutrons. An estimate for a standard MCNP fixed source calculation, E_s , is the sum of contributions for all generations starting from a unit source.

$$E_s = E_k + k_{eff}E_k + k_{eff}^2E_k + k_{eff}^3E_k + \dots = E_k/(1 - k_{eff}) \quad . \quad (2.26)$$

Note that $1/(1 - k_{eff})$ is the true system multiplication. The above result depends on our assumptions about the unit fission source used in the standard MCNP run. Usually, E_s will vary considerably from the above result, depending on the difference between the fixed source and the eigenmode source generated in the eigenvalue problem. E_s will be a fairly good estimate if the fixed source is a distributed source roughly approximating the eigenmode source. Tallies from a criticality calculation are appropriate only for a critical system and the tally results can be scaled to a desired fission neutron source (power) level or total neutron pulse strength.

In a fixed source MCNP problem, the net multiplication M is defined to be unity plus the gain G_f in neutrons from fission plus the gain G_x from

CHAPTER 2
KCODE

nonfission multiplicative reactions. Using neutron weight balance (creation equals loss),

$$M = 1 + G_f + G_x = W_e + W_c \quad , \quad (2.27)$$

where W_e is the weight of neutrons escaped per source neutron and W_c is the weight of neutrons captured per source neutron. In a criticality calculation, fission is treated as an absorptive process; the corresponding relationship for the net multiplication is then

$$M^o = 1 + G_x^o = W_e^o + W_c^o + W_f^o \quad , \quad (2.28)$$

where the superscript o designates results from the criticality calculation and W_f^o is the weight of neutrons causing fission per source neutron. Because k_{eff} is the number of fission neutrons produced in a generation per source neutron, we can also write

$$k_{eff} = \bar{\nu}W_f^o \quad , \quad (2.29)$$

where $\bar{\nu}$ is the average number of neutrons emitted per fission for the entire problem. Making the same assumptions as above for the fixed source used in the standard MCNP calculation and using equations (2.26), (2.27), and (2.28), we obtain

$$M = W_e + W_c = \frac{W_e^o + W_c^o}{1 - k_{eff}} = \frac{M^o - W_f^o}{1 - k_{eff}}$$

or, by using (2.28) and (2.29),

$$M = \frac{M^o - \frac{k_{eff}}{\bar{\nu}}}{1 - k_{eff}} = \frac{1 - \frac{k_{eff}}{\bar{\nu}} + G_x^o}{1 - k_{eff}} \quad .$$

Often, the nonfission multiplicative reactions $G_x^o \ll 1$. This implies that k_{eff} can be **approximated** by k_{eff}^{FS} (from an appropriate **Fixed Source** calculation)

$$k_{eff} \approx k_{eff}^{FS} = \frac{M - 1}{M - \frac{1}{\bar{\nu}}} \quad , \quad (2.30)$$

when the two fission neutron source distributions are nearly the same. The average value of $\bar{\nu}$ in a problem can be calculated by dividing the fission neutrons gained by the fission neutrons lost as given in the totals of the neutron weight balance for physical events. Note, however, that the above estimate is subject to the same limitations as described in Eq. 2.26.

C. Recommendations for Making a Good Criticality Calculation

1. Problem Set-Up

As with any calculation, the geometry must be adequately and correctly specified to represent the true physical situation. Geometry plots should be made and cells, materials, and masses checked for correctness. The appropriate nuclear data, including $S(\alpha, \beta)$ thermal data, at the correct material temperatures should be specified. Do as good a job as possible to put initial fission source points in every cell with fissionable material. Try running short problems with both analog and implicit capture (see the PHYS:N card) to improve the figure of merit for the combined k_{eff} and any tallies being made. Follow the tips for good calculations listed at the end of Chapter 1.

2. Number of Neutrons per Cycle and Number of Cycles

Criticality calculations can suffer from two potential problems. The first is the failure to sufficiently converge the spatial distribution of the fission source from its initial guess to a distribution fluctuating around the fundamental eigenmode solution. It is recommended that you make an initial run with a relatively small number of source particles per generation (perhaps 500) and generously allow a large enough number of cycles so that the eigenvalue appears to be fluctuating about a constant value. You should examine the results and continue the calculation if any trends in the eigenvalue are noticeable. The SRCTP file from the last k_{eff} cycle of the initial run can then be used as the source for the final production run to be made with a larger number of histories per cycle.

This convergence procedure can be extended for very slowly convergent problems, typically large, thermal, low-leakage systems, where a convergence run might be made with 500 histories per cycle. Then a second convergence run would be made with 1000 histories per cycle, using the SRCTP file from the first run as an initial fission source guess. If the results from the second run appear satisfactory, then a final run might be made using 4000 particles per cycle with the SRCTP file from the second run as an initial fission source guess. In the final run, only a few cycles should need to be skipped. The bottom line is this: skip enough cycles so that the normal spatial mode is achieved.

The second potential problem arises from the fact that the criticality algorithm produces a very small negative bias in the estimated eigenvalue. The bias depends upon $1/N$, where N is the number of source particles per generation. Thus it is desirable to make N as large as possible. Any value of $N > 200$ should be sufficient to reduce the bias to a small level.

The eigenvalue bias Δk_{eff} has been shown⁹² to be

$$-\Delta k_{eff} = \frac{(I_t - I_c)}{2k_{eff}} (\sigma_{k_{eff}}^2 - \sigma_{approx}^2) \quad , \quad (2.31)$$

where $\sigma_{k_{eff}}$ is the true standard deviation for the final k_{eff} ,
 σ_{approx} is the approximate standard deviation computed assuming

CHAPTER 2 KCODE

the individual k_{eff} values are statistically independent, and

$$\sigma_{k_{eff}}^2 > \sigma_{approx}^2.$$

The standard deviations are computed at the end of the problem. Because the σ^2 s decrease as $1/(I_t - I_c)$, Δk_{eff} is independent of the number of active cycles. Recall that Δk_{eff} is proportional to $1/N$, the number of neutrons per k_{eff} cycle.

Eqn. (2.31) can be written⁹² as the following inequality:

$$\frac{|\Delta k_{eff}|}{\sigma_{k_{eff}}} < \frac{(I_t - I_c)\sigma_{k_{eff}}}{2k_{eff}}. \quad (2.32)$$

This inequality is useful for determining an upper limit to the number of active cycles that should be used for a calculation without having Δk_{eff} dominate $\sigma_{k_{eff}}$. If $\sigma_{k_{eff}}/k_{eff}$ is 0.0025, which is a reasonable value for criticality calculations, and $I_t - I_c$ is 400, then $|\Delta k_{eff}|/\sigma_{k_{eff}} < 0.5$ and Δk_{eff} will not dominate the k_{eff} confidence interval. If $\sigma_{k_{eff}}$ is reasonably well approximated by MCNP's estimated standard deviation, this ratio will be much less than 0.5.

The total running time for the active cycles is proportional to $N(I_t - I_c)$, and the standard deviation in the estimated eigenvalue is proportional to $1/\sqrt{N(I_t - I_c)}$. From the results of the convergence run, the total number of histories needed to achieve the desired standard deviation can be estimated.

It is recommended that 200 to 400 active cycles be used, assuming that the above $|\Delta k_{eff}|/\sigma_{k_{eff}}$ is much less than unity in doing so. This large number of cycles will provide large batch sizes of k_{eff} cycles (e.g., 40 batches of 10 cycles each for 400 active cycles) to compare estimated standard deviations with those obtained for a batch size of one k_{eff} cycle. For example, for 400 active cycles, 40 batches of 10 k_{eff} s are created and analyzed for a new average k_{eff} and a new estimated standard deviation. The behavior of the average k_{eff} by a larger number of cycles can also be observed to ensure a good normal spatial mode. Fewer than 30 active cycles is not recommended because trends in the average k_{eff} may not have enough cycles to develop.

3. Analysis of Criticality Problem Results

The goal of the calculation is to produce a k_{eff} confidence interval that includes the true result the desired fraction of the time. Check all WARNING messages. Understand their significance to the calculation. Study the results of the checks that MCNP makes that were described starting on page 2–157.

The criticality problem output contains a lot of useful information. Study it to make sure that: 1) the problem terminated properly; 2) enough cycles were skipped to ensure that the normal spatial mode for fission sources was achieved; 3) all cells with fissionable material were sampled; 4) the average combined k_{eff} appears to be varying randomly about the average value for the active cycles; 5) the average combined k_{eff} -by-cycles-skipped does not exhibit a trend during the latter stages of the calculation; 6) the confidence intervals for the batched (with at least 30 batch values) combined k_{eff} do

not differ significantly from the final result; 7) the impact of having the largest of each of the three k_{eff} estimators occurring on the next cycle is not too great on the final confidence interval; and 8) the combined k_{eff} figure of merit should be stable. The combined k_{eff} figure of merit should be reasonably stable, but not as stable as a tally figure of merit because the number of histories for each cycle is not exactly the same and combined k_{eff} relative error may experience some changes because of changes in the estimated covariance matrix for the three individual estimators.

Plots (using the z option) can be made of the three individual and average k_{eff} estimators by cycle, as well as the three estimator combined k_{eff} . Use these plots to better understand the results.

If there is concern about a calculation, the k_{eff} -by-cycles-skipped table presents the results that would be obtained in the final result box for differing numbers of cycles skipped. This information can provide insight into fission source spatial convergence, normality of the k_{eff} data sets, and changes in the 95% and 99% confidence intervals. If concern persists, a problem could be run that tallies the track length estimator k_{eff} using an F4:n tally and an FM card using the -6 and -7 reaction multipliers (see Chapter 4 for an example). In the most drastic cases, several independent calculations can be made and the variance of the k_{eff} values (and any other tallies) could be computed from the individual values.

If a conservative (too large) k_{eff} confidence interval is desired, the results from the largest k_{eff} occurring on the next cycle table can be used. This situation could occur with a maximum probability of $1/(I_t - I_c)$ for highly positively correlated k_{eff} s to $1/(I_t - I_c)^3$ for no correlation.

Finally, keep in mind the discussion in starting on page 2–158. For large systems with a dominance ratio close to one, the estimated standard deviations for tallies could be much smaller than the true standard deviation. The cycle-to-cycle correlations in the fission sources are not taken into account, especially for any tallies that are not made over the entire problem. The only way to obtain the correct statistical errors in this situation is to run a series of independent problems using different random number sequences and analyze the sampled tally results to estimate the statistical uncertainties.

IX. VOLUMES AND AREAS⁹⁹

The particle flux in Monte Carlo transport problems often is estimated as the track length per unit volume or the number of particles crossing a surface per unit area. Therefore, knowing the volumes and surface areas of the geometric regions in a Monte Carlo problem is essential. Knowing volumes is useful in calculating the masses and densities of cells and thus in calculating volumetric or mass heating. Furthermore, calculation of the mass of a geometry is frequently a good check on the accuracy of the geometry setup when the mass is known by other means.

Calculating volumes and surface areas in modern Monte Carlo transport codes is nontrivial. MCNP allows the construction of cells from unions

CHAPTER 2

Volume/Area

and/or intersections of regions defined by an arbitrary combination of second-degree surfaces, toroidal fourth-degree surfaces, or both. These surfaces can have different orientations or be segmented for tallying purposes. The cells they form even can consist of several disjoint subcells. Cells can be constructed from quadrilateral or hexagonal lattices or can be embedded in repeated structures universes. Although such generality greatly increases the flexibility of MCNP, computing cell volumes and surface areas understandably requires increasingly elaborate computational methods.

MCNP automatically calculates volumes and areas of polyhedral cells and of cells or surfaces generated by surfaces of revolution about any axis, even a skew axis. If a tally is segmented, the segment volumes or areas are computed. For nonrotationally symmetric or nonpolyhedral cells, a stochastic volume and surface area method that uses ray tracing is available. See page 2–165.

A. Rotationally Symmetric Volumes and Areas

The procedure for computing volumes and surface areas of rotationally symmetric bodies is as follows:

1. Determine the common axis of symmetry of the cell.⁹⁹ If there is none and if the cell is not a polyhedron, MCNP cannot compute the volume (except stochastically) and the area of each bounding surface cannot be computed on the side of the asymmetric cell.
2. Convert the bounding surfaces to q-form:

$$ar^2 + br + cs^2 + ds + e = 0 \quad ,$$

where s is the axis of rotational symmetry in the r - s coordinate system. All MCNP surfaces except tori are quadratic surfaces and therefore can be put into q-form.

3. Determine all intersections of the bounding surfaces with each other in the r - s coordinate system. This procedure generally requires the solution of a quartic equation.²³ For spheres, ellipses, and tori, extra intersection points are added so that these surfaces are not infinite. The list of intersections are put in order of increasing s -coordinate. If no intersection is found, the surface is infinite; its volume and area on one side cannot be computed.

4. Integrate over each bounding surface segment between intersections:

$$V = \pi \int r^2 ds \quad \text{for volumes;}$$
$$A = 2\pi \int r \sqrt{1 + \left(\frac{dr}{ds}\right)^2} ds \quad \text{for surface areas.}$$

A bounding surface segment lies between two intersections that bound the cell of interest.

A numerical integration is required for the area of a toroidal surface; all other integrals are directly solved by integration formulas. The sense of a

bounding surface to a cell determines the sign of V . The area of each surface is determined cell-by-cell twice, once for each side of the surface. An area will be calculated unless bounded on both sides by asymmetric or infinite cells.

B. Polyhedron Volumes and Areas

A polyhedron is a body bounded only by planes that can have an arbitrary orientation. The procedure for calculating the volumes and surface areas of polyhedra is as follows:

1. For each facet side (planar surface), determine the intersections (r_i, s_i) of the other bounding planes in the r - s coordinate system. The r - s coordinate system is redefined for each facet to be an arbitrary coordinate system in the plane of the facet.
2. Determine the area of the facet:

$$a = 1/2 \sum (s_{i+1} - s_i)(r_{i+1} + r_i) \quad ,$$

and the coordinates of its centroid, r_c, s_c :

$$r_c = 1/(6a) \sum (s_{i+1} - s_i)(r_{i+1}^2 + r_{i+1}r_i + r_i^2) \quad ,$$

$$s_c = 1/(6a) \sum (r_{i+1} - r_i)(s_{i+1}^2 + s_{i+1}s_i + s_i^2) \quad .$$

The sums are over all bounding edges of the facet where i and $i + 1$ are the ends of the bounding edge such that, in going from i to $i + 1$, the facet is on the right side. As with rotationally symmetric cells, the area of a surface is determined cell-by-cell twice, once for each side. The area of a surface on one side is the sum over all facets on that side.

3. The volume of a polyhedron is computed by using an arbitrary reference plane. Prisms are projected from each facet normal to the reference plane, and the volume of each prism is $V = da \cos \theta$ where

d = distance from reference plane to facet centroid;

a = facet area; and

θ = angle between the external normal of the facet and the positive normal of the reference plane.

The sum of the prism volumes is the polyhedron cell volume.

C. Stochastic Volume and Area Calculation

MCNP cannot calculate the volumes and areas of asymmetric, nonpolyhedral, or infinite cells. Also, in very rare cases, the volume and area calculation can fail because of roundoff errors. For these cases a stochastic estimation is possible by ray tracing. The procedure is as follows:

1. Void out all materials in the problem (VOID card).
2. Set all nonzero importances to one and all positive weight windows to zero.

CHAPTER 2

Plotter

3. Use a planar source with a source weight equal to the surface area to flood the geometry with particles. This will cause the particle flux throughout the geometry to statistically approach unity. Perhaps the best way to do a stochastic volume estimation is to use an inward-directed, biased cosine source on a spherical surface with weight equal to πr^2 .

4. Use the cell flux tally (F4) to tabulate volumes and the surface flux tally (F2) to tabulate areas. The cell flux tally is inversely proportional to cell volume. Thus in cells whose volumes are known, the unit flux will result in a tally of unity and in cells whose volume is uncalculated, the unit flux will result in a tally of volumes. Similarly, the surface flux tally is inversely proportional to area so that the unit flux will result in a tally of unity wherever the area is known and a tally of area wherever it is unknown.

X. PLOTTER

The MCNP plotter draws cross-sectional views of the problem geometry according to commands entered by the user. See Appendix B for the command vocabulary and examples of use. The pictures can be drawn on the screen of a terminal or on some local or remote hard copy graphics device, as directed by the user. The pictures are drawn in a square viewport on the graphics device. The mapping between the viewport and the portion of the problem space to be plotted, called the window, is user-defined. A plane in problem space, the plot plane, is defined by specifying an origin \vec{r}_o and two perpendicular basis vectors \vec{a} and \vec{b} . The size of the window in the plot plane is defined by specifying two extents. The picture appears in the viewport with the origin at the center, the first basis vector pointing to the right and the second basis vector pointing up. The width of the picture is twice the first extent and the height is twice the second extent. If the extents are unequal, the picture is distorted. The central task of the plotter is to plot curves representing the intersections of the surfaces of the geometry with the plot plane within the window.

All plotted curves are conics, defined here to include straight lines. The intersection of a plane with any MCNP surface that is not a torus is always a conic. A torus is plotted only if the plot plane contains the torus axis or is perpendicular to it, in which cases the intersection curves are conics. The first step in plotting the curves is to find equations for them, starting from the equations for the surfaces of the problem. Equations are needed in two forms for each curve: a quadratic equation and a pair of parametric equations. The quadratic equations are needed to solve for the intersections of the curves. The parametric equations are needed for defining the points on the portions of the curves that are actually plotted.

The equation of a conic is

$$As^2 + 2Hst + Bt^2 + 2Gs + 2Ft + C = 0 \quad ,$$

where s and t are coordinates in the plot plane. They are related to problem coordinates (x, y, z) by

$$\vec{r} = \vec{r}_o + s\vec{a} + t\vec{b}$$

or in matrix form

$$\begin{bmatrix} 1 \\ x \\ y \\ z \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ x_o & a_x & b_x \\ y_o & a_y & b_y \\ z_o & a_z & b_z \end{bmatrix} \begin{bmatrix} 1 \\ s \\ t \end{bmatrix} \quad \text{or} \quad \begin{bmatrix} 1 \\ x \\ y \\ z \end{bmatrix} = PL \begin{bmatrix} 1 \\ s \\ t \end{bmatrix} .$$

In matrix form the conic equation is

$$[1 \quad s \quad t] \begin{bmatrix} C & G & F \\ G & A & H \\ F & H & B \end{bmatrix} \begin{bmatrix} 1 \\ s \\ t \end{bmatrix} = 0 \quad \text{or} \quad [1 \quad s \quad t] QM \begin{bmatrix} 1 \\ s \\ t \end{bmatrix} .$$

Thus, finding the equation of a curve to be plotted is a matter of finding the QM matrix, given the PL matrix and the coefficients of the surface.

Any surface in MCNP, if it is not a torus, can be readily written as

$$Ax^2 + By^2 + Cz^2 + Dxy + Eyz + Fzx + Gx + Hy + Jz + K = 0 \quad ,$$

or in matrix form as

$$[1 \quad x \quad y \quad z] \begin{bmatrix} K & G/2 & H/2 & J/2 \\ G/2 & A & D/2 & F/2 \\ H/2 & D/2 & B & E/2 \\ J/2 & F/2 & E/2 & C \end{bmatrix} \begin{bmatrix} 1 \\ x \\ y \\ z \end{bmatrix} = 0 \quad ,$$

or

$$[1 \quad x \quad y \quad z] AM \begin{bmatrix} 1 \\ x \\ y \\ z \end{bmatrix} = 0 \quad .$$

The transpose of the transformation between (s, t) and (x, y, z) is

$$[1 \quad x \quad y \quad z] = [1 \quad s \quad t] PL^T \quad ,$$

where PL^T is the transpose of the PL matrix. Substitution in the surface equation gives

$$[1 \quad s \quad t] PL^T AM PL \begin{bmatrix} 1 \\ s \\ t \end{bmatrix} = 0 \quad .$$

Therefore, $QM = PL^T AM PL$.

A convenient set of parametric equations for conics is

$$\text{straight line} \quad s = C_1 + C_2p$$

CHAPTER 2

Plotter

	$t = C_4 + C_5 p$
parabola	$s = C_1 + C_2 p + C_3 p^2$
	$t = C_4 + C_5 p + C_6 p^2$
ellipse	$s = C_1 + C_2 \sin p + C_3 \cos p$
	$t = C_4 + C_5 \sin p + C_6 \cos p$
hyperbola	$s = C_1 + C_2 \sinh p + C_3 \cosh p$
	$t = C_4 + C_5 \sinh p + C_6 \cosh p$

The type of a conic is determined by examination of the conic invariants,¹⁰⁰ which are simple functions of the elements of QM . Some of the surfaces produce two curves, such as the two branches of a hyperbola or two straight lines. A separate set of parametric coefficients, C_1 through C_6 , is needed for each curve in such cases. The parametric coefficients are found by transforming QM into yet another coordinate system where most of its elements are zero. The parametric coefficients are then simple functions¹⁰⁰ of the remaining elements. Finally, the coefficients are transformed from that coordinate system back to the (s, t) system.

For a plottable torus, the curves are either a pair of identical ellipses or a pair of concentric circles. The parametric coefficients are readily calculated from the surface coefficients and the elements of QM are simple functions of the parametric coefficients.

The next step is to reject all curves that lie entirely outside the window by finding the intersections of each curve with the straight line segments that bound the window, taking into account the possibility that an ellipse may lie entirely inside the window.

The remaining curves are plotted one at a time. The intersections of the current curve with all of the other remaining curves and with the boundaries of the window are found by solving the simultaneous equations

$$[1 \quad s \quad t] QM_i \begin{bmatrix} 1 \\ s \\ t \end{bmatrix} = 0 \quad ,$$

where $i = 1$ is the current curve and $i = 2$ is one of the other curves. This process generally requires finding the roots of a quartic. False roots and roots outside the window are rejected and the value of the parameter p for each remaining intersection is found. The intersections then are arranged in order of increasing values of p .

Each segment of the curve—the portion of the curve between two adjacent intersections—is examined to see whether and how it should be plotted. A point near the center of the segment is transformed back to the (x, y, z) coordinate system. All cells immediately adjacent to the surface at that point are found. If there is exactly one cell on each side of the surface and those cells are the same, the segment is not plotted. If there is exactly one cell on each side and those cells are different, the segment is plotted as a solid line. If anything else is found, the segment is plotted as a dotted line, which indicates either that there is an error in the problem geometry or that some other surface of the problem also intersects the plot plane along the segment.

If a curve to be plotted is not a straight line, it is plotted as a sequence of short straight lines between selected points on the curve. The points are selected according to the criterion that the middle of the line drawn between points must not lie farther from the nearest point on the true curve than the nominal resolution of the picture. The nominal resolution is fixed at 1/3000 of a side of the viewport. This is a bit coarse for the best plotting devices and is quite a bit too fine for the worst ones, but it produces adequate pictures at reasonable cost.

XI. PSEUDORANDOM NUMBERS

Like any other Monte Carlo program, MCNP uses a sequence of pseudorandom numbers to sample from probability distributions. MCNP has always used the congruential scheme of Lehmer,¹⁶ though the mechanics of implementation have been modified for portability to different computer platforms. In particular, a method has been devised that multiplies two 64-bit words to get a 128-bit word without using more than 64-bit words for the 128-bit word.¹⁰¹

A pseudorandom sequence of integers I_n is generated by

$$I_{n+1} = \text{mod}(MI_n, 2^{48}) \quad ,$$

where M is the random number multiplier, and 48-bit integers and 48-bit floating point mantissas are assumed. The default value of M , which can be changed with the DBCN card, is

$$M = 5^{19} = 19073486328125 \quad .$$

The pseudorandom number is then

$$R_n = 2^{-48} I_n \quad .$$

The starting pseudorandom number of each history is

$$I_{n+S} = \text{mod}(M^S I_n, 2^{48}) \quad ,$$

where S is the pseudorandom number stride. Because each pseudorandom number is the least significant (lower) 48-bits of M multiplied by the previous random number, the lower 48 bits of I_{n+S} are the same as the lower 48 bits of $M^S I_n$. The default value of S , which can be changed with the DBCN card, is

$$S = 152917_{10} = 452525_8 = 1001010101010101_2 \quad .$$

The 01010101 pattern ensures that the bit pattern will change when the stride is multiplied by almost anything.

The period P of the MCNP algorithm is

$$P = 2^{46} \approx 7.04 \times 10^{13}$$

CHAPTER 2 Perturbation

because the last two binary bits of the lower 48 bits of M^k are 01_2 for all values of k . The period could be increased from 2^{46} to

$$P = 2^{48} \approx 2.81 \times 10^{14}$$

by adding 1 as follows:

$$I_n = \text{mod}(MI_{n-1}, 2^{48}) + 1 \quad .$$

MCNP prints a WARNING and counts the number of histories for which the stride S is exceeded. MCNP also prints a WARNING if the period P is exceeded. Exceeding the stride or the period does not result in wrong answers but does result in an underestimate of the variance. However, because the random numbers are used for very different purposes, MCNP seems quite insensitive to overrunning either the stride or the period.¹⁰¹

Sometimes users wish to know how much of the variation between problems is purely statistical and the variance is insufficient to provide this information. In correlated sampling (see page 2–143) and criticality problems, the variances can be underestimated because of correlation between histories. In this case, rerun the problems with a different random number sequence, either by starting with a new random number or by changing the random number stride or multiplier on the DBCN card. MCNP checks for and does not allow invalid choices, such as an even numbered initial random number that, after a few pseudorandom numbers, would result in all subsequent random numbers being zero.

XII. PERTURBATIONS

The evaluation of response or tally sensitivities to cross-section data involves finding the ratio of the change in a tally to the infinitesimal change in the data, as given by the Taylor series expansion. In deterministic methods, this ratio is approximated by performing two calculations, one with the original data and one with the perturbed data. This approach is useful even when the magnitude of the perturbation becomes very small. In Monte Carlo methods, however, this approach fails as the magnitude of the perturbation becomes small because of the uncertainty associated with the response. For this reason, the differential operator technique was developed.

The differential operator perturbation technique as applied in the Monte Carlo method was introduced by Olhoeft¹⁰² in the early 1960's. Nearly a decade after its introduction, this technique was applied to geometric perturbations by Takahashi¹⁰³. A decade later, the method was generalized for perturbations in cross-section data by Hall^{104,105} and later Rief.¹⁰⁶ A rudimentary implementation into MCNP followed shortly thereafter.¹⁰⁷ With an enhancement of the user interface and the addition of second order effects, this implementation has evolved into a standard MCNP feature.

A. Derivation of the Operator

In the differential operator approach, a change in the Monte Carlo response c , due to changes in a related data set (represented by the parameter v), is given by a Taylor series expansion

$$\Delta c = \frac{dc}{dv} \cdot \Delta v + \frac{1}{2!} \cdot \frac{d^2c}{dv^2} \cdot \Delta v^2 + \dots + \frac{1}{n!} \cdot \frac{d^nc}{dv^n} \cdot \Delta v^n + \dots \quad ,$$

where the n^{th} order coefficient is

$$u_n = \frac{1}{n!} \cdot \frac{d^nc}{dv^n} \quad .$$

This can be written as

$$u_n = \frac{1}{n!} \sum_{b \in B} \sum_{h \in H} x_b^n(h) \left(\frac{\partial^n c}{\partial x_b^n(h)} \right) \quad ,$$

for the data set

$$x_b(h) = K_b(h) \cdot e^v; b \in B, h \in H \quad ,$$

where $K_b(h)$ is some constant, B represents a set of macroscopic cross sections, and H represents a set of energies or an energy interval.

For a track based response estimator

$$c = \sum_j t_j q_j \quad ,$$

where t_j is the response estimator and q_j is the probability of path segment j (path segment j is comprised of segment $j - 1$ plus the current track.) This gives

$$u_n = \frac{1}{n!} \sum_j \left[\sum_{b \in B} \sum_{h \in H} x_b^n(h) \left(\frac{\partial^n}{\partial x_b^n(h)} (t_j q_j) \right) \right] \quad ,$$

or

$$u_n = \frac{1}{n!} \sum_j \gamma_{nj} t_j q_j \quad ,$$

where

$$\gamma_{nj} \equiv \sum_{b \in B} \sum_{h \in H} x_b^n(h) \left(\frac{\partial^n}{\partial x_b^n(h)} (t_j q_j) \right) \left(\frac{1}{t_j q_j} \right) \quad .$$

With some manipulations presented in Ref. 108, the path segment estimator $\gamma_{nj} t_j$ can be converted to a particle history estimator of the form

CHAPTER 2
Perturbation

$$u_n = \sum_i V_{ni} p_i \quad ,$$

where p_i is the probability of the i^{th} history and V_{ni} is the n^{th} order coefficient estimator for history i , given by

$$V_{ni} \equiv \frac{1}{n!} \sum_j \gamma_{nj'} t_{j'} \quad .$$

Note that this sum involves only those path segments j' in particle history i . The Monte Carlo expected value of u_n becomes

$$\begin{aligned} \langle u_n \rangle &= \frac{1}{N} \sum_i V_{ni} \\ &= \frac{1}{N n!} \sum_i \left(\sum_{j'} \gamma_{nj'} t_{j'} \right) \quad , \end{aligned}$$

for a sample of N particle histories.

1. First Order

For a first order perturbation, the differential operator becomes

$$\gamma_{1j'} = \sum_{k=0}^m \beta_{j'k} \quad ,$$

where

$$\beta_{j'k} = \sum_{b \in B} \sum_{h \in H} \left(\delta_{hE} \delta_{ba} - \frac{\delta_{hE'} x_b(E')}{x_T(E')} - \delta_{hE} x_b(E) \lambda_k + \frac{\delta_{hE} x_b(E)}{x_T(E)} \right)$$

for a track segment k that starts with a particle undergoing reaction type “a” at energy E' and is scattered to energy E and collides after a distance λ_k . Note that δ_{hE} and δ_{ba} are unity if $h=E$ and $b=a$; otherwise they vanish. A more complete derivation of this equation can be found in Ref. 109. A similar derivation can be performed for other types of tracks (i.e., collision to boundary, boundary to collision, and boundary to boundary), leading to one or more of these four terms. Finally, the expected value of the first order coefficient becomes

$$\langle u_1 \rangle = \frac{1}{N} \sum_i \left[\sum_{j'} \left(\sum_{k=0}^m \beta_{j'k} \right) t_{j'} \right] \quad ,$$

where $\beta_{j'k}$ is calculated from one or more terms of the previous equation for track k .

2. Second Order

For a second order perturbation, the differential operator becomes

$$\gamma_{2j'} = \sum_{k=0}^m (\alpha_{j'k} - \beta_{j'k}^2) + \left(\sum_{k=0}^m \beta_{j'k} \right)^2, \quad ,$$

where

$$\alpha_{j'k} = \sum_{b \in B} \sum_{h \in H} \left(\frac{2\delta_{hE'} x_b^2(E')}{x_T^2(E')} - \frac{2\delta_{hE'} \delta_{ba} x_b(E')}{x_T(E')} + \delta_{hE} x_b^2(E) \lambda_k^2 - \frac{2\delta_{hE} x_b^2(E) \lambda_k}{x_T(E)} \right).$$

It is evident that $\gamma_{2j'}$ requires little additional effort to $\gamma_{1j'}$, namely the computation of $\alpha_{j'k}$. Once again, for other types of tracks one or more of these four terms is required. The expected value of the second order coefficient becomes

$$\langle u_2 \rangle = \frac{1}{2N} \sum_i \left[\sum_{j'} \left(\sum_{k=0}^m (\alpha_{j'k} - \beta_{j'k}^2) + \left(\sum_{k=0}^m \beta_{j'k} \right)^2 \right) t_{j'} \right], \quad ,$$

where $\beta_{j'k}$ and $\alpha_{j'k}$ are given by one or more terms as described above for track k.

B. Limitations

Although it is always a high priority to minimize the limitations of any MCNP feature, the perturbation technique itself has the limitations given below. Chapter 3, page 3–130, has examples you might refer to.

1. A fatal error is generated if a PERT card attempts to unvoid a region. The simple solution is to include the material in the unperturbed problem and void the region of interest with the PERT card. See Appendix B of Ref. 109.
2. A fatal error is generated if a PERT card attempts to alter a material composition in such a way as to introduce a new nuclide. The solution is to set up the unperturbed problem with a mixture of both materials and introduce PERT cards to remove each. See Appendix B of Ref. 109.
3. Exercise caution when using a PERT card with FM tallies. If the unperturbed cross section is also listed on an FM tally, the estimated change in that tally is likely invalid because of an additional term that has not yet been implemented. For example, if the FM tally is a track-length k_{eff} estimator and the perturbation is a change in density of the fissile material, then the perturbation estimate will be invalid since both the tally and perturbation involve the fission cross section. In most cases this term can be determined with an additional FM tally. See Appendix D of Ref. 109.

CHAPTER 2

Perturbation

4. DXTRAN and point detector tallies are not currently compatible with the PERT card. This limitation may be removed in future versions.
5. While there is no limit to the number of perturbations, they should be kept to a minimum, as each perturbation can degrade performance by 10–20%.

C. Accuracy

Analyzing the first and second order perturbation results presented in Ref. 109 leads to the following rules of thumb. The first order perturbation estimator typically provides sufficient accuracy for response or tally changes that are less than 5%. The default first and second order estimator offers acceptable accuracy for response changes that are less than 20–30%. This upper bound depends on the behavior of the response as a function of the perturbed parameter. The magnitude of the second order estimator is a good measure of the range of applicability. If this magnitude exceeds 30% of the first order estimator, it is likely that higher order terms are needed for an accurate prediction. The METHOD keyword on the PERT card allows one to tally the second order term separate from the first. See Chapter 3, page 3–128.

XII. REFERENCES

1. L. L. Carter and E. D. Cashwell, *Particle Transport Simulation with the Monte Carlo Method*, ERDA Critical Review Series, TID-26607 (1975).
2. Ivan Lux and Laszlo Koblinger, *Monte Carlo Particle Transport Methods: Neutron and Photon Calculations*, CRC Press, Boca Raton (1991).
3. C. J. Everett and E. D. Cashwell, "A Third Monte Carlo Sampler," Los Alamos National Laboratory Report, LA-9721-MS, (March 1983).
4. J. S. Hendricks and J. F. Briesmeister, "Recent MCNP Developments," *IEEE Transactions on Nuclear Science*, **39**, 4, 1035-1040 (August 1992).
5. G. Compte de Buffon, "Essai d'arithmetique morale," *Supplement a la Naturelle*, Vol. 4, 1777.
6. A Hall, "On an Experimental Determination of Pi," *Messeng. Math.*, 2, 113-114 (1873).
7. J. M. Hammersley and D. C. Handscomb, *Monte Carlo Methods*, John Wiley & Sons, New York (1964).
8. Marquis Pierre-Simon de Laplace, *Theorie Analytique des Probabilities*, Livre 2 pp. 356-366 contained in *Oeuvres Completes de Laplace, de L'Academie des Sciences*, Paris, Vol. 7, part 2, 1786.
9. Lord Kelvin, "Nineteenth Century Clouds Over the Dynamical Theory of Heat and Light," *Philosophical Magazine*, series 6, 2, 1 (1901).
10. W. W. Wood, "Early History of Computer Simulations in Statistical Mechanics and Molecular Dynamics," International School of Physics "Enrico Fermi," Varenna, Italy, 1985, Molecular-Dynamics Simulation of Statistical Mechanical Systems, XCVII Corso (Soc. Italiana di Fisica, Bologna) (1986).
11. Necia Grant Cooper, Ed., *From Cardinals to Chaos — Reflections on the Life and Legacy of Stanislaw Ulam*, Cambridge University Press, New York (1989).
12. "Fermi Invention Rediscovered at LASL," *The Atom*, Los Alamos Scientific Laboratory (October 1966).
13. N. Metropolis and S. Ulam, "The Monte Carlo Method," *J. Amer. Stat. Assoc.*, 44, 335 (1949).
14. Herman Kahn, "Modifications of the Monte Carlo Method," *Proceeding, Seminar on Scientific Computation*, Nov. 1949, IBM, New York, 20-27 (1950).
15. A. S. Householder, G. E. Forsythe, and H. H. Germond, Ed., *Monte Carlo Methods*, NBS Applied Mathematics Series, Vol. 12, 6, (1951).
16. D. H. Lehmer, "Mathematical Methods in Large-Scale Computing Units," *Ann. Comp. Lab.*, Harvard Univ. 26, 141-146 (1951).
17. Herman Kahn, "Applications of Monte Carlo," AECU-3259 Report, Rand Corporation, Santa Monica, CA, (1954).

CHAPTER 2

References

18. E. D. Cashwell and C. J. Everett, *A Practical Manual on the Monte Carlo Method for Random Walk Problems*, Pergamon Press, Inc., New York (1959).
19. Robert R. Johnston, "A General Monte Carlo Neutronics Code," Los Alamos Scientific Laboratory Report, LAMS-2856 (March 1963).
20. E. D. Cashwell, J. R. Neergaard, W. M. Taylor, and G. D. Turner, "MCN: A Neutron Monte Carlo Code," Los Alamos Scientific Laboratory Report, LA-4751 (January 1972).
21. E. D. Cashwell, J. R. Neergaard, C. J. Everett, R. G. Schrandt, W. M. Taylor, and G. D. Turner, "Monte Carlo Photon Codes: MCG and MCP," Los Alamos Scientific Laboratory Report, LA-5157-MS (March 1973).
22. J. A. Halblieb and T. A. Mehlhorn, "ITS: The Integrated TIGER Series of Coupled Electron/Photon Monte Carlo Transport Codes," Sandia National Laboratory Report, SAND 84-0573 (1984).
23. E. D. Cashwell and C. J. Everett, "Intersection of a Ray with a Surface of Third or Fourth Degree," Los Alamos Scientific Laboratory Report, LA-4299 (December 1969).
24. R. Kinsey, "Data Formats and Procedures for the Evaluated Nuclear Data File, ENDF," Brookhaven National Laboratory Report, BNL-NCS-50496 (ENDF 102) 2nd Edition (ENDF/B-V) (October 1979).
25. R. J. Howerton, D. E. Cullen, R. C. Haight, M. H. MacGregor, S. T. Perkins, and E. F. Plechaty, "The LLL Evaluated Nuclear Data Library (ENDL): Evaluation Techniques, Reaction Index, and Descriptions of Individual Reactions," Lawrence Livermore National Laboratory Report UCRL-50400, Vol. 15, Part A (September 1975).
26. E. D. Arthur and P. G. Young, "Evaluated Neutron-Induced Cross Sections for $^{54,56}\text{Fe}$ to 40 MeV," Los Alamos Scientific Laboratory report LA-8626-MS (ENDF-304) (December 1980).
27. D. G. Foster, Jr. and E. D. Arthur, "Average Neutronic Properties of "Prompt" Fission Products," Los Alamos National Laboratory report LA-9168-MS (February 1982).
28. E. D. Arthur, P. G. Young, A. B. Smith, and C. A. Philis, "New Tungsten Isotope Evaluations for Neutron Energies Between 0.1 and 20 MeV," *Trans. Am. Nucl. Soc.* **39**, 793 (1981).
29. M. W. Asprey, R. B. Lazarus, and R. E. Seamon, "EVXS: A Code to Generate Multigroup Cross Sections from the Los Alamos Master Data File," Los Alamos Scientific Laboratory report LA-4855 (June 1974).
30. R. E. MacFarlane, D. W. Muir, and R. M. Boicourt, "The NJOY Nuclear Data Processing System, Volume I: User's Manual," Los Alamos National Laboratory report LA-9303-M, Vol. I (ENDF-324) (May 1982).
R. E. MacFarlane, D. W. Muir, and R. M. Boicourt, "The NJOY Nuclear Data Processing System, Volume II: The NJOY, RECONR, BROADR,

CHAPTER 2

References

- HEATR, and THERMR Modules,” Los Alamos National Laboratory report LA-9303-M, Vol. II (ENDF-324) (May 1982).
31. R. J. Howerton, R. E. Dye, P. C. Giles, J. R. Kimlinger, S. T. Perkins and E. F. Plechaty, “Omega Documentation,” Lawrence Livermore National Laboratory report UCRL-50400, Vol. 25 (August 1983).
 32. E. Storm and H. I. Israel, “Photon Cross Sections from 0.001 to 100 Mev for Elements 1 through 100,” Los Alamos Scientific Laboratory report LA-3753 (November 1967).
 33. J. H. Hubbell, W. J. Veigele, E. A. Briggs, R. T. Brown, D. T. Cromer and R. J. Howerton, “Atomic Form Factors, Incoherent Scattering Functions, and Photon Scattering Cross Sections,” *J. Phys. Chem. Ref. Data* **4**, 471 (1975).
 34. C. J. Everett and E. D. Cashwell, “MCP Code Fluorescence-Routine Revision,” Los Alamos Scientific Laboratory report LA-5240-MS (May 1973).
 35. D. E. Cullen, M. H. Chen, J. H. Hubbell, S. T. Perkins, E. F. Plechaty, J. A. Rathkopf, and J. H. Schfield, “Tables and Graphs of Photon-Interaction Cross Sections from 10 eV to 100 GeV Derived from the LLNL Evaluated Photon Data Library (EPDL),” Lawrence Livermore National Laboratory report UCRL-50400, Vol. 6 (October 31, 1989).
 36. M. A. Gardner and R. J. Howerton, “ACTL: Evaluated Neutron Activation Cross-Section Library—Evaluation Techniques and Reaction Index,” Lawrence Livermore National Laboratory report UCRL-50400, Vol. 18 (October 1978).
 37. J. U. Koppel and D. H. Houston, “Reference Manual for ENDF Thermal Neutron Scattering Data,” General Atomics report GA-8744, Revised (ENDF-269) (July 1978).
 38. J. C. Wagner, E. L. Redmond II, S. P. Palmtag, and J. S. Hendricks, “MCNP: Multigroup/Adjoint Capabilities,” Los Alamos National Laboratory report, LA-12704 (December 1993).
 39. J. E. Morel, L. J. Lorence, Jr., R. P. Kensek, J. A. Halbleib, and D. P. Sloan, “A Hybrid Multigroup/Continuous–Energy Monte Carlo Method for Solving the Boltzmann–Fokker–Planck Equation,” *Nucl. Sci. Eng.*, **124**, p. 369–389 (1996).
 40. L. J. Lorence, Jr., J. E. Morel, G. D. Valdez, “Physics Guide to CEPXS: A Multigroup Coupled Electron–Photon Cross–Section Generating Code, Version 1.0,” SAND89–1685 (1989) and “User’s Guide to CEPXS/ONED–ANT: A One–Dimensional Coupled Electron–Photon Discrete Ordinates Code Package, Version 1.0,” SAND89–1661 (1989) and L. J. Lorence, Jr., W. E. Nelson, J. E. Morel, “Coupled Electron–Photon Transport Calculations Using the Method of Discrete–Ordinates,” *IEEE/NSREC*, Vol. NS–32, No. 6, Dec. 1985.
 41. R. C. Little and R. E. Seamon, “Neutron-Induced Photon Production in MCNP,” *Proceedings of the Sixth International Conference on Radiation Shielding*, Vol. I, 151, (May 1983).

CHAPTER 2

References

42. J. S. Hendricks and R. E. Prael, "Monte Carlo Next-Event Estimates from Thermal Collisions," *Nucl. Sci. Eng.*, **109** (3) pp. 150-157 (October 1991).
43. J. S. Hendricks, R. E. Prael, "MCNP $S(\alpha, \beta)$ Detector Scheme," Los Alamos National Laboratory report, LA-11952 (October 1990).
44. H. Kahn, "Applications of Monte Carlo," AEC-3259 The Rand Corporation (April 1956).
45. L. Koblinger, "Direct Sampling from the Klein-Nishina Distribution for Photon Energies Above 1.4 MeV," *Nucl. Sci. Eng.*, **56**, 218 (1975).
46. R. N. Blomquist and E. M. Gelbard, "An Assessment of Existing Klein-Nishina Monte Carlo Sampling Methods," *Nucl. Sci. Eng.*, **83**, 380 (1983).
47. G. W. Grodstein, "X-Ray Attenuation Coefficients from 10 keV to 100 MeV," National Bureau of Standards, Circular No. 583 (1957).
48. S. Goudsmit and J. L. Saunderson, "Multiple Scattering of Electrons," *Phys. Rev.* **57** (1940) 24.
49. L. Landau, "On the Energy Loss of Fast Particles by Ionization," *J. Phys. USSR* **8** (1944) 201.
50. O. Blunck and S. Leisegang, "Zum Energieverlust schneller Elektronen in dünnen Schichten," *Z. Physik* **128** (1950) 500.
51. M. J. Berger, "Monte Carlo Calculation of the Penetration and Diffusion of Fast Charged Particles," in *Methods in Computational Physics, Vol. 1*, edited by B. Alder, S. Fernbach, and M. Rotenberg, (Academic Press, New York, 1963) 135.
52. Stephen M. Seltzer, "An Overview of ETRAN Monte Carlo Methods," in *Monte Carlo Transport of Electrons and Photons*, edited by Theodore M. Jenkins, Walter R. Nelson, and Alessandro Rindi, (Plenum Press, New York, 1988) 153.
53. J. Halbleib, "Structure and Operation of the ITS Code System," in *Monte Carlo Transport of Electrons and Photons*, edited by Theodore M. Jenkins, Walter R. Nelson, and Alessandro Rindi, (Plenum Press, New York, 1988) 249.
54. E. Rutherford, "The Scattering of α and β Particles by Matter and the Structure of the Atom," *Philos. Mag.* **21** (1911) 669.
55. W. Börsch-Supan, "On the Evaluation of the Function

$$\phi(\lambda) = \frac{1}{2\pi i} \int_{\sigma-i\infty}^{\sigma+i\infty} e^{\mu \ln \mu + \lambda \mu} d\mu$$

for Real Values of λ ," *J. Res. National Bureau of Standards* **65B** (1961) 245.

56. J. A. Halbleib, R. P. Kensek, T. A. Mehlhorn, G. D. Valdez, S. M. Seltzer, and M. J. Berger, "ITS Version 3.0: The Integrated TIGER Series of Coupled Electron/Photon Monte Carlo Transport Codes," Sandia National Laboratories report SAND91-1634 (March 1992).

57. O. Blunck and K. Westphal, "Zum Energieverlust energiereicher Elektronen in dünnen Schichten," *Z. Physik* **130** (1951) 641.
58. V. A. Chechin and V. C. Ermilova, "The Ionization-Loss Distribution at Very Small Absorber Thickness," *Nucl. Instr. Meth.* **136** (1976) 551.
59. Stephen M. Seltzer, "Electron-Photon Monte Carlo Calculations: The ETRAN Code," *Appl. Radiat. Isot.* Vol. 42, No. 10 (1991) pp. 917-941.
60. M. E. Riley, C. J. MacCallum, and F. Biggs, "Theoretical Electron-Atom Elastic Scattering Cross Sections. Selected Elements, 1 keV to 256 keV," *Atom. Data and Nucl. Data Tables* **15** (1975) 443.
61. N. F. Mott, "The Scattering of Fast Electrons by Atomic Nuclei," *Proc. Roy. Soc. (London)* **A124** (1929) 425.
62. G. Molière, "Theorie der Streuung schneller geladener Teilchen II: Mehrfach- und Vielfachstreuung," *Z. Naturforsch.* **3a** (1948) 78.
63. H. A. Bethe and W. Heitler, "On Stopping of Fast Particles and on the Creation of Positive Electrons," *Proc. Roy. Soc. (London)* **A146** (1934) 83.
64. Stephen M. Seltzer, "Cross Sections for Bremsstrahlung Production and Electron Impact Ionization," in *Monte Carlo Transport of Electrons and Photons*, edited by Theodore M. Jenkins, Walter R. Nelson, and Alessandro Rindi, (Plenum Press, New York, 1988) 81.
65. H. W. Koch and J. W. Motz, "Bremsstrahlung Cross-Section Formulas and Related Data," *Rev. Mod. Phys.* **31** (1959) 920.
66. Martin J. Berger and Stephen M. Seltzer, "Bremsstrahlung and Photon-neutrons from Thick Tungsten and Tantalum Targets," *Phys. Rev.* **C2** (1970) 621.
67. C. Møller, "Zur Theorie des Durchgang schneller Elektronen durch Materie," *Ann. Physik.* **14** (1932) 568.
68. D. P. Sloan, "A New Multigroup Monte Carlo Scattering Algorithm Suitable for Neutral and Charged-Particle Boltzmann and Fokker-Planck Calculations," Ph.D. dissertation, Sandia National Laboratories report SAND83-7094, (May 1983).
69. K. J. Adams and M. Hart, "Multigroup Boltzmann-Fokker-Planck Electron Transport Capability in MCNP," *Trans. Am. Nucl. Soc.*, **73**, 334 (1995).
70. J. E. Stewart, "A General Point-on-a-Ring Detector," *Transactions of the American Nuclear Society*, **28**, 643 (1978).
71. R. A. Forster, "Ring Detector and Angle Biasing," Los Alamos Scientific Laboratory technical memorandum TD-6-8-79 (July 1979).
72. Guy Estes and Ed Cashwell, "MCNP1B Variance Error Estimator," TD-6-27-78(8/31/78).
73. A. Dubi, "On the Analysis of the Variance in Monte Carlo Calculations," *Nucl. Sci. Eng.*, **72**, 108 (1979). See also I. Lux, "On Efficient Estimation of Variances," *Nucl. Sci. Eng.*, **92**, 607 (1986).

CHAPTER 2

References

74. Shane P. Pederson, "Mean Estimation in Highly Skewed Samples," Los Alamos National Laboratory Report LA-12114-MS (1991).
75. T. E. Booth, "Analytic Comparison of Monte Carlo Geometry Splitting and Exponential Transform," *Trans. Am. Nucl. Soc.*, **64**,303 (1991).
76. T. E. Booth, "A Caution on Reliability Using "Optimal" Variance Reduction Parameters," *Trans. Am. Nucl. Soc.*, **66**, 278 (1991).
77. T. E. Booth, "Analytic Monte Carlo Score Distributions for Future Statistical Confidence Interval Studies," *Nucl. Sci. Eng.*, **112**, 159 (1992).
78. R. A. Forster, "A New Method of Assessing the Statistical Convergence of Monte Carlo Solutions," *Trans. Am. Nucl. Soc.*, **64**,305 (1991).
79. R. A. Forster, S. P. Pederson, T. E. Booth, "Two Proposed Convergence Criteria for Monte Carlo Solutions," *Trans. Am. Nucl. Soc.*, **64**,305 (1991).
80. J. R. M. Hosking and J. R. Wallis, "Parameter and Quantile Estimation for the Generalized Pareto Distribution," *Technometrics*, **29**,339 (1987).
81. W. H. Press, B. P. Flannery, S. A. Teukolsky, and W. T. Vetterling, *Numerical Recipes: The Art of Scientific Computing (FORTRAN Version)*, Cambridge University Press (1990).
82. Malvin H. Kalos, Paula A Whitlock, *Monte Carlo Methods, Volume I: Basics*, John Wiley & Sons, New York, 1987.
83. T. E. Booth, "A Sample Problem for Variance Reduction in MCNP," Los Alamos National Laboratory report LA-10363-MS (June 1985).
84. R. A. Forster, R. C. Little, J. F. Briesmeister, and J. S. Hendricks, "MCNP Capabilities For Nuclear Well Logging Calculations," *IEEE Transactions on Nuclear Science*, **37** (3), 1378 (June 1990).
85. T. E. Booth and J. S. Hendricks, "Importance Estimation in Forward Monte Carlo Calculations," *Nucl. Tech./Fusion*, **5** (1984).
86. F. H. Clark, "The Exponential Transform as an Importance-Sampling Device, A Review," ORNL-RSIC-14 (January 1966).
87. P. K. Sarkar and M. A. Prasad, "Prediction of Statistical Error and Optimization of Biased Monte Carlo Transport Calculations," *Nucl. Sci. Eng.*, **70**, 243-261, (1979).
88. J. S. Hendricks, "Construction of Equiprobable Bins for Monte Carlo Calculation," *Trans. Am. Nucl. Soc.*, **35**, 247 (1980).
89. G. Bell and S. Glasstone, *Nuclear Reactor Theory*, Litton Educational Publishing, Inc., 1970.
90. T. J. Urbatsch, R. A. Forster, R. E. Prael, and R. J. Beckman, "Estimation and Interpretation of k_{eff} Confidence Intervals in MCNP," Los Alamos National Laboratory report LA-12658, (November 1995).
91. C. D. Harmon II, R. D. Busch, J. F. Briesmeister, and R. A. Forster, "Criticality Calculations with MCNP, A Primer," Nuclear Criticality Safety Group, University of New Mexico, Los Alamos National Laboratory, (December 1993).

92. E. M. Gelbard and R. Prael, "Computations of Standard Deviations in Eigenvalue Calculations," *Progress in Nuclear Energy*, **24**, p 237 (1990).
93. G. D. Spriggs, R. D. Busch, K. J. Adams, D. K. Parsons, L. Petrie, and J. S. Hendricks, "On the Definition of Neutron Lifetimes in Multiplying and Nonmultiplying Systems," Los Alamos National Laboratory Report, LA-13260-MS, (March 1997).
94. M. Halperin, "Almost Linearly-Optimum Combination of Unbiased Estimates," *Amer. Stat. Ass. J.*, **56**, 36-43 (1961).
95. R. C. Gast and N. R. Candelore, "The Recap-12 Monte Carlo Eigenfunction Strategy and Uncertainties," WAPD-TM-1127 (L) (1974).
96. S. S. Shapiro and M. B. Wilk, "An Analysis of Variance Test for Normality," *Biometrika*, **52**, p. 591 (1965).
97. R. B. D'Agostino, "An Omnibus Test of Normality for Moderate and Large Size Samples," *Biometrika*, **58**, p. 341 (1971).
98. L. L. Carter, T. L. Miles, and S. E. Binney, "Quantifying the Reliability of Uncertainty Predictions in Monte Carlo Fast Reactor Physics Calculations," *Nucl. Sci. Eng.*, **113**, p. 324 (1993).
99. J. S. Hendricks, "Calculation of Cell Volumes and Surface Areas in MCNP," Los Alamos Scientific Laboratory report LA-8113-MS (January 1980).
100. B. Spain, *Analytical Conics*, Pergamon, 1957.
101. J. S. Hendricks, "Effects of Changing the Random Number Stride in Monte Carlo Calculations," *Nucl. Sci. Eng.*, **109** (1) pp. 86-91 (September 1991).
102. J. E. Olhoeft, "The Doppler Effect for a Non-Uniform Temperature Distribution in Reactor Fuel Elements," WCAP-2048, Westinghouse Electric Corporation, Atomic Power Division, Pittsburgh (1962).
103. H. Takahashi, "Monte Carlo Method for Geometrical Perturbation and its Application to the Pulsed Fast Reactor," *Nucl. Sci. Eng.* **41**, p. 259 (1970).
104. M. C. Hall, "Monte Carlo Perturbation Theory in Neutron Transport Calculations," PhD. Thesis, University of London (1980).
105. M. C. Hall, "Cross-Section Adjustment with Monte Carlo Sensitivities: Application to the Winfrith Iron Benchmark," *Nucl. Sci. Eng.* **81**, p. 423 (1982).
106. H. Rief, "Generalized Monte Carlo Perturbation Algorithms for Correlated Sampling and a Second-Order Taylor Series Approach," *Ann. Nucl. Energy* **11**, p. 455 (1984).
107. G. McKinney, "A Monte Carlo (MCNP) Sensitivity Code Development and Application," M. S. Thesis, University of Washington, (1984).
108. G. W. McKinney, "Theory Related to the Differential Operator Perturbation Technique," Los Alamos National Laboratory Memo, X-6:GWM-94-124 (1994).

CHAPTER 2

References

109. G. W. McKinney and J. L. Iverson, "Verification of the Monte Carlo Differential Operator Technique for MCNP," Los Alamos National Laboratory Report LA-13098, (February 1996).
110. S. P. Pederson, R. A. Forster, and T. E. Booth, "Confidence Interval Procedures for Monte Carlo Transport Simulations," to be published in *Nucl. Sci. Eng.*, 1997.

CHAPTER 3
 DESCRIPTION OF MCNP INPUT

Input to MCNP consists of several files, but the main one supplied by the user is the INP (the default name) file, which contains the input information necessary to describe the problem. Only a small subset of all available input cards will be needed in any particular problem. The input cards are summarized by card type on page 3–132. The word “card” is used throughout this manual to describe a single line of input up to 80 characters.

Maximum dimensions exist for some MCNP input items; they are summarized on page 3–135. The user can increase any of these maximum values by altering the code and recompiling.

All features of MCNP should be used with caution and knowledge. This is especially true of detectors and variance reduction schemes; you are encouraged to read the appropriate sections of Chapter 2 before using them.

The units used throughout MCNP are given in Chapter 1 on page 1–19.

I. INP FILE

The INP file can have two forms, initiate-run and continue-run. Either can contain an optional message block that replaces or supplements the MCNP execution line information.

A. Message Block

A user may optionally put a set of cards called the message block before the problem identification title card in the INP file. In computer environments where there are no execution line messages, the message block is the only means for giving MCNP an execution message. Less crucially, it is a convenient way to avoid retyping an often-repeated message. The message block starts with the string MESSAGE: and is limited to columns 1–80. Alphabetic characters can be upper, lower, or mixed case. All cards before the blank line delimiter are continuation cards. A \$ and & in the message block are end-of-line markers. The message block ends with a blank line delimiter before the title card. The syntax of the message is the same as for the regular execution line message discussed on page 1–29. The meanings of the components of the message are the same as for the execution line message, subject to the following rules, which are needed to resolve conflicts between the message block and execution line message if the two are used simultaneously. Information in the execution line takes precedence over the same information in the message block, in particular:

- a. $INP = filename$ is not a legitimate entry in the message block. The name INP may be changed on the MCNP execution line only.
- b. In the case of $A = B$ (filename substitution), if the construct $A =$ appears in both the execution line message and in the message block, the message block entry is ignored.

CHAPTER 3

INP File

- c. If there are any program module execution options (like IP or IX) in the execution line message, all execution options in the message block are ignored.
- d. Any keyword entry in the execution line message causes any corresponding entry in the message block to be ignored. For example, C 7 (specifying continue with the seventh dump) in the execution line message would cause C 4 in the message block to be ignored.
- e. However if C or C m appears in the message block but not in the execution line, the run is still a continue-run.

B. Initiate-Run

This form is used to set up a Monte Carlo problem (describe geometry, materials, tallies, etc.) and run if desired. The initiate-run file has the following form:

Message Block	}Optional
Blank Line Delimiter	
Title Card	
Cell Cards	
.	
.	
Blank Line Delimiter	
Surface Cards	
.	
.	
Blank Line Delimiter	
Data Cards	
.	
.	
Blank Line Terminator	Recommended
Anything else	Optional

The first card in the file after the optional message block is the required problem title card. It is limited to one 80-column line and is used as a title in various places in the MCNP output. Alphabetic characters can be upper, lower, or mixed case.

With a valid set of data cards MCNP will run with or without the blank line terminator. With the terminator MCNP will stop reading the input file there even if additional lines are in the file. Some users like to keep additional material, such as alternative versions of the problem or textual information, associated with the input file itself. The terminator will prevent such additional lines from being read.

C. Continue-Run

Continue-run is used to continue running histories in a problem that was terminated earlier—for example, to run the job 2 hours and then to run it

an additional hour later. It can also be used to reconstruct the output of a previous run. A continue-run must contain C or CN in the MCNP execution line or message block to indicate a continue-run. It will start with the last dump unless C m is used to start with the mth dump.

In addition to the C or CN option on the MCNP execution line, two files can be important for this procedure: (1) the restart file (default name RUNTPE), and (2) an optional continue-run input file (default name INP).

The run file, generated by MCNP in the initiate-run sequence, contains the geometry, cross sections, problem parameters, tallies, and all other information necessary to restart the job. In addition the problem results at various stages of the run are recorded in a series of dumps. See the PRDMP card (page 3–113) for a discussion of the selection of dump times. As discussed below, the run may be restarted from any of these dumps.

The CN execution message option differs from the C option only in that the dumps produced during the continue-run are written immediately after the fixed data portion of the RUNTPE file rather than after the dump from which the continue-run started. The new dumps overwrite the old dumps, providing a way for the user to prevent unmanageable growth of RUNTPE files. RUNTPE growth also can be controlled by the NDMP entry on the PRDMP card.

The optional continue-run input file must have the word CONTINUE as the first entry on the first line (title card), or after the optional Message Block and its blank line delimiter. Alphabetic characters can be upper, lower, or mixed case. This file has the following form:

Message Block	}	Optional
Blank Line Delimiter		
CONTINUE		
Data Cards		
.		
.		
Blank Line Terminator		Recommended
Anything else		Optional

The data cards allowed in the continue-run input file are a subset of the data cards available for an initiate-run file. The allowed continue-run data cards are FQ, DD, NPS, CTME, IDUM, RDUM, PRDMP, LOST, DBCN, PRINT, KCODE, MPLOT, ZA, ZB, and ZC.

A very convenient feature is that if none of the above items is to be changed (and if the computing environment allows execution line messages), the continue-run input file is not required; only the run file RUNTPE and the C option on the MCNP execution line are necessary. For example, if you run a job for a minute but you want more particles run, execute with the C or CN message on the execute line, and the job will pick up where it stopped and continue until another time limit or particle cutoff is reached or until you stop it manually. This example assumes that a restart file called RUNTPE from the initial run is in your current directory.

CHAPTER 3

INP File

The complete continue-run execution line option is C m or CN m, where m specifies which dump to pick up from the RUNTPE and to continue with. If m is not specified, the last dump is taken by default. If the initial run producing the RUNTPE was stopped because of particle cutoff (NPS card, page 3–112), NPS must be increased for a continue-run. The NPS card refers to total histories to be run, including preceding continue-runs and the initial run. CTME in a continue-run is the number of minutes more to run, not cumulative total time. To run more KCODE cycles, only the fourth entry KCT matters. Like NPS, KCT refers to total cycles to be run, including previous ones.

In a continue-run, a negative number entered on the NPS card produces a print output file at the time of the requested dump. No more histories will be run. This can be useful when the printed output has been lost or you want to alter the content of the output with the PRINT or FQ cards.

Be cautious if you use a FILES card in the initial run. See page 3–119.

D. Card Format

All input lines are limited to 80 columns. Alphabetic characters can be upper, lower, or mixed case. Most input is entered in horizontal form; however, a vertical input format is allowed for data cards. A comment can be added to any input card. A \$ (dollar sign) terminates data entry and anything that follows the \$ is interpreted as a comment. Blank lines are used as delimiters and terminators. Data entries are separated by one or more blanks.

Comment cards can be used anywhere in the INP file after the problem title card and before the last blank terminator card. These cards must have a C anywhere in columns 1–5 followed by at least one blank. Comment cards are printed only with the input file listing and not anywhere else in the MCNP output file. The FCn input card is available for user comments and is printed as a heading for tally n (as a tally title, for example). The SCn card is available for user comments and is printed as a heading for source probability distribution n.

The title card is limited to one 80-column line and can contain any information the user desires or can even be blank. It usually contains information describing the particular problem. Note that a blank card elsewhere is used as a delimiter or as a terminator.

1. Horizontal Input Format

Cell, surface, and data cards all must begin within the first five columns. The card name or number and particle designator is followed by data entries separated by one or more blanks. Blanks in the first five columns indicate a continuation of the data from the last named card. An & (ampersand) preceded by at least one blank ending a line indicates data will continue on the following card. Data on the continuation card can be in columns 1–80. Completely blank cards are reserved as delimiters between major sections

of the input file. An individual entry must be entirely on one line. There can be only one card of any given type for a given particle designation (see page 3–7). Integers must be entered where integer input is required. Other numerical data can be entered as integer or floating point and will be read properly by MCNP. (In fact noninteger numerical data can be entered in any form acceptable to a FORTRAN E-edit descriptor.)

Four features incorporated in the code facilitate input card preparation:

1. nR means *repeat* the immediately preceding entry on the card n times. For example, 2 4R is the same as 2 2 2 2.
2. nI means *insert* n linear interpolates between the entries immediately preceding and following this feature. For example, 1.5 2I 3.0 on a card is the same as 1.5 2.0 2.5 3. In the construct X nI Y, if X and Y are integers, and if Y – X is an exact multiple of n+1, correct integer interpolates will be created. Otherwise only real interpolates will be created, but Y will be stored directly in all cases. In the above example, the 2.0 may not be exact, but in the example 1 4I 6 = 1 2 3 4 5 6, all interpolates are exact.
3. xM is a *multiply* feature and when used on an input card, it is replaced by the value of the previous entry on the card multiplied by the factor x. For example, 1 1 2M 2M 2M 2M 4M 2M 2M is equivalent to 1 1 2 4 8 16 64 128 256.
4. nJ can be used on an input card to *jump* over the entry where used and take the default value. As an example, the following two cards are identical in their effect:

```
DD .1 1000
DD J 1000
```

J J J is also equivalent to 3J. You can jump to a particular entry on a card without having to explicitly specify prior items on the card. This feature is convenient if you know you want to use a default value but can't remember it. DBCN 7J 5082 is another example.

These features apply to both integer and floating point quantities. If n (an integer) is omitted in the constructs nR, nI, and nJ, then n is assumed to be 1. If x (integer or floating point) is omitted in xM, it is a fatal error. The rules for dealing with adjacent special input items are as follows:

- (1) nR must be preceded by a number or by an item created by R or M.
- (2) nI must be preceded by a number or by an item created by R or M, and must be followed by a number.
- (3) xM must be preceded by a number or by an item created by R or M.
- (4) nJ may be preceded by anything except I and may begin the card input list.

Examples: 1 3M 2R = 1 3 3 3
1 3M I 4 = 1 3 3.5 4

CHAPTER 3

INP File

```
1 3M 3M    = 1 3 9
1 2R 2I 2.5 = 1 1 1 1.5 2.0 2.5
1 R 2M     = 1 1 2
1 R R     = 1 1 1
1 2I 4 3M  = 1 2 3 4 12
1 2I 4 2I 10 = 1 2 3 4 6 8 10
3J 4R     is illegal.
1 4I 3M   is illegal.
1 4I J    is illegal.
```

2. Vertical Input Format

Column input is particularly useful for cell parameters and source distributions. Cell importances or volumes strung out on horizontal input lines are not very readable and often cause errors when users add or delete cells. In column format, all the cell parameters for one cell can be on a single line, labeled with the name of the cell. If a cell is deleted, the user deletes just one line of cell parameters instead of hunting for the data item that belongs to the cell in each of several multiline cell parameter cards. For source distributions, corresponding SI, SP, and SB values are side by side. Source options, other than defaults, are on the next line and must all be entered explicitly. The & continuation symbol is not needed, and if present, is ignored.

In column format, card names are put side by side on one input line and the data values are listed in columns under the card names. A # is put somewhere in columns 1–5 on the line with the card names. The card names must be all cell parameters, all surface parameters, or all something else. If a card name appears on a # card, there must not be a regular horizontal card by that name in the same input file. If there are more entries on data value lines than card names on the # line, the first data entry is a cell or surface number. If any cell names are entered, all must be entered. If cell names are entered, the cells don't have to be in the same order as they are in the cell cards block. If cell names are omitted, the default order is the order of the cells in the cell card block. The same rules apply to surface parameters, but because we presently have only one surface parameter (AREA), column input of surface parameters is less useful.

There can be more than one block of column data in an input file. Typically, there would be one block for cell parameters and one for each source distribution. If a lot of cell parameter options are being used, additional blocks of column data would be needed.

The entries in each column do not need to be precisely under the card name at the top of the column, but you might want the columns to be reasonably neat for readability. The column format is intended for input data that naturally fit into columns of equal length, but less tidy data are not prohibited. If a longer column is to the right of a shorter column, the shorter column must be filled with enough J entries to eliminate any ambiguity about which columns the data items are in.

Special syntax items (R, M, I, and J) are not as appropriate in column format as they are on horizontal lines, but they are not prohibited. They are, of course, interpreted vertically instead of horizontally. Multiple special syntax items, such as 9R, are not allowed if cell or surface names are present.

The form of a column input block is

#	S_1	S_2	...	S_m
K_1	D_{11}	D_{12}	...	D_{1m}
K_2	D_{21}	D_{22}	...	D_{2m}
⋮	⋮	⋮	⋮	⋮
K_n	D_{n1}	D_{n2}	...	D_{nm}

1. The # is somewhere in columns 1–5.
2. Each line can be only 80 columns wide.
3. Each column, S_i through D_{li} , where l may be less than n , represents a regular input card.
4. The S_i must be valid MCNP card names. They must be all cell parameters, all surface parameters, or all something else.
5. D_{1i} through D_{ni} must be valid entries for an S_i card, except that $D_{l+1,i}$ through D_{ni} may be some J 's possibly followed by some blanks.
6. If D_{ji} is nonblank, $D_{j,i-1}$ must also be nonblank. A J may be used if necessary to make $D_{j,i-1}$ nonblank.
7. The S_i must not appear anywhere else in the input file.
8. The K_j are optional integers. If any are nonblank, all must be nonblank.
9. If the S_i are cell parameter card names, the K_j , if present, must be valid cell names. The same is true with surface parameters.
10. If the K_j are present, the D_{ji} must not be multiple special syntax items, such as 9R.

E. Particle Designators

Several of the input cards require a particle designator to distinguish between input data for neutrons, for photons and for electrons. These cards are IMP, EXT, FCL, WWN, WWE, WWP, WWGE, DXT, DXC, F, F5X, F5Y, F5Z, PHYS, ELPT, ESPLT, and CUT. The particle designator consists of the symbol : (colon) and the letter N, P or E immediately after the name of the card. At least one blank must follow the particle designator. For example, to enter neutron importances, use an IMP:N card; enter photon importances on an IMP:P card. To specify the same value for more than one kind of particle, a single card can be used instead of several. Example: IMP:E,P,N 1 1 0. With a tally card, the particle designator follows the card name including tally number. For example, *F5:N indicates a neutron point detector energy tally. In the heating tally case, both particle designators may appear. The syntax F6:N,P indicates the combined heating tally for both neutrons and photons.

F. Default Values

Many MCNP input parameters have default values, which are summarized on page 3–132. Therefore you do not always have to specify explicitly

CHAPTER 3

INP File

every input parameter every time if the defaults match your needs. If an input card is left out, the default values for all parameters on the card are used (the photon cutoff card with its five entries is an example). However, if you want to change a particular defaulted parameter on a card but that parameter is preceded by others, you have to specify the others or use the nJ jump feature to jump over the parameters for which you still want the default. CUT:P 3J -.10 is a convenient way to use the defaults for the first three parameters on the photon cutoff card but change the fourth.

G. Input Error Messages

MCNP makes extensive checks (over 400) of the input file for user errors. A fatal error message is printed, both at the terminal and in the OUTF file, if the user violates a basic constraint of the input specification, and MCNP will terminate before running any particles. The first fatal error is real; subsequent error messages may or may not be real because of the nature of the first fatal message.

The FATAL option on the MCNP execution line instructs MCNP to ignore fatal errors and run particles, but the user should be extremely cautious about doing this.

Most MCNP error messages are warnings and are not fatal. The user should not ignore these messages but should understand their significance before making important calculations.

In addition to FATAL and WARNING messages, MCNP issues BAD TROUBLE messages immediately before any impending catastrophe, such as a divide by zero, which would otherwise cause the program to “crash.” MCNP terminates as soon as the BAD TROUBLE message is issued. User input errors in the INP file are the most common reason for issuing a BAD TROUBLE message. These error messages indicate what corrective action is required.

H. Geometry Errors

There is one very important kind of input error that MCNP will not detect while processing data from the INP file. MCNP cannot detect overlapping cells or gaps between cells until a particle track actually gets lost. Even then the precise nature of the error may remain unclear. However, there is much that you can and should do to check your geometry before starting a long computer run.

Use the geometry-plotting feature of MCNP to look at the system from several directions and at various scales. Be sure that what you see is what you intend. Any gaps or overlaps in the geometry will probably show up as dashed lines. The intersection of a surface with the plot plane is drawn as a dashed line if there is not exactly one cell on each side of the surface at each point. Dashed lines can also appear if the plot plane happens to coincide with a plane of the problem, if there are any cookie-cutter cells in the source, or if there are DXTRAN spheres in the problem.

Set up and run a short problem in which your system is flooded with particle tracks from an external source. The necessary changes in the INP file are as follows:

1. Add a VOID card. This will override some of the other specifications in the problem to make all the cells voids, turn heating tallies into flux tallies, and turn off any FM cards.
2. Add another cell and a large spherical surface to the problem such that the surface surrounds the system and the old outside world cell is split by the new surface into two cells: the space between the system and the new surface, which is the new cell, and the space outside the new surface, which is now the outside world cell. Be sure that the new cell has nonzero importance. Actually, it is best to make all nonzero importances equal. If the system is infinite in one or two dimensions, use one or more planes instead of a sphere.
3. Replace the source specifications by an inward directed surface source to flood the geometry with particles:

SDEF SUR=m NRM=-1

where m is the number of the new spherical surface added in Step 2. If the new surface is a plane, you must specify the portion to be used by means of POS and RAD or possibly X, Y, and Z source distributions.

Because there are no collisions, a short run will generate a great many tracks through your system. If there are any geometry errors, they should cause some of the particles to get lost.

When a particle first gets lost, whether in a special run with the VOID card or in a regular production run, the history is rerun to produce some special output on the OUTF file. Event-log printing is turned on during the rerun. The event log will show all surface crossings and will tell you the path the particle took to the bad spot in the geometry. When the particle again gets lost, a description of the situation at that point is printed. You can usually deduce the cause of the lost particle from this output. It is not possible to rerun lost particles in a multitasking run.

If the cause of the lost particle is still obscure, try plotting the geometry with the origin of the plot at the point where the particle got lost and with the horizontal axis of the plot plane along the direction the particle was moving. The cause of the trouble is likely to appear as a dashed line somewhere in the plot or as some discrepancy between the plot and your idea of what it should look like.

II. CELL CARDS

Form: j m d geom params
or: j LIKE n BUT list

j = cell number; $1 \leq j \leq 99999$.

 If cell has transformation, $1 \leq j \leq 999$. See page 3-23.

CHAPTER 3 Cell Cards

- m = 0 if the cell is a void.
= material number if the cell is not a void. This indicates that the cell is to contain material m , which is specified on the Mm card. See page 3–95.
- d = absent if the cell is a void.
= cell material density. A positive entry is interpreted as the atomic density in units of 10^{24} atoms/cm³. A negative entry is interpreted as the mass density in units of g/cm³.
- geom = specification of the geometry of the cell. It consists of signed surface numbers and Boolean operators that specify how the regions bounded by the surfaces are to be combined.
- params = optional specification of cell parameters by entries in the keyword=value form.
- n = name of another cell
- list = set of keyword=value specifications that define the attributes that differ between cell n and j .

In the geometry specification, a signed surface number stands for the region on the side of the surface where points have the indicated sense. The plus sign for positive sense is optional. The regions are combined by Boolean operators: intersection (no symbol—implicit, like multiplication in algebra); union, `::`; and complement, `#`. Parentheses can be used to control the order of the operations. Parentheses and operator symbols also function as delimiters. Where they are present, blank delimiters are not necessary. The default order of operations is complement first, intersection second, and union last. A number immediately after a complement operator, without parentheses, is interpreted as a cell number and is shorthand for the geometry specification of that cell number.

```
Example: 3 0 -1 2 -4 $ definition of cell 3
          #3          $ equivalent to next line
          #(-1 2 -4)
```

For a simple cell (no union or complement operators), the geometry specification is just a blank-delimited list of the bounding surfaces and ambiguity surfaces of the cell with signs determined by the sense of the cell with respect to each surface. See the Geometry sections of Chapters 1, 2, and 4 for complete explanations of how to specify the geometry of cells in MCNP.

Cell parameters can be defined on cell cards instead of in the data card section of the INP file. A blank is equivalent to the equal sign. If a cell parameter is entered on any cell card, a cell-parameter card with that name can not be present, nor can the mnemonic appear on any column-format input card. Some cell parameters can be specified on cell cards and a different subset on cell-parameter or column-format cards. The form is keyword=value, where the allowed keywords are IMP, VOL, PWT, EXT, FCL, WWN, DXC, NONU, PD, and TMP, with particle designators where necessary. Four cell parameter cards associated with the repeated structures capability are U,

TRCL, LAT and FILL. Like any cell parameter card, these four cards can be placed in the data card section of the INP file. Our recommendation is that the mnemonic and entry for each cell be placed on the cell card line after the cell description. The entries on the TRCL card and the FILL card, in particular, can be quite long and involved and it seems to be conceptually simpler when they are placed on the cell card line.

The LIKE n BUT feature uses keywords for the cell material number and density. The mnemonics are MAT and RHO, respectively. These keywords only can be used following the LIKE n BUT construct. In a normal cell description, material number and density are still the second and third entries on the cell card.

TMP and WWN data can be entered on cell cards in two ways. The keyword=value form TMP1=value TMP2=value etc. can be used or a special syntax is available where the single keyword TMP is followed by all the temperatures of the cell in an order corresponding to the times on the THTME card. The form for the WWN card is analogous: WWN1:n=value or WWN:n followed by all the lower weight bounds for the energy intervals of the cell.

Example: 10 16 -4.2 1 -2 3 IMP:N=4 IMP:P=8 EXT:N=-.4X

This says that cell 10 is to be filled with material 16 at a density of 4.2 g/cm³. The cell consists of the intersections of the regions on the positive side of surface 1, the negative side of surface 2, and the positive side of surface 3. The neutron importance in cell 10 is 4 and the photon importance is 8. Neutrons in cell 10 are subject to an exponential transform in the minus X direction with stretching parameter 0.4.

Here are some precautions for when you are preparing cell cards:

1. Avoid excessively complicated cells. MCNP runs faster when the problem geometry is made up of many simpler cells rather than fewer more complicated cells. The maximum number of items (surface numbers, operators, and parentheses) in a cell description, after all complement operators have been expanded, is 100. Most cell descriptions should be much shorter than that.
2. Avoid adding unneeded surfaces to the geometry description of a cell through poor use of the complement operator. The extra surfaces make the problem run slower and may destroy the necessary conditions for volume and area calculations. See page 4–14.
3. Always use the geometry-plotting feature of MCNP to check the geometry of a problem. See Appendix B.
4. Flood the system with particles from an outside source to find errors in the geometry. See page 3–8.
5. If you add or remove cells, change all your cell parameter cards accordingly. The difficulty of this can be reduced if you use vertical format for your cell parameter cards. See page 3–6. Alternatively, define the values of cell parameters on cell cards and eliminate cell parameter cards entirely.

CHAPTER 3 Surface Cards

A. Shorthand Cell Specification

The LIKE n BUT feature is very useful in problems with a lot of repeated structures. Cell j inherits from cell n the values of all attributes that are not specified in the list. The cell card for cell n must be before the cell card for cell j in the INP file. Any card name that appears after the BUT is a cell parameter on a cell card and, therefore, must appear on cell cards only, not on any cards in the data block of the INP file.

Example: 2 3 -3.7 -1 IMP:N=2 IMP:P=4
3 LIKE 2 BUT TRCL=1 IMP:N=10

This says that cell 3 is the same as cell 2 in every respect except that cell 3 has a different location (TRCL=1) and a different neutron importance. The material in cell 3, the density and the definition are the same as cell 2 and the photon importance is the same.

III. SURFACE CARDS

A. Surfaces Defined by Equations

Form: j n a list

- j = surface number: $1 \leq j \leq 99999$, with asterisk for a reflecting surface or plus for a white boundary.
If cell or surface has transformation, $1 \leq j \leq 999$. See page 3–23.
- n = absent or 0 for no coordinate transformation.
= > 0, specifies number of a TRn card.
= < 0, specifies surface j is periodic with surface n.
- a = equation mnemonic from Table 3.1
- list = one to ten entries, as required.

The surface types, equations, their mnemonics, and the order of the card entries are given in Table 3.1. To specify a surface by this method, find the surface in Table 3.1 and determine the coefficients for the equation (you may need to consult a book on analytical geometry). The information is entered on a surface card according to the above form. Under certain conditions a surface can also be defined by specifying geometrical points, as discussed in the next two sections.

A point (x, y, z) is defined as having positive sense with respect to a surface when the expression for that surface evaluated at (x, y, z) is positive. The expression for a surface is the left side of the equation for the surface in Table 3.1. With the sphere, cylinder, cone, and torus, this definition is identical to defining the sense to be positive outside the figure. With planes normal to axes (PX, PY, or PZ), the definition gives positive sense for points with x , y , or z values exceeding the intercept of the plane. For the P, SQ and GQ surfaces, the user supplies all of the coefficients for the expression and thus can determine the sense of the surface at will. This is different from the other cases where the sense, though arbitrary, is uniquely determined by the

form of the expression. Therefore, in a surface transformation (see the TRn card on page 3–26) a PX, PY, or PZ surface will sometimes be replaced by a P surface just to prevent the sense of the surface from getting reversed.

If the surface number is preceded by an asterisk, a reflecting surface is defined. A particle track that hits a reflecting surface is reflected specularly. If the surface number is preceded by a plus, a white boundary is defined. Detectors and DXTRAN (next–event estimators) usually should not be used in problems that have reflecting surfaces or white boundaries. See page 2–81. Tallies in problems with reflecting surfaces will need to be normalized differently. See page 2–13.

A negative second entry n specifies that surface j is periodic with surface k. The following restrictions apply:

1. Surfaces j and k must be planes.
2. No surface transformation is allowed for the periodic planes.
3. The periodic cell(s) can be infinite or bounded by planes on the top and bottom that can be reflecting or white, but cannot be periodic.
4. Periodic planes can only bound other periodic planes or top and bottom planes.
5. A single zero–importance cell must be on one side of each periodic plane.
6. All periodic planes must have a common rotational vector normal to the geometry top and bottom.
7. Next–event estimators such as detectors and DXTRAN should not be used.

CHAPTER 3
Surface Cards

Table 3.1 MCNP Surface Cards

Mnemonic	Type	Description	Equation	Card Entries
P	Plane ↓	General	$Ax + By + Cz - D = 0$	$ABCD$
PX		Normal to X-axis	$x - D = 0$	D
PY		Normal to Y-axis	$y - D = 0$	D
PZ		Normal to Z-axis	$z - D = 0$	D
SO	Sphere ↓	Centered at Origin	$x^2 + y^2 + z^2 - R^2 = 0$	R
S		General	$(x - \bar{x})^2 + (y - \bar{y})^2 + (z - \bar{z})^2 - R^2 = 0$	$\bar{x} \bar{y} \bar{z} R$
SX		Centered on X-axis	$(x - \bar{x})^2 + y^2 + z^2 - R^2 = 0$	$\bar{x} R$
SY		Centered on Y-axis	$x^2 + (y - \bar{y})^2 + z^2 - R^2 = 0$	$\bar{y} R$
SZ		Centered on Z-axis	$x^2 + y^2 + (z - \bar{z})^2 - R^2 = 0$	$\bar{z} R$
C/X	Cylinder ↓	Parallel to X-axis	$(y - \bar{y})^2 + (z - \bar{z})^2 - R^2 = 0$	$\bar{y} \bar{z} R$
C/Y		Parallel to Y-axis	$(x - \bar{x})^2 + (z - \bar{z})^2 - R^2 = 0$	$\bar{x} \bar{z} R$
C/Z		Parallel to Z-axis	$(x - \bar{x})^2 + (y - \bar{y})^2 - R^2 = 0$	$\bar{x} \bar{y} R$
CX		On X-axis	$y^2 + z^2 - R^2 = 0$	R
CY		On Y-axis	$x^2 + z^2 - R^2 = 0$	R
CZ		On Z-axis	$x^2 + y^2 - R^2 = 0$	R
K/X	Cone ↓	Parallel to X-axis	$\sqrt{(y - \bar{y})^2 + (z - \bar{z})^2} - t(x - \bar{x}) = 0$	$\bar{x} \bar{y} \bar{z} t^2 \pm 1$
K/Y		Parallel to Y-axis	$\sqrt{(x - \bar{x})^2 + (z - \bar{z})^2} - t(y - \bar{y}) = 0$	$\bar{x} \bar{y} \bar{z} t^2 \pm 1$
K/Z		Parallel to Z-axis	$\sqrt{(x - \bar{x})^2 + (y - \bar{y})^2} - t(z - \bar{z}) = 0$	$\bar{x} \bar{y} \bar{z} t^2 \pm 1$
KX		On X-axis	$\sqrt{y^2 + z^2} - t(x - \bar{x}) = 0$	$\bar{x} t^2 \pm 1$
KY		On Y-axis	$\sqrt{x^2 + z^2} - t(y - \bar{y}) = 0$	$\bar{y} t^2 \pm 1$
KZ		On Z-axis	$\sqrt{x^2 + y^2} - t(z - \bar{z}) = 0$	$\bar{z} t^2 \pm 1$
				± 1 used only for 1 sheet cone
SQ	Ellipsoid Hyperboloid Paraboloid	Axes parallel to X-, Y-, or Z-axis	$A(x - \bar{x})^2 + B(y - \bar{y})^2 + C(z - \bar{z})^2 + 2D(x - \bar{x}) + 2E(y - \bar{y}) + 2F(z - \bar{z}) + G = 0$	$A B C D E$ $F G \bar{x} \bar{y} \bar{z}$
GQ	Cylinder Cone Ellipsoid Hyperboloid Paraboloid	Axes not parallel to X-, Y-, or Z-axis	$Ax^2 + By^2 + Cz^2 + Dxy + Eyz + Fzx + Gx + Hy + Jz + K = 0$	$A B C D E$ $F G H J K$
TX	Elliptical or circular torus. Axis is Parallel to X-, Y-, or Z-axis		$(x - \bar{x})^2/B^2 + (\sqrt{(y - \bar{y})^2 + (z - \bar{z})^2} - A)^2/C^2 - 1 = 0$	$\bar{x} \bar{y} \bar{z} A B C$
TY			$(y - \bar{y})^2/B^2 + (\sqrt{(x - \bar{x})^2 + (z - \bar{z})^2} - A)^2/C^2 - 1 = 0$	$\bar{x} \bar{y} \bar{z} A B C$
TZ			$(z - \bar{z})^2/B^2 + (\sqrt{(x - \bar{x})^2 + (y - \bar{y})^2} - A)^2/C^2 - 1 = 0$	$\bar{x} \bar{y} \bar{z} A B C$
X Y Z P	Surfaces defined by points		See pages 3-16 and 3-18	

Example 1: j PY 3

This describes a plane normal to the y -axis at $y = 3$ with positive sense for all points with $y > 3$.

Example 2: j K/Y 0 0 2 .25 1

This specifies a cone whose vertex is at $(x, y, z) = (0, 0, 2)$ and whose axis is parallel to the y -axis. The tangent t of the opening angle of the cone is 0.5 (note that t^2 is entered) and only the positive (right hand) sheet of the cone is used. Points outside the cone have a positive sense.

Example 3: j GQ 1 .25 .75 0 - .866
0 -12 -2 3.464 39

This is a cylinder of radius 1 cm whose axis is in a plane normal to the x -axis at $x = 6$, displaced 2 cm from the x -axis and rotated 30° about the x -axis off the y -axis toward the z -axis. The sense is positive for points outside the cylinder. Such a cylinder would be much easier to specify by first defining it in an auxiliary coordinate system where it is symmetric about a coordinate axis and then using the TRn input card (see page 3–26) to define the relation between the basic and auxiliary coordinate systems. The input would then be

j 7 CX 1
*TR7 6 1 -1.732 0 30 60

See Chapter 4 for additional examples of the TRn card.

The TX, TY, and TZ input cards represent elliptical tori (fourth degree surfaces) rotationally symmetric about axes parallel to the x , y , and z axes, respectively. A TY torus is illustrated in Figure 3.1a. Note that the input parameters $\bar{x} \bar{y} \bar{z} a b c$ specify the ellipse

$$\frac{s^2}{b^2} + \frac{(r - a)^2}{c^2} = 1$$

rotated about the s -axis in the (r, s) cylindrical coordinate system (Figure 3.1b) whose origin is at \bar{x} , \bar{y} , \bar{z} in the x, y, z system. In the case of a TY torus,

$$s = (y - \bar{y})$$

$$\text{and } r = \sqrt{(x - \bar{x})^2 + (z - \bar{z})^2}$$

A torus is degenerate if $|a| < c$ where $0 < a < c$ produces the outer surface (Figure 3.1c), and $-c < a < 0$ produces the inner surface (Figure 3.1d).

Coordinate transformations for tori are limited to those in which each axis of the auxiliary coordinate system is parallel to an axis of the main system.

CHAPTER 3
Surface Cards

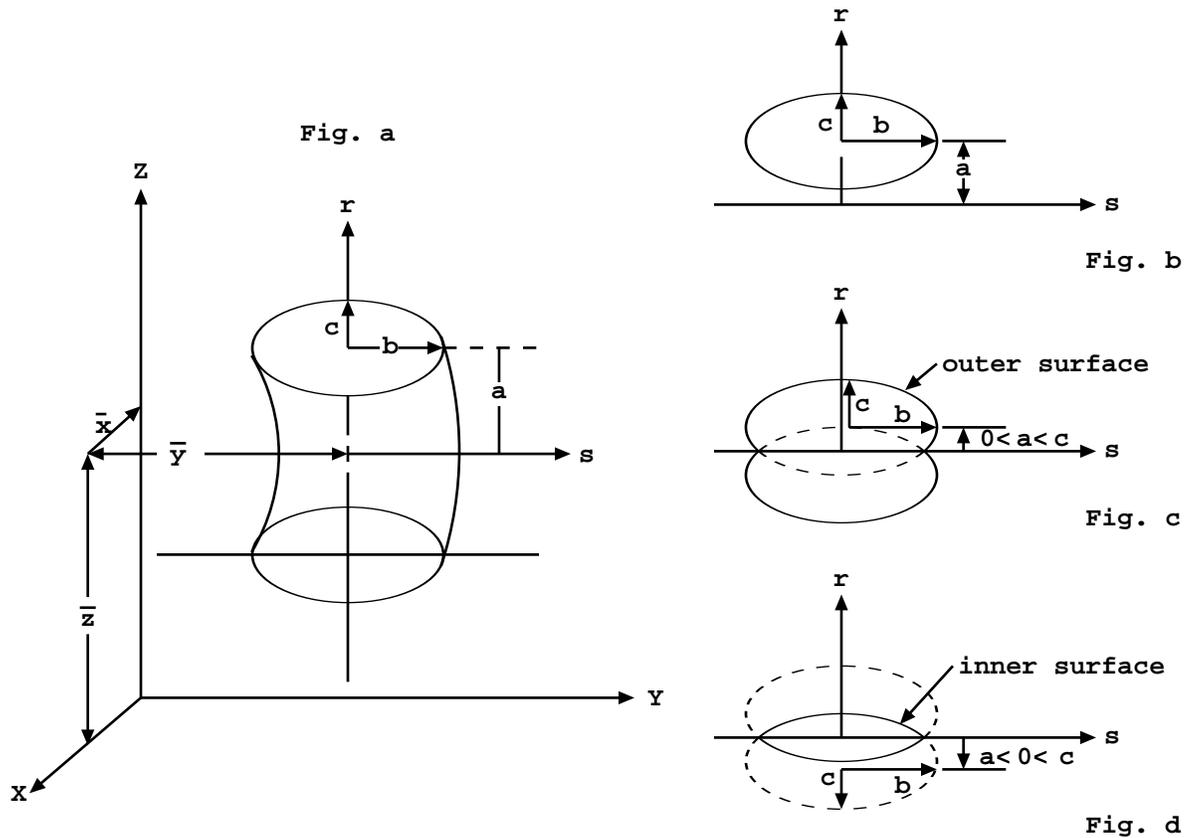


Figure 3.1 Torus

B. Axisymmetric Surfaces Defined by Points

Form: j n a list

- j = surface number: $1 \leq j \leq 99999$
- n = absent for no coordinate transformation, or number of TRn card.
- a = the letter X, Y, or Z
- list = one to three coordinate pairs.

Surface cards of type X, Y, and Z may be used to describe surfaces by coordinate points rather than by equation coefficients as in the previous section. The surfaces described by these cards must be symmetric about the x -, y -, or z -axis, respectively, and, if the surface consists of more than one sheet, the specified coordinate points must all be on the same sheet.

Each of the coordinate pairs defines a geometrical point on the surface. On the Y card, for example, the entries may be

$$j \quad Y \quad y_1 \quad r_1 \quad y_2 \quad r_2$$

where $r_i = \sqrt{(x_i^2 + z_i^2)}$ and y_i is the coordinate of point i .

If one coordinate pair is used, a plane (PX, PY, or PZ) is defined.

If two coordinate pairs are used, a linear surface (PX, PY, PZ, CX, CY, CZ, KX, KY, or KZ) is defined.

If three coordinate pairs are used, a quadratic surface (PX, PY, PZ, SO, SX, SY, SZ, CX, CY, CZ, KX, KY, KZ, or SQ) is defined.

When a cone is specified by two points, a cone of only one sheet is generated.

The senses of these surfaces (except SQ) are determined by the code to be identical to the senses one would obtain by specifying the surface by equations. For SQ, the sense is defined so that points sufficiently far from the axis of symmetry have positive sense. Note that this is different from the equation-defined SQ, where the user could choose the sense freely.

Example 1: j X 7 5 3 2 4 3

This describes a surface symmetric about the x -axis, which passes through the three (x, r) points (7,5), (3,2), and (4,3). This surface is a hyperboloid of two sheets, converted in MCNP to its equivalent

j SQ -0.083333333 1 1 0 0 0 68.52083 -26.5 0 0.

Example 2: j Y 1 2 1 3 3 4

This describes two parallel planes at $Y=1$ and $Y=3$ and is a fatal error because the requirement that all points be on the same sheet is not met.

Example 3: j Y 3 0 4 1 5 0

This describes a sphere of radius 1 with center at $(x, y, z) = (0, 4, 0)$.

Example 4: j Z 1 0 2 1 3 4

This surface is rejected because the points are on two different sheets of the hyperboloid

$$x^2 + y^2 - 7z^2 + 20z - 13 = 0 \quad .$$

However, the surface

j Z 2 1 3 4 5 9.380832

which has the same surface equation as above is accepted because all coordinates lie on a single surface, the right sheet of the hyperboloid.

Example 5: 1 0 1 -2 3 \$ cell 1

1	Y	-3	2	2	1	
2	Y	2	3	3	3	4 2
3	Y	2	1	3	1	4 2

This final example defines a cell bounded by a cone, hyperboloid, and an ellipsoid. The three surfaces define the donut-like cell that is symmetric about the y -axis. A cross section of this cell is seen in Figure 3.2. To plot this view, type $PX=0$ $EX=5$. One surface goes through the points (-3,2) and (2,1). The second surface goes through (2,3), (3,3), and (4,2). The last surface is defined by the points (2,1), (3,1), and (4,2). These coordinate

CHAPTER 3

Data Cards

points are in the form (y, r) . Using these cards, MCNP indicates that surface 1 is a cone of one sheet, surface 2 is an ellipsoid, and surface 3 is a hyperboloid of one sheet. The equation coefficients for the standard surface equations are printed out for the various surfaces when the PRINT input card or execution option is used. For example, an SQ card defining surface 3 is

```
3      SQ    1 -1.5 1 0 0 0  -.625 0 2.5 0
```

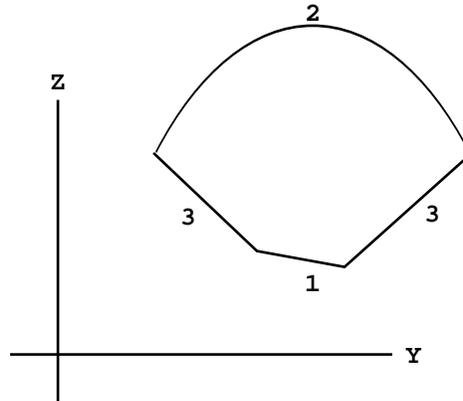


Figure 3.2

C. General Plane Defined by Three Points

Form: j n P $X_1 Y_1 Z_1 X_2 Y_2 Z_2 X_3 Y_3 Z_3$

j = surface number: $1 \leq j \leq 99999$ or ≤ 999 if repeated structure.

n = absent or 0 for no coordinate transformation.

= > 0 , specifies number of a TRn card.

= < 0 , specifies surface j is periodic with surface n .

(X_i, Y_i, Z_i) = coordinates of points to define the plane.

If there are four entries on a P card, they are assumed to be the general plane equation coefficients as in Table 3.1. If there are more than four entries, they give the coordinates of three points lying in the desired plane. The code converts them to the required surface coefficients to produce the plane

$$Ax + By + Cz - D = 0 \quad .$$

The sense of the plane is determined by requiring the origin to have negative sense. If the plane passes through the origin ($D = 0$), the point $(0, 0, \infty)$ has positive sense. If this fails ($D = C = 0$), the point $(0, \infty, 0)$ has positive sense. If this fails ($D = C = B = 0$), the point $(\infty, 0, 0)$ has positive sense. If this fails, the three points lie in a line and a fatal error is issued.

IV. DATA CARDS

All MCNP input cards other than those for cells and surfaces are entered after the blank card delimiter following the surface card block. The

CHAPTER 3 Geometry Cards

mnemonic must begin within the first five columns. These cards fall into the following categories:

<u>Category</u>	<u>Page</u>
(A) Problem type	3–19
(B) Geometry cards	3–19
(C) Variance reduction	3–28
(D) Source specification	3–39
(E) Tally specification	3–62
(F) Material and cross section specification	3–95
(G) Energy and thermal treatment	3–103
(H) Problem cutoffs	3–110
(I) User data arrays	3–113
(J) Peripheral cards	3–113

These card categories are described below. Only the cards listed on page 3–3 are allowed in a continue-run input file. No data card can be used more than once with the same number or particle type designations. For example, M1 and M2 are acceptable, as are CUT:N and CUT:P, but two M1 cards or two CUT:N cards are disallowed.

A. Problem Type (MODE) Card

Form: MODE $x_1 \dots x_i$

$x_i =$ N for neutron transport
 P for photon transport
 E for electron transport

Default: If the MODE card is omitted, MODE N is assumed.

Use: A MODE card is required unless MODE=N. The entries are space delineated.

B. Geometry Cards

<u>Mnemonic</u>	<u>Card Type</u>	<u>Page</u>
VOL	Cell volumes	3–20
AREA	Surface areas	3–20
U	Universes	3–22
TRCL	Cell transformations	3–23
LAT	Lattices	3–24
FILL	Fill card	3–25
TR	Coordinate transformation	3–26

CHAPTER 3 Geometry Cards

1. VOL Cell Volume Card

Form: VOL $x_1 x_2 \dots x_i$
or: VOL NO $x_1 x_2 \dots x_i$

x_i = volume of cell i where $i=1, 2, \dots$ number of cells in the problem.
NO = no volumes or areas are calculated.

Default: MCNP attempts to calculate the volume of all cells unless “NO” appears on the VOL card. If no value is entered for a cell on the VOL card, the calculated volume is used.

Use: Optional card used to input cell volumes.

With the VOL card, if the number of entries does not equal the number of cells in the problem, it is a fatal error. Use the nJ feature to skip over cells for which you do not want to enter values. The entry NO on the VOL card will bypass the volume calculation altogether. The x_i entries following NO are optional. If present, x_i entries are the volume values the code will use. For some problems the NO option saves considerable computer time.

Volumes or masses of cells are required for some tallies. MCNP calculates the volumes of all cells that are rotationally symmetric (generated by surfaces of revolution) about any axis, even a skew axis. It will also calculate the volumes of polyhedral cells. As a byproduct of the volume calculation, areas and masses are also calculated. These volumes, areas, and masses can be printed in the OUTF file by using the PRINT card. The user can enter values on the VOL card for the volume of any cell and these values, instead of the calculated values, will be used for tally purposes. If a cell volume required for a tally cannot be calculated and is not entered on the VOL or SDn cards, a fatal error message is printed.

The VOL card provides an alternative way to enter volumes required by tallies. Normally the SDn card would be used. The VOL card can be used only for cell volumes, whereas the SDn card can be used for cell and segment volumes or masses.

Volumes of cells or segments that cannot be calculated by MCNP or by the user can be obtained in a separate MCNP run using the ray-tracing technique described on page 2–165.

2. AREA Surface Area Card

Form: AREA $x_1 \dots x_i \dots x_n$

x_i = area of surface i where $i=1, 2, \dots$ number of surfaces in the problem.

Default: MCNP attempts to calculate the area of all surfaces. If no value is entered for a surface on the AREA card, the calculated area, if any, is used.

Use: Optional card used to input surface areas.

This card is analogous to the VOL card. MCNP calculates the area of surfaces as a byproduct of the volume calculation. If the volume of all cells

on either side of the surface can be calculated, the area of the surface will be calculated. Otherwise the area calculation will fail. A fatal error occurs if an area is required for tallying purposes and is not available either from the MCNP calculation or from an AREA or SDn card.

The AREA card provides an alternative way to enter areas required by tallies. Normally the SDn card would be used. The AREA card can be used only for areas of whole surfaces, whereas the SDn card can be used for areas of surface segments as well as whole surfaces.

3-6. Repeated Structures Cards

The primary goal of the repeated-structures capability is to make it possible to describe only once the cells and surfaces of any structure that appears more than once in a geometry. The amount of input data the user has to provide and the amount of computer memory needed by problems that have a lot of geometrical repetition is reduced. Problems that would be impractical because they take an unreasonable amount of work to set up or they use too much memory can be run. One example of such a problem is a reactor core that has dozens of nearly identical fuel modules. Another example is a room containing some complicated nearly identical objects arranged in some not necessarily regular order. This feature reduces input and memory use but problems won't run any faster than with any other description. Examples of the use of repeated structures cards are in Chapter 4.

The repeated structures capability extends the concept of an MCNP cell. The user can specify that a cell is to be filled with something called a universe. A universe is either a lattice or an arbitrary collection of cells. A single universe, described only once, can be designated to fill each of any number of cells in the geometry. Some or all of the cells in a universe may themselves be filled with universes.

Several concepts and cards combine in order to use this capability.

- Remember that cell parameters can be defined on cell cards.
- The “*LIKE m BUT*” feature is a shorthand making it possible to make one cell equivalent to another except for assorted attributes that can be specified with keyword=value entries. See page 3–11.
- The *universe* card, the U card, is used to specify to what universe the cell belongs.
- The *fill* card is used to specify with which universe a cell is to be filled.
- The *TRCL* card makes it possible to define only once the surfaces that bound several cells identical in size and shape but located at different places in the geometry. It follows the transformation rules established for the TR card. See page 3–26.
- The *lattice* card, the LAT card, is used to define an infinite array of hexahedra or hexagonal prisms. The order of specification of the surfaces of a lattice cell identifies which lattice element lies beyond each surface.
- A general source description can be defined in a repeated structures part of the geometry. Surface source surfaces must be regular MCNP surfaces, not surfaces associated with a repeated structures part of the geometry. No

CHAPTER 3

Geometry Cards

check is made that this requirement is met. The user must remember and this notification is your only warning.

- An importance in a cell that is in a universe is interpreted as a multiplier of the importance of the filled cell. Weight–window lower bounds are handled the same way.

Chapter 4 contains several examples that illustrate the repeated structures input and logic. The reader is strongly encouraged to become familiar with these examples and to use them as teaching aids to help understand the card descriptions that follow.

3. U Universe Card

As mentioned earlier, a universe may be either a lattice or a collection of ordinary cells. A nonzero entry on the U card is the number of the universe that the corresponding cell belongs to. Lack of a U card or a zero entry means that the cell does not belong to any universe. Universe numbers are arbitrary integers chosen by the user. The FILL card, page 3–25, indicates that a cell is filled by all the cells having a corresponding integer entry on the U card. The cells of a universe may be finite or infinite, but they must fill all of the space inside any cell that the universe is specified to fill.

One way to think about the connection between a filled cell and the filling universe is that the filled cell is a “window” that looks into a second level, like a window in a wall provides a view of the outdoors. Cells in the second level can be infinite because they will be “ended” when they bump into or intersect the surfaces of the “window.” The second level can have its own origin, in a primed coordinate system, unrelated to the upper level origin. However, if the filled cell and filling universe have all their surfaces in the same coordinate system, one TRCL card, explained on page 3–23, will define the coordinate system of both filled and filling cells. The first repeated structures example in Chapter 4 illustrates this fact.

A cell in a universe can be filled by another universe, in which case a third level is introduced. There is a maximum of 20 levels, more than most problems will need. To clarify some jargon about hierarchies, the highest to lowest level is in inverse order to the associated numerical value. The highest level is level zero, lower is level one, lower still is level two, etc.

In version 4B the surfaces of a filled cell and those in a filling universe CAN be coincident. In other words, the cells of a universe can fit exactly into the filled cell. The following cell and surface cards illustrate this feature.. They represent a 50 x 20 x 10–cm box filled with a lattice of 10 x 10 x 10–cm cubes, each of which is filled with a sphere.

A problem will run faster by preceding the U card entry with a minus sign for any cell that is not truncated by the boundary of any higher level cell. The minus sign indicates that calculating distances to boundary in higher level cells can be omitted. In the problem below, cell 3 has a negative universe number. It is a finite cell and is not truncated by any other cell. Cell 4 cannot have a negative universe number because it is an infinite region that is truncated by cell 2.

CHAPTER 3 Geometry Cards

CAUTION: Use this capability AT YOUR OWN RISK. MCNP cannot detect errors in this feature as the logic that enables detection is omitted by the presence of the negative universe. Extremely wrong answers can be quietly calculated. Use this feature with EXTREME caution. Plot several views of the geometry or run with the VOID card (see page 3–8) to check for errors.

```

1    0    1 -2 -3 4 -5 6    fill=1
2    0    -7 1 -3 8    u=1 fill=2 lat=1
3    0    -11                u=-2
4    0    11                u=2
5    0    -1:2:3:-4:5:-6

1    px    0
2    px    50
3    py    10
4    py    -10
5    pz    5
6    pz    -5
7    px    10
8    py    0
10   py    10
11   s     5 5 0 4

```

Every cell in the problem is either part of the real world (universe level 0) or part of some universe, but the surfaces of a problem are less restricted. A single surface can be used to describe cells in more than one universe. Coincident surfaces can not be reflecting or periodic, source surfaces, or tally surfaces. If the surface is used for tallying, a duplicate surface with another name will have to be used in places where that tally is not supposed to be made. Materials are normally put into the cells of the lowest level universe, not in the higher level but there is an exception in the case of a lattice.

4. TRCL Cell Transformation Card

The TRCL card makes it possible to describe just once the surfaces that bound several cells identical in size and shape but located at different places in the geometry. It is especially valuable when these cells are filled with the same universe. If the surfaces of these filled cells and the surfaces of the cells in the universe that fills them are all described in the same auxiliary coordinate system, a single transformation will completely define the interior of all these filled cells because the cells of the universe will inherit the transformation of the cells they fill.

The basic form of an entry is an integer that is interpreted as the number of a TR card that contains a transformation for all of the surfaces of the cell and is located in the data card section of the INP file. The absence of the TRCL card or zero means there is no transformation, the default. The actual transformation can be entered following the TRCL mnemonic, enclosed by parentheses. If the actual transformation is entered, all the rules applying to the TR card (page 3–26) are valid. If the symbol *TRCL is used, the

CHAPTER 3

Geometry Cards

rotation matrix entries are angles in degrees instead of cosines, the same as the *TR card.

If a cell has a transformation, a set of new surfaces with unique names is generated from the original surfaces. The name of the generated surface is equal to the name of the original surface plus 1000 times the name of the cell. This formula gives generated names that are predictable and can be used on other cell cards and on tally cards. This method limits cell names and original surface names to no more than three digits, however. These generated surfaces are only the bounding surfaces of the transformed cell, not the surfaces of any universe that fills it. MCNP requires only one full description of each universe, no matter how many times that universe is referenced in the problem.

5. LAT Lattice Card

LAT=1 means the lattice is made of hexahedra, solids with six faces. LAT=2 means the lattice is made of hexagonal prisms, solids with eight faces. A nonzero entry on the LAT card means that the corresponding cell is the (0,0,0) element of a lattice. The cell description of a lattice cell has two main purposes. It is a standard MCNP cell description and the order of specification of the surfaces of the cell identifies which lattice element lies beyond each surface.

After you have designed your lattice, decide which element you want to be the (0,0,0) element and in which directions in the lattice you want the three lattice indices to increase. In the case of a hexagonal prism lattice you have two constraints: the first and second indices must increase across adjacent surfaces and the third index must increase in one or the other direction along the length of the prism. You will then enter the bounding surfaces of the (0,0,0) element on the cell card in the right order, in accordance with the following conventions. For a hexahedral lattice cell, beyond the first surface listed is the (1,0,0) element, beyond the second surface listed is the (-1,0,0) element, then the (0,1,0), (0,-1,0), (0,0,1) and (0,0,-1) lattice elements in that order. This method provides the order of arrangement of the lattice to the code so that when you specify element (7,9,3), the code knows which one that is. For a hexagonal prism lattice cell, on the opposite side of the first surface listed is element (1,0,0), opposite the second listed surface is (-1,0,0), then (0,1,0), (0,-1,0), (-1,1,0), (1,-1,0), (0,0,1), and (0,0,-1). These last two surfaces must be the base surfaces of the prism. Example 5, page 4–25, illustrates a hexagonal prism lattice cell.

The hexahedra need not be rectangular and the hexagonal prisms need not be regular, but the lattices made out of them must fill space exactly. This means that opposite sides have to be identical and parallel. A hexahedral lattice cell may be infinite in one or two of its dimensions. A hexagonal prism lattice cell may be infinite in the direction along the length of the prism. The cross section must be convex (no butterflies). It does not matter whether the lattice is left-handed or right-handed. A lattice must be the only thing in its universe. The real world (universe level 0) itself can be a lattice. If a particle

leaves the last cell of a real-world, limited-extent lattice (see the FILL card for how the extent of a lattice can be limited), it is killed (escapes).

6. FILL Fill Card

A nonzero entry on the FILL card indicates the number of the universe that fills the corresponding cell. The same number on the U card identifies the cells making up the filling universe. The FILL entry may optionally be followed by, in parentheses, either a transformation number or the transformation itself. This transformation is between the coordinate systems of the filled cell and the filling universe, with the universe considered to be in the auxiliary coordinate system. If no transformation is specified, the universe inherits the transformation, if any, of the filled cell. A *FILL may be used if the rotation matrix entries are angles in degrees rather than cosines. In the data card section of the INP file you cannot have both a FILL and a *FILL entry. If you want to enter some angles by degrees (*FILL) and some angles by cosines (FILL), all FILL and *FILL data must be placed on the cell cards of the INP file.

If the filled cell is a lattice, the FILL specification can be either a single entry, as described above, or an array. If it is a single entry, every cell of the lattice is filled by the same universe. If it is an array, the portion of the lattice covered by the array is filled and the rest of the lattice does not exist. It is possible to fill various elements of the lattice with different universes, as shown below and in examples in Chapter 4, section III,

The array specification for a cell filled by a lattice has three dimension declarators followed by the array values themselves. The dimension declarators define the ranges of the three lattice indices. They are in the same form as in FORTRAN, but both lower and upper bounds must be explicitly stated with positive, negative, or zero integers, separated by a colon. The indices of each lattice element are determined by its location with respect to the (0,0,0) element. Reread the LAT card section, if needed, with particular emphasis on how the order of specification of the surfaces of the cell identifies the ordering of the lattice elements. The first two surfaces listed on the cell card define the direction the first lattice index must cover. The numerical range of the indices depends on where in the lattice the (0,0,0) element is located. For example, -5:5, 0:10, and -10:0 all define a range of 11 elements. The third and fourth surfaces listed in the cell description define the direction of the second lattice index.

The array values follow the dimension declarators. Each element in the array corresponds to an element in the lattice. Only those elements of the lattice that correspond to elements in the array actually exist. The value of each array element is the number of the universe that is to fill the corresponding lattice. There are two values that can be used in the array that have special meanings. A zero in a real world (level zero) lattice means that the lattice element does not exist, making it possible, in effect, to specify a nonrectangular array. If the array value is the same as the number of the universe of the lattice, that element is not filled with any universe but

CHAPTER 3 Geometry Cards

with the material specified on the cell card for the lattice cell. A real world (level zero) lattice, by default, is universe zero and only can be universe zero. Therefore, using the universe number of the lattice as an array value to fill that element with the cell material is not possible. As with a single entry FILL specification, any value in the array optionally may be followed by, in parentheses, a transformation number or the transformation itself.

Example: FILL=0:2 1:2 0:1 4 4 2 0 4 0 4 3 3 0 4 0

Only eight elements of this lattice exist. Elements (0,1,0), (1,1,0), (1,2,0), (0,1,1) and (1,2,1) are filled with universe 4. Element (2,1,0) is filled with universe 2. Elements (1,1,1) and (2,1,1) are filled with universe 3.

7. TRn Coordinate Transformation Card

Form: TRn O_1 O_2 O_3 B_1 B_2 B_3 B_4 B_5 B_6 B_7 B_8 B_9 M

n = number of the transformation: $1 < n < 999$. *TRn means that the B_i are angles in degrees rather than being the cosines of the angles.

O_1 O_2 O_3 = displacement vector of the transformation.

B_1 to B_9 = rotation matrix of the transformation.

M = 1 means that the displacement vector is the location of the origin of the auxiliary coordinate system, defined in the main system. This is the default.

= -1 means that the displacement vector is the location of the origin of the main coordinate system, defined in the auxiliary system.

Default: TRn 0 0 0 1 0 0 0 1 0 0 0 1 1

The maximum number of transformations in a single problem is 999. A cone of one sheet can be rotated only from being on or parallel to one coordinate axis to being on or parallel to another coordinate axis (multiples of 90°). A cone of one sheet can have any origin displacement vector appropriate to the problem. A cone of two sheets can be transformed anywhere. A cone of two sheets with an ambiguity surface in the cell description to cut off one half (the cell looks like one sheet) can be transformed. The ambiguity surface must have the same transformation number as the cone of two sheets. Ambiguity surfaces are described on page 2–12.

The B matrix specifies the relationship between the directions of the axes of the two coordinate systems. B_i is the cosine of the angle (or the angle itself, in degrees in the range from 0 to 180, if the optional asterisk is used) between an axis of the main coordinate system (x, y, z) and an axis of the auxiliary coordinate system (x', y', z') as follows:

Element	B_1	B_2	B_3	B_4	B_5	B_6	B_7	B_8	B_9
Axes	x, x'	y, x'	z, x'	x, y'	y, y'	z, y'	x, z'	y, z'	z, z'

The meanings of the B_i do not depend on M . It is usually not necessary to enter all of the elements of the B matrix. These patterns are acceptable:

1. All nine elements.
2. Two of the three vectors either way in the matrix (6 values). MCNP will create the third vector by cross product.
3. One vector each way in the matrix (5 values). The component in common must be less than 1. MCNP will fill out the matrix by the Eulerian angles scheme.
4. One vector (3 values). MCNP will create the other two vectors in some arbitrary way.
5. None. MCNP will create the identity matrix.

A vector consists of the three elements in either a row or a column in the matrix. In all cases MCNP cleans up any small nonorthogonality and normalizes the matrix. In this process, exact vectors like (1,0,0) are left unchanged. A warning message is issued if the nonorthogonality is more than about 0.001 radian.

Pattern #5 is appropriate when the transformation is a pure translation. Pattern #4 is appropriate when the auxiliary coordinate system is being used to describe a set of surfaces that are all surfaces of rotation about a common skew axis. Patterns 2 and 3 are about equally useful in more general cases. Pattern #1 is required if one of the systems is right handed and the other is left handed.

Coordinate transformations in MCNP are used to simplify the geometrical description of surfaces and to relate the coordinate system of a surface source problem to the coordinate system of the problem that wrote the surface source file. See the surface source SSR card on page 3–56. Periodic boundary surfaces cannot have surface transformations.

To use a transformation to simplify the description of a surface, choose an auxiliary coordinate system in which the description of the surface is easy, include a transformation number *n* on the surface card, and specify the transformation on a TR*n* card. See page 4–14 for an example showing how much easier it is to specify a skewed cylinder this way than as a GQ surface. Often a whole cluster of cells will have a common natural coordinate system. All of their surfaces can be described in that system, which can then be specified by a single TR*n* card.

Example: 17 4 PX 5
 TR4 7 .9 1.3 0 -1 0 0 0 1 -1 0 0

Surface 17 is set up in an auxiliary coordinate system that is related to the main coordinate system by transformation number 4. (Presumably there are many other surfaces in this problem that are using the same transformation, probably because they came from the input file of an earlier problem. Otherwise there would be no reason to use a transformation to set up a surface as simple as a plane perpendicular to a coordinate axis.) MCNP will produce coefficients in the main coordinate system as if surface 17 had been entered as

CHAPTER 3

Variance Reduction

17 P 0 -1 0 4.1

It will not produce

17 PY -4.1

that is located at the same place in space, because this PY surface has the wrong sense. More examples of the transformation are in Chapter 4.

C. Variance Reduction

The following cards define parameters for variance reduction cards.

<u>Mnemonic</u>	<u>Card Type</u>	<u>Page</u>
IMP	Cell importances	3–28
ESPLT	Energy splitting and roulette	3–29
PWT	Photon production weights	3–30
EXT	Exponential transform	3–31
VECT	Vector input	3–33
FCL	Forced collision	3–33
WWE	Weight window energies	3–34
WWN	Weight window bounds	3–35
WWP	Weight window parameter	3–36
WWG	Weight window generation	3–37
WWGE	Weight window generation energies	3–38
PDn	Detector contribution to tally n	3–38
DXC	DXTRAN cell contributions	3–38
BBREM	Bremsstrahlung biasing	3–39

Only the importance card is required (except when the weight window is used); most of the others are for optional variance reduction techniques.

Entries on a cell or surface parameter card correspond in order to the cell or surface cards that appear earlier in the INP file. To get to the particular cell(s) or surface(s) on a card, you must supply the appropriate default values on the cards as spacers (the nR repeat or nJ jump features may help). The number of entries on a cell or surface parameter card should always equal the number of cells or surfaces in the problem or a FATAL error will result.

Many of these cards require a knowledge of both the Monte Carlo method and the particular variance reduction technique being used. Chapter 2 and some of the references listed at the end of the manual may provide some of this knowledge.

1. IMP Cell Importance Cards

Form: IMP:n $x_1 x_2 \dots x_i \dots x_I$

n = N for neutrons, P for photons, E for electrons. N , P or P , E or N , P , E is allowed if importances are the same for different particle types.

x_i = importance for cell i

I = number of cells in the problem

Default: If an IMP:P card is omitted in a MODE N P problem, all photon cell importances are set to unity unless the neutron importance is 0. Then the photon importance is 0 also.

Use: An IMP:n card is required with an entry for every cell unless weight window cards are used.

The importance of a cell is used to terminate the particle's history if the importance is zero, for geometry splitting and Russian roulette as described on page 2–120 to help particles move to more important regions of the geometry, and in the weight cutoff game described on page 3–110. An importance in a cell that is in a universe is interpreted as a multiplier of the importance of the filled cell.

Neutrons, photons, and electrons can be split differently by having separate IMP:N, IMP:P, and IMP:E cards. It is a fatal error if the number of entries on any IMP:n card is not equal to the number of cells in the problem. The nJ feature is allowed and provides the default importance of zero. The nR repeat and nM multiply features are especially useful with this card.

Example: IMP:N 1 2 2M 0 1 20R

The neutron importance of cell 1 is 1, cell 2 is 2, cell 3 is 4, cell 4 is 0, and cells 5 through 25 is 1. A track will be split 2 for 1 going from cell 2 into cell 3, each new track having half the weight of the original track before splitting. A track moving in the opposite direction will be terminated in about half (that is, probability=0.5) the cases but followed in the remaining cases with twice the weight.

Remember that both tracks and contributions to detectors and DXTRAN spheres are killed in cells of zero importance.

A track will neither be split nor rouletted when it enters a void cell even if the importance ratio of the adjacent cells would normally call for a split or roulette. However, the importance of the nonvoid cell it left is remembered and splitting or Russian roulette will be played when the particle next enters a nonvoid cell. As an example of the benefit of not splitting into a void, consider a long, void pipe surrounded by a material like concrete where the importances are decreasing radially away from the pipe. Considerable computer time can be wasted by tracks bouncing back and forth across the pipe and doing nothing but splitting then immediately undergoing roulette. Splitting into a void increases the time per history but has no counterbalancing effect on the expected history variance. Thus the *FOM* is reduced by the increased time per history.

2. ESPLT Energy Splitting and Roulette Card

Form: ESPLT:n $N_1 E_1 \dots N_5 E_5$

- n = N for neutrons, P for photons, E for electrons.
- N_i = number of tracks into which a particle will be split.
- E_i = energy (MeV) at which particles are to undergo splitting.

CHAPTER 3

Variance Reduction

Default: Omission of this card means that energy splitting will not take place for those particles for which the card is omitted.

Use: Optional; use energy-dependent weight windows instead.

The ESPLT card allows for splitting and Russian roulette in energy, as the IMP card allows for splitting and Russian roulette as a function of geometry. Energy splitting may result in low weight particles that are inadvertently killed by the weight cutoff game (CUT card). Because energy dependent weight windows perform the same function as the ESPLT card, are not limited to five energy groups, may have spatial dependence, and are more compatible with other variance reduction features, use of the ESPLT card is discouraged.

The entries on this card consist of pairs of energy-biasing parameters, N_i and E_i , with a maximum of five pairs allowed. N_i can be noninteger and also can be between 0 and 1, in which case Russian roulette on energy is played. For N_i between 0 and 1 the quantity becomes the survival probability in the roulette game.

If the particle's energy falls below E_i , the specified splitting or roulette always occurs. If the particle's energy increases above E_i , the inverse game is normally played. For example, suppose roulette is specified at 1 eV with survival probability 0.5; if a particle's energy increases above 1 eV, it is split 2 for 1.

A neutron's energy may increase by fission or from thermal up-scattering. There are cases when it may not be desirable to have the inverse splitting or roulette game played on energy increases (particularly in a fission-dominated problem). If $N_1 < 0$, then splitting or roulette will be played only for energy decreases and not for energy increases.

Example: ESPLT:N 2 .1 2 .01 .25 .001

This example specifies a 2 for 1 split when the neutron energy falls below 0.1 MeV, another 2 for 1 split when the energy falls below 0.01 MeV, and Russian roulette when the energy falls below 0.001 MeV with a 25% chance of surviving.

3. PWT Photon Weight Card

Form: PWT $W_1 W_2 \dots W_i \dots W_I$

W_i = relative threshold weight of photons produced at neutron collisions in cell i

I = number of cells in the problem.

Default: $W_i = -1$.

Use: Recommended for MODE N P and MODE N P E problems.

The PWT card is used in Mode N P or Mode N P E problems. Its purpose is to control the number and weight of neutron-induced photons

produced at neutron collisions. Only prompt photons are produced from neutron collisions. Delayed gammas are neglected by MCNP. The PWT card application is further discussed on page 2–31.

For each cell with a positive W_i entry, only neutron-induced photons with weights greater than $W_i * I_s / I_i$ are produced, where I_s and I_i are the neutron importances of the collision and source cells, respectively. Russian roulette is played to determine if a neutron-induced photon with a weight below this value survives.

For each cell with a negative W_i entry, only neutron-induced photons with weights greater than $-W_i * W_s * I_s / I_i$ are produced, where W_s is the starting weight of the neutron for the history being followed, and I_s and I_i are the neutron importances of the collision and source cells, respectively. Russian roulette is played to determine if a neutron-induced photon with weight below this value survives.

If $W_i = 0$, exactly one photon will be generated at each neutron collision in cell i , provided that photon production is possible. If $W_i = -1.0E6$, photon production in cell i is turned off.

The PWT card controls the production of neutron-induced photons by comparing the total weight of photons produced with a relative threshold weight specified on the PWT card. This threshold weight is relative to the neutron cell importance and, if $W_i < 0$, to the source neutron weight. If more neutron-induced photons are desired, the absolute value of W_i should be lowered to reduce the weight and therefore increase the number of photons. If fewer neutron-induced photons are desired, the absolute value of W_i should be increased.

Following are some tips on how to choose PWT card entries.

For problems with energy-independent photon weight windows, the entries on the PWT card should be identical to those on the WWN1:P card. Neutron-induced photons will then be born inside the photon weight window bounds as much as possible.

For problems with energy-dependent photon weight windows, the entries on the PWT card should be the same as the lowest nonzero weight window for any weight window energy group on the WWNn:P cards.

For problems using photon cell importances (IMP:P), rather than photon weight windows (WWNn:P), a good first guess for PWT card entries is either the default value, $W_i = -1$, or set W_i in every cell to the average source weight.

4. EXT Exponential Transform Card

Form: EXT:n A_1 A_2 ... A_i ... A_I

n = N for neutrons, P for photons, not available for electrons.

A_i = entry for cell i . Each entry A_i is of the form $A = QVm$,
 where Q describes the amount of stretching and
 Vm defines the stretching direction.

I = number of cells in the problem.

CHAPTER 3

Variance Reduction

Default: No transform, $A_i = 0$.

Use: Optional. Use cautiously with the weight window.

The exponential transform method stretches the path length between collisions in a preferred direction by adjusting the total cross section as follows: $\Sigma_t^* = \Sigma_t(1 - p\mu)$, where

Σ_t^* = artificially adjusted total cross section;

Σ_t = true total cross section;

p = the stretching parameter; and

μ = cosine of angle between particle direction and stretching direction.

The stretching parameter p can be specified by the stretching entry Q three ways:

$Q = 0$; $p = 0$ exponential transform not used

$Q = p$; $0 < p < 1$ constant stretching parameter

$Q = S$; $p = \Sigma_a/\Sigma_t$, where Σ_a is the capture cross section.

Letting $p = \Sigma_a/\Sigma_t$ can be used for implicit capture along a flight path, as described on page 2-33.

The stretching direction is defined by the Vm part of each A_i entry on the EXT card with three options.

1. Omit the Vm part of the A_i entry; that is, enter only the stretching entry $A_i = Q$ for a given cell. This causes the stretching to be in the particle direction ($\mu = 1$), independent of the particle direction and is not recommended unless you want to do implicit capture along a flight path, in which case $A_i = Q = S$ and the distance to scatter rather than the distance to collision is sampled.
2. Specify the stretching direction as Vm , the line from the collision point to the point (x_m, y_m, z_m) , where (x_m, y_m, z_m) is specified on the VECT card (see next section). The direction cosine μ is now the cosine of the angle between the particle direction and the line drawn from the collision point to point (x_m, y_m, z_m) . The sign of A_i governs whether stretching is toward or away from (x_m, y_m, z_m) .
3. Specify the stretching direction as $Vm = X, Y,$ or Z , so the direction cosine μ is the cosine of the angle between the particle direction and the X -, Y -, or Z -axis, respectively. The sign of A_i governs whether stretching is toward or away from the X -, Y -, or Z -axis.

Example: EXT:N 0 0 .7V2 S -SV2 -.6V9 0 .5V9 SZ -.4X
 VECT V9 0 0 0 V2 1 1 1

The 10 entries are for the 10 cells in this problem. Path length stretching is not turned on for photons or for cells 1, 2, and 7. Following is a summary of path length stretching in the other cells.

cell	A_i	Q	Vm	stretching parameter	direction
3	.7V2	.7	V2	$p = .7$	toward point (1,1,1)
4	S	S		$p = \Sigma_a/\Sigma_t$	particle direction

5	-SV2	S	-V2	$p = \Sigma_a/\Sigma_t$	away from point (1,1,1)
6	-.6V9	.6	-V9	$p = .6$	away from origin
8	.5V9	.5	V9	$p = .5$	toward origin
9	SZ	S	Z	$p = \Sigma_a/\Sigma_t$	along +Z-axis
10	-.4X	.4	-X	$p = .4$	along -X-axis

The exponential transform should not be used in the same cell as forced collisions or without good weight control, such as the weight window. The transform works well only when the particle flux has an exponential distribution, such as in highly absorbing problems.

5. VECT Vector Input Card

Form: VECT $Vm \ x_m \ y_m \ z_m \ \dots \ Vn \ x_n \ y_n \ z_n \ \dots$

m, n = any numbers to uniquely identify vectors $Vm, Vn \dots$
 $x_m \ y_m \ z_m$ = coordinate triplets to define vector Vm .

Default: None.

Use: Optional.

The entries on the VECT card are quadruplets which define any number of vectors for either the exponential transform or user patches. See the EXT card (page 3–31) for a usage example.

6. FCL Forced Collision Card

Form: FCL: $n \quad x_1 \ x_2 \ \dots \ x_i \ \dots \ x_I$

n = N for neutrons, P for photons, not available for electrons.
 x_i = forced collision control for cell i . $-1 \leq x_i \leq 1$
 I = number of cells in the problem.

Default: $x_i = 0$, no forced collisions.

Use: Optional. Exercise caution.

The FCL card controls the forcing of neutron or photon collisions in each cell. This is particularly useful for generating contributions to point detectors or DXTRAN spheres. The weight window game at surfaces is not played when entering forced collision cells.

If $x_i \neq 0$, all particles entering cell i are split into collided and uncollided parts with the appropriate weight adjustment (see page 2–131). If $|x_i| < 1$, Russian roulette is played on the collided parts with survival probability $|x_i|$ to keep the number of collided histories from getting too large. Fractional x_i entries are recommended if a number of forced collision cells are adjacent to each other.

If $x_i < 0$, the forced collision process applies only to particles entering the cell. After the forced collision, the weight cutoff is ignored and all subsequent collisions are handled in the usual analog manner. Weight windows are

CHAPTER 3 Variance Reduction

not ignored and are applied after contributions are made to detectors and DXTRAN spheres.

If $x_i > 0$, the forced collision process applies both to particles entering cell i and to the collided particles surviving the weight cutoff or weight window games. Particles will continue to be split into uncollided and (with probability $|x_i|$) collided parts until killed by either weight cutoff or weight windows.

Usage tips:

Let $x_i = 1$ or -1 unless a number of forced collision cells are adjacent to each other or the number of forced collision particles produced is higher than desired. Then fractional values are usually needed.

When weight window bounds bracket the typical weight entering the cell, choose $x_i > 0$. When weight window bounds bracket the weight typical of force collision particles, choose $x_i < 0$.

When using importances, use $x_i > 0$ because $x_i < 0$ turns off the weight cutoff game.

7-9. Weight Window Cards

Weight windows provide an alternative means to importances (IMP:n cards) and energy splitting (ESPLT:n cards) for specifying space and energy importance functions. The advantages of weight windows are that (1) they provide an importance function in both space and energy; (2) they control particle weights; (3) they are more compatible with other variance reduction features such as the exponential transform (EXT:n card); (4) they can be applied at surface crossings, collisions, or both; (5) the severity of splitting or Russian roulette can be controlled; (6) they can be turned off in selected space or energy regions; and (7) they can be automatically generated by the weight window generator. The disadvantages are that (1) weight windows are not as straightforward as importances; and (2) when the source weight is changed, the weight windows may have to be renormalized. You are strongly advised to read the section on weight windows in Chapter 2.

A weight-window lower bound in a cell that is in a universe is interpreted as a multiplier of the weight-window lower bound of the filled cell.

(a) WWE Weight Window Energies

Form: WWE:n $E_1 E_2 \dots E_i \dots E_j; j \leq 99$

n = N for neutrons, P for photons, E for electrons
 E_i = upper energy bound of i^{th} window
 E_{i-1} = lower energy bound of i^{th} window
 E_0 = 0, by definition

Default: If this card is omitted and the weight window is used, a single energy interval will be established corresponding to the energy limits of the problem being run.

Use: Optional. Use only with WWN card.

The weight window energy card defines the energy intervals for which weight window bounds will be specified on the WWN card. The minimum energy, which is not entered on the WWE card, is zero.

(b) WWN Weight Window Bounds

Form: WWNi:n w_{i1} w_{i2} ... w_{ij} ... w_{iJ}

n = N for neutrons, P for photons, E for electrons

w_{ij} = lower weight bound in cell j and energy interval

$E_{i-1} < E < E_i$, $E_0 = 0$, as defined on the WWE card.

If no WWE card, $i = 1$.

J = number of cells in the problem.

Default: None.

Use: Weight windows (WWN and WWP cards) are required unless importances (IMP card) are used.

The WWN card specifies the lower weight bound of the space and energy dependent weight windows. It must be used with the WWP card, and, if the weight windows are energy dependent, with the WWE card. The IMP:n card should not be used if a WWN:n card, where n is the same particle type, is used.

If $w_{ij} < 0$, any particle entering cell j is killed. That is, negative entries correspond to zero importance. If negative entries are used for one energy group, they should be used for all the other energy groups in the same cell.

If $w_{ij} > 0$, particles entering or colliding in cell j are split or rouletted according to the options on the WWP card, described in the next section.

If $w_{ij} = 0$, the weight window game is turned off in cell j for energy bin i and the weight cutoff game is turned on. The weight cutoffs on the CUT card should be specified as the lowest permissible weights desired in the problem. Otherwise, most particles entering cells with $w_{ij} = 0$ will be killed by the weight cutoff. The capability to turn the weight window game off in various energy and spatial regions is useful when these regions cannot be characterized by a single importance function or set of weight window bounds.

In terms of the weight window, particle weight bounds are always absolute and not relative; you have to explicitly account for weight changes from any other variance reduction techniques such as source biasing. You must specify one lower weight bound per cell per energy interval. There must be no holes in the specification; that is, if WWNi is specified, WWNj for $1 < j < i$ must also be specified.

Example 1: WWE:N E_1 E_2 E_3
 WWN1:N w_{11} w_{12} w_{13} w_{14}
 WWN2:N w_{21} w_{22} w_{23} w_{24}
 WWN3:N w_{31} w_{32} w_{33} w_{34}

CHAPTER 3 Variance Reduction

These cards define three energy intervals and the weight window bounds for a four-cell neutron problem.

Example 2: WWN1:P w_{11} w_{12} w_{13}

This card, without an accompanying WWE card, defines an energy independent photon weight window for a three-cell problem.

(c) WWP Weight Window Parameter Card

Form: WWP:n WUPN WSURVN MXSPLN MWHERE SWITCHN

n = N for neutrons, P for photons, E for electrons

WUPN = If the particle weight goes above WUPN times the lower weight bound, the particle will be split.
Required: WUPN \geq 2.

WSURVN = If the particle survives the Russian roulette game, its weight becomes MIN(WSURVN times the lower weight bound, WGT*MXSPLN).
Required: $1 < \text{WSURVN} < \text{WUPN}$.

MXSPLN = No particle will ever be split more than MXSPLN-for-one or be rouletted more harshly than one-in-MXSPLN.
Required: MXSPLN $>$ 1.

MWHERE = decides where to check a particle's weight.
-1 means check the weight at collisions only
0 means check the weight at surfaces and collisions
1 means check the weight at surfaces only

SWITCHN = special parameter allowing the lower weight bounds to be specified as SWITCHN $>$ 0 divided by the cell importances from the IMP card.

Defaults: WUPN=5; WSURVN=0.6*WUPN; MXSPLN=5; MWHERE=0;
SWITCHN=0

Use: Weight windows are required unless importances are used.

The WWP card contains parameters that control use of the weight window lower bounds specified on the WWN cards or, if SWITCHN $>$ 0, the IMP cards. Having SWITCHN $>$ 0 and also having WWNi cards is a fatal error. If SWITCHN is zero, the lower weight bounds must be specified with the WWNi cards.

(d) Using Existing Cell Importances to Specify the Lower Weight Bound

An energy-independent weight window may be specified using existing importances from the IMP card and setting the fifth entry (SWITCHN) on the WWP card to a positive constant C . If this option is selected, the lower weight bounds for the cells become C/I , where I is the cell importance. The remaining entries on the WWP card are entered as described above. A suggested value for C is one in which source particles start within the weight

window. If that is not possible, your window is probably too narrow or you need to respecify your source.

10–11. Weight Window Generation Cards

The weight window generator estimates the importances of the space-energy regions of phase space specified by the user. The space-energy weight window parameters are then calculated inversely proportional to the importances. Sometime in the future a space-energy-angle weight window and generator may be available, but for now, both the weight window and the generator cannot be used on problems with heavy angular dependence, such as streaming problems. The generator should be used in problems without a heavy angular dependence and with the geometry adequately specified for sampling purposes. In MCNP4A, the weight window generator works for neutrons and photons only.

Recall that the generator estimates the average importance of a phase-space cell. If the cells are too large, the importance variation inside the cell will be large and the average importance will not represent the cell. Inadequate geometry specification also occurs with large importance differences between adjacent cells. Fortunately, the generator provides information about whether the geometry specification is adequate for sampling purposes.

The user is advised to become familiar with the section on the weight window in Chapter 2 before trying to use the weight window generator.

(a) WWG Weight Window Generation

Form: WWG I_t I_c W_g x_r y_r z_r J

- I_t = problem tally number (n of the Fn card).
 The particular tally bin for which the weight window generator is optimized is defined by the TFN card and cannot be an electron tally.
- I_c = reference cell, typically a source cell.
- W_g = value of the generated lower weight window bound for cell I_c . If $W_g = 0$, it will be half the average source weight.
- x_r y_r z_r = coordinates of point which particles should move toward or away from.
- J = debug print flag. $J = 0/1 = \text{off/on}$.

Default: No weight window values are generated.

Use: Optional.

The WWG card causes the optimum importance function for tally I_t to be generated on the WWP and WWNi cards, which are printed, evaluated, and summarized in the OUTF file. This resulting weight window importance function can then be used in subsequent runs. For many problems, this generated importance function is superior to anything an experienced user

CHAPTER 3

Variance Reduction

can guess on an IMP card. To generate an energy-dependent weight window, use the WWGE card described below.

(b) WWGE Weight Window Generation Energies

Form: WWGE:n $E_1 E_2 \dots E_i \dots E_j; j \leq 15$

$n = N$ for neutrons, P for photons, E for electrons

$E_i =$ upper energy bound for weight window group to be generated, $E_{i+1} > E_i$.

Default: If this card is omitted and the weight window is used, a single energy interval will be established corresponding to the energy limits of the problem being run. If the card is present but has no entries, ten energy bins will be generated with energies of $E_i = 10^{i-8}$ MeV and $j = 10$.

Use: Optional.

12. PDn Detector Contribution Card

Form: PDn $P_1 P_2 \dots P_i \dots P_I$

$n =$ tally number

$P_i =$ probability of contribution to detector n from cell i

$I =$ number of cells in the problem.

Default: $P_i = 1$.

Use: Optional. Consider also using the DD card, page 3–89.

The PDn card reduces the number of contributions to detector tallies from selected cells that are relatively unimportant to a given detector, thus saving computing time. At each collision in cell i , the detector tallies are made with probability P_i ($0 \leq P_i \leq 1$). The tally is then increased by the factor $1/P_i$ to obtain unbiased results for all cells except those where $P_i = 0$. This enables you to increase the running speed by setting $P_i < 1$ for cells many mean free paths from the detectors. It also selectively eliminates detector contributions from cells by setting the P_i 's to zero.

A default set of probabilities can be established for all tallies by use of a PD0 (zero) card. These default values will be overridden for a specific tally n by values entered on a PDn card.

13. DXC DXTRAN Contribution Card

Form: DXCm:n $P_1 P_2 \dots P_i \dots P_I$

$m =$ which DXTRAN sphere the DXC card applies to. If 0 or absent, the DXC card applies to all the DXTRAN spheres in the problem.

$n = N$ for neutrons, P for photons, not available for electrons.

$P_i =$ probability of contribution to DXTRAN spheres from cell i

$I =$ number of cells in the problem

Default: $m = 0$, $P_i = 1$.

Use: Optional. Consider also using the DD card, page 3–89.

This card is analogous to the above PDn card but is used for contributions to DXTRAN spheres.

14. BBREM Bremsstrahlung Biasing Card

Form: BBREM b_1 b_2 b_3 ... b_{49} m_1 m_2 ... m_n

b_1 = any positive value (currently unused).

$b_2 \dots b_{49}$ = bias factors for the bremsstrahlung energy spectrum.

$m_1 \dots m_n$ = list of materials for which the biasing is invoked.

Default: None.

Use: Optional.

The bremsstrahlung process generates many low-energy photons, but the higher-energy photons are often of more interest. One way to generate more high-energy photon tracks is to bias each sampling of a bremsstrahlung photon toward a larger fraction of the available electron energy. For example, a bias such as

```
BBREM 1. 1. 46I 10. 888 999
```

would create a gradually increasing enhancement (from the lowest to the highest fraction of the electron energy available to a given event) of the probability that the sampled bremsstrahlung photon will carry a particular fraction of the electron energy. This biasing would apply to each instance of the sampling of a bremsstrahlung photon in materials 888 and 999. The sampling in other materials would remain unbiased. The bias factors are normalized by the code in a manner that depends both on material and on electron energy, so that although the ratios of the photon weight adjustments among the different groups are known, the actual number of photons produced in any group is not easily predictable.

In most problems the above prescription will increase the total number of bremsstrahlung photons produced because there will be more photon tracks generated at higher energies. The secondary electrons created by these photons will tend to have higher energies as well, and will therefore be able to create more bremsstrahlung tracks than they would at lower energies. This increase in the population of the electron-photon cascade will make the problem run more slowly. The benefits of better sampling of the high-energy domain must be balanced against this increase in run time.

For a more detailed discussion of the bremsstrahlung energy biasing scheme, see Chapter 2.

D. Source Specification

Every MCNP problem has one of four sources: general source (SDEF card), surface source (SSR card), criticality source (KCODE card), or user-supplied source (default if SDEF, SSR, and KCODE are all missing). All

CHAPTER 3

Source Cards

can use source distribution functions, specified on SIn, SPn, SBn, and DSn cards.

The following cards are used to specify the source.

<u>Mnemonic</u>	<u>Card Type</u>	<u>Page</u>
SDEF	General source	3–40
SIn	Source information	3–48
SPn	Source probability	3–48
SBn	Source bias	3–48
DSn	Dependent source	3–52
SCn	Source comment	3–53
SSW	Surface source write	3–55
SSR	Surface source read	3–56
KCODE	Criticality source	3–59
KSRC	Source points	3–61

The MODE card also serves as part of the source specification in some cases by implying the type of particle to be started from the source.

The source has to define the values of the following MCNP variables for each particle it produces:

ERG	the energy of the particle (MeV). See * below.
TME	the time when the particle started (shakes)
UUU, VVV, WWW	the direction of the flight of the particle
XXX, YYY, ZZZ	the position of the particle
IPT	the type of the particle
WGT	the statistical weight of the particle
ICL	the cell where the particle started
JSU	the surface where the particle started, or zero if the starting point is not on any surface

Additional variables may have to be defined if there are point detectors or DXTRAN spheres in the problem.

*ERG has a different meaning in a special case. If there is a negative IGM on the MGOPT card, which indicates a special electron–photon multigroup problem, ERG on the SDEF card is interpreted as an energy group number, an integer.

1. SDEF General Source Card

Form: SDEF source variable = specification ...

Use: Required for problems using the general source. Optional for problems using the criticality source.

The equal signs are optional. The source variables are not quite the same as MCNP variables that the source must set. Many are intermediate

quantities that control the sampling of the final variables. All have default values. The specification of a source variable has one of these three forms:

1. explicit value,
2. a distribution number prefixed by a D, or
3. the name of another variable prefixed by an F, followed by a distribution number prefixed by a D. Var = Dn means that the value of source variable var is sampled from distribution n. Var Fvar' Dn means that var is sampled from distribution n that depends on the variable var'. Only one level of dependence is allowed. Each distribution may be used for only one source variable.

The above scheme translates into three levels of source description. The first level exists when a source variable has an explicit or default value (for example, a single energy) or a default distribution (for example, an isotropic angular distribution). The second level occurs when a source variable is given by a probability distribution. This level requires the SI and/or SP cards. The third level occurs when a variable depends on another variable. This level requires the DS card.

MCNP samples the source variables in an order set up according to the needs of the particular problem. Each dependent variable must be sampled after the variable it depends on has been sampled. If the value of one variable influences the default value of another variable or the way it is sampled, as SUR influences DIR, they may have to be sampled in the right order. The scheme used in MCNP to set up the order of sampling is complicated and may not always work. If it fails, a message will be printed. The fix in such instances may be to use explicit values or distributions instead of depending on defaults.

Table 3.2 summarizes the source variables and lists their defaults.

Table 3.2
Source Variables

<u>Variable</u>	<u>Meaning</u>	<u>Default</u>
CEL	Cell	Determined from XXX,YYY,ZZZ and possibly UUU,VVV,WWW
SUR	Surface	Zero (means cell source)
ERG	Energy (MeV)	14 MeV
TME	Time (shakes)	0
DIR	μ , the cosine of the angle between VEC and UUU,VVV,WWW (Azimuthal angle is always sampled uniformly in 0° to 360°)	Volume case: μ is sampled uniformly in -1 to 1 . (isotropic) Surface case: $p(\mu) = 2\mu$ in 0 to 1 . (cosine distribution)
VEC	Reference vector for DIR	Volume case: required unless isotropic Surface case: vector

CHAPTER 3
Source Cards

		normal to the surface with sign determined by NRM
NRM	Sign of the surface normal	+1
POS	Reference point for position sampling	0,0,0
RAD	Radial distance of the position from POS or AXS	0
EXT	Cell case: distance from POS along AXS Surface case: Cosine of angle from AXS	0
AXS	Reference vector for EXT and RAD	No direction
X	x-coordinate of position	No X
Y	y-coordinate of position	No Y
Z	z-coordinate of position	No Z
CCC	Cookie-cutter cell	No cookie-cutter cell
ARA	Area of surface (required only for direct contributions to point detectors from plane surface source.)	None
WGT	Particle weight	1
EFF	Rejection efficiency criterion for position sampling	.01
PAR	Particle type source will emit	1=neutron if MODE N or N P or N P E 2=photon if MODE P or P E 3=electron if MODE E

The specification of WGT, EFF and PAR must be only an explicit value. A distribution is not allowed. The allowed value for PAR is 1 for neutron, 2 for photon, or 3 for electron. The default is the lowest of these three that corresponds to an actual or default entry on the MODE card. Only one kind of particle is allowed in an SDEF source.

Most of the source variables are scalars. VEC, POS, and AXS are vectors. Where a value of a source variable is required, as on SDEF, SI, or DS cards, usually a single number is appropriate, but with VEC, POS, and AXS, the value must actually be a triplet of numbers, the x , y , and z components of the vector.

The source variables SUR, POS, RAD, EXT, AXS, X, Y, Z, and CCC are used in various combinations to determine the coordinates (x, y, z) of the starting positions of the source particles. With them you can specify three different kinds of volume distributions and three different kinds of distributions on surfaces. Degenerate versions of those distributions provide line and point sources. More elaborate distributions can be approximated by combining several simple distributions, using the S option of the SIn and DSn cards.

The three volume distributions are cartesian, spherical, and cylindrical. The value of the variable SUR is zero for a volume distribution. A volume distribution can be used in combination with the CEL variable to sample uniformly throughout the interior of a cell. A cartesian, spherical, or cylindrical region that completely contains a cell is specified and is sampled uniformly in volume. If the sampled point is found to be inside the cell, it is accepted. Otherwise it is rejected and another point is sampled. If you use this technique, you must make sure that the sampling region really does contain every part of the cell because MCNP has no way of checking for this. Cookie-cutter rejection, described below, can be used instead of or in combination with CEL rejection.

A cartesian volume distribution is specified with the variables X , Y , and Z . A degenerate case of the cartesian distribution, in which the three variables are constants, defines a point source. A single point source can be specified by giving values to the three variables right on the SDEF card. If there are several source points in the problem, it would usually be easier to use a degenerate spherical distribution for each point. Other degenerate cases of the cartesian distribution are a line source and a rectangular plane source. A cartesian distribution is an efficient shape for the CEL rejection technique when the cell is approximately rectangular. It is much better than a cylindrical distribution when the cell is a long thin slab. It is, however, limited in that its faces can only be perpendicular to the coordinate axes.

A spherical volume distribution is specified with the variables POS and RAD. X , Y , Z , and AXS must not be specified or it will be taken to be a cartesian or cylindrical distribution. The sampled value of the vector POS defines the center of the sphere. The sampled value of RAD defines the distance from the center of the sphere to the position of the particle. The position is then sampled uniformly on the surface of the sphere of radius RAD. Uniform sampling in volume is obtained if the distribution of RAD is a power law with $a = 2$, which is the default in this case. A common use of the spherical volume distribution is to sample uniformly in the volume between two spherical surfaces. The two radii are specified on the SIn card for RAD and the effect of a SPn -21 2 card is obtained by default (see page 3-48). If RAD is not specified, the default is zero. This is useful because it specifies a point source at the position POS. A distribution for POS, with an L on the SIn card, is the easiest way to specify a set of point sources in a problem.

A cylindrical volume distribution is specified with the variables POS, AXS, RAD, and EXT. The axis of the cylinder passes through the point POS in the direction AXS. The position of the particles is sampled uniformly on a circle whose radius is the sampled value of RAD, centered on the axis of the cylinder. The circle lies in a plane perpendicular to AXS at a distance from POS which is the sampled value of EXT. A common use of the cylindrical distribution is to sample uniformly in volume within a cylindrical shell. The distances of the ends of the cylinder from POS are entered on the SIn card for EXT and the inner and outer radii are entered on the SIn card for RAD.

CHAPTER 3

Source Cards

Uniform sampling between the two values of EXT and power law sampling between the two values of RAD, with $a = 1$ which gives sampling uniform in volume, are provided by default. A useful degenerate case is EXT=0, which provides a source with circular symmetry on a plane.

Warning: Never position any kind of degenerate volume distribution in such a way that it lies on one of the defined surfaces of the problem geometry. Even a bounding surface that extends into the interior of a cell can cause trouble. If possible, use one of the surface distributions instead. Otherwise, move to a position just a little way off of the surface. It will not make any detectable difference in the answers, and it will prevent particles from getting lost.

The value of the variable SUR is nonzero for a distribution on a surface. If X , Y , and Z are specified, their sampled values determine the position. You must in this case make sure that the point really is on the surface because MCNP does not check. If X , Y , and Z are not specified, the position is sampled on the surface SUR. The shape of the surface, which can be either a spheroid, sphere, or plane, determines the way the position is sampled. Sampling with CEL rejection is not available, but cookie-cutter rejection can be used to do anything that CEL rejection would do. Cylindrical surface sources must be specified as degenerate volume sources.

If the value of SUR is the name of a spheroidal surface, the position of the particle is sampled uniformly in area on the surface. A spheroid is an ellipse revolved around one of its axes. A spheroid for this purpose must have its axis parallel to one of the coordinate axes. There is presently no provision for easy nonuniform or biased sampling on a spheroidal surface. A distribution of cookie-cutter cells could be used to produce a crude nonuniform distribution of position.

If the value of SUR is the name of a spherical surface, the position of the particle is sampled on that surface. If the vector AXS is not specified, the position is sampled uniformly in area on the surface. If AXS is specified, the sampled value of EXT is used for the cosine of the angle between the direction AXS and the vector from the center of the sphere to the position point. The azimuthal angle is sampled uniformly in the range from 0° to 360° . A nonuniform distribution of position, in polar angle only, is available through a nonuniform distribution of EXT. A biased distribution of EXT can be used to start more particles from the side of the sphere nearest the tallying regions of the geometry. The exponential distribution function (–31; see page 3–51) is usually most appropriate for this.

If the value of SUR is the name of a plane surface, the position is sampled on that plane. The sampled value of POS must be a point on the plane. You must make sure that POS really is on the plane because MCNP, for the sake of speed, does not check it. The sampled position of the particle is at a distance from POS equal to the sampled value of RAD. The position is sampled uniformly on the circle of radius RAD centered on POS. Uniform sampling in area is obtained if the distribution of RAD is a power law with $a = 1$, which is the default in this case.

Cookie-cutter rejection is available for both cell and surface sources. If CCC is present, the position sampled by the above procedures is accepted if it is within cell CCC and is resampled if it is not, exactly like CEL rejection in the cell source case. You must be careful not to specify a cookie-cutter cell such that MCNP mistakes it for a real cell. There should be no trouble if the cookie-cutter cells are bounded by surfaces used for no other purpose in the problem and if the cookie-cutter cell cards are at the end of the list of cell cards. Don't make a cookie-cutter cell more complicated than it has to be. For a surface source, the only thing that matters is the intersection of the cookie-cutter cell with the source surface. An infinitely long cell of uniform cross section, bounded by planes and cylinders, is usually adequate for a plane surface source.

Warning: The combination of either CEL or CCC rejection with biased sampling of the position is nearly always an unfair game. If you use this combination, you must make sure that it really is a fair game because MCNP is not able to detect the error.

The source variables SUR, VEC, NRM, and DIR are used to determine the initial direction of flight of the source particles. The direction of flight is sampled with respect to the reference vector VEC, which, of course, can itself be sampled from a distribution. The polar angle is the sampled value of the variable DIR. The azimuthal angle is sampled uniformly in the range from 0° to 360°. If VEC and DIR are not specified for a volume distribution of position (SUR=0), an isotropic distribution of direction is produced by default. If VEC is not specified for a distribution on a surface (SUR≠0), the vector normal to the surface, with the sign determined by the sign of NRM, is used by default. If DIR is not specified for a distribution on a surface, the cosine distribution $p(\text{DIR})=2*\text{DIR}$, $0<\text{DIR}<1$, is used by default. A biased distribution of DIR can be used to make more source particles start in a direction towards the tallying regions of the geometry. The exponential distribution function (-31; see page 3-51) is usually most appropriate for this.

Discrete values of DIR are allowed. DIR=1 gives a monodirectional source in the direction of VEC. This is sometimes useful as an approximation to an actual source that is at a large distance from the geometry of the problem. In most cases discrete values of DIR will prevent direct contributions to point detectors from being scored. The direct contribution will be scored only if the source is on a plane surface, is sampled uniformly in area within a circle (using RAD sampled from SP -21 1), VEC is perpendicular to the surface (the default), and DIR=1. A cookie-cutter cell is allowed and a value of ARA is necessary. Discrete values of DIR with DXTRAN are generally wrong because $p(\mu) = .5$ is assumed. See page 2-136.

The efficiency criterion EFF applies to both CCC and CEL rejection. If in any source cell or cookie-cutter cell the acceptance rate is too low, the problem is terminated for inefficiency. The criterion for termination is $\text{MAX}(\text{number of successes}, 10) < \text{EFF} * \text{number of tries}$. The default value of EFF, 0.01, lets a problem get by at rather low efficiency, but for the

CHAPTER 3

Source Cards

rare problem in which low source efficiency is unavoidable, you may need to specify a lower value for EFF.

This section discusses a source in a geometry that we will call a repeated structure and is one that includes FILL, U, or LAT cards. We strongly emphasize that print table 110 should be studied carefully to ensure that the proper source path and position are being sampled when repeated structures are used in a source description.

The only part of the MCNP source specification that is different when the source is in a repeated structure part of the geometry is the use of the CEL parameter on the SDEF card. CEL must have a value that is a path from level **0** to level **n**, which is not necessarily the bottom:

$$c_0 : c_1 : \dots : c_n$$

c_i is a cell in the universe that fills cell c_{i-1} , or is zero, or is Dm for a distribution of cells in the repeated structure case. Dm is not valid for a lattice. c_i can have a minus sign and is discussed more below. Dm cannot have a minus sign. If $c_i = 0$, the cell at that level is searched for. Recall that level n is not necessarily the bottom level in the problem. If c_i is one specific element in a lattice, it is indicated as: ... : c_i (j1 j2 j3) : ...

The coordinate system for position and direction sampling (pds) is the coordinate system of the first negative or zero c_i in the source path. Each entry in the source path represents a geometry level, where level zero is the first source path entry, level one the second, etc., and level zero is above level one, level two is below level one. The pds level is the level associated with the pds cell or pds coordinate system. All levels above the pds level must be included in the source path. Levels below the pds level need not be specified, and when given, may include one or more zero entries. The default pds level is the last entry in the source path when the path has no negative or zero entry.

Position rejection is done in cells at all levels where $c_i \neq 0$, but if any c_i has a negative universe number on its cell card and is at or above the pds level, higher level cells are not checked.

The following chart illustrates the idea of the pds level.

<u>CEL Source Path</u>	<u>Cell of pds Level</u>	<u>pds Level</u>
8:7:6:5	5	3
8:-7:6	7	1
8:7:-6:0:4:0	6	2
8:-7(1 0 0):6(0 0 0):0	7	1
8:7(1 0 0):6(0 0 0):0	Will be determined	3

Lattice cell elements that are defined using the expanded FILL card (see page 3-25) can be uniformly sampled automatically. This feature is applied to lattice cell entries in the source path that lack an explicit lattice index AND that are *at or above* the pds level. Lattice cells not defined by the expanded FILL card must include an explicit lattice index when at or above the pds level. Rejection of automatically sampled lattice elements depends on the entry after the lattice cell number in the source path.

Assume the following cell cards:

```
7 0 surfaces lat=1 u=1 fill=0:2 0:0 0:0 1 2 3
cells 8 and 9 belong to universe 2
cells 10 and 11 belong to universe 3
```

Cell 7 is a lattice with three existing elements: (0 0 0) is filled by itself [u=1], (1 0 0) is filled by cells 8 and 9 [u=2], and (2 0 0) is filled by cells 10 and 11 [u=3]. The following combinations show what elements are accepted and what are rejected.

<u>CEL Source Path</u>	<u>Accepted</u>	<u>Rejected</u>
7	All elements	None
7:0	All elements	None
7:8	(1 0 0)	(0 0 0), (2 0 0)
7:10	(2 0 0)	(0 0 0), (1 0 0)

The sampling efficiency for cell 7 in the OUTF file will reflect the element rejections. Lattice cell entries that lack an explicit lattice index AND are *below* the pds level are not sampled. Instead, the appropriate lattice element is determined by the input source position.

Lattice element sampling is independent from position sampling. First a lattice element is chosen, then a position is chosen. If the sampled position is not in the sampled lattice element, the position is resampled until it is in the specified source path and in the lattice element chosen or until an efficiency error occurs. The lattice elements will not be resampled to accommodate the sampled position. Lattice element rejection is done only as described above.

Using the previous description of lattice cell 7, add that cell 6 is filled by cell 7. The source path becomes 6:7:0. Three elements of the lattice exist [fill=0:2 0:0 0:0] but element (0 0 0) now is cut off by cell 6. Lattice element (0 0 0) still will be sampled 1/3 of the time. The first time element (0 0 0) is sampled a fatal error will occur because the sampled position, no matter what it is, will be rejected because element (0 0 0) does not exist. **CAUTION:** Implement automatic lattice sampling carefully and ensure that all of the lattice elements specified on the expanded FILL card really do exist.

See Chapter 4 for an example of specifying a source in a lattice geometry.

Example: SDEF (no entries)

This card specifies a 14-MeV isotropic point source at position 0,0,0 at time 0 with weight 1 (all defaults).

CHAPTER 3

Source Cards

2. SIn	Source Information Card
3. SPn	Source Probability Card
4. SBn	Source Bias Card

Form: SIn option $I_1 \dots I_k$

n = distribution number ($n = 1,999$)

option = how the I_i 's are to be interpreted. Allowed values are:

omitted or H—bin boundaries for a histogram distribution,
for scalar variables only. This is the default.

L—discrete source variable values

A—points where a probability density distribution is defined

S—distribution numbers

$I_1 \dots I_k$ = source variable values or distribution numbers

Default: SIn H $I_i \dots I_k$

Form: SPn option $P_1 \dots P_k$

or: SPn $f a b$

n = distribution number ($n = 1,999$)

option = how the P_i are to be interpreted. Allowed values are:

omitted—same as D for an H or L distribution. Probability
density for an A distribution on SI card.

D—bin probabilities for an H or L distribution on SI card.
This is the default.

C—cumulative bin probabilities for an H or L distribution
on SI card.

V—for cell distributions only. Probability is proportional
to cell volume (times P_i if the P_i are present).

$P_i \dots P_k$ = source variable probabilities

f = designator (negative number) for a built-in function

a, b = parameters for the built-in function (see Table 3.3)

Default: SPn D $P_1 \dots P_k$

Form: SBn option $B_1 \dots B_k$

or: SBn $f a b$

n , option, f , a , and b are the same as for the SPn card, except that the
only values allowed for f are -21 and -31

$B_i \dots B_k$ = source variable biased probabilities

Default: SBn D $B_1 \dots B_k$

The first form of the SP card, where the first entry is positive or non-numeric, indicates that it and its SI card define a probability distribution function. The entries on the SI card are either values of the source variable or, when the S option is used, distribution numbers. The entries on the SP card are probabilities that correspond to the entries on the SI card.

When the H option is used, the numerical entries on the SI card are bin boundaries and must be monotonically increasing. The first numerical entry on the SP card must be zero and the following entries are bin probabilities or cumulative bin probabilities, depending on whether the D or C option is used. The probabilities need not be normalized. The variable is sampled by first sampling a bin according to the bin probabilities and then sampling uniformly within the chosen bin.

When the A option is used, the entries on the SI card are values of the source variable at which the probability density is defined. The entries must be monotonically increasing, and the lowest and highest values define the range of the variable. The numerical entries on the SP card are values of the probability density corresponding to the values of the variable on the SI card. They need not be normalized. In the sampling process, the probability density is linearly interpolated between the specified values. The first and last entries on the SP card will typically be zero, but nonzero values are also allowed.

When the L option is used, the numerical entries on the SI card are discrete values of the source variable, such as cell numbers or the energies of photon spectrum lines. The entries on the SP card are either probabilities of those discrete values or cumulative probabilities, depending on whether the D or C option is used. The entries on the SI card need not be monotonically increasing.

The S option allows sampling among distributions, one of which is chosen for further sampling. This feature makes it unnecessary to fold distributions together and is essential if some of the distributions are discrete and others are linearly interpolated. The distributions listed on an SI card with the S option can themselves also have the S option. MCNP can handle this structure to a depth of about 20, which should be far more than necessary for any practical problem. Each distribution number on the SI card can be prefixed with a D, or the D can be omitted. If a distribution number is zero, the default value for the variable is used. A distribution can appear in more than one place with an S option, but a distribution cannot be used for more than one source variable.

The V option on the SP card is a special case used only when the source variable is CEL. This option is useful when the cell volume is a factor in the probability of particle emission. If MCNP cannot calculate the volume of such a cell and the volume is not given on a VOL card, you have a fatal error.

The SB card is used to provide a probability distribution for sampling that is different from the true probability distribution on the SP card. Its purpose is to bias the sampling of its source variable to improve the convergence rate of the problem. The weight of each source particle is adjusted to compensate for the bias. All rules that apply to the first form of the SP card apply to the SB card.

The second form of the SP card, where the first entry is negative, indicates that a built-in analytic function is to be used to generate a continuous

CHAPTER 3
Source Cards

probability density function for the source variable. Built-in functions can be used only for scalar variables. See Table 3.3 for a description of these functions.

Table 3.3
Built-In Functions for Source Probability and Bias Specification

Source Variable	Function No. and Input Parameters	Description
ERG	-2 a	Maxwell fission spectrum
ERG	-3 $a b$	Watt fission spectrum
ERG	-4 $a b$	Gaussian fusion spectrum
ERG	-5 a	Evaporation spectrum
ERG	-6 $a b$	Muir velocity Gaussian fusion spectrum
ERG	-7 $a b$	Spare
DIR, RAD, or EXT	-21 a	Power law $p(x) = c x ^a$
DIR or EXT	-31 a	Exponential: $p(\mu) = ce^{a\mu}$
TME	-41 $a b$	Gaussian distribution of time

$f = -2$ Maxwell fission energy spectrum: $p(E) = CE^{1/2} \exp(-E/a)$, where a is a temperature in MeV.
Default: $a = 1.2895$ MeV

$f = -3$ Watt fission energy spectrum: $p(E) = C \exp(-E/a) \sinh(bE)^{1/2}$.
Defaults: $a = 0.965$ MeV, $b = 2.29$ MeV⁻¹. See Appendix H for additional parameters appropriate to neutron-induced fission in various materials and for spontaneous fission.

$f = -4$ Gaussian fusion energy spectrum: $p(E) = C \exp[-((E - b)/a)^2]$, where a is the width in MeV and b is the average energy in MeV. Width here is defined as the ΔE above b where the value of the exponential is equal to e^{-1} . If $a < 0$, it is interpreted as a temperature in MeV and b must also be negative. If $b = -1$, the D-T fusion energy is calculated and used for b . If $b = -2$, the D-D fusion energy is calculated and used for b . Note that a is not the "full-width-at-half-maximum," but is related to it by $\text{FWHM} = a(\ln 2)^{1/2}$.
Defaults: $a = -0.01$ MeV, $b = -1$ (DT fusion at 10 keV).

$f = -5$ Evaporation energy spectrum: $p(E) = CE \exp(-E/a)$.
Default: $a = 1.2895$ MeV.

$f = -6$ Muir velocity Gaussian fusion energy spectrum:
 $p(E) = C \exp -((E^{1/2} - b^{1/2})/a)^2$, where a is the width in MeV^{1/2}, and b is the energy in MeV corresponding to the average speed. Width here is defined

as the change in velocity above the average velocity $b^{1/2}$, where the value of the exponential is equal to e^{-1} . To get a spectrum somewhat comparable to $f = -4$, the width can be determined by $a = (b + a_4)^{1/2} - b^{1/2}$, where a_4 is the width used with the Gaussian fusion energy spectrum. If $a < 0$, it is interpreted as a temperature in MeV. If $b = -1$, the D-T fusion energy is calculated and used for b . If $b = -2$, the D-D fusion energy is calculated and used for b .

Defaults: $a = -0.01$ MeV, $b = -1$ (DT fusion at 10 keV).

$f = -7$ Spare energy spectrum. The basic framework for another energy spectrum is in place to make it easier for a user to add a spectrum of his own. The subroutines to change are SPROB, SPEC, SMPSRC, and possibly CALCPS.

$f = -21$ Power law: $p(x) = c|x|^a$.

The default depends on the variable. For DIR, $a = 1$. For RAD, $a = 2$, unless AXS is defined or JSU $\neq 0$, in which case $a = 1$. For EXT, $a = 0$.

$f = -31$ Exponential: $p(\mu) = ce^{a\mu}$.

Default: $a = 0$.

$f = -41$ Gaussian distribution of time:

$p(t) = c \exp[-(1.6651092(t - b)/a)^2]$, where a is the width at half maximum in shakes and b is the mean in shakes.

Defaults: a =no default, $b = 0$.

The built-in functions can be used only for the variables shown in Table 3.3. Any of the built-in functions can be used on SP cards, but only -21 and -31 can be used on SB cards. If a function is used on an SB card, only that same function can be used on the corresponding SP card. The combination of a regular table on the SI and SP cards with a function on the SB card is not allowed.

A built-in function on an SP card may be biased or truncated or both by a table on SI and SB cards. The biasing affects only the probabilities of the bins, not the shape of the function within each bin. If it is biased, the function is approximated within each bin by n equally probable groups such that the product of n and the number of bins is as large as possible but not over 300. Unless the function is -21 or -31 , the weight of the source particle is adjusted to compensate for truncation of the function by the entries on the SI card.

Special defaults are available for distributions that use built-in functions.

1. If SB f is present and SP f is not, an SP f with default input parameters is, in effect, provided by MCNP.
2. If only an SI card is present for RAD or EXT, an SP -21 with default input parameters is, in effect, provided.
3. If only SP -21 or SP -31 is present for DIR or EXT, an SI 0 1, for -21 , or SI -1 1, for -31 , is, in effect, provided.

CHAPTER 3
Source Cards

4. If SI x and SP -21 are present for RAD, the SI is treated as if it were SI $0 x$.
5. If SI x and SP -21 or SP -31 are present for EXT, the SI is treated as if it were SI $-x x$.

5. DSn Dependent Source Distribution Card

Form: DSn option $J_1 \dots J_k$
 or: DSn T $I_1 J_1 \dots I_k J_k$
 or: DSn Q $V_1 S_1 \dots V_k S_k$

n = distribution number ($n=1,999$)

option = how the J_i are to be interpreted. Allowed values are:

blank or H—source variable values in a continuous
 distribution, for scalar variables only

L—discrete source variable values

S—distribution numbers

T = values of the dependent variable follow values of the
 independent variable, which must be a discrete scalar variable

I_i = values of the independent variable

J_i = values of the dependent variable

Q = distribution numbers follow values of the independent
 variable, which must be a scalar variable

V_i = monotonically increasing set of values of the independent variable

S_i = distribution numbers for the dependent variable

Default: DSn H $J_1 \dots J_k$

The DS card is used instead of the SI card for a variable that depends on another source variable, as indicated on the SDEF card. No SP or SB card is used. MCNP first determines the value of the independent source variable as usual by sampling the probability function of the independent variable. Then the value of the dependent variable is determined according to the form of the DS card.

The first form of the DS card has several possibilities. If the SI card of the independent variable has a histogram distribution of n bins ($n+1$ entries) and the DS card has the blank or H option, the DS card must have $n+1$ entries to specify n bins. The first entry need not be zero. If the sampled value of the independent variable is $I_i + [f(I_{i+1} - I_i)]$, then the value of the dependent variable is $J_i + [f(J_{i+1} - J_i)]$, where the terms in f are used only for continuous distributions. The interpolation factor f always exists whether or not it is needed for the independent distribution. If the L or S option is used on the DS card, n entries are required to specify n discrete values. It is not necessary for the distributions of the independent and dependent variables to be both discrete or both continuous. All combinations work correctly.

When the T option is used on a DS card, the sampled value of the independent variable is sought among the I_i , and if a match is found, the independent variable gets the value J_i . If no match is found, the dependent

variable gets its default value. The purpose of the T option is to shorten the input when a dependent variable should usually get the default value.

When the Q option is used on a DS card, the V_i define a set of bins for the independent variable. The sampled value of the independent variable is compared with the V_i , starting with V_1 , and if the sampled value is less than or equal to V_i , the distribution S_i is sampled for the value of the dependent variable. The value of V_k must be greater than or equal to any possible value of the independent variable. If a distribution number S_i is zero, the default value for the variable is used. The Q option is the only form of the DS card that can be used when the distribution of the independent variable is a built-in function.

6. SCn Source Comment Card

Form: SCn comment

n = distribution number ($n=1,999$)

The comment is printed as part of the header of distribution n in the source distribution table and in the source distribution frequency table. The & continuation symbol is considered as part of the comment, not as a continuation command.

Default: No comment.

Examples of the General Source

Example 1: SDEF ERG=D1 POS= $x y z$ WGT= w
 SI1 H $E_1 E_2 \dots E_k$
 SP1 D 0 $P_2 \dots P_k$
 SB1 D 0 $B_2 \dots B_k$

This is a point isotropic source at x, y, z with a biased continuous-energy distribution and average source particle weight w . The starting cell is not specified. MCNP will determine it from the values of x, y , and z .

Example 2: SDEF SUR= m AXS= $i j k$ EXT=D6
 SB6 -31 1.5

This is a source on surface m . The presence of AXS and EXT implies that surface m is a sphere because AXS and EXT are not otherwise used together for sources on a surface. By default, the particles are emitted in a cosine distribution. They are emitted outward if the positive normal to the sphere is outward, which it is for all the spherical surface types but might not be if the sphere is specified as type SQ. The position on the surface is biased toward the direction i, j, k by an exponential bias (specified by -31) such that the maximum and minimum source particle weights are $e^{1.5} = 4.48$ and $e^{-1.5} = 0.223$. By default, MCNP provides the effect of two cards: SI6 -1 1 and SP6 -31 0.

CHAPTER 3 Source Cards

Example 3: SDEF SUR= m NRM=-1 DIR=D1 WGT= w
SB1 -21 2

This is an inward-directed source on spherical surface m , assuming the positive normal of the surface is directed outward. If $w = \pi r^2$, where r is the radius of sphere m , this source in conjunction with a VOID card, a VOL card, and type 2 and type 4 tallies, is suitable for estimating the areas of surfaces and the volumes of cells. See page 2–165. By default, MCNP provides the effect of two cards: SI1 0 1 and SP1 -21 1. The directional bias by the SB1 card causes higher track density toward the center of the sphere, where presumably the cells of greatest interest lie, than it would be if the unbiased cosine distribution were used. This bias, incidentally, provides a zero-variance estimate of the (known) volume of the sphere m .

Example 4: SDEF ERG=D1 POS= $x y z$ CEL= m RAD=D2
EXT=D3 AXS= $i j k$
SP1 -3
SI2 $r_1 r_2$
SI3 l

This source is distributed uniformly in volume throughout cell m , which presumably approximates a cylinder. The cell is enclosed by a sampling volume centered at x, y, z . The axis of the sampling volume is the line through x, y, z in the direction i, j, k . The inner and outer radii of the sampling volume are r_1 and r_2 , and it extends along i, j, k for a distance $\pm l$ from x, y, z . The user has to make sure that the sampling volume totally encloses cell m . The energies of the source particles are sampled from the Watt fission spectrum using the default values of the two parameters, making it a Cranberg spectrum. By default, MCNP interprets SI3 l as if it were actually SI3 $-l + l$ and provides the effect of two cards: SP2 -21 1 and SP3 -21 0.

Example 5: SDEF SUR= m POS= $x y z$ RAD=D1 DIR=1 CCC= n
SI1 r

This is a monodirectional source emitted from surface m in the direction of the positive normal to the surface. The presence of POS and RAD implies that surface m is a plane because POS and RAD are not otherwise used together for sources on a surface. The position is sampled uniformly in area on the surface within radius r of point x, y, z . The user must make sure that point x, y, z actually lies on surface m . The sampled position is rejected and resampled if it is not within cookie-cutter cell n . The starting cell is found from the position and the direction of the particle. By default, MCNP interprets SI1 r as if it were actually SI1 0 r and provides the effect of card SP1 -21 1.

Example 6: SDEF POS D1 ERG FPOS D2
SI1 L 5 3.3 6 75 3.3 6

```

SP1   .3 .7
DS2   S 3 4
SI3   H 2 10 14
SP3   D 0 1 2
SI4   -3 a b

```

This is a point isotropic source in two locations, shown by two x, y, z 's on the SI1 card. The code will determine the starting cell. With probability .3 the first location will be picked and with probability .7 the second location will be chosen. Each location has a different energy spectrum, pointed to by the DS2 card. All other needed source variables will use their default values.

7. SSW Surface Source Write Card

Form: SSW $S_1 S_2 (C_1 \cdots C_k) S_3 S_n$ keyword=values

The = signs are optional.

S_i = problem surface number, with the appropriate sense of inward or outward particle direction, for which particle-crossing information is to be written to the surface source file WSSA.

C_i = problem cell number. A positive entry denotes an other-side cell. A negative entry specifies a just-left cell.

SYM m symmetry option flag
 $m=0$, no symmetry assumed.
 $m=1$, spherical symmetry assumed. The list of problem surface numbers must contain only one surface and it must be a sphere.

PTY $n_1 n_2 \cdots$ tracks to record
 absent=record all tracks. This is the default.
 $n_i=N$, record neutron tracks
 $n_i=P$, record photon tracks
 $n_i=E$, record electron tracks

CEL $C_1 C_2 \cdots C_n$
 list of names of all the cells from which KCODE fission source neutrons are to be written, active cycles only.

Default: SYM=0 PTY absent=record all particle types

Use: Optional, as needed.

This card is used to write a surface source file or KCODE fission volume source file for use in a subsequent MCNP calculation. Care must be taken to include enough geometry beyond the specified surfaces to account for albedo effects. The card allows a list, in parentheses, of one or more cell names, positive or negative, after any of the surface names. If the list of cells is absent, any track that crosses the surface in the correct direction will be recorded. If the list is present, a track will be recorded if it crosses the surface in the correct direction and is either entering a cell in the list whose entry is positive or leaving a cell in the list whose entry is negative.

CHAPTER 3

Source Cards

If the SYM=1 option is used, the geometry inside the surface must be spherically symmetric and the materials must be symmetric. In very few cases will the SYM=1 option apply. The user must determine whether SYM=1 is appropriate for the problem. If the SYM=1 option is used, fewer words per particle need to be written to the surface source file and certain biasing options become available when reading the surface source file. In a KCODE calculation, particles are written only for active cycles.

Example: SSW 4 -7 19 (45 -46) 16 -83 (49) ...

A track that crosses surface 19 in the correct direction will be recorded only if it is either entering cell 45 or leaving cell 46. A track that crosses surface 83 in the correct direction will be recorded only if it is entering cell 49. A track that crosses surface 4 or 7 or 16 in the correct direction will be recorded regardless of what cells it happens to be leaving or entering.

Fission volume sources from a KCODE calculation can be written from active cycles only. The fission neutrons and prompt photons can then be transported in a subsequent calculation using the SSR surface source read fixed-source capability. In a KCODE criticality calculation the fission neutron sources and prompt photons produced from fission during each cycle are written to the WSSA surface source file if the SSW card has the CEL keyword followed by the names of all the cells from which fission source neutrons are to be written. Particles crossing specified surfaces can also be written by specifying S_i . The SYM=1 option (spherically symmetric surface source) cannot be used if CEL is specified.

Example: SSW 1 2 (3 4) CEL 8 9

A track that crosses surface 2 in the correct direction will be recorded only if it enters cell 3 or 4. A track crossing surface 1 in the correct direction always will be recorded. And particles created from fission events in cells 8 and 9 will be recorded.

During execution, surface source information is written to the scratch file WXXA. Upon normal completion, WXXA becomes WSSA. If the run terminates abnormally, the WXXA file will appear instead of WSSA and must be saved along with the RUNTPE file. The job must be continued for at least one more history. At the subsequent normal termination, WXXA disappears and the correct surface source file WSSA is properly written.

8. SSR Surface Source Read Card

Form: SSR keyword=values keyword=values

The = signs are optional.

OLD $S_1 S_2 \dots S_n$

list of problem surface numbers, a subset of the surfaces on the SSW card that created the file WSSA, now called RSSA.

CEL $C_1 C_2 \dots C_n$

like OLD but for cells in which KCODE fission neutrons or photons were written

- NEW $S_{a1} S_{a2} \dots S_{an} S_{b1} S_{b2} \dots S_{bn}$
 problem surface numbers upon which the surface source is to start particles in this run. The n entries may be repeated to start the surface source in a, b, \dots transformed locations.
- COL m collision option flag
 $m = -1$ start from the surface source file only those particles that came directly from the source without a collision
 $m = 1$ start from the surface source file only those particles that had collisions before crossing the recording surface
 $m = 0$ start particles without regard to collisions
- WGT x Each particle weight is multiplied by the constant x as it is accepted for transport.
- TR n transformation number. Track positions and velocities are transformed from the auxiliary coordinate system (the coordinate system of the problem that wrote the surface source file) into the coordinate system of the current problem, using the transformation on the TR n card, which must be present in the INP file of the current problem.
- TR D_n Distribution number for a set of SIn, SP n , and SB n cards. If the surface source is transformed into several locations, the SIn card lists the transformation numbers and the SP n and SB n cards give the probabilities and bias of each transformation.
- PSC c , a nonnegative constant that is used in an approximation to the PSC evaluation for the probability of the surface source emitting a particle into a specified angle relative to the surface normal.

The following four keywords are used only with spherically symmetric surface sources, that is, sources generated with SYM=1 on the SSW card.

- AXS $u v w$ Direction cosines that define an axis through the center of the surface sphere in the auxiliary (original) coordinate system. This is the reference vector for EXT.
- EXT D_n n is the number of a distribution (SIn, SP n , and SB n cards) that will bias the sampling of the cosine of the angle between the direction AXS and the vector from the center of the sphere to the starting point on the sphere surface.
- POA c Particles with a polar angle cosine relative to the source surface normal that falls between 1 and c will be accepted for transport. All others are disregarded and no weight adjustment is made.
- BCW $r z_b z_e$ $0 < z_b < z_e$ All particles with acceptable polar angles relative to the surface normal are started so that they will pass through a cylindrical window of radius r , starting at z_b from the center of the source sphere, and ending at z_e from the center. The axis of the cylinder is parallel to the z-axis of the auxiliary (original) coordinate system and contains the center of the source sphere. The weight of each source particle

CHAPTER 3

Source Cards

is adjusted to compensate for this biasing of position and direction.

Defaults:	OLD	accept all surfaces in the original run.
	CEL	accept all cells in the original run.
	NEW	the surfaces in the OLD list.
	COL	$m = 0$
	WGT	1
	TR	no transformation
	AXS	no axis
	EXT	no position bias
	POA	$c = 0$
	BCW	no cylindrical window
	PSC	no default value

Use: Required for surface source problems.

An exact treatment of point detectors or DXTRAN spheres with a surface source is not possible because the $p(\cos\theta)$ values required for the source contribution are not readily available. (See the description of detector tallies in Chapter 2.) To use detectors or DXTRAN with a surface source, an approximate $p(\cos\theta)$ must be specified on the SSR card. The most common azimuthally symmetric approximation for an angular emission probability density function is given by

$$p(\cos\theta) = C_n(\cos\theta)^n \quad n \geq 0.$$

The PSC=value entered is n , the power to which $\cos\theta$ is raised. C_n is a normalization constant calculated in MCNP and θ is the angle between the direction vector to the point detector and the surface normal at the point where the particle is to be started. Because surface crossings are recorded in only one direction specified on the SSW card, the limits on μ are always between 1 and 0. A PSC entry of zero specifies an isotropic angular distribution on the surface. An entry of 1 specifies a cosine angular distribution that produces an isotropic angular flux on the surface. In the case of a 1D spherical surface source of radius R , a cosine distribution is adequate if the point detector or DXTRAN sphere is more than $4R$ away from the source.

WARNING: Remember that the value entered is only an approximation. If the point detector or DXTRAN sphere is close to the source sphere and the approximation is poor, the answers will be **WRONG**.

The particle type is determined primarily by the type of the particle on the RSSA file, but particles incompatible with the problem mode are rejected without weight adjustment.

Fission neutrons and photons written to the surface source file in a KCODE calculation can be used as a volume-distributed source in a subsequent calculation. A NONU card should be used so that fission neutrons and photons are not counted twice. Generally a TOTNU card also should

be used. Total $\bar{\nu}$ is the default for KCODE sources but prompt $\bar{\nu}$ is the default for non-KCODE sources. Delayed gammas are ignored in MCNP. The keyword CEL specifies which fission cells to accept of those from the KCODE calculation that wrote the RSSA file.

```
Example 1: Original run: SSW 1 2 3
           Current run: SSR OLD 3 2 NEW 6 7 12 13 TR D5 COL 1
                       SI5 L 4 5
                       SP5 .4 .6
                       SB5 .3 .7
```

Particles starting on surface 1 in the original run will not be started in the current run because 1 is absent from the list of OLD surface numbers. Particles recorded on surface 2 in the original run will be started on surfaces 7 and 13 and particles recorded on surface 3 in the original run will be started on surfaces 6 and 12, as prescribed by the mapping from the OLD to the NEW surface numbers. The COL keyword causes only particles that crossed surfaces 2 and 3 in the original problem after having undergone collisions to be started in the current problem. The TR entry indicates that distribution function 5 describes the required surface transformations. According to the SI5 card, surfaces 6 and 7 are related to surfaces 3 and 2, respectively, by transformation TR4; surfaces 12 and 13 are related to 3 and 2 by TR5. The physical probability of starting on surfaces 6 and 7 is 40% according to the SP5 card, and the physical probability of starting on surfaces 12 and 13 is 60%. The SB5 card causes the particles from surfaces 3 and 2 to be started on surfaces 6 and 7 30% of the time with weight multiplier 4/3 and to be started on surfaces 12 and 13 70% of the time with weight multiplier 6/7.

```
Example 2: Original run: SSW 3 SYM 1
           Current run: SSR AXS 0 0 1 EXT D99
                       SI99 -1 .5 1
                       SP99 C .75 1
                       SB99 .5 .5
```

All particles written to surface 3 in the original problem will be started on surface 3 in the new problem, which must be exactly the same because no OLD, NEW, COL, or TR keywords are present. Because this is a spherically symmetric problem, indicated by the SYM 1 flag in the original run, the position on the sphere can be biased. It is biased in the z -direction with a cone bias described by distribution 99.

9. KCODE Criticality Source Card

Form: KCODE NSRCK RKK IKZ KCT MSRK KNRM MRKP

NSRCK = nominal source size per cycle
RKK = initial guess for k_{eff}
IKZ = number of cycles to be skipped before beginning

CHAPTER 3 Source Cards

tally accumulation

KCT = number of cycles to be done
MSRK = number of source points to allocate storage for
KNRM = method of tally normalization.
0 means normalize tallies by weight
not zero means normalize tallies to number of particles
MRKP = number of k_{eff} cycle values stored in RKPL array
KC8 = summary and tally information averaged over:
0 = all cycles
1 = active cycles only.

Defaults: NSRCK=no default; RKK=1.0; IKZ=5; KCT=0, that is, do not terminate on the number of cycles; MSRK=4500 or 1.5*NSRCK, whichever is larger; KNRM=0; MRKP=201 or 2*KCT, whichever is larger; and KC8=1, active cycles only.

Use: This card is required for criticality calculations.

The KCODE card specifies the MCNP criticality source that is used for determining k_{eff} . The criticality source uses total fission nubar values unless overridden by a TOTNU NO card. The KCODE source applies only to neutron problems. In a MODE N,P problem, secondary photon production from neutrons is turned off during inactive cycles. SSW particles are not written during inactive cycles. See Chapter 1 for further information.

The NSRCK entry is the nominal source size for each cycle and is frequently taken to be in the range of $300 < \text{NSRCK} \leq 3000$. The IKZ entry is the number of cycles to skip before beginning tally accumulation (this is important if the initial source guess is poor). The KCT entry specifies the number of cycles to be done before the problem ends. A zero entry means never terminate on the number of cycles but terminate on time. The MSRK is the maximum number of source points for which storage will be allocated. If an SRCTP file with a larger value of MSRK is read for the initial source, the larger value is used.

Fission sites for each cycle are those points generated by the previous cycle. For the initial cycle, fission sites can come from an SRCTP file from a similar geometry, from a KSRC card, or from a volume distribution specified by an SDEF card.

If in the first cycle the source being generated overruns the current source, the initial guess (RKK) is probably too low. The code then proceeds to print a comment, continues without writing a new source, calculates k'_{eff} , reads the initial source back in, and begins the problem using k'_{eff} instead of RKK. If the generated source again overruns the current source after the first cycle, the job terminates and either a better initial guess (RKK) or more source space (MSRK) should be specified on the next try.

KC8=0 causes tallies and summary table information to be for both active and inactive cycles and should not be used. KC8=0 also results in a strange MCTAL file normalization.

10. KSRC Source Points for KCODE Calculation

Form: KSRC $x_1 y_1 z_1 x_2 y_2 z_2 \dots$

x_i, y_i, z_i = location of initial source points

Default: None. If this card is absent, an SRCTP source file or SDEF card must be supplied to provide initial source points for a criticality calculation.

Use: Optional card for use with criticality calculations.

This card contains up to NSRCK (x, y, z) triplets, which are locations of initial source points for a KCODE criticality calculation. At least one point must be in a cell containing fissile material. The points must be away from cell boundaries. It is not necessary to input all NSRCK coordinate points. MCNP will start approximately (NSRCK/number of points) particles at each point. Usually one point in each fissile region is adequate, because MCNP will quickly calculate and use the new fission source distribution. The energy of each particle in the initial source is sampled from a Watt fission spectrum hardwired into MCNP, with the values $a = 0.965\text{MeV}$ and $b = 2.29\text{MeV}^{-1}$.

An SRCTP file from a previous criticality calculation may be used instead of a KSRC card. If the current problem has a lot in common with the previous problem, using the SRCTP file may save some computer time. Even if the problems are quite different, the SRCTP file may still be usable if some of the points in the SRCTP file are in cells containing fissile material in the current problem. Points in void or zero importance cells will be deleted. The number of particles actually started at each point will be such as to produce approximately NSRCK initial source particles.

An SDEF card also can be used to sample initial source points in fissile material regions. The SDEF card parameters applicable to volume sampling can be used: CEL, POS, RAD, EXT, AXS, X, Y, Z; and CCC, ERG, and EFF. If a uniform volume distribution is chosen, the early values of k_{eff} will likely be low because too many particles are put near where they can escape, just the opposite of the usual situation with the KSRC card. Do not change the default value of WGT for a KCODE calculation.

11. Subroutines SOURCE and SRCDX

If SDEF, SSR, or KCODE cards are not present in the INP file, a user supplied source is assumed and is implemented by calling subroutine SOURCE, which the user must provide. Chapter 4 has examples of a SOURCE subroutine and discusses the SRCDX subroutine. The parameters that must be specified within the subroutine are listed and defined on page 3–40.

Prior to calling subroutine SOURCE, isotropic direction cosines u, v, w (UUU,VVV,WWW) are calculated. Therefore, you need not specify the direction cosines if you want an isotropic distribution.

CHAPTER 3

Tally Cards

The SIn, SPn, and SBn cards also can be used with the SOURCE subroutine, although modifications to other parts of MCNP may be required for proper initialization and to set up storage. A random number generator RANG() is available for use by SOURCE for generating random numbers between 0 and 1. Up to 50 numerical entries can be entered on each of the IDUM and RDUM cards for use by SOURCE. The IDUM entries must be integers and the RDUM entries floating point numbers.

If you are using a detector or DXTRAN and your source has an anisotropic angular distribution, you will need to supply an SRCDX subroutine to specify PSCs for each detector or DXTRAN sphere (see Chapters 2 and 4).

There are unused variables stored in the particle bank that are reserved for the user called SPARE(M), M=1,MSPARE, where MSPARE=3. Depending on the application, you may need to reset them to 0 in SOURCE for each history; MCNP does not reset them.

E. Tally Specification

The tally cards are used to specify what type of information the user wants to gain from the Monte Carlo calculation; that is, current across a surface, flux at a point, heating in a region, etc. This information is requested by the user by using a combination of the following cards. To obtain tally results, only the Fn card is required; the other tally cards provide various optional features.

<u>Mnemonic</u>	<u>Card Type</u>	<u>Page</u>
Fna	Tally type	3-63
FCn	Tally comment	3-72
En	Tally energies	3-72
Tn	Tally times	3-73
Cn	Tally cosines	3-74
FQn	Tally print hierarchy	3-75
FMn	Tally multiplier	3-75
DEn/DFn	Dose energy / Dose function	3-79
EMn	Energy multiplier	3-80
TMn	Time multiplier	3-80
CMn	Cosine multiplier	3-81
CFn	Cell flagging	3-81
SFn	Surface flagging	3-82
FSn	Tally segment	3-83
SDn	Segmented volume/area	3-84
FUn	TALLYX input	3-86
TFn	Tally fluctuation print	3-88
DD	Detector and DXTRAN diagnostics	3-89
DXT	DXTRAN	3-91
FTn	Special treatments	3-93

The n is a user-chosen tally number < 999 ; choices of n are given in the following section. When a choice of n is made for a particular tally type, any other input card used with that tally (such as En for energy bins) is given the same value of n by the user.

Much of the information on these cards is used to describe tally “bins,” subdivisions of the tally space into discrete and contiguous increments such as cosine, energy, or time. Usually when the user subdivides a tally into bins, MCNP can also provide the total tally summed over appropriate bins (such as over energy bins). Absence of any bin specification card results in one unbounded bin rather than one bin with a default bound. No information is printed about the limits on the unbounded bin.

If there are reflecting surfaces or periodic boundaries in the problem, the user may have to normalize the tallies in some special way (this can be done by setting the weight of the source particles or by using the FMn card).

Printed with each tally bin is the relative error of the tally corresponding to one standard deviation. These errors *cannot* be believed reliable (hence neither can the tally itself) unless the error is fairly low. Results with errors greater than 50% are useless, results between 20% and 50% can be believed to within a factor of a few, results between 10% and 20% are questionable, results less than 10% are generally (but not always) reliable except for detectors, and detector results are generally reliable below 5%. One bin of every tally is designated for the tally fluctuation charts at the end of the output file. This bin is also used for the weight window generator. It also is subject to ten statistical checks for tally convergence, including calculation of the variance of the variance (VOV). The VOV can be printed for all bins in a tally by using the DBCN card.

1. Fna Tally Cards

Seven basic neutron tally types, six basic photon tally types, and four basic electron tally types are available in MCNP as standard tallies. All are normalized to be per source particle unless changed by the user with a TALLYX subroutine or normed by weight in a criticality (KCODE) calculation.

<u>Mnemonic</u>	<u>Tally Description</u>	<u>Fn units</u>	<u>*Fn units</u>
F1:N or F1:P or F1:E	Current integrated over a surface	particles	MeV
F2:N or F2:P or F2:E	Flux averaged over a surface	particles/cm ²	MeV/cm ²
F4:N or F4:P or F4:E	Flux averaged over a cell	particles/cm ²	MeV/cm ²
F5a:N or F5a:P	Flux at a point or ring detector	particles/cm ²	MeV/cm ²
F6:N or F6:N,P or F6:P	Energy deposition averaged over a cell	MeV/g	jerks/g
F7:N	Fission energy deposition	MeV/g	jerks/g

CHAPTER 3

Tally Cards

	averaged over a cell		
F8:P	Energy distribution of	pulses	MeV
or F8:E	pulses created in a detector		
or F8:P,E			
or +F8:E	Charge deposition	charge	

The tallies are identified by tally type and particle type as follows. Tallies are given the numbers 1, 2, 4, 5, 6, 7, 8, or increments of 10 thereof, and are given the particle designator :N, :P, or :E (or :N,P only in the case of tally type 6 or :P,E only in the case of tally type 8). Thus you may have as many of any basic tally as you need, each with different energy bins or flagging or anything else. F4:N, F14:N, F104:N, and F234:N are all legitimate neutron cell flux tallies; they could all be for the same cell(s) but with different energy or multiplier bins, for example. Similarly F5:P, F15:P, and *F305:P are all photon point detector tallies. Having both an F1:N card and an F1:P card in the same INP file is not allowed. The tally number may not exceed three digits.

Tally types 1, 2, 4, and 5 are normally weight tallies (particles in the above table); however, if the Fn card is flagged with an asterisk (for example, *F1:N), energy times weight will be tallied. The asterisk flagging can also be used on tally types 6 and 7 to change the units from MeV/g to jerks/g (1 jerk = 1 GJ = 10^9 J). The asterisk on a tally type 8 converts from a pulse height tally to an energy deposition tally. All of the units are shown in the above table.

Tally type 8 can also be flagged with a plus (+) to convert it from an energy deposition tally (flagged with an asterisk) to a charge deposition tally. The tally is the negative particle weight for electrons and the positive weight for positrons. The +F8 tally can be checked against an F1:E type surface tally. See page 3–68 for an example.

Only the F2 surface flux tally requires the surface area. The area calculated is the total area of the surface that may bound several cells, not a portion of the surface that bounds only a particular cell. If you need only the segment of a surface, you might segment the full surface with the FSn card (see page 3–83) and use the SDn card (see page 3–84) to enter the appropriate values. You can also redefine the geometry as another solution to the problem. The detector total is restricted to 20. The tally total is limited to 100. Note that a single type 5 tally may create more than one detector.

(a) Surface and Cell Tallies (tally types 1, 2, 4, 6, and 7)

Simple Form: Fn:pl $S_1 \dots S_k$

General Form: Fn:pl $S_1(S_2 \dots S_3)(S_4 \dots S_5)S_6S_7 \dots$

n = tally number.

pl = N or P or N,P or E

S_i = problem number of surface or cell for tallying, or T .

Only surfaces bounding cells and listed in the cell card description can be used on F1 and F2 tallies.

In the simple form above, MCNP creates k surface or cell bins for the requested tally, listing the results separately for each surface or cell. In the more general form, a bin is created for each surface or cell listed separately and for each collection of surfaces or cells enclosed within a set of parentheses. Entries within parentheses may also appear separately or in other combinations. Parentheses indicate that the tally is for the union of the items within the parentheses. For unnormalized tallies (tally type 1), the union of tallies is a sum, but for normalized tallies (types 2, 4, 6, and 7), the union results in an average. See page 3–69 for an explanation of the repeated structure and lattice tally format.

The symbol T entered on surface or cell Fn cards is shorthand for a region that is the union of all of the other entries on the card. A tally is made for the individual entries on the Fn card plus the union of all the entries.

If a tally label of the surfaces or cells in the output requires more than eleven characters, including spaces, MCNP defines an alphabetical or numerical designator for printing purposes. The designator [for example, G is (1 2 3 4 5 6)] is printed with the tally output. This labeling scheme is usually required for tallies over the union of a long list of surfaces or cells.

Example 1: F2:N 1 3 6 T

This card specifies four neutron flux tallies, one across each of the surfaces 1, 3, and 6 and one which is the average of the flux across all three of the surfaces.

Example 2: F1:P (1 2) (3 4 5) 6

This card provides three photon current tallies, one for the sum over surfaces 1 and 2; one for the sum over surfaces 3, 4, and 5; and one for surface 6 alone.

Example 3: F371:N (1 2 3) (1 4) T

This card provides three neutron current tallies, one for the sum over surfaces 1, 2, and 3; one for the sum over surfaces 1 and 4; and one for the sum over surfaces 1, 2, 3, and 4. The point of this example is that the T bin is not confused by the repetition of surface 1.

Another case for study is in the DEMO example in Chapter 5.

(b) Detector Tallies (tally type 5)

Form for point detectors: Fn:pl X Y Z $\pm R_o$

n = tally number.

pl = N for neutrons or P for photons,

X Y Z = location of the detector point.

$\pm R_o$ = radius of the sphere of exclusion:
in centimeters if R_o is entered as positive,

CHAPTER 3

Tally Cards

in mean free paths if entered as negative.
(Negative entry illegal in a void region.)

Form for ring detectors: Fna:pl a_o r $\pm R_o$

- n = tally number.
- a = the letter X, Y, or Z.
- pl = N for neutrons or P for photons.
- a_o = distance along axis “a” where the ring plane intersects the axis.
- r = radius of the ring in centimeters.
- $\pm R_o$ = same meaning as for point detectors, but describes a sphere about the point selected on the ring.

Default: None.

Use: You are encouraged to read about detectors in Chapter 2 before using them because they are very susceptible to unreliable results if used improperly. Remember that contributions to a detector are not made through a region of zero importance. Ring (rather than point) detectors should be used in all problems with axial symmetry. A detector located right on a surface will probably cause trouble. Detectors and DXTRAN can be used in problems with the $S(\alpha, \beta)$ thermal treatment, but the $S(\alpha, \beta)$ contributions are approximate (see page 2–49). Detectors used with reflecting, white, or periodic surfaces give wrong answers (see page 2–81). Consider using the PDn and DDn cards.

For more than one detector with the same n or na designation, sets of the above input parameters (quadruplets for Fn or triplets for Fna) are simply continued on the same Fn or Fna card. If more than one detector of the same type (an F5:N and an F15:N, for example) are at the same location, the time-consuming contribution calculation upon collision is made only once and not independently for each detector, according to the rules in Chapter 2. Thus it is inexpensive to add more than one detector (each with a different response function, for example) at the same location as another.

The printout for detectors is normally in two parts: (1) the total of all contributions to the detector (as a function of any defined bins such as energy) and (2) the direct (or uncollided) contribution to the detector from the source. The direct contribution is always included in the total of all contributions. Adding the symbol ND at the end of a type 5 detector tally card inhibits the separate printing of the direct contribution for that tally. In coupled neutron/photon problems, the direct contribution in photon tallies is from photons created at neutron collisions.

Rules of Thumb for R_o : R_o should be about 1/8 to 1/2 mean free path for particles of average energy at the sphere and zero in a void. Supplying R_o in terms of mean free path will increase the variance and is not recommended unless you have no idea how to specify it in centimeters. R_o must

not encompass more than one material. MCNP cannot check this and the consequences may be wrong answers.

(c) Pulse Height Tally (tally type 8)

Simple Form: Fn:pl $S_1 \dots S_k$
 General Form: Fn:pl $S_1(S_2 \dots S_3)(S_4 \dots S_5)S_6S_7 \dots$

n = tally number.
 pl = P, E or P,E
 S_i = problem number of cell for tallying, or T .

The F8 tally provides the energy distribution of pulses created in a detector by radiation and is called a pulse height tally. See page 3–69 for an explanation of the repeated structure and lattice tally format. The F8 card is used to list the cell bins, just like an F4 tally. Cell, user, and energy bin cards are allowed. Flagging, segment, multiplier, time, and cosine bins are not allowed. The energy bins accumulate the energy deposited in a cell by all the tracks of a history rather than the energy of the scoring tracks. Both photons and electrons will be tallied if present, even if only E or only P is on the F8 card. In other words, the F8:P, F8:E, and F8:P,E are all equivalent tallies. An asterisk on the F8 card converts the tally from a pulse height tally to an energy deposition tally. A plus on the F8 card converts the tally from a pulse height tally to a charge deposition tally.

If the F8 card has an asterisk or plus and there is no energy binning (E8 card), variance reduction of all kinds is allowed. In this special case, the total energy deposition or charge is correct even though the tallies in energy bins would not be correct. However, there still can be problems as described on page 2–74.

Care must be taken when selecting energy bins for a pulse height tally. It is recommended that a zero bin and an epsilon bin be included such as

F8 0 1E-5 1E-3 1E-1 ...

The zero bin will catch nonanalog knock-on electron negative scores. The epsilon (1E-5) bin will catch scores from particles that travel through the cell without depositing energy. See page 2–74.

The pulse height tally is a radical departure from other MCNP tallies. All other tallies are estimates of macroscopic variables, such as flux, whose values are determined by very large numbers of microscopic events. The pulse height tally records the energy or charge deposited in a cell by each source particle and its secondary particles. For other tallies it is not necessary to model microscopic events realistically as long as the expectation values of macroscopic variables were correct. For the pulse height tally, microscopic events must be modeled much more realistically.

The departures from microscopic realism in MCNP are everywhere. The number, energies, and directions of the secondary neutrons and photons from a neutron collision are sampled without any correlation between the particles and with no regard for the conservation of energy. Modeling the fluctuations

CHAPTER 3

Tally Cards

in the number of fission neutrons is limited to choosing between the integer next larger and the integer next smaller than the average number of fission neutrons. The fluctuations in the energy loss rate of an electron are not correlated with the production of knock-ons and x rays. The variance reduction schemes in MCNP create unrealistic histories that nevertheless give correct results for macroscopic tallies.

Problems that give correct pulse height tallies are severely limited. The only possible variance reduction scheme is biasing of the source itself. **CAUTION:** The pulse height tally does not work well with neutrons (and is not allowed) because of the nonanalog nature of neutron transport that departs from microscopic realism at every turn. One can have a neutron source in a MODE N,P or N,P,E problem, but only the photons and electrons can be tallied on the F8 card. The F8 tally can be used effectively in photon problems. Electron problems may give correct results as long as the tally cells are thick enough for the errors in the energy loss rate to average out. MCNP tries to detect conditions in a problem that would invalidate pulse height tallies, but it is not able to catch all of them. The user must ascertain that his problem does not violate the necessary conditions for obtaining correct answers.

Scoring the pulse height tally is done at the end of each history. A temporary account of energy is kept for each pulse height tally cell bin during the history. At the source, the source cell is credited with the energy times the weight of the source particle. When a particle crosses a surface, the energy times the weight of the particle is subtracted from the account of the cell that it is leaving and is added to the account of the cell that it is entering. The energy here is the kinetic energy of the particle plus 1.022016 MeV if it is a positron. At the end of the history, the account in each tally cell is divided by the source weight. The resulting energy determines which energy bin the score is put in. The value of the score is the source weight, or, if there is an asterisk on the F8 card, the source weight times the energy in the account. If there is a plus on the F8 card, the tally is the negative particle weight for electrons and the positive weight for positrons. The +F8 charge deposition tally can be checked against an electron F1:E surface tally with the FT ELC option if the volume of the +F8 is exactly enclosed by the surfaces on the F1:E card. For example, if cell 1 is enclosed by spherical surface 2, then

```
+F8:E 1      and      F1:E 2
                        FT1 ELC 1
                        C1 0 1
```

give the same result provided the two F1 current tally bins (in – out) are properly subtracted.

Note that the meaning of the energy bins of a pulse height tally is entirely different from the meaning of the energy bins of the other tallies in MCNP. The normal meaning of energy bins is the energy of a scoring track. The meaning of the energy bins of a pulse height tally is the energy deposited in a cell bin by all the tracks of a history.

(d) Surface, Cell, and Pulse Height Tallies for Repeated Structures
and Lattices (tally types 1, 2, 4, 6, 7, and 8)

Simple Form: Fn:pl $S_1 \dots S_k$

General Form: Fn:pl $S_1(S_2 \dots S_3)((S_4 S_5) < (C_1 C_2[I_1 \dots I_2]) < (C_3 C_4 C_5)) \dots$

n = tally number.

pl = N or P or N,P or E.

S_i = problem number of a surface or cell for tallying, U=#, or T.

C_i = problem number of a cell filled with a universe, or U=#.

= problem number of a universe used on a fill card.

I_i = index data for a lattice cell element, with three possible formats:

I_1	Indicating the I_1 th lattice element of cell C_2 , as defined by the FILL array.
$I_1 : I_2 \quad I_3 : I_4 \quad I_5 : I_6$	Range of one or more lattice elements. Use the same format as on the FILL card.
$I_1 \quad I_2 \quad I_3, I_4 \quad I_5 \quad I_6$	Indicating lattice element (I_1, I_2, I_3), (I_4, I_5, I_6), etc. See LAT and FILL cards for indices explanation.

In the simple form, MCNP creates k surface or cell bins for the requested tally, listing the results separately for each surface or cell. In the more general form, a bin is created for each surface or cell listed separately and for each collection of surfaces or cells enclosed within a set of parentheses. A tally bin can involve a single tally level or multiple tally levels. Tallies involving repeated structure and lattice geometries can use either form.

If a tally label of the surface or cells in a given bin exceeds eleven characters, including spaces, an alphabetical or numerical designator is defined for printing purposes. The designator [G is (1 2 3 4 5 6)], for example, would be printed with the tally output. This labeling scheme is usually required for tallies over the union of a long list of surfaces or cells or with repeated structure tallies.

Some operators and nomenclature need to be introduced before the explanation of repeated structures and lattice tallies. The left arrow or less than symbol, $<$, is used to identify surfaces or cells within levels of repeated structures. See page 3–22 for explanation of geometry levels. A tally bin that includes one or more left arrows implies multiple levels, called a chain. Multiple entries enclosed by parentheses at any level of a tally chain indicates the union of the items. Brackets, [], immediately following a filled lattice cell identify one or more elements of that lattice. The input tally bin chain involving multiple levels MUST be enclosed by an outer set of parentheses.

F4:N (5 < 4 < 2 [1 0 0])

This example could specify an F4 tally in cell 5 when it is in cell 4, when cell 4 is in cell 2, which is a lattice, and only in lattice element [1,0,0]. While any cell (lattice, filled, or simple) can be entered as a tally cell (e.g., S_1 through S_5), only cells filled with a universe can be used in higher levels (e.g., C_1 through C_5 .) See General Form, page 3–69.

CHAPTER 3
Tally Cards

Multiple bin format: In addition to multiple levels, multiple entries can be used in each level of the tally chain resulting in multiple output bins. Within the parentheses required around the tally bin chain, other sets of parentheses can be used to indicate the union of cells as in a simple tally description, resulting in fewer output tally bins.

$$((S_4 S_5) < (C_1 C_2 [I_1 \dots I_2]) < (C_3 C_4 C_5))$$

This example results in one output tally bin and will be the union of the tally in S_4 plus S_5 that fill C_1 or C_2 [elements $I_1 \dots I_2$] and when C_1 or C_2 fills cells C_3 , C_4 , or C_5 . Removing the first and third inner parentheses:

$$(S_4 S_5 < (C_1 C_2 [I_1 \dots I_2]) < C_3 C_4 C_5)$$

results in the creation of $2*1*3=6$ bins as follows:

$$\begin{aligned} &(S_4 < (C_1 C_2 [I_1 \dots I_2]) < C_3), (S_5 < (C_1 C_2 [I_1 \dots I_2]) < C_3), \\ &(S_4 < (C_1 C_2 [I_1 \dots I_2]) < C_4), (S_5 < (C_1 C_2 [I_1 \dots I_2]) < C_4), \\ &(S_4 < (C_1 C_2 [I_1 \dots I_2]) < C_5), (S_5 < (C_1 C_2 [I_1 \dots I_2]) < C_5), \end{aligned}$$

The repeated structure/lattice input tally bin format with levels that have multiple entries automatically creates multiple output tally bins. The total number of bins generated is the product of the number of entries at each level. If parentheses enclose all entries at a level, the number of entries at that level is one and results in the union of all those entries. See Chapter 4, page 4–42, for a caution when tallying a union of overlapping regions. For unnormalized tallies (type 1), the union is a sum. For normalized tallies (type 2, 4, 6, 7), the union is an average. A symbol T on the tally line creates an additional tally bin that is the union or total of all the other tally bins.

Brackets: Brackets, [], enclose index data for lattice cell elements. Brackets make it possible to tally on a cell or surface only when it is within the specified lattice elements. The brackets must immediately follow a filled lattice cell. Listing a lattice cell without brackets will produce a tally when the tally cell or surface is in any element of the lattice, provided the tally cell or surface fills an entry at all other levels in the chain. The use of brackets is limited to levels after the first $<$ in the tally specification.

To tally within lattice elements of a real world (level zero) lattice cell, use the special syntax that follows. Cell 3 contains material 1 and is bounded by four surfaces. The F4 card specifies a tally only in lattice element (0,0,0). This syntax is required because brackets can only follow a $<$.

```

      .
      3      1  -1.0  -1  2  -3  4  lat=1
      .
F4:N      (3 < 3 [0 0 0])

```

Universe format: The universe format, U=#, is a shorthand method of including all cells and lattice elements filled by universe #. This format can be used in any level of the tally chain. The following example illustrates valid shorthand U=# descriptions in the left column. The right column shows the tally after the shorthand has been expanded. Cells 4 and 5 are filled with universe 1.

F4:N	u=1	4 5
	(u=1)	(4 5)
	(u=1 < 2 < 3)	(4 5 < 2 < 3)
	((u = 1)< 2 < 3)	((4 5)< 2 < 3)
	(1 < u = 1 < 2 < 3)	(1 < 4 5 < 2 < 3)
	(1 < (u = 1)< 2 < 3)	(1 < (4 5)< 2 < 3)

In complex geometries, the U=# format should be used sparingly, especially with the multiple bin format. If 100 cells are filled by universe 1 and 10 cells are filled by universe 2, then the tally

$$F4:N \quad (u = 1 < u = 2)$$

will create 1000 output tally bins. However,

$$F4:N \quad ((u = 1) < (u = 2))$$

will create only one output tally bin.

Use of SDn card: When making tallies in repeated structure and lattice geometries, often a volume or area is required and MCNP will be unable to calculate it. Possibly the geometry causes the calculation to fail. A universe can be repeated a different number of times in different cells and the code has no way to determine this. There are two distinct options for entries on the SDn card relating to repeated structures and they cannot be mixed within a single tally.

The first option is to enter a value for each first level entry on the related F card. If the entry on the F card is the union of cells, the SD card value will be the volume of the union of the cells. The following examples illustrate Fn card tally descriptions in the left column. The right column shows the SDn card entries.

F4:N	(1 < 4 5 6 < 7 8)	SD4	V ₁
	(1 2 3 < 4 5 6 < 7 8)		V ₁ V ₂ V ₃
	(1 2 3 < (4 5 6) < (7 8))		V ₁ V ₂ V ₃
	((1 2 3) < 4 5 6 < 7 8)		V ₁₂₃

V_i=volume of cell *i* and V₁₂₃=volume of the union of cells 1, 2, and 3. Even though the first line creates six tally bins, only one SD value is entered. This divisor is applied to all bins generated by the input tally bin. You do not need to know the number of bins generated by each input tally bin in order to use the SD card. The last line is the union of cells 1, 2, and 3 and only one divisor is entered on the SD card.

The second option is to enter a value for each bin generated by the Fn card.

F4:N	(1 < 4 5 6 < 7 8)	SD4	V ₁ ¹ V ₁ ² V ₁ ³ V ₁ ⁴ V ₁ ⁵ V ₁ ⁶
	(1 2 3 < 4 5 6 < 7 8)		V ₁ ¹ V ₂ ² V ₃ ³ V ₁ ⁴ V ₂ ⁵ V ₃ ⁶ V ₁ ⁷ V ₂ ⁸ V ₃ ⁹
	(1 2 3 < (4 5 6) < (7 8))		... V ₁ ¹⁶ V ₂ ¹⁷ V ₃ ¹⁸
	((1 2 3) < 4 5 6 < 7 8)		V ₁ V ₂ V ₃
	(1 2 3) < 4 5 6 < 7 8)		V ₁₂₃ ¹ V ₁₂₃ ² V ₁₂₃ ³ V ₁₂₃ ⁴ V ₁₂₃ ⁵ V ₁₂₃ ⁶

CHAPTER 3

Tally Cards

V_i^j =volume of cell i for bin j and V_{123}^j =volume of the union of cells 1, 2, and 3 for bin j . If cell i is repeated the same number of times in all six bins generated by the first line above, then all six SD values for this input bin will be the same ($V_1^1 = V_1^2 = V_1^3 \dots$). However, if cell 1 is repeated a different number of times in each bin, then different SD values should be entered. The volume is multiplied by the number of times it is repeated. In these cases, the total cell 1 volume for each generated bin will not be calculated. The bin generation order is explained previously in the Fn card section. For the first line above, the bin order is (1<4<7), (1<5<7), (1<6<7), (1<4<8), (1<5<8), and (1<6<8). The second line above generated 18 tally bins, and 18 SD values are required in the proper sequence. This option requires the knowledge of both the number and sequence of bins generated by each input tally bin.

2. FCn Tally Comment Card

Form: FCn any desired information...

Default: No comment.

Use: Recommended for modified tally.

Anything entered after FCn will appear as the title heading of tally Fn. This card is particularly useful when tallies are modified in some way, so later readers of the output will be warned of modified or nonstandard tallies. The FCn card can be continued only by blanks in columns 1–5 on succeeding lines. The & continuation symbol is considered as part of the comment, not as a continuation command.

3. En Tally Energy Card

Form: En $E_1 \dots E_k$

n = tally number.

E_i = upper bound (in MeV) of the i^{th} energy bin for tally n .

Default: If the En card is absent, there will be one bin over all energies unless this default has been changed by an E0 card.

Use: Required if EMn card is used.

The entries on the En card must be entered in the order of increasing magnitude. If a particle has an energy greater than the last entry, it will not be tallied, but you will be warned that this has happened. If the last entry is greater than the upper energy limit E_{max} specified on the PHYS card, the last bin will be lowered to E_{max} . If there are several bins above E_{max} , the extra bins are eliminated.

An E0 (zero) card may be used to set up a default energy bin structure for all tallies. A specific En card will override the default structure for tally n .

MCNP automatically provides the total over all specified energy bins, but the total can be inhibited for a given tally by putting the symbol NT at the end of the En card for that tally.

Example: E11 .1 1 20

This will separate an F11 current tally into four energy bins: (1) from the energy cutoff to 0.1 MeV, (2) from 0.1 to 1.0 MeV, (3) from 1.0 to 20.0 MeV, and (4) a total over all energy.

4. Tn Tally Time Card

Form: $Tn \ T_1 \dots T_k$

n = tally number.

T_i = upper bound (in shakes) of the i^{th} time bin for tally n .

Default: If the Tn card is absent, there will be one bin over all times unless this default has been changed by a T0 card.

Use: Required if TMn card is used. Consider FQn card.

The times on the Tn card must be entered in order of increasing magnitude. If a particle has a time greater than the last entry on the Tn card, it will not be tallied, but you will be warned that this has happened. The last time bin entry should always be less than or equal to the time cutoff (see CUT card) except for point detectors. If time bins greater than the time cutoff are entered for tallies other than point detectors, the first bin limit over the cutoff will be lowered to the cutoff. All higher bins will be eliminated. For point detector tallies, time bins can exceed the time cutoff so that particles will score at detectors remote from the main body of the system. Setting the time cutoff lower than the last time bin will inhibit unproductive transport of slow neutrons in the system and will increase the efficiency of the problem.

A T0 (zero) card may be used to set up a default time bin structure for all tallies. A specific Tn card will override the default structure for tally n .

MCNP automatically provides the total over all specified time bins, but the total can be inhibited for a given tally by putting the symbol NT at the end of the Tn card for that tally.

Example: T2 -1 1 1.0+37 NT

This will separate an F2 flux surface tally into three time bins: (1) from $-\infty$ to -1.0 shake, (2) from -1.0 shake to 1.0 shake, and (3) from 1.0 shake to $1.0e37$ shakes, effectively infinity. No total bin will be printed in this example.

5. Cn Cosine Card (tally type 1 only)

Form: $Cn \ C_1 \dots C_k$

CHAPTER 3

Tally Cards

n = tally number.

C_i = upper cosine limit of the i^{th} angular bin for surface
current tally n . $C_1 > -1$. $C_k = 1$.

Default: If the Cn card is absent, there will be one bin over all angles unless this default has been changed by a C0 card.

Use: Tally type 1. Required if CMn card is used. Consider FQn card.

The angular limits described by the Cn card are defined with respect to the positive normal to the surface at the particle point of entry. An FTn card with an FRV U V W option can be used to make the cosine bins relative to the vector u,v,w. The positive normal to the surface is always in the direction of a cell that has positive sense with respect to that surface. The cosines must be entered in increasing order, beginning with the cosine of the largest angle less than 180° to the normal and ending with the normal ($\cos=1$). A lower bound of -1 is set in the code and should not be entered on the card. The last entry must always be 1.

A C0 (zero) card may be used to set up a default angular bin structure for all tallies. A specific Cn card will override the default structure for tally n. Note that the selection of a single cosine bin for an F1 tally gives the total and not the net current crossing a surface.

MCNP does not automatically provide the total over all specified cosine bins, but the total can be generated for a given tally by putting the symbol T at the end of the Cn card for that tally.

Example: C1 -.866 -.5 0 .5 .866 1

This will tally currents within the angular limits (1) 180° to 150° , (2) 150° to 120° , (3) 120° to 90° , (4) 90° to 60° , (5) 60° to 30° , and (6) 30° to 0° with respect to the positive normal. No total will be provided.

As an example of the relation between a surface normal and sense for the C1 card, consider a source at the origin of a coordinate system and a plane (PY) intersecting the $+y$ axis. An entry of 0 and 1 on the C1 card will tally all source particles transmitted through the plane in the 0 to 1 cosine bin (0° to 90°) and all particles scattered back across the plane in the -1 to 0 cosine bin (90° to 180°). A plane (PY) intersecting the $-y$ axis will result in a tally of all source particles transmitted through the second plane in the -1 to 0 bin (90° to 180°) and all particles scattered back across the plane in the 0 to 1 bin (0° to 90°). Note that the positive normal direction for both planes is the same, the $+y$ axis.

6. FQn Print Hierarchy Card

Form: FQn $a_1 a_2 \dots a_8$

n = tally number

a_i = F—cell, surface, or detector

D—direct or flagged
 U—user
 S—segment
 M—multiplier
 C—cosine
 E—energy
 T—time

Default: Order as given above.

Use: Recommended where appropriate.

The a_i 's are the letters representing all eight possible types of tally bins. This card can be used to change the order in which the output is printed for the tallies. For a given tally, the default order shown above is changed by entering a different ordering of the letters, which are space delimited.

A subset of the letters can be used, in which case MCNP places them at the end of the FQn card and precedes them with the unspecified letters in the default order. The first letter is for the outermost loop of the nest in the tally printout coding. The last two sets of bins make a table: the next to last set goes vertically; the last set of bins goes horizontally in the table.

Note that the default order is a table in E and T; any other bins in a tally will be listed vertically down the output page. Thus if you have a tally with only cell, user, and energy bins, the print for that tally will be a hard-to-read vertical list. Specifying U E as the only entries or last two entries on the FQn card will produce the same output, but in an easy-to-read table.

An FQ0 (zero) card may be used to change the default order for all tallies. A specific FQn card will then override that order for tally number n .

An example of this card is in the DEMO example in Chapter 5.

7. FMn Tally Multiplier Card

Form: FMn (bin set 1) (bin set 2) ... T

n = tally number

(bin set i) = ((multiplier set 1) (multiplier set 2) ... (attenuator set))

T = absent for no total over bins

= present for total over all bins

attenuator set = C -1 m_1 px_1 m_2 px_2 ...

multiplier set i = C m (reaction list 1) (reaction list 2) ...

special multiplier set i = C -k

C = multiplicative constant

-1 = flag indicating attenuator rather than multiplier set

m = material number identified on an Mm card

px = density times thickness of attenuating material;
 atom density if positive, mass density if negative

CHAPTER 3

Tally Cards

k = special multiplier option;
(reaction list i) = sums and products of ENDF or
special reaction numbers, described below.

Parentheses:

(a) If a given multiplier set contains only one reaction list, the parentheses surrounding the reaction list may be omitted. Parentheses within a reaction list are forbidden.

(b) If a given bin set consists of more than a single multiplier or attenuator set, each multiplier or attenuator set must be surrounded by parentheses, and the combination must also be surrounded by parentheses.

(c) If the FMn card consists only of a single bin set, and that bin set consists only of a single multiplier or attenuator bin, surrounding parentheses may be omitted.

Default: If the C entry is negative (for type 4 tally only), C is replaced by $|C|$ times the atom density of the cell where the tally is made.

Use: Optional. Use the attenuators only when they are thin. Use only the multiplicative constant for tally types 6 and 7. Disallowed for tally type 8.

The FMn card is used to calculate any quantity of the form

$$C \int \varphi(E) R_m(E) dE,$$

where $\varphi(E)$ is the energy-dependent fluence (particles/cm²) and $R(E)$ is an operator of additive and/or multiplicative response functions from the MCNP cross-section libraries or specially designated quantities. Note that some MCNP cross-section library reaction numbers are different from ENDF/B reaction numbers. See below. The constant C is any arbitrary scalar quantity that can be used for normalization. The material number m must appear on an Mm card, but need not be used in a geometrical cell of the problem.

A reaction list consists of one or more reaction numbers delimited by spaces and/or colons. A space between reaction numbers means multiply the reactions. A colon means add the reactions. The hierarchy of operation is multiply first and then add. One bin is created for each reaction list. Thus, if R_1 , R_2 , and R_3 are three reaction numbers, the form $R_1 R_2 : R_3$ represents one reaction list (one bin) calling for reaction R_3 added to the product of reactions R_1 and R_2 . No parentheses are allowed within the reaction list. The product of R_1 with the sum of R_2 and R_3 would be represented by the form $R_1 R_2 : R_1 R_3$ rather than by the form $R_1 (R_2 : R_3)$. The latter form would produce two bins with quite a different meaning (see Examples 1 and 2 below).

The reaction cross sections are *microscopic* (with units of barns) and not macroscopic. Thus, if the constant C is the atomic density (in atoms per barn-cm), the results will include the normalization “per cm³.” The examples in Chapter 4 illustrate the normalization.

CHAPTER 3 Tally Cards

Any number of ENDF/B or special reactions can be used in a multiplier set as long as they are present in the MCNP cross-section libraries, or in special libraries of dosimetry data. If neither a material nor any reactions are given, the tally is multiplied by the constant C .

A multiplier set that has only two entries, $C -k$, has special meaning. If $k=-1$, the tally is multiplied by $1/\text{weight}$ and the tally is the number of tracks (or collisions for the F5 tally.) If $k=-2$, the tally is multiplied by $1/\text{velocity}$ and the tally is the neutron population integrated over time, or the prompt removal lifetime. See Chapter 2 page 2–152, Chapter 4 example 3 page 3–313life and the KCODE problem in Chapter 5.

In addition to most of the approximately one hundred standard ENDF reaction numbers available (for example, $R = 1, 2, 16$, representing σ_{tot} , σ_{el} , $\sigma_{n,2n}$), the following nonstandard special R numbers may be used:

- Neutrons: –1 total cross section without thermal
 –2 absorption cross section
 –3 elastic cross section without thermal
 –4 average heating number (MeV/collision)
 –5 gamma-ray production cross section, barns
 –6 total fission cross section
 –7 fission ν
 –8 fission Q (MeV/fission)
- Photons: –1 incoherent scattering cross section
 –2 coherent scattering cross section
 –3 photoelectric cross section
 –4 pair production cross section
 –5 total cross section
 –6 photon heating number
- Multigroup: –1 total cross section
 –2 fission cross section
 –3 nubar data
 –4 fission chi data
 –5 absorption cross section
 –6 stopping powers
 –7 momentum transfers

A list of many of the ENDF reaction numbers can be found in Appendix G. The total and elastic cross sections, $R = 1$ and $R = 2$, are adjusted for temperature dependence. All other reactions are interpolated directly from the library data tables. Note that for tritium production, the R number differs from one nuclide to another. Note also that tally types 6 and 7 already include reactions, so the FMn card makes little sense for $n = 6$ or 7. Only the constant-multiplier feature should be used for these tally types, generally. Photon production reactions can be specified according to the MTRP prescription in Table F.6 in Appendix F.

An attenuator set of the form $C -1 m px$, where m is the material number and px is the product of density and thickness, allows the tally to

CHAPTER 3
Tally Cards

be modified by the factor $e^{-\sigma_{tot}px}$ representing an exponential line-of-sight attenuator. This capability makes it possible to have attenuators without actually modeling them in the problem geometry.

Caution: The assumption is made that the attenuator is thin, so that simple exponential attenuation without buildup from scattering is valid.

The attenuator set may include more than one layer:

$$C \quad -1 \quad m_1 \quad px_1 \quad m_2 \quad px_2$$

in which case the factor is $e^{-\sigma_1px_1 - \sigma_2px_2}$. The attenuator set may also be part of a bin set, for example,

$$((C_1 \quad m_1 \quad R_1) (C_2 \quad m_2 \quad R_2) (C_3 - 1 \quad m_3 \quad px_3))$$

in which case the attenuation factor is applied to every bin created by the multiplier sets. Note that both the inner and the outer parentheses are required for this application.

Tallies are posted in all multiplier bins for each score. MCNP does not automatically provide the total over all specified multiplier bins for a particular tally. The total is available for a tally, however, by putting the symbol T at the end of the FMn card for that tally.

Example 1: FMn $C \quad m \quad R_1 \quad R_2 : R_1 \quad R_3$

Example 2: FMn $C \quad m \quad R_1 (R_2 : R_3)$

These two examples reiterate that parentheses cannot be used for algebraic hierarchy within a reaction list. The first example produces a single bin with the product of reaction R_1 with the sum of reactions R_2 and R_3 . The second case creates two bins, the first of which is reaction R_1 alone; the second is the sum of R_2 and R_3 , without reference to R_1 .

Example 3: F2:N 1 2 3 4
 FM2 (C_1) (C_2) (C_3) (C_4) T

Example 4: F12:N 1 2 3 4
 FM12 C_1

Example 5: F22:N (1 2 3) 4 T
 FM22 (C_1) (C_2) (C_3) (C_4)

These three examples illustrate the syntax when only the constant-multiplier feature is used. All parentheses are required in these examples. Tally 2 creates 20 bins: the flux across each of surfaces 1, 2, 3, and 4 with each multiplied by each constant C_1 , C_2 , C_3 , C_4 , and the sum of the four constants. Tally 12 creates 4 bins: the flux across each of surfaces 1, 2, 3, and 4 with each multiplied by the constant C_1 . Tally 22 creates 12 bins: the flux across surface 1 plus surface 2 plus surface 3, the flux across surface 4, and the flux across all four surfaces with each multiplied by each constant C_1 , C_2 , C_3 , and C_4 . An FQn card with an entry of F M or M F would print these bins of the tallies in an easy-to-read table rather than strung out vertically down the output page.

Several more examples of the FMn card are in Chapter 4. The DEMO example in Chapter 5 also illustrates the general form of the card.

Using MCNP tallies, there are two ways to obtain the energy deposited in a material in terms of rads (1 rad = 100 ergs/g). When the actual material of interest is present in the MCNP model, the simplest way is to use the heating tally with units MeV/g in conjunction with $C=1.602E-08$ on the companion FMn card, where $C=(1.602E-06 \text{ ergs/MeV})/(100 \text{ ergs/g})$. When the material is not present in the model, rads can be obtained from type 1, 2, 4, and 5 tallies by using an FMn card where C is equal to the factor above times $N_o\eta \times 10^{-24}/A$, where N_o is Avogadro's number and η and A are the number of atoms/molecule and the atomic weight, respectively, of the material of interest. The implicit assumption when the material is not present is that it does not affect the radiation transport significantly. In the reaction list on the FM card, you must enter $-4 \ 1$ for neutron heating and $-5 \ -6$ for photon heating. See pages 2-73 and 4-35 for examples. For both F4 and F6, if a heating number from the data library is negative, it is set to zero by the code.

8. DEn Dose Energy Card
DFn Dose Function Card

Form: DEn A $E_1 \dots E_k$
 DFn B $F_1 \dots F_k$

- n = tally number.
- E_i = an energy (in MeV).
- F_i = the corresponding value of the dose function.
- A = LOG or LIN interpolation method for energy table.
- B = LOG or LIN interpolation method for dose function table.

Defaults: If A or B is missing, LOG is chosen for that table.

Use: Tally comment recommended.

This feature allows you to enter a pointwise response function (such as flux-to-dose conversion factors) as a function of energy to modify a regular tally. Both cards must have the same number of numerical entries, and they must be monotonically increasing in energy. Particle energies outside the energy range defined on these cards use either the highest or lowest value.

By default MCNP uses log-log interpolation between the points rather than a histogram function as is done for the EMn card. The energy points specified on the DEn card do not have to equal the tally energy bins specified with the En card for the Fn tally. Unlike EMn card use, there can be many points on the DEn and DFn cards, but the response can be tallied in only a few energy bins such as one unbounded energy bin.

If n is zero on these two cards, the function will be applied to all tallies that do not have DEn and DFn cards specifically associated with them.

CHAPTER 3

Tally Cards

LIN or LOG may be chosen independently for either table. Thus any combination of interpolation (log-log, linear-linear, linear-log, or log-linear) is possible. The default log-log interpolation is appropriate for the ANSI/ANS flux-to-dose rate conversion factors (they are listed in Appendix H); kermas for air, water, and tissue; and energy absorption coefficients.

Example: DE5 $E_1 E_2 E_3 E_4 \dots E_k$
 DF5 LIN $F_1 F_2 F_3 F_4 \dots F_k$

This example will cause a point detector tally to be modified according to the dose function F(E) using logarithmic interpolation on the energy table and linear interpolation on the dose function table.

9. EMn Energy Multiplier Card

Form: EMn $M_1 \dots M_k$

n = tally number.

M_i = multiplier to be applied to the i^{th} energy bin.

Default: None.

Use: Requires En card. Tally comment recommended.

This card can be used with any tally (specified by n) to scale the usual current, flux, etc. by a response function. There should be one entry for each energy entry on the corresponding En card. When a tally is being recorded within a certain energy bin, the regular contribution is multiplied by the entry on the EMn card corresponding to that bin. For example, a dose rate can be tallied with the appropriate response function entries. Tallies can also be changed to be per unit energy if the entries are $1/\Delta E$ for each bin. Note that this card modifies the tally by an energy-dependent function that has the form of a histogram and not a continuous function. It also requires the tally to have as many energy bins as there are histograms on the EMn card. If either of these two effects is not desired, see the DEn and DF n cards.

A set of energy multipliers can be specified on an EM0 (zero) card that will be used for all tallies for which there is not a specific EMn card.

10. TMn Time Multiplier Card

Form: TMn $M_1 \dots M_k$

n = tally number.

M_i = multiplier to be applied to the i^{th} time bin.

Default: None.

Use: Requires Tn card. Tally comment recommended.

This card is just like the EMn card except that the entries multiply time bins rather than energy bins. The Tn and TMn cards must have the same number of entries. Note that this card modifies the tally by a time-dependent function that has the form of a histogram and not a continuous function.

A set of time multipliers can be specified on a TM0 (zero) card that will be used for all tallies for which there is not a specific TMn card.

For example, if the entries are $1/\Delta T$, where ΔT is the width of the corresponding time bin, the tally will be changed to be per unit time with the units of $1/\Delta T$.

11. CMn Cosine Multiplier Card (tally type 1 only)

Form: CMn $M_1 \dots M_k$

n = tally number.
 M_i = multiplier to be applied to the i^{th} cosine bin.

Default: None.

Use: Tally type 1. Requires Cn card. Tally comment recommended.

This card is just like the EMn and TMn cards except that the entries multiply cosine bins. The number of entries on the CMn card must be the same as on the Cn card. Note that this card modifies the tally by an angular-dependent function that has the form of a histogram and not a continuous function.

A set of cosine multipliers can be specified on a CM0 (zero) card that will be used for all type 1 tallies for which there is not a specific CMn card.

For example, if you want the directionally dependent F1 tally results to be per steradian, the i^{th} entry on the CM1 card is

$$\frac{1}{2\pi(\cos \theta_i - \cos \theta_{i-1})}$$

where θ_o is 180° .

12. CFn Cell-Flagging Card (tally types 1, 2, 4, 6, 7)

Form: CFn $C_1 \dots C_k$

n = tally number.
 C_i = problem cell numbers whose tally contributions are to be flagged.

Default: None.

Use: Not with detectors or pulse height tallies. Consider FQn card.

Particle tracks may be “flagged” when they leave designated cells, and the contributions of these flagged tracks to a tally are listed separately in

CHAPTER 3

Tally Cards

addition to the normal total tally. This is a method of determining the tally contribution from tracks that have passed through a certain part of the geometry.

Cell flagging cannot be used for detector tallies. The same purpose can be accomplished with an FTn card with the ICD option.

The cell flag is turned on only upon leaving a cell. A source particle born in a flagged cell does not turn the flag on until it leaves the cell.

In MODE N P the flagged neutron tallies are those caused by neutrons leaving the flagged cell, but the flagged photon tallies can be caused by either a photon leaving a flagged cell or a neutron leaving a flagged cell and then leading to a photon which is tallied.

Example: F4:N 6 10 13
CF4 3 4

In this example the flag is turned on when a neutron leaves cell 3 or 4. The print of Tally 4 is doubled. The first print is the total track length tally in cells 6, 10, and 13. The second print is the tally in these cells for only those neutrons that have left cell 3 or 4 at some time before making their contribution to the cell 6, 10, or 13 tally.

13. SFn Surface-Flagging Card (tally types 1, 2, 4, 6, 7)

Form: SFn $S_1 \dots S_k$

n = tally number.

S_i = problem surface numbers whose tally contributions are to be flagged.

Default: None.

Use: Not with detectors. Consider FQn card.

This feature is identical to cell flagging except that particles turn the flag on when they cross the specified surfaces. Thus a second tally print is given for only those particles that have crossed one or more of the surfaces specified on the SFn card.

Surface flagging cannot be used for detector tallies but an FTn card with the ICD option will do the same thing.

The situation for photon tallies in MODE N P is like that for the CFn card: a photon can be flagged either because it has crossed a flagged surface or because it was created by a neutron that crossed a flagged surface.

Both a CFn and an SFn card can be used for the same tally. The tally is flagged if the track leaves one or more of the specified cells or crosses one or more of the surfaces. Only one flagged output for a tally is produced from the combined CFn and SFn card use.

14. FS_n Tally Segment Card (tally types 1, 2, 4, 6, 7)

Form: FS_n $S_1 \dots S_k$

n = tally number.

S_i = signed problem number of a segmenting surface.

Default: No segmenting.

Use: Not with detectors. May require SD_n card. Consider FQ_n card.

This card allows you to subdivide a cell or a surface into segments for tallying purposes, the advantage being that it is then not necessary to specify the problem geometry with extra cells just for tallying. The segmenting surfaces specified on the FS_n card are listed with the regular problem surfaces, but they need not be part of the actual geometry and hence do not complicate the cell/surface relationships.

If k surfaces are entered on the FS_n card, $k+1$ surface or volume segments are created. Tally n is subdivided into $k+1$ segment bins according to the order and sense of the segmenting surfaces listed on the FS_n card. If the symbol T is on the FS_n card, there will be an additional total bin. Segmenting is done according to the following scheme:

Fn:N S (or C)
FS_n $S_1 \dots S_k T$ (optional)

Tally n over surface S (or in cell C) will be subdivided into the following bins:

- (1) the portion with the same sense with respect to surface S_1 as the sign given to S_1 ,
- (2) the portion with the same sense with respect to surface S_2 as the sign given to S_2 but excluding that already scored in a previously listed segment,
- ⋮
- (k) the portion with the same sense with respect to surface S_k as the sign given to S_k but excluding that already scored in a previously listed segment,
- (k+1) everything else,
- (k+2) entire surface or cell if T is present on FS_n card.

If the symbol T is absent from the FS_n card, the $(k+2)^{th}$ bin is missing and MCNP calculates the tally only for each segment (including the “everything else” segment). If multiple entries are on the Fn card, each cell or surface in the tally is segmented according to the above rules. For tally types 1 or 2, the segmenting surfaces divide a problem surface into segments for the current or flux tallies. The segmenting surfaces divide a problem cell into segments for tally types 4, 6, or 7. For normalized tallies, the segment

CHAPTER 3

Tally Cards

areas (for type 2), volumes (for type 4), or masses (for types 6 and 7) may have to be provided. See the discussion under the SDn card.

Example 1: F2:N 1
 FS2 -3 -4

This example subdivides surface 1 into three sections and calculates the neutron flux across each of them. There are three prints for the F2 tally: (1) the flux across that part of surface 1 that has negative sense with respect to surface 3, (2) the flux across that part of surface 1 that has negative sense with respect to surface 4 but that has not already been scored (and so must have positive sense with respect to surface 3), (3) everything else (that is, the flux across surface 1 with positive sense with respect to both surfaces 3 and 4).

Example 2: F2:N 1
 FS2 -3 4

The order and sense of the surfaces on the FS2 card are important. This example produces the same numbers as does Example 1 but changes the order of the printed flux. Bins two and three are interchanged.

It is possible to get a zero score in some tally segments if the segmenting surfaces and their senses are not properly specified. In Example 1 above, if all tallies that are positive with respect to surface 3 are also all positive with respect to surface 4, the second segment bin will have no scores.

Example 3: F1:N 1 2 *T*
 FS1 -3 *T*

This example produces three current tallies: (1) across surface 1, (2) across surface 2, and (3) the sum across surfaces 1 and 2. Each tally will be subdivided into three parts: (1) that with a negative sense with respect to surface 3, (2) that with a positive sense with respect to surface 3, and (3) a total independent of surface 3.

Several additional examples of the FSn card are in Chapter 4.

15. SDn Segment Divisor Card (tally types 1, 2, 4, 6, 7)

Form: SDn (D_{11} D_{12} ... D_{1m}) (D_{21} D_{22} ... D_{2m}) ... (D_{k1} D_{k2} ... D_{km})

n = tally number.

k = number of cells or surfaces on Fn card, including *T* if present.

m = number of segmenting bins on the FSn card, including the remainder segment, and the total segment if FSn has a *T*.

D_{ij} = area, volume, or mass of j_{th} segment of the i_{th} surface or cell bin for tally n .

The parentheses are optional.

Hierarchy for obtaining volume, area, or mass:

- A. For cell or surface without segmenting (tally types 2, 4, 6, and 7):
 - 1) nonzero entry on SDn card,
 - 2) nonzero entry on VOL or AREA card,
 - 3) volume, area or mass calculated by MCNP,
 - 4) fatal error
- B. For cell or surface with segmenting (tally types 2, 4, 6, and 7):
 - 1) nonzero entry on SDn card,
 - 2) volume, area or mass calculated by MCNP
 - 3) fatal error
- C. For surface in a type 1 tally:
 - 1) nonzero entry on SDn card,
 - 2) no divisor.

Use: Not with detectors. May be required with FSn card. Can be used without FSn card.

For segmented cell volumes or surface areas defined by the FSn card that are not automatically calculated by MCNP, the user can provide volumes, areas, or masses on this segment divisor card to be used by tally n . This card is similar to the VOL and AREA cards but is used for specific tallies, whereas the other two are used for the entire problem geometry. For tally type 2 the entry is area, for tally type 4 the entry is volume, and for tally types 6 and 7 the entries are masses. Tally type 1 (the current tally) is not normally divided by anything, but with the SD1 card the user can introduce any desired divisor, for example, area to tally surface current density.

Example F4:N 1 2 3 T
 SD4 1 1 1 1

Note that the SDn card may be used to define tally divisors even if the tally is not segmented. In this example the tally calculates the flux in the three cells plus the union of the three cells. The VOL card can be used to set the volume divisor of the three cells (to unity, for example), but it cannot do anything about the divisor for the union. Its divisor is the sum of the volumes (whether MCNP-calculated or user-entered) of the three cells. But the divisors for all four of the cell bins may be set to unity by means of the SDn card. This overrides entries on the VOL and AREA cards. See page 3–71 for use with repeated structure tallies.

16. FUn TALLYX Input Card

Form: FUn $X_1 X_2 \dots X_k$
 or: FUn *blank*

- n = tally number.
- X_i = input parameter establishing user bin i .

CHAPTER 3

Tally Cards

Default: If the FU card is absent, subroutine TALLYX is not called.

Use: Used with a user-supplied TALLYX subroutine or FTn card.

This card is used with a user-supplied tally modification subroutine TALLYX and some cases of the FTn card. If the FUn card has no input parameters, TALLYX will be called but no user bins will be created. The k entries on the FUn card serve three purposes: (1) each entry establishes a separate user tally bin for tally n , (2) each entry can be used as an input parameter for TALLYX to define the user bin it establishes, and (3) the entries appear in the output as labels for the user bins. $\text{IPTAL}(\text{LIPT}+3,1,\text{ITAL})$ is the pointer to the location in the TDS array of the word preceding the location of the data entries from the FUn card. Thus if the FUn card has the form shown above,

$$\begin{aligned} \text{TDS}(\text{L}+1) &= X_1 \\ \text{TDS}(\text{L}+2) &= X_2 \\ &\vdots \\ \text{TDS}(\text{L}+k) &= X_k \end{aligned}$$

where

$$\begin{aligned} \text{L} &= \text{IPTAL}(\text{LIPT}+3,1,\text{ITAL}) \\ k &= \text{IPTAL}(\text{LIPT}+3,4,\text{ITAL}) - 1 \\ &= \text{IPTAL}(\text{LIPT}+3,3,\text{ITAL}) - 1 \\ n &= \text{JPTAL}(\text{LJPT}+1,\text{ITAL}) \\ \text{ITAL} &= \text{program number of the tally} \end{aligned}$$

MCNP automatically provides the total over all specified user bins. The total can be inhibited for a tally, however, by putting the symbol NT at the end of the FUn card for that tally. Then the card has the form

FUn $X_1 X_2 \dots X_k$ NT

and there is one change in the preceding list of variables:

$$\begin{aligned} k &= \text{IPTAL}(\text{LIPT}+3,4,\text{ITAL}) - 1 \\ &= \text{IPTAL}(\text{LIPT}+3,3,\text{ITAL}) \end{aligned}$$

The discussion of the IPTAL and JPTAL arrays in Appendix E and the following description of TALLYX may be useful.

SUBROUTINE TALLYX User-supplied Subroutine

Use: Called for tally n only if an FUn card is in the INP file.

TALLYX is called whenever a tally with an associated FUn card but no FTn card is scored. The locations of the calls to TALLYX are such that TALLYX is the very last thing to modify a score before it is posted in the tally. TALLYX calls can be initiated by more than one FUn card for different values of n ; a branch must be constructed inside the subroutine based on which tally Fn is calling TALLYX, where $n = \text{JPTAL}(\text{LJPT}+1, \text{ITAL})$. TALLYX has the following form:

```

SUBROUTINE TALLYX(T,IB)
*CALL CM
User-supplied FORTRAN statements
RETURN
END

```

The quantity T (first argument of TALLYX) that is scored in a standard tally may be multiplied or replaced by anything. The modified score T is then put into one of the k user bins established by the FUn card. In TALLYX(T,IB) the second argument IB is defined to allow for more than one pass through TALLYX per tally score. By default, IB=0, which means make one pass through the MCNP coding where user bin tally scores are posted. If the user sets IB<0 in TALLYX, no score will be made. If the user sets IB>0, passes through the user bin loop including TALLYX will be made until IB is reset to zero. This scheme allows for tally modification and posting in more than one user bin. The variable IBU is the variable designating the particular user bin established by the FUn card. Its value is 1 before the first pass through the user bin loop. The indices of the current user, segment, cosine, energy, and time bins (IBU, IBS, IBC, IBE, and IBT, respectively) and the flag JBD that indicates flagged- or direct-versus-not are in Common for optional modification by TALLYX. Note that the index of the multiplier bin is not available and cannot be modified. NTX is a variable in blank Common. It is set equal to NX just before the CALL TALLYX in TALLYD and TALLY. The variable NX is set to unity just before the start of the user bins loop and is incremented after the CALL TALLYX, so NTX contains the number of the TALLYX call. An example of using NTX to tally in every user bin before leaving the user bin loop follows:

```

SUBROUTINE TALLYX(T,IB)
*CALL CM
T = whatever
IBU = NTX
IB = 1
IF(NTX.GE.IPTAL(LIPT+3,4,ITAL)-1) IB = 0
RETURN
END

```

If IBU is out of range, no score is made and a count of out-of-range scores is incremented. If excessive loops through TALLYX are made, MCNP assumes IB has been incorrectly set and terminates the job with a BAD TROUBLE error (excessive is greater than the product of the numbers of bins of all kinds in the tally). Several examples of the FUn card and TALLYX are in Chapter 4. The procedure for implementing a TALLYX subroutine is the same as for the user-provided SOURCE subroutine.

17. TF_n Tally Fluctuation Card

Form: TF_n $I_1 \dots I_8$

CHAPTER 3

Tally Cards

n = tally number.
 I_i = bin number for bin type i . $1 \leq I_i \leq last$
 $last = IPTAL(LIPT+i,3,ITAL)$
= total number of bins in one of the eight bin types.

Default: 1 1 *last last* 1 *last last last*

Use: Whenever one or more tally bins are more important than the default bin. Particularly useful in conjunction with the weight window generator.

At the end of the output, one chart for each tally is printed to give an indication of tally fluctuations; that is, how well the tally has converged. The tally mean, relative error, variance of the variance, Pareto slope (see page 2–105), and figure of merit ($FOM = 1/(\sigma^2 t)$, where σ is the relative error printed with the tally and t is computer time in minutes) are printed as functions of the number of histories run. The FOM should be roughly constant. The TF card determines for which bin in tally n the fluctuations are printed. It also determines which tally bin is optimized by the weight window generator (WWE and WWG cards).

Unless otherwise specified on a TF n card (n cannot be zero), the tally fluctuation chart for tally n is for the tally bin described by the above default, which means specifically

1. first cell, surface, or detector on Fn card
2. total rather than flagged or uncollided flux
3. last user bin
4. last segment bin
5. first multiplier bin on FM n card
6. last cosine bin
7. last energy bin
8. last time bin.

The TF n card allows you to change the above definition for a given tally and specify for which tally bin the chart and all the statistical analysis output will be printed. The eight entries on the card correspond (in order) to the above list of bin indices for the eight dimensions of the tally bins array. The order is fixed and not affected by an FQ n card.

The mean printed in a chart will correspond to some number in the regular tally print. If you have more than one surface listed on an F2 card, for example, the chart will be for the first surface only; charts can be obtained for all surfaces by having a separate tally for each surface.

You may find the J feature useful to jump over *last* entries. Remember that totals are calculated for energy, time, and user bins (unless inhibited by using NT), so that *last* for eight energy bins is 9. If one segmenting surface divides a cell or surface into two segments, *last* in that case is 2, unless T

is used on the FS card, in which case *last* is 3. If there are no user bins or cosine bins, for example, *last* is 1 for each; *last* is never less than 1.

Example: Suppose an F2 tally has four surface entries, is segmented into two segments (the segment plus everything else) by one segmenting surface, and has eight energy bins. By default one chart will be produced for the first surface listed, for the part outside the segment, and totaled over energy. If we wish a chart for the fifth energy bin of the third surface in the first segment, we would use `TF2 3 2J 1 2J 5`.

18. DDn Detector Diagnostics Card

Form: DDn $k_1 m_1 k_2 m_2 \dots$

- $n = 1$ for neutron DXTRAN spheres
- $= 2$ for photon DXTRAN spheres
- $=$ tally number for specific detector tally
- $k_i =$ criterion for playing Russian roulette for detector i
- $m_i =$ criterion for printing large contributions

Defaults: If k_i is not specified on a DDn card, k_i on the DD card is used. If that is not specified, k_1 on the DD card is used. If that is not specified, $k_i = 0.1$ is used. A similar sequence of defaults is followed for m_i , with the final default being $m_i = 1000$.

Use: Optional. Remember that Russian roulette will be played for detectors and DXTRAN unless specifically turned off by use of the DD card. Consider also using the PDn or DXC cards.

This card (1) using a Russian roulette game, can speed up calculations significantly by limiting small contributions that are less than some fraction k of the average contribution per history to detectors or DXTRAN spheres, and (2) can provide more information about the origin of large contributions or the lack of a sufficient number of collisions close to the detector or DXTRAN sphere. The information provided about large contributions may be useful for setting cell importances or source-biasing parameters.

For a given detector or DXTRAN sphere, the Russian roulette criterion works as follows:

1. If k_i is positive, all contributions to the detector or sphere are made for the first 200 histories. Then the average contribution per history is computed (and will be updated from time to time throughout the problem). Thereafter, any contribution to the detector or sphere larger than k_i times this average contribution will always be made, but any contribution smaller than k_i times the average will be subject to the Russian roulette game. (k_i is not allowed to be greater than 1.)
2. If k_i is negative, contributions larger than $|k_i|$ will always be made, and contributions smaller than $|k_i|$ will be subject to Russian roulette. This

CHAPTER 3
Tally Cards

applies to all histories from the beginning of the problem, and the 200th history has no significance.

3. If k_i is zero, no Russian roulette game will be played for the detector or sphere.

Probably, $k = 0.5$ is suitable for most problems; the nonzero default value 0.1 means that the game is *always played unless explicitly turned off by the user*.

The second entry, m_i , determines the condition for printing diagnostics for large contributions. If the entry is zero, there is no diagnostic print. If the entry is positive, two possibilities exist.

- (1) If the corresponding k_i is positive or zero, no diagnostic prints will be made for the first 200 histories. Thereafter, the first 100 contributions larger than m_i times the average tally per history will be printed.
- (2) If the corresponding k_i is negative, the first 100 contributions larger than m_i times $|k_i|$ will be printed.

Remember that when k_i is positive the Russian roulette game is played on the basis of the estimated average contribution per history. Because the estimate improves from time to time, the game is based on different values for different histories. This can make debugging a problem more complicated, and the variance estimate does not quite obey the Central Limit Theorem. A procedure worth considering is to determine the average contribution per history in a preliminary run and then to use some fraction of the negative of this value in subsequent longer runs. The Russian roulette game is played without regard to particle time or energy; thus time and energy bins for which the ultimate tally is small may lose a disproportionate share of scores by the roulette game.

The DD card eliminates tracks with DXTRAN but only contributions with detectors.

```
Example: DXT:N   x1  y1  z1  RI1  RO1
                x2  y2  z2  RI2  RO2
                x3  y3  z3  RI3  RO3
DXT:P           x4  y4  z4  RI4  RO4
F15X:P          a1  r1  R1
                a2  r2  R2
DD              .2   100 .15 2000
DD1             -1.1E25 3000 J J J 3000
DD15            .4    10
```

Detector/sphere	k	m
sphere 1	-1.1E25	3000
sphere 2	.15	2000
sphere 3	.2	3000
sphere 4	.2	100
detector 1	.4	10
detector 2	.15	2000

Another example of the DD card and a description of its output is in Chapter 5. For a more detailed discussion of the Russian roulette game, see page 2–82 in Chapter 2.

19. DXT DXTRAN Card

Form: DXT:n $x_1 y_1 z_1 RI_1 RO_1 x_2 y_2 z_2 RI_2 RO_2 \dots DWC_1 DWC_2 DPWT$

- n = N for neutrons, P for photons, not available for electrons.
- $x_i y_i z_i$ = coordinates of the point at the center of the i^{th} pair of spheres
- RI_i = radius of the i^{th} inner sphere in cm
- RO_i = radius of the i^{th} outer sphere in cm
- DWC_1 = upper weight cutoff in the spheres
- DWC_2 = lower weight cutoff in the spheres
- $DPWT$ = minimum photon weight. Entered on DXT:N card only.

Defaults: Zero for DWC_1 , DWC_2 , and $DPWT$.

Use: Optional. Consider using the DXC:N, DXC:P, or DD cards when using DXTRAN.

DXTRAN is used to improve the particle sample in the vicinity of a tally (see page 2–136). It should not be misconstrued as a tally itself, such as a detector; it is used in conjunction with tallies as a variance reduction technique. DXTRAN spheres must not overlap. The inner sphere should normally cover the tally region if possible.

The technique is most effective when the geometry inside the spheres is very simple and can be costly if the inside geometry is complicated, involving several surfaces. The inner sphere is intended to surround the region of interest. The outer sphere should surround neighboring regions that may scatter into the region of interest. In MCNP, the relative importance of the two regions is five. That is, the probability density for scattering toward the inner sphere region is five times as high as the probability density for scattering between the inner and outer spheres. The weight factor is 1/5 for particles scattered toward the inner sphere.

Detection of DXTRAN Setup Error: Specifying a tally cell or surface partly inside and partly outside a DXTRAN sphere will usually make the mean of the tally erratic and the variance huge. MCNP looks for this condition and terminates execution when it is found. The condition cannot be detected in the problem initiation but only after the problem has run for awhile.

Rule of Thumb for RI and RO: The inner radius RI should be at least as large as the tally region, and RO-RI should be about one mean free path for particles of average energy at the spheres. DXTRAN can be used around detectors, but the combination may be very sensitive to reliable sampling.

There can be up to five sets of X Y Z RI RO on each DXT card. There is only one set of DWC_1 and DWC_2 entries for each particle type. This pair is

CHAPTER 3

Tally Cards

entered after conclusion of the other data and (with DXT:N) before the one value of DPWT. The weight cutoffs apply to DXTRAN particle tracks inside the outer radii and have default values of zero. The DXTRAN photon weight cutoffs have no effect unless the simple physics is used, with one exception: upon leaving the sphere, track weights (regardless of what physics is used) are checked against the cutoffs of the CUT:P card.

The minimum photon weight limit $DPWT$ on the DXT:N card parallels almost exactly the minimum photon weight entries on the PWT card. One slight difference is that in Russian roulette during photon production inside DXTRAN spheres, the factor for relating current cell importance to source cell importance is not applied. Thus, the user must have some knowledge of the weight distribution of the DXTRAN particles (from a short run with the DD card, for example) inside the DXTRAN sphere, so the lower weight limit for photon production may be intelligently specified. As in the case of the PWT entries, a negative entry will make the minimum photon weight relative to the source particle starting weight. The default value is zero, which means photon production will occur at each neutron DXTRAN particle collision in a material with nonzero photon production cross section inside the DXTRAN sphere.

DXTRAN can be used in a problem with the $S(\alpha, \beta)$ thermal treatment, but contributions to the DXTRAN spheres are approximate. DXTRAN should not be used with reflecting surfaces, white boundaries, or periodic boundaries (see page 2–81). DXTRAN is incompatible with a monodirectional source because direct contributions from the source are ignored.

If more than one set of DXTRAN spheres is used in the same problem, they can “talk” to each other in the sense that collisions of DXTRAN particles in one set of spheres cause contributions to another set of spheres. The contributions to the second set have, in general, extremely low weights but may be numerous with an associated large increase in computer time. In this case the DXTRAN weight cutoffs probably will be required to kill the very-low-weighted particles. The DD card can give you an indication of the weight distribution of DXTRAN particles.

20. FTn Special Treatments for Tallies

Form: FTn ID₁ P_{1,1} P_{1,2} P_{1,3} ··· ID₂ P_{2,1} P_{2,2} P_{2,3} ···

n = tally number.

ID _{i} = the alphabetic keyword identifier for a special treatment.

The allowed values are:

FRV fixed arbitrary reference direction for tally 1 cosine binning.

GEB Gaussian energy broadening.

TMC time convolution.

INC identify the number of collisions.

ICD identify the cell from which each detector score is made.

SCX	identify the sampled index of a specified source distribution.
SCD	identify which of several specified source distributions was used.
PTT	put different multigroup particle types in different user bins.
ELC	electron current tally.
$P_{i,j}$	= parameters for that special treatment, either a number, a parenthesis or a colon.

Default: If the FT card is absent, there is no special treatment for tally n.

Use: Optional; as needed.

The syntax and meaning of the $P_{i,j}$ is different for each ID_i . A special treatment may cause a set of user bins or possibly a set of some other kind of bins to be created. The information in the $P_{i,j}$ allows the number and kind of those bins to be inferred easily. More than one special treatment can be specified by a given tally except for combinations of INC, ICD, SCX,SCD, PTT and ELC. Only one of these special treatments can be used by a tally at one time because all require user bins, making them mutually exclusive.

A description of the special treatments available follows with an explanation of the allowed parameters for each.

FRV $V_1 V_2 V_3$

The V_i are the xyz components of vector V, not necessarily normalized. If the FRV special treatment is in effect for a type 1 tally, the direction V is used in place of the vector normal to the surface as the reference direction for getting the cosine for binning.

GEB a b c

The parameters specify the full width at half maximum of the observed energy broadening in a physical radiation detector: $fwhm = a + b\sqrt{E} + cE^2$, where E is the energy of the particle. The units of a, b, and c are MeV, $MeV^{1/2}$, and none, respectively. The energy actually scored is sampled from the Gaussian with that fwhm. See Chapter 2.

TMC a b

All particles should be started at time zero. The tally scores are made as if the source was actually a square pulse starting at time a and ending at time b.

INC

No parameters follow the keyword but an FUn card is required. Its bin boundaries are the number of collisions that have occurred in the track since the creation of the current type of particle, whether at the source or at a

CHAPTER 3

Tally Cards

collision where some other type of particle created it. If the INC special treatment is in effect, the call to TALLYX that the presence of the FUn card would normally trigger does not occur. Instead IBU is set by calling JBIN with the number of collisions as the argument.

ICD

No parameters follow the keyword but an FUn card is required. Its bins are the names of some or all of the cells in the problem. If the cell from which a detector score is about to be made is not in the list on the FUn card, the score is not made. TALLYX is not called. The selection of the user bin is done in TALLYD.

SCX k

The parameter k is the name of one of the source distributions and is the k that appears on the SIk card. One user bin is created for each bin of source distribution k plus a total bin. The scores for tally n are then binned according to which bin of source distribution k the source particle came from. The score of the total bin is the score you would see for tally n without the special treatment, if source distribution k is not a dependent distribution.

CAUTION: For a dependent distribution, the score in the total bin is the subtotal portion of the score from dependent distribution k.

SCD

No parameters follow the keyword but an FUn card is required. Its bins are a list of source distribution numbers from SIk cards. The scores for tally n are then binned according to which distribution listed on the FUn card was sampled. This feature might be used to identify which of several source nuclides emitted the source particle. In this case, the source distributions listed on the FUn card would presumably be energy distributions. Each energy distribution is the correct energy distribution for some nuclide known to the user and the probability of that distribution being sampled from is proportional to the activity of that nuclide in the source. The user might want to include an FCn card that tells to what nuclide each energy distribution number corresponds.

CAUTION: If more than one of the source distributions listed on the FU card is used for a given history, only the *first* one used will score.

PTT

No parameters follow the keyword but an FUn card is required. Its bins are a list of atomic weights in units of MeV of particles masquerading as neutrons in a multigroup data library. The scores for tally n are then binned according to the particle type as differentiated from the masses in the multigroup data library. For example, .511 0 would be for electrons and photons masquerading as neutrons.

ELC c

The single parameter c of ELC specifies how the charge on an electron is to affect the scoring of an F1 tally. Normally, an electron F1 tally gives particle

current without regard for the charges of the particles. There are 3 possible values for c:

- c=1 to cause negative electrons to make negative scores
 - c=2 to put positrons and negative electrons into separate user bins
 - c=3 for the effect of both c=1 and c=2
- If c=2 or 3, three user bins, positrons, electrons and total are created.

F. Material Specification Cards

The cards in this section specify the isotopic composition of the materials in the cells and which cross-section evaluations are to be used.

Cards appropriate to this section are

<u>Mnemonic</u>	<u>Description</u>	<u>Page</u>
Mm	Material	3-95
DRXS	Discrete reaction	3-97
TOTNU	Total fission $\bar{\nu}$	3-98
NONU	Fission turnoff	3-98
AWTAB	Atomic weight	3-99
XSn	Cross-section files	3-99
VOID	Negates materials	3-100
PIKMT	Photon-production bias	3-100
MGOPT	Multigroup card	3-102

1. Mm Material Card

Form: Mm $Z A I D_1$ *fraction*₁ $Z A I D_2$ *fraction*₂ ... keyword=value ...

m corresponds to the material number on the cell cards

$Z A I D_i$ = either a full ZZZAAA.nnX or partial ZZZAAA element or nuclide identifier for constituent i where ZZZ is the atomic number, AAA is the atomic mass, nn is the library identifier, and X is the class of data

fraction _{i} = atomic fraction (or weight fraction if entered as a negative number) of constituent i in the material.

keyword = value, where = sign is optional. Keywords are:

GAS = m flag for density-effect correction to electron stopping power.

$m = 0$ calculation appropriate for material in the condensed (solid or liquid) state used.

$m = 1$ calculation appropriate for material in the gaseous state used.

ESTEP = n causes the number of electron substeps per energy step to be increased to n for the material. If n is smaller than the built-in default found for this material, the entry is ignored. Both the default value and the ESTEP value actually used are printed in Table 85.

CHAPTER 3

Material Cards

NLIB = *id* changes the default neutron table identifier to the string *id*. The neutron default is a blank string, which selects the first matching entry in XSDIR.

PLIB = *id* changes the default photon table identifier to *id*.

ELIB = *id* changes the default electron table identifier to *id*.

Default: None for ZAID fraction; GAS=0; ESTEP internally set; NLIB, PLIB, and ELIB=first match in XSDIR.

Use: Optional, but required if you want materials in cells.

Neutrons. For naturally occurring elements, AAA = 000. Thus, ZAID = 74182.01 represents the isotope ^{182}W and ZAID = 74000.01 represents the element tungsten. Natural elements not available from among those listed in Appendix G must be constructed on an Mm card by adding together the individual isotopes if they are available.

If the density for cells with AAA = 000 is input in g/cm^3 , MCNP will assume the atomic weight for the natural element.

The ZZZ and AAA quantities are determined for neutrons by looking at the list of cross sections in Appendix G and finding the appropriate ZAID associated with an evaluation that you want.

Photons and electrons. If neutrons are not being run, the AAA can be set to 000 and the nnX can be omitted. Cross sections are specified exactly like the neutron cross sections, but ZZZAAA.nnX equals ZZZ000. There is no distinction between isotope and element for photons and electrons. However, if the isotopic distribution for the element differs from the natural element, the atom density should be entered on the cell cards to ensure the correct atom density for these cells.

Nuclide Fraction. The nuclide fractions may be normalized to 1.0 or left unnormalized. For instance, if the material is H_2O the atom fractions can be entered as 0.667 and 0.333 or as 2 and 1 for H and O respectively. If the fractions are entered with negative signs they are assumed to be weight fractions. Weight fractions and atom fractions cannot be mixed on the same Mm card.

There is no limit to the number of “nuclide fraction” entries or the total number of different cross-section tables allowed.

Default Library Hierarchy. When NLIB=*id* is included on an Mm card, the default neutron table identifier for that material is changed to *id*. Fully specifying a ZAID on that Mm card, ZZZAAA.nnX, overrides the NLIB=*id* default.

Example: M1 NLIB=50D 1001 2 8016.50C 1 6012 1
This material consists of three isotopes. Hydrogen (1001) and carbon (6012) are not fully specified and will use the default neutron table that has been defined by the NLIB entry to be 50D, the discrete reaction library. Oxygen

(8016.50C) is fully specified and will use the continuous energy library. The same default override hierarchy also applies to photon and electron specifications.

2. DRXS Discrete Reaction Cross-Section Card

Form: DRXS $Z A I D_1$ $Z A I D_2$... $Z A I D_i$...
 or *blank*

$Z A I D_i$ = Identifying number of the form ZZAAA.nn, where ZZ is the atomic number, AAA the mass number, and *nn* the neutron library identifier.

Default: Continuous-energy cross-section treatment if DRXS is absent.

Use: Optional. Applies only to neutron cross sections.

Nuclides listed on the optional DRXS card are given a discrete energy treatment instead of the regular fully continuous-energy cross-section treatment if the necessary discrete data are available. Check the list in Appendix G for availability. If the DRXS card is present but has no entries after the mnemonic, discrete cross sections will be used for every nuclide, if available.

Unless you are transporting neutrons in an energy region where resonances and hence self-shielding are of little importance, it is not recommended that this card be used. However, if the problem under consideration meets this criterion, using the DRXS card can reduce computer storage requirements and enhance timesharing.

All discrete reaction libraries are based on a 262 energy group structure. Groups below 1 eV make the discrete treatment appropriate for thermal neutron problems near room temperature. Also, all discrete reaction libraries (except for DRL79) have photon production data given in expanded format.

Use of these discrete cross sections will not result in the calculation being what is commonly referred to as a multigroup Monte Carlo calculation because the only change is that the cross sections are represented in a histogram form rather than a continuous-energy form. The angular treatment used for scattering, energy sampling after scattering, etc., is performed using identical procedures and data as in the continuous-energy treatment. The user wanting to make a truly multigroup Monte Carlo calculation should use the MGOPT card multigroup capability.

3. TOTNU Total Fission Card

Form: TOTNU NO
 or *blank*

Default: If the TOTNU card is absent, prompt $\bar{\nu}$ is used for non-KCODE calculations and total $\bar{\nu}$ is used for KCODE calculations.

CHAPTER 3

Material Cards

Use: All steady-state problems should use this card.

In a non-KCODE problem, the absence of a TOTNU card causes prompt $\bar{\nu}$ to be used for all fissionable nuclides for which prompt $\bar{\nu}$ values are available. If a TOTNU card is present but has no entry after it, total $\bar{\nu}$ will be used for those fissionable nuclides for which total values are available. A TOTNU card with NO as the entry is the same as if the card were absent, that is, prompt $\bar{\nu}$ is used.

In a KCODE calculation, the absence of a TOTNU card causes total $\bar{\nu}$ to be used for all fissionable nuclides for which total values are available. If a TOTNU card is present but has no entry after it, total $\bar{\nu}$ is again used. A TOTNU card with NO as the entry causes prompt $\bar{\nu}$ to be used for all fissionable nuclides for which prompt values are available.

The nuclide list of Appendix G indicates data available for each fissionable nuclide. The MCNP neutron cross-section summary print from XACT will show whether prompt or total was used.

4. NONU Fission Turnoff Card

Form: NONU $a_1 a_2 \dots a_i \dots a_{mxa}$
or *blank*

$a_i = 0$ fission in cell i treated as capture; gammas produced
 $= 1$ fission in cell i treated as real; gammas produced
 $= 2$ fission in cell i treated as capture; gammas not produced
 $mxa =$ number of cells in the problem

Default: If the NONU card is absent, fission is treated as real fission.

Use: Optional, as needed.

This card allows turning off fission in any cell. The fission is then treated as simple capture and accounted for on the loss side of the problem summary as the “Loss to fission” entry. If the NONU card is not used, all cells are given their regular treatment of real fission, that is, the same as if all entries were one. If the NONU card is present but blank, all a_i 's are assumed to be zero and fission in all cells is treated like capture. The NONU card cannot be added to a continue-run.

Sometimes it is desirable to run a problem with a fixed source in a multiplying medium. For example, an operating reactor power distribution could be specified as a function of position in the core either by an SDEF source description or by writing the fission source from a KCODE calculation to a WSSA file with a CEL option on an SSW card. The non-KCODE calculation would be impossible to run because of the criticality of the system and because fission neutrons have already been accounted for. Using the NONU card in the non-KCODE mode allows this problem to run correctly by treating fission as simple capture.

A value of 2 treats fission as capture and, in addition, no fission gamma rays are produced. This option should be used with KCODE fission source problems written to surface source files. Suppressing the creation of new fission neutrons and photons is important because they are already accounted for in the source.

5. AWTAB Atomic Weight Card

Form: AWTAB $Z A I D_1 A W_1 Z A I D_2 A W_2 \dots$

$Z A I D_i$ = $Z A I D$ used on the Mm material card but not including the nn specification.
 $A W_i$ = atomic weight ratios.

Default: If the AWTAB card is absent, MCNP will use the atomic weight ratios from the cross-section directory file XSDIR and cross-section tables.

Use: Optional, as needed.

Entries on this card override the existing atomic weight ratios as contained in both the cross-section directory file XSDIR and the cross-section tables. The AWTAB card is needed when atomic weights are not available in an XSDIR file. Also, for fission products, $Z A I D=50120.35$, the atomic weight of tin ($^{120}_{50}\text{Sn}$) will be used, so the following AWTAB card is needed:

AWTAB 50120.35 116.490609

WARNING: Using atomic weight ratios different from the ones in the cross-section tables in a neutron problem can lead to negative neutron energies, which will cause the problem to terminate prematurely.

6. XSn Cross-Section File Card

Use: Optional, as an alternative to the directory part of the XSDIR file.

The XSn card can be used to load cross-section evaluations not listed in the XSDIR file directory. You can use XSn cards in addition to the XSDIR file. Each XSn card, with $n = 1$ to 999, is used to describe one cross section table. The entries for the XSn card are identical to those in XSDIR except that the + is not used for continuation. A detailed description of the required entries is provided in Appendix F.

7. VOID Material Void Card

Form: VOID no entries
 or: VOID $C_1 C_2 \dots C_i$

C_i = cell number

Default: None.

CHAPTER 3
Material Cards

Use: Debugging geometry and calculating volumes.

The first form is used when calculating volumes stochastically (see page 2–165) and in checking for geometry errors (see page 3–8). When there are no entries on the VOID card, all cells in the problem are made void by setting the material number and density to zero, FM cards are turned off, heating tallies are turned into flux tallies, and, if there is no NPS card, the effect of an NPS 100000 card is created. If there is a TALLYX subroutine, it may need to be changed, too.

The second form is used to selectively void cells instead of replacing the material number and density on each selected cell card by a zero by hand. It can be a convenience if you want to check whether the presence of some object in your geometry makes any significant difference in the answers.

8. PIKMT Photon–Production Bias Card

Form: PIKMT Z_1 IPIK₁ MT_{1,1} PMT_{1,1} ··· MT_{1,IPIK₁} PMT_{1,IPIK₁}
 Z_n IPIK_n MT_{n,1} PMT_{n,1} ··· MT_{n,IPIK_n} PMT_{n,IPIK_n}

- Z_i = the ZAID of the i^{th} entry. Full or partial ZAIDs can be specified, that is, 29000 is equivalent to 29000.50.
- IPIK _{i} = the parameter that controls the biasing for ZAID _{i} .
 If IPIK _{i} = 0, there is no biasing for ZAID _{i} ; photons from ZAID _{i} are produced with the normal sampling technique.
 If IPIK _{i} = –1, no photons are produced from ZAID _{i} .
 This is the default, so that if no entries are made on the PIKMT card for a particular ZAID, there will be no photons produced from that ZAID.
 If IPIK _{i} > 0, there is biasing for ZAID _{i} . The value of IPIK _{i} is the number of partial photon–production reactions to be sampled.
- MT _{i,j} and PMT _{i,j} are only required for ZAIDs with IPIK _{i} > 0. In these cases, IPIK _{i} pairs of entries of MTs and PMTs are necessary. The MTs are the identifiers for the partial photon–production reactions to be sampled. The PMTs control, to a certain extent, the frequency with which the specified MTs are sampled. The entries need not be normalized. For a ZAID with a positive value of IPIK, any reaction that is not identified with its MT on the PIKMT card will not be sampled.

Default: If the PIKMT card is absent, there is no biasing of neutron–induced photons.

Use: Optional; see caveats below.

For several classes of coupled neutron–photon calculations, the desired result is the intensity of a small subset of the entire photon energy spectrum. Two examples are discrete–energy (line) photons and the high–energy

tail of a continuum spectrum. In such cases, it may be profitable to bias the spectrum of neutron-induced photons to produce only those that are of interest.

1. The most important thing to realize when using the PIKMT card is that nonzero probability events may be completely excluded. In other words, the biasing game is not necessarily a fair one. While neutron tallies will be unaffected (within statistics), the only reliable photon tallies will be those with energy bins immediately around the energies of the discrete photons produced.
2. Users need information about the MT identifiers of the reactions that produce discrete-energy photons. This information is available for Los Alamos users in a document stored on the CFS as /X6XS/CTSS /DISCEGAM. Send the file to the HSP with the -V, -UC and -CC options.
3. The feature is also useful for biasing the neutron-induced photon spectrum to produce very high energy photons (for example, $E_\gamma \geq 10$ MeV). Without biasing, these high-energy photons are produced very infrequently; therefore, it is difficult to extract reliable statistical information about them. An energy cutoff can be used to terminate a track when it falls below the energy range of interest. Los Alamos users interested in using the PIKMT card for this application should see XTM regarding an internal code (NIPE) that is useful for optimizing such problems.

Example: PIKMT 26000.55 1 102001 1 7014 0
 29000 2 3001 2 3002 1
 8016 -1

This example results in normal sampling of all photon-production reactions for ^{14}N . All photons from neutron collisions with Fe are from the reaction with MT identifier 102001. Two photon-production reactions with Cu are allowed. Because of the PMT parameters the reaction with MT identifier 3001 is sampled twice as frequently relative to the reaction with MT identifier 3002 than otherwise would be the case. No photons are produced from ^{16}O or from any other isotopes in the problem that are not listed on the PIKMT card.

9. MGOPT Multigroup Adjoint Transport Option

Form: MGOPT MCAL IGM IPLT ISB ICW FNW RIM

- MCAL = F for forward problem
 A for adjoint problem
- IGM = the total number of energy groups for all kinds of particles in the problem. A negative total indicates a special electron-photon problem.
- IPLT = indicator of how weight windows are to be used.
 = 0 means that IMP values set cell importances. Weight

CHAPTER 3 Material Cards

	windows, if any, are ignored for cell importance splitting and Russian roulette.
	= 1 means that weight windows must be provided and are transformed into energy-dependent cell importances. A zero weight-window lower bound produces an importance equal to the lowest nonzero importance for that energy group.
	= 2 means that weight-windows do what they normally do.
ISB	= Controls adjoint biasing for adjoint problems only (MCAL=A).
	= 0 means collisions are biased by infinite-medium fluxes.
	= 1 means collisions are biased by functions derived from weight-windows, which must be supplied.
	= 2 means collisions are not biased.
ICW	= name of the reference cell for generated weight windows.
	= 0 means weight windows are not generated.
	≠ 0 requires volumes be supplied or calculated for all cells of nonzero importance.
FNW	= normalization value for generated weight windows. The value of the weight-window lower bound in the most important energy group in cell ICW is set to FNW.
RIM	= compression limit for generated weight windows. Before generated weight windows are printed out, the weight windows in each group separately are checked to see that the ratio of the highest to the lowest is less than RIM. If not, they are compressed.

Default: IPLT=0, ISB=0, ICW=0, FNW=1, RIM=1000. MCAL and IGM must be specified.

Use: Required for multigroup calculation.

MCAL and IGM are required parameters. The others are optional. “J” is not an acceptable value for any of the parameters.

At this time, the standard MCNP multigroup neutron cross sections are given in 30 groups and photons are given in 12 groups. Thus, an existing continuous-energy input file can be converted to a multigroup input file simply by adding one of the following cards:

```
MGOPT F 30 $MODE N
MGOPT F 42 $MODE N P
MGOPT F 12 $MODE P
```

A negative IGM value allows a single cross-section table to include data for more than one sort of particle. This feature applies currently to electron/photon multigroup calculations only. A problem with 50 electron groups followed by 30 photon groups in one table would have IGM=-80. Also all tables must have the same group structure. A negative IGM value

will use the energy variable on the source or tally card as a group index unless it is associated with a distribution. For an energy distribution on the source card, there should be IGM increasing integer entries for each group on the SI card. On a tally energy card, if there are less than IGM entries, they will be taken as energies in MeV; otherwise, the bins will be according to group index. The particles can be separated in tallies by using the PTT option on the FTn tally card.

An input file for an adjoint problem can have both an IMP card and weight window cards (IPLT=0 ISB=1). The entries on the weight window cards are not weight windows in the normal sense but biasing functions. If IPLT=1 the values on a weight window card become energy-dependent cell importances. Until now, importances have been energy independent.

See Appendix G for a more complete discussion of multigroup libraries.

G. Energy and Thermal Treatment Specification

The following cards control energy and other physics aspects of MCNP:

<u>Mnemonic</u>	<u>Card Type</u>	<u>Page</u>
PHYS	Energy physics cutoff	3–103
TMP	Free-gas thermal temperature	3–108
THTME	Thermal times	3–108
MTm	$S(\alpha, \beta)$ material	3–109

All energy entries on these cards are in units of MeV, and all times are in shakes.

1. PHYS Energy Physics Cutoff Card

(a) Neutrons

Form: PHYS:N EMAX EMCNF

EMAX = upper limit for neutron energy, MeV.

EMCNF = energy boundary (MeV) above which neutrons are treated with implicit capture and below which they are treated with analog capture.

Default: EMAX = very large; EMCNF = 0.0 MeV.

Use: Optional.

EMAX is the upper limit for neutron energy. All neutron cross-section data above EMAX are expunged. If EMAX is not specified, there is no upper energy expunging of cross-section data to save computer storage space. The physics of MCNP is such that if a neutron energy is greater than the maximum energy in a table (typically 20 MeV), the cross section for the

CHAPTER 3 Energy Cards

maximum energy is used with no extrapolation. If, either by source or collision, a particle is born above EMAX, it is rejected and the particle energy is resampled.

EMCNF controls the type of capture. Any neutron with energy greater than EMCNF will receive the implicit capture treatment; below EMCNF, it will receive analog capture. This parameter is analogous to EMCPF on the PHYS:P card and is useful in eliminating low-energy histories when using a thermal treatment. Substantial computer time may be saved in a region of low absorption (especially if the region is heterogeneous and bounded by a reflecting surface) simply by reducing the number of tracks. EMCNF should be set to operate when a neutron enters a thermal regime, typically a few kT . However, analog capture may undesirably kill important particles before they are tallied or participate in physics important to the problem.

If EMCNF = EMAX, analog capture is used regardless of the value of WC1 on the CUT card. If WC1 = 0, analog capture is used regardless of the value of EMCNF.

(b) Photons

Form: PHYS:P EMCPF IDES NOCOH

EMCPF = upper energy limit (in MeV) for detailed photon physics treatment.
IDES = 0 photons will produce electrons in MODE E problems or bremsstrahlung photons with the thick target bremsstrahlung model.
 = 1 photons will not produce electrons as above.
NOCOH = 0 coherent scattering occurs.
 = 1 coherent scattering will not occur.

Default: EMCPF = 100 MeV; IDES = 0; NOCOH = 0.

Use: Optional.

Photons with energy greater than EMCPF will be tracked using the simple physics treatment. If WC1 = 0 on the CUT:P card, analog capture is used in the energy region above EMCPF. Otherwise capture is simulated by weight reduction with Russian roulette on weight cutoff. Photons with energy less than EMCPF will be treated with the more detailed physics that always includes analog capture.

The simple physics treatment, intended primarily for higher energy photons, considers the following physical processes: photoelectric effect (without fluorescence), Compton scattering from free electrons without the use of form factors, and pair production. The highly forward peaked coherent Thomson scattering is ignored.

The detailed physics treatment differs in that photoelectric absorption can result in fluorescent emission, the Thomson and Klein-Nishina differen-

tial cross sections are modified by appropriate form factors taking electron binding effects into account, and coherent scattering is included.

For a detailed discussion of the simple and detailed photon physics treatments, see Chapter 2.

To turn off the production of secondary electrons generated by photons, the switch IDES may be set, either on the PHYS:P or on the PHYS:E card. If either of these cards sets IDES = 1, photons will NOT produce electrons, even if IDES = 0 is set on the other. In a photon-only problem, turning off secondary electrons causes the thick-target bremsstrahlung model to be bypassed. This option should be exercised only with great care because it alters the physics of the electron-photon cascade and will give erroneously low photon results when bremsstrahlung and electron transport are significant.

NOCOH is a switch to allow coherent scattering to be turned off for photons with energies below EMCPF. Thus, coherent scattering can be suppressed within the detailed physics treatment without losing the other advantages of the detailed model. When NOCOH = 1, the cross section for coherent scattering will be set to zero. This approximation can be useful in problems with bad point detector variances.

(c) Electrons

Form: PHYS:E EMAX IDES IPHOT IBAD ISTRG BNUM XNUM RNOK ENUM

- EMAX = upper limit for electron energy in MeV.
- IDES = 0 photons will produce electrons.
= 1 photons will not produce electrons.
- IPHOT = 0 electrons will produce photons.
= 1 electrons will not produce photons.
- IBAD = 0 full bremsstrahlung tabular angular distribution.
= 1 simple bremsstrahlung angular distribution approximation.
- ISTRG = 0 sampled straggling for electron energy loss.
= 1 expected-value straggling for electron energy loss.
- BNUM > 0 produce BNUM times the analog number of bremsstrahlung photons.
= 0 bremsstrahlung photons will not be produced.
- XNUM > 0 produce XNUM times the analog number of electron-induced x-rays.
= 0 x-ray photons will not be produced by electrons.
- RNOK > 0 produce RNOK times the analog number of knock-on electrons.
= 0 knock-on electrons will not be produced.
- ENUM > 0 produce ENUM times the analog number of photon-induced secondary electrons.
= 0 photon-induced secondary electrons will not be produced.

CHAPTER 3 Energy Cards

Defaults: EMAX = 100 MeV; IDES, IPHOT, IBAD, ISTRG = 0; BNUM, XNUM, RNOK, ENUM = 1.

Use: Optional.

EMAX is the upper electron energy limit in MeV. Electron cross sections and related data are generated on a logarithmic energy grid from EMAX down to an energy at least as low as the global energy cutoff for electrons. Setting the value of EMAX too high results in longer processing times and larger storage requirements for electron data. EMAX should be set to the highest electron energy encountered in your problem.

IDES is a switch to turn off electron production by photons. The default (IDES = 0) is for photons to create electrons in all photon-electron problems and for photons to produce bremsstrahlung photons using the thick-target bremsstrahlung approximation in photon problems run without electrons. In either case the electron default cross section library will be read, which requires considerable processing time. Electron transport is also very slow. However, the neglect of electron transport and bremsstrahlung production will cause erroneously low photon results when these effects are important. IDES = 1 turns off electron production, but it does not turn off the pair production-produced annihilation photons. See ENUM.

IPHOT is a switch to turn off photon production by electrons. Because photon transport is fast relative to electron transport and is usually required for an accurate physical model, the default (IPHOT = 0, which leaves photon production on) is recommended.

IBAD is a switch to turn on the simple approximate bremsstrahlung angular distribution treatment and turn off the full, more detailed model. The electron transport random walk can be done with either the simple or full treatment, but photon contributions to detectors and DXTRAN can use only the simple treatment. The full detailed physics model is more accurate and just as fast as the simple approximate treatment for the electron transport random walk, and is therefore the default (IBAD = 0) even though it is inconsistent with the way bremsstrahlung photons contribute to detectors and DXTRAN spheres. Setting IBAD = 1 causes the simple treatment to be used for detectors and DXTRAN and the electron random walk, which is self-consistent.

ISTRG is a switch to control the electron continuous-energy slowing down treatment. If ISTRG = 1, the expected value for each collision is used; if ISTRG = 0 (default), the more realistic sampled value is used. The option of using the expected value is useful for some comparisons to deterministic electron transport calculations.

BNUM, XNUM, RNOK, and ENUM are biasing parameters for specific classes of electron or photon production processes. For each parameter the default is 1.0, which invokes an analog treatment for the associated process. Other values allow biasing of the sampling of the processes. The processes associated with the four parameters follow.

BNUM is used to control the sampling of bremsstrahlung photons produced along electron substeps. The default value (BNUM = 1) results in the analog number of bremsstrahlung tracks being sampled. If BNUM > 0, the number of bremsstrahlung photons produced is BNUM times the number that would be produced in the analog case. If the number of tracks is increased, an appropriate weight reduction is made; if the biasing reduces the number of tracks, the weight is increased. If BNUM = 0, the production of bremsstrahlung photons is turned off.

XNUM is used to control the sampling of x-ray photons produced along electron substeps. The default value (XNUM = 1) results in the analog number of tracks being sampled. If XNUM > 0, the number of photons produced is XNUM times the number that would be produced in the analog case, and an appropriate weight adjustment is made. If XNUM = 0, the production of x-ray photons by electrons is turned off.

RNOK is used to control the number of knock-on electrons produced in electron interactions. The default value (RNOK = 1) results in the analog number of tracks being sampled. If RNOK > 0, the number of knock-on electrons produced is RNOK times the analog number, and an appropriate weight adjustment is made. If RNOK = 0, the production of knock-on electrons is turned off.

ENUM is used to control the generation of photon-induced secondary electrons. The default value (ENUM = 1) results in an analog treatment. If ENUM > 0, ENUM times the analog number of secondaries will be produced, and an appropriate weight adjustment is made. If ENUM = 0, the generation of secondary electrons by photons will be turned off. ENUM = 0 differs from IDES = 1. If ENUM = 0, pair production is totally turned off. If IDES = 1, the pair production-produced annihilation photons are still produced.

In any of these biasing schemes, increasing the population of photons also increases the population of electrons because the additional photon tracks create photoelectrons, Compton recoil electrons, pair production electrons, etc. Similarly, increasing the number of electrons will propagate an increase in the population of subsequent generations of the cascade. Because electron transport is slow, a judicious use of ENUM < 1 may often be appropriate.

The use of the switches, or of zero values for the biasing parameters, to turn off various processes goes beyond biasing, and actually changes the physics of the simulation. Therefore such actions should be taken with extreme care. These options are provided primarily for purposes of debugging, code development, and special-purpose studies of the cascade transport process.

3. TMP Free-Gas Thermal Temperature Card

Form: TMPn T_{1n} T_{2n} ... T_{in} ... T_{In}

- n = index of time on the THTME card.
- T_{in} = temperature of i^{th} cell at time n , in MeV.
- I = number of cells in the problem.

CHAPTER 3 Energy Cards

Default: 2.53×10^{-8} MeV, room temperature.

Use: Optional. Required when THTME card is used. Needed for low- energy neutron transport at other than room temperature.

The TMP cards provide MCNP the time-dependent thermal cell temperatures that are necessary for the free-gas thermal treatment of low-energy neutron transport described on page 2–27. This treatment becomes important when the neutron energy is less than about 4 times the temperature of heavy nuclei or less than about 400 times the temperature of light nuclei. Thus the TMP cards should be used when parts of the problem are not at room temperature and neutrons are transported with energies within a factor of 400 from the thermal temperature.

Thermal temperatures are entered as a function of time with a maximum of 99 time entries allowed. These times are entered on a thermal time (THTME) card. The thermal temperatures at time t_{1n} are listed, cell by cell, on the TMP1 card; the cell thermal temperatures at time t_{2n} are listed on the TMP2 card, etc. A linear interpolation is used to determine the cell thermal temperatures at times between two entries. Time values before t_{1n} or after t_{In} use the thermal temperatures at the nearest time entry.

A fatal error occurs if a zero temperature is specified for a nonvoid cell.

We use kT to denote the thermal temperature of a cell and use units of MeV. The following formulas can be used to provide the values of kT for temperatures in degrees Kelvin, Celsius, Rankine, and Fahrenheit.

$$\begin{aligned}kT(\text{MeV}) &= 8.617 \times 10^{-11} T \text{ where } T \text{ is in degrees } K \\ &= 8.617 \times 10^{-11} (T + 273.15) \text{ where } T \text{ is in degrees } C \\ &= 4.787 \times 10^{-11} T \text{ where } T \text{ is in degrees } R \\ &= 4.787 \times 10^{-11} (T + 459.67) \text{ where } T \text{ is in degrees } F\end{aligned}$$

4. THTME Thermal Times Card

Form: THTME $t_1 t_2 \dots t_n \dots t_N$

t_n = time in shakes at which thermal temperatures are specified on the TMP card.

N = total number of thermal times specified.

Default: Zero; temperature is not time dependent.

Use: Optional. Use with TMP card.

The THTME card specifies the times at which the thermal temperatures on the TMPn cards are provided. The temperatures on the TMP1 card are at time t_1 on the THTME card, the temperatures on the TMP2 card are at time t_2 on the THTME card, etc. The times must be monotonically increasing: $t_n < t_{n+1}$. For each entry on the THTME card there must be a TMPn card.

5. MTm $S(\alpha, \beta)$ Material Card

Form: MTm $X_1 X_2 \dots$

$X_i = S(\alpha, \beta)$ identifier corresponding to a particular component on the Mm card.

Default: None.

Use: Optional, as needed.

For any material defined on an Mn card, a particular component of that material (represented by a *Z A I D* number) may be associated through an MTm card with an $S(\alpha, \beta)$ data set if that data set exists. The $S(\alpha, \beta)$ data for that *Z A I D* are used in every cell in which that material is specified. For a particular *Z A I D* in a material, the free-gas treatment may be used down to the energy where $S(\alpha, \beta)$ data are available. At that point, the $S(\alpha, \beta)$ treatment automatically overrides the free-gas treatment (that is, there is no mixing of the two treatments for the same *Z A I D* in the same material at a given energy).

Typically the free-gas model will be used for a particular *Z A I D* of a material down to 4 eV and then the $S(\alpha, \beta)$ treatment will take over. In general, $S(\alpha, \beta)$ effects are most significant below 2 eV.

The $S(\alpha, \beta)$ treatment is invoked by identifiers on MTm cards. The m refers to the material m defined on a regular Mm card. The appearance of an MTm card will cause the loading of the corresponding $S(\alpha, \beta)$ data from the thermal data file.

The currently available $S(\alpha, \beta)$ identifiers for the MTm card are listed in Table G.1 of Appendix G.

$S(\alpha, \beta)$ contributions to detectors or DXTRAN spheres are approximate.

Examples:	M1	1001 2	8016 1	light water
	MT1	LWTR.07		
	M14	1001 2	6012 1	polyethylene
	MT14	POLY.03		
	M8	6012 1		graphite
	MT8	GRPH.01		

H. Problem Cutoff Cards

The following cards can be used in an initiate-run or a continue-run input file to specify parameters for some of the ways to terminate tracks in MCNP. The cards in this section are:

<u>Card</u>	<u>Description</u>	<u>Page</u>
CUT	Cutoffs	3–110
ELPT	Cell-by-cell energy cutoff	3–111

CHAPTER 3

Cutoff Cards

NPS	History cutoff	3-112
CTME	Computer time cutoff	3-112

1. CUT Cutoffs Card

Form: CUT:n *T E WC1 WC2 SWTM*

n = *N* for neutrons, *P* for photons, *E* for electrons.

T = time cutoff in shakes, 1 shake=10⁻⁸ sec.

E = lower energy cutoff in MeV.

WC1 and *WC2* = weight cutoffs.

SWTM = minimum source weight.

Use: Optional, as needed.

Neutron default: *T*=very large, *E*=0.0 MeV, *WC1* = -0.50, *WC2* = -0.25,
SWTM=minimum source weight if the general source is used.

If a neutron's time becomes greater than *T*, its transport is stopped and it is killed. Even though MCNP is time dependent, neutron decay is not considered. Any neutron with energy lower than *E* is killed.

If a neutron's weight *WGT* falls below *WC2* times the ratio *R* of the source cell importance to the current cell importance, then with probability *WGT*/(*WC1* * *R*), the neutron survives and is assigned *WGT* = *WC1* * *R*. If negative values are entered for the weight cutoffs, the values

$$|WC1| * W_s \text{ and } |WC2| * W_s$$

will be used for *WC1* and *WC2*, respectively, where *W_s* is the minimum weight assigned to a source neutron from an MCNP general source. These negative entries are recommended for most problems. If only *WC1* is specified, then *WC2* = 0.5 * *WC1*. See page 2-123 for a discussion of weight cutoffs.

In a coupled neutron/photon problem, photons are generated before the neutron weight cutoff game is played.

If *WC1* is set to zero, capture is treated explicitly by analog rather than implicitly by reducing the neutrons's weight according to the capture probability. If *EMCNF* = *E_{max}* on the PHYS card, analog capture is used regardless of the value of *WC1* except for neutrons leaving a DXTRAN sphere.

SWTM (source weight minimum) can be used to make the weight cutoffs relative to the minimum starting weight of a source particle for user source as is done automatically for the general source. The entry will in general be the minimum starting weight of all source particles, including the effects of energy and direction biasing. The entry is also effective for the general source as well. Then *SWTM* is multiplied by the W entry on the SDEF card but is unaffected by any directional or energy biasing. This entry is ignored for a KCODE calculation.

Photon default: T =neutron cutoff, $E=0.001$ MeV, $WC1 = -0.50$, $WC2 = -0.25$, $SWTM$ =minimum source weight if the general source is used. If there are pulse height tallies, $WC1 = WC2 = 0$.

The CUT:P weight cutoffs are analogous to the CUT:N card except that they are used only for energies above the EMCPF entry on the PHYS:P card (see page 3–104). If $WC1=0$, analog capture is specified for photons of energy greater than EMCPF, just as it is for neutrons. For energies below EMCPF, analog capture is the only choice with one exception: photons leaving a DXTRAN sphere. Their weight is always checked against the CUT:P weight cutoff upon exiting. If only $WC1$ is specified, then $WC2 = 0.5*WC1$.

In a coupled neutron/photon problem, the photon weight cutoffs are the same as the neutron weight cutoffs unless overridden by a CUT:P card. Again, the photon weight cutoffs have no effect at energies below EMCPF (except with DXTRAN as noted above).

MCNP allows only analog capture below 0.001 MeV. Because the photoelectric cross section is virtually 100% of the total cross section below that energy for all isotopes, tracks will be quickly captured and terminated.

Electron default: T =neutron cutoff, $E=0.001$ MeV, $WC1 = 0$, $WC2 = 0$, $SWTM$ =minimum source weight if the general source is used.

The CUT:E weight cutoff entries have the same meaning as the neutron entries have.

2. ELPT Cell-by-cell Energy Cutoff

Form: ELPT:n $x_1 x_2 \dots x_i \dots x_I$

n = N for neutrons, P for photons, E for electrons.
 x_i = lower energy cutoff of cell i
 I = number of cells in the problem.

A separate lower energy cutoff can be specified for each cell in the problem. The higher of either the value on the ELPT:n card or the global value E on the CUT:n card applies.

3. NPS History Cutoff Card

Form: NPS N

N = number of particle histories.

Default: None.

Use: As needed to terminate the Monte Carlo calculation.

The single entry N on this card is used to terminate the Monte Carlo calculation after N histories have been transported—unless the calculation is terminated earlier for some other reason such as computer time cutoff.

CHAPTER 3

Cutoff Cards

In a continue-run, NPS is the total number of particles including runs before the continue-run; it is cumulative. However, a negative NPS entry means to print an output file at the time of the last history run and then stop.

In a surface source problem, either more or less than all of the particle histories on the RSSA surface source file will be run, depending on the value N entered on the NPS card. If $N < NP1$, where $NP1$ is the number of original histories, Russian roulette with weight adjustment will be played with each history in the file, using a survival probability of $N/NP1$. If $N > NP1$, the histories will be split $N/NP1$ to 1, and the fractional part is taken care of by sampling. This can be done equally well for nonspherical sources by cell importance splitting. With a spherical source, each multiple occurrence of the history is sampled for a different starting location on the source sphere, possibly improving the spatial statistics of the results. In either case, the use of the NPS card will not provide additional information about the original source distributions or the transport to the recording surface crossing.

In a criticality calculation, the NPS card has no meaning and a warning error message is issued if it is used.

3. CTME Computer Time Cutoff Card

Form: CTME x

x = maximum amount of computer time (in minutes) to be spent in the Monte Carlo calculation.

Default: None.

Use: As needed.

For a continue-run job the time on the CTME card is the time relative to the start of the continue-run; it is not cumulative.

Five normal ways to terminate an MCNP calculation are the NPS card, the CTME card, the job time limit, the end of a surface source file, and the number of cycles on a KCODE card. If more than one is in effect, the one hit first will control. MCNP checks the computer time remaining in a running problem and will terminate the job itself, leaving enough time to wrap up and terminate gracefully.

I. User Data Arrays

Two arrays, IDUM and RDUM, are in MCNP variable COMMON and are available to the user. They are included in the dumps on the RUNTPE file and may therefore be used for any purposes, including accumulating information over the entire course of a problem through several continue-runs. Each array is dimensioned 50, and they may be filled by cards in the input file INP. IDUM is an integer array and RDUM is a floating point array.

1. IDUM Integer Array Card

Form: IDUM $I_1 \dots I_n$, $1 \leq n \leq 50$

Default: All array values zero.

Use: Useful only in user-modified versions of MCNP.

Entries (up to 50) fill the IDUM array with integer numbers. If floating point numbers are entered, they will be truncated and converted to integers.

2. RDUM Floating Point Array Card

Form: RDUM $R_1 \dots R_n$, $1 \leq n \leq 50$

Default: All array values zero.

Use: Useful only in user-modified versions of MCNP.

Entries (up to 50) fill the RDUM array with floating point numbers.

J. Peripheral Cards

The following cards offer a variety of conveniences:

<u>Mnemonic</u>	<u>Card Type</u>	<u>Page</u>
PRDMP	Print and dump cycle	3-113
LOST	Lost particle	3-115
DBCN	Debug information	3-115
FILES	Create user files	3-119
PRINT	Printing control	3-120
MPLOT	Plot tally while problem is running	3-122
PTRAC	Particle track output card	3-123
PERT	Perturbation Card	3-128

1. PRDMP Print and Dump Cycle Card

Form: PRDMP NDP NDM MCT NDMP DMMP

NDP	= increment for printing tallies	
NDM	= increment for dumping to RUNTPE file	
MCT	= flag to write MCTAL file	
NDMP	= maximum number of dumps on RUNTPE file	
DMMP	<u>Sequential MCNP</u>	<u>Multiprocessing MCNP</u>
	TFC entries every	TFC entries and rendezvous every
	< 0	1000 particles
=	0	1000 particles (see discussion below)
	> 0	DMMP particles

CHAPTER 3

Peripheral Cards

Default: Print only after the calculation has successfully ended. Dump every 15 minutes and at the end of the problem. Do not write a MCTAL file. Write all dumps to the RUNTPE file. DMMP=0 (see table above).

Use: Recommended, especially for complex problems.

The PRDMP card allows the user to control the interval at which tallies are printed to the OUTF file and information is dumped to the RUNTPE file. Positive entries mean that after every NDP histories the summary and tallies are printed to the output file, and after every NDM histories a dump is written to the run file. A negative entry changes the unit from histories to minutes of computer time.

In a criticality calculation, positive entries for NDP and NDM on the PRDMP card are interpreted as the number of cycles rather than the number of particles started. Printing and dumping are done only at the ends of cycles.

If the third entry, MCT, on the PRDMP card is nonzero, a MCTAL file is written at the problem end. The MCTAL file is an ASCII file of tallies that can be subsequently plotted with the MCNP MCPLOT option (see description elsewhere). The MCTAL file is also a convenient way to store tally information in a format that is stable for use in the user's own auxiliary programs. For example, if the user is on a system that cannot use the MCNP MCPLOT option, the MCTAL file can be manipulated into whatever format is required by the user's own local plotting algorithms. If MCT=-1, references to code name, version number, problem ID, figure of merit, and anything else having to do with running time are omitted from MCTAL and OUTF so that tracking runs (identical random walks) yield identical MCTAL and OUTF files.

The PRDMP card also allows the user to control the size of the RUNTPE file by specifying the maximum number of dumps, NDMP, to be written. The RUNTPE file will contain the last NDMPs that were written. For example, if NDMP = 4, after dump 20 is written only dumps 17, 18, 19, and 20 will be on the RUNTPE file. In all cases, the fixed data and cross section data at the front of the RUNTPE file are preserved.

The fifth entry, DMMP, can have several possible meanings. For sequential MCNP, a value of DMMP ≤ 0 results in TFC entries every 1000 particles initially. This value doubles to 2000 after 20 TFC entries. A positive value of DMMP produces TFC entries every DMMP particles initially. For distributed memory multiprocessing, DMMP < 0 produces TFC entries and task rendezvous every 1000 particles initially, the same as does the sequential version. DMMP=0, the default value, produces ten TFC entries and task rendezvous, rounded to the nearest 1000 particles, based on other cutoffs such as NPS, CTME, etc. This selection optimizes speedup in conjunction with TFC entries. If detectors/DXTRAN are used with default Russian roulette criteria (DD card default), the DMMP=0 entry is changed by MCNP to < 0 , ensuring tracking with the sequential version (i.e., TFC entries and rendezvous every 1000 particles). As with the sequential version,

DMMP > 0 produces TFC entries and task rendezvous every DMMP particles, even with detectors/DXTRAN with default Russian roulette criteria. Setting DMMP to a large positive number minimizes communication time and maximizes speedup. However, the TFC may not have many entries, possibly only one, if DMMP=NPS.

2. LOST Lost Particle Card

Form: LOST LOST(1) LOST(2)

LOST(1) = number of particles which can be lost before the job terminates with BAD TROUBLE

LOST(2) = maximum number of debug prints that will be made for lost particles

Defaults: 10 lost particles and 10 debug prints.

Use: Discouraged. Losing more than 10 particles is rarely justifiable.

The word “lost” means that a particle gets to an ill-defined section of the geometry and does not know where to go next. This card should be used cautiously: you should know why the particles are being lost, and the number lost should be statistically insignificant out of the total sample. Even if only one of many particles gets lost, there could be something seriously wrong with the geometry specification. Geometry plots in the area where the particles are being lost can be extremely useful in isolating the reason that particles are being lost. See page 3–8.

3. DBCN Debug Information Card

Form: DBCN $X_1 X_2 X_3 \dots X_{20}$

X_1 = the starting pseudorandom number. Default = $(5^{19})^{152917}$;

X_2 = debug print interval;

X_3 and X_4 = history number limits for event log printing;

X_5 = maximum number of events in the event log to print per history. Default = 600;

X_6 = unused.

X_7 = 1 produces a detailed print from the volume and surface area calculations;

X_8 = number of the history whose starting pseudorandom number is to be used to start the first history of this problem;

X_9 = closeness of coincident repeated structures surfaces. Default = 1.E-4;

X_{10} = seconds between time interrupts. Default = 100 seconds;

X_{11} = 1 causes collision lines to print in lost particle event log;

X_{12} = expected number of random numbers;

X_{13} = random number stride. Default = 152917;

CHAPTER 3

Peripheral Cards

X_{14}	= random number multiplier. Default = 5^{19} ;
X_{15}	= 1 prints the shifted confidence interval and the variance of the variance for all tally bins;
X_{16}	= scale the score grid for the accumulation of the empirical $f(x)$ in print tables 161 and 162;
X_{17}	= 0 default angular treatment for partial substeps to generation sites of secondary particles; > 0 angular treatment for secondary generation used in SDR CRADA; < 0 MCNP4A treatment of electron angles at secondary generation sites;
X_{18}	= 0 default “MCNP–style” energy indexing algorithm; 1 “ITS–style” energy indexing algorithm;
X_{20}	= track previous version.

Use: Optional.

The entries on this card are used primarily for debugging problems and the code itself. The first 12 can be changed in a continue run which is useful for diagnosing troubles that occur late in a long-running problem.

- (1) X_1 is the random number used for starting the transport of the first particle history in a run. See also entry X_8 , which for repeating particle histories, is the preferred method of changing the pseudorandom number sequence. See the **caution** after the last DBCN item listed below.
- (2) X_2 is used to print out information about every X_2 th particle. The information consists of: (a) the particle history number, (b) the total number of neutron, photon, and electron collisions, (c) the total number of random numbers generated, and (d) the random number at the beginning of the history. This information is printed at the beginning of the history and is preceded by the letters DBCN in the output to facilitate a pattern search.
- (3) and (4) Event log printing is done for histories X_3 through X_4 , inclusively. The information includes a step-by-step account of each history, such as where and how a particle is born, which surface it crosses and which cell it enters, what happens to it in a cell, etc. See X_{11} .
- (5) X_5 is the maximum number of events the event log will print per history. The default is 600.
- (6) Unused.
- (7) $X_7 = 1$ will cause a detailed print from the volume and surface area calculations which is useful only to MCNP code developers.
- (8) The X_8 th entry causes the starting random number of the problem to be the random number which would normally be picked for the X_8 th history. If a surface source is used, the X_8 th surface source history will be taken from the RSSA file at the problem start. The purpose of this entry is

to let the X_8 th history be the first history of a problem for debugging purposes or to select a random number sequence different from that in an identical problem to compare statistical convergence. See the **caution** after the last DBCN item listed below.

- (9) X_9 defines the distance allowed between coincident repeated structures surfaces for them still to be considered coincident. The default is $1.E-4$. A value of $1.E-30$ reproduces the earlier treatment where coincident repeated structures surfaces was not allowed. X_9 should not have to be changed unless geometries have dimensions greater than $1.E5$ or surfaces at different levels are intended to be closer than $2.E-4$.
- (10) X_{10} is the seconds between time interrupts for checking if a history has run too long or is in an infinite loop. The default is 100 seconds. If in two consecutive time interrupts the random walk is in the same history, MCNP assumes that something is wrong and stops the job. If histories should legitimately take longer than X_{10} seconds the job can be continued with a larger value for X_{10} specified on the DBCN card in the continue-run INP file.

This entry also affects the time increment MCNP reserves for itself to terminate a job before the job time limit is reached. The increment for interactive jobs is $2X_{10}$ or 1% of the time limit, whichever is greater.

- (11) $X_{11} = 1$ causes collision lines to print in the lost particle event log.
- (12) X_{12} is the expected number of random numbers for this calculation. Entering X_{12} will cause the last line of the output file to print X_{12} and the actual number of random numbers used so that a quick comparison can be made to see if two problems tracked each other.
- (13) X_{13} is the random number stride, S. The default is $S = X_{13} = 152917$. Each source history starts with a random number S numbers up the pseudorandom number sequence from the random number of the previous history. If any history requires more than S random numbers, the number of times S was exceeded is printed in the problem summary of the OUTF file. The maximum number of random numbers required for a history is always printed in the problem summary. Exceeding the random number stride will cause a correlation between histories and should be avoided because variances may be underestimated. However, if the stride is too large, then the period of the random number sequence, $2^{46} \approx 7.04E13$, will be exceeded. S should be chosen so that $NPS*S < 2^{46}$. Exceeding the period will underestimate variances, particularly if S is a power of 2. For MCNP3B and earlier versions, $S = 4297$.
- (14) X_{14} is the random number multiplier. The default is $X_{14} = 5^{19} = 19073486328125$ which is adequate for all known problems. If a new entry is such that the sum of its left and right 24-bit halves is not less than 2^{24} then the input value is rejected. If X_{14} is even it is also rejected because the random number sequence rapidly converges to zero.

CHAPTER 3

Peripheral Cards

- (15) A nonzero X_{15} entry causes the shifted confidence interval and the variance of the variance (VOV) to be calculated and printed for all tally bins. An extra line of tally output is created for each tally that contains nonzero information. The shifted confidence interval center is followed by the estimated VOV. If the tally mean and relative error (RE) are all zeros, the VOV line is not printed because it is all zero also. Changing X_{15} from nonzero to zero in a CONTINUE run will cause the VOV information not to be printed. X_{15} cannot be changed from zero to nonzero in a CONTINUE run.
- (16) MCNP uses a logarithmically spaced history score grid in print table 161 for $f(x)$, producing a straight line for $f(x)$ on a log-log plot for $1/x^n$ behavior, covering 60 decades of unnormalized tally magnitudes from $1E-30$ to $1E30$. This range can be multiplied by the X_{16} entry when the range is not sufficient. A negative entry means that negative history scores will be accrued in the score grid, $f(-x)$, and the absolute value of X_{16} will be used as the score grid multiplier. Positive history scores will then be lumped into the lowest bin with this option. This scaling can be done only in the original problem, not in a CONTINUE run.
- (17) If 0, the default angular treatment for partial substeps to generation sites of secondary particles is invoked. This treatment accounts for the probability of the delta function first, then interpolates in the cosine of the deflection angle. It does not preserve the plane in which the deflection angle will lie at the end of the full substep.
If > 0 , the angular treatment for secondary generation that was used in the SDR CRADA investigations is invoked. The cosine of the electron angle is interpolated and the end-of-substep plane is preserved, but the changing probability of the delta function along the substep is ignored. This option is preserved for further testing of angular algorithms, because the SDR results are known to be sensitive to these details.
If < 0 , the MCNP4A treatment of electron angles at secondary generation sites is invoked. Used with $\text{dbcn}(20)=0$, comparisons to the earlier treatment can be made.
- (18) If 0, the default “MCNP-style” energy indexing algorithm is used, also called the “bin-centered” treatment.
If $\neq 0$, the “ITS-style” energy algorithm is used, also called the “nearest group boundary” treatment. Allows us to match ITS results as closely as possible.
- (20) A nonzero X_{20} entry causes MCNP to track the previous version of the code, except in the few cases when bugs are too hard to duplicate with this option. Because bug corrections, new features, and enhanced physics must be undone, $X_{20} \neq 0$ should be used only for debugging purposes.

CAUTION: When trying to duplicate a particle history by setting the starting random number with either X_1 or X_8 , the random number sequence

may be altered by a default Russian Roulette game on contributions to detectors or DXTRAN spheres. If a problem has detectors or DXTRAN, the only ways to reproduce histories with X_1 or X_8 are: (a) turn off the Russian Roulette game on the DD card by setting $k = 0$; (b) play the roulette game with a fixed criterion by setting $k < 0$ on the DD card; or (c) reproduce a history with $NPS < 200$.

4. FILES File Creation Card

Form: FILES unit no. filename access form record length

unit no. = 1 to 99
 filename = name of the file
 access = sequential or direct
 form = formatted or unformatted
 record length = record length in a direct access file

Default: None; none; sequential; formatted if sequential, unformatted if direct; not required if sequential, no default if direct.

Use: When a user-modified version of MCNP needs files whose characteristics may vary from run to run.

If this card is present, the first two entries are required and must not conflict with existing MCNP units and files. The words “sequential,” “direct,” “formatted,” and “unformatted” may be abbreviated. If more than one file is on the FILES card, the defaults are not much help, but the abbreviations will keep it brief. The maximum number of files allowed is six, unless the dimension of the KUFIL array in Fixed Common is increased.

Example: FILES 21 ANDY S F 0 22 MIKE D U 512

If the filename is DUMN1 or DUMN2, the user may optionally use the execution line message to designate a file whose name might be different from run to run, for instance in a continue-run.

Example: FILES 17 DUMN1
 MCNP INP=TEST3 DUMN1=POST3

Caution: The names of any user files in a continue-run will be the same as in the initial run, which means the names are not automatically sequenced if a file of the same name already exists. A second output file from a continue-run will clobber an existing file of the same name. Furthermore, if you are using the FILES card for an input file and do a continue-run, you will have to provide the coding for keeping track of the record number and then positioning the correct starting location on the file when you continue or MCNP will start reading the file at the beginning.

CHAPTER 3 Peripheral Cards

The FILES card is not legal in a continue-run input file because there is no way to readjust dynamically allocated storage for a possible requested increase in buffer space.

5. PRINT Output Print Tables

Form: PRINT x

- x = no entry gives the full output print
- x = $x_1 x_2 \dots$ prints basic output plus the tables
 specified by the numbers x_1, x_2, \dots
- x = $-x_1 -x_2 \dots$ prints full output except the tables
 specified by the numbers x_1, x_2, \dots

Default: Absence of the PRINT card in the INP file or the PRINT option in the execution line will result in a less than full output print.

Use: Optional.

The following output will be printed automatically, if applicable:

- a listing of the input file,
- the problem summary of particle creation and loss,
- KCODE cycle summaries,
- tallies,
- tally fluctuation charts, and
- the tables listed below marked basic and default.

You will always get the information indicated by the first five bullets above and the tables labelled “basic” below. They *cannot* be turned off. Tables marked “default” will be printed automatically but they *can* be turned off with the PRINT card.

To get all optional print tables applicable to your problem, indicated in the table below as blank type, use the PRINT card in the INP file or PRINT option on the execute line. The PRINT option takes precedence over the input card. Absence of a PRINT card or PRINT option produces only the tables marked “basic,” “default,” and “shorten.” Entries are allowed only on the PRINT card, not following the PRINT option. Entries on the PRINT card can be in any order.

The PRINT card entries are table numbers of optional and default tables, and control turning the table off or on. If all the entries are positive, you will get the “basic” tables plus the tables requested on the PRINT card. If any entry is negative, you will get all tables applicable to your problem *except* those turned off by the negative entries.

The table number appears in the upper righthand corner of the table, providing a convenient pattern when scanning the output file with an editor. The pattern is PRINT TABLE n , where n is preceded always by one space and is a two- or three-digit number. The table numbers and titles and type are summarized in the table below. Tables that can not be controlled by

CHAPTER 3
Peripheral Cards

the PRINT card are marked as type “basic.” Tables that are automatically printed but *can* be turned off are marked as type “default.” Tables with no type (blank) can be turned off and on with the PRINT card or option.

Tables 160, 161, and 162 are different from the other tables. If you turn off table 160, tables 161 and 162 will not appear either. If table 160 is printed, they will all be printed. They are all automatically printed if there is no PRINT card or if there is a blank PRINT card. If a PRINT card has a positive entry, tables 160, 161, and 162 will not appear, unless table 160 is explicitly requested. If the entry is negative, they will appear, unless table 160 is explicitly turned off.

Table 175 can not be turned off completely, but the output can be greatly shortened to every 100 cycles plus the last five cycles. PRINT -175 and PRINT 110 will both produce the short version of Table 175.

Table 128, the repeated structure universe map, is special. If table 128 is not turned on in an initial run, it CANNOT be turned on in a subsequent continue-run because the (often large) storage arrays have not been set up. Table 128 is the only print table that affects storage. The information in the other tables is always stored, whether or not it is printed. A warning will be printed in a repeated structures problem if you do not request the universe map/lattice activity table in the original run.

The PRINT control can be used in a continue-run to recover all or any print tables applicable to your problem, even if they were not requested in the original run. A continue file with NPS -1 and PRINT will create the output file for the initial run starting with the Problem Summary (located after table 110). Table 128 can never be printed if it was not requested in the original run.

Table Number	Type	Table Description
10		Source coefficients and distribution
20		Weight window information
30		Tally description
35		Coincident detectors
40		Material composition
50		Cell volumes and masses, surface areas
60	basic	Cell importances
62	basic	Forced collision and exponential transform
70		Surface coefficients
72	basic	Cell temperatures
85		Electron range and straggling tables
90		KCODE source data
98		Physical constants and compile options
100	basic	Cross section tables
102		Assignment of $S(\alpha, \beta)$ data to nuclides
110		First 50 starting histories
120		Analysis of the quality of your importance function

CHAPTER 3

Peripheral Cards

126	basic	Particle activity in each cell
128		Universe map
130		Neutron/photon/electron weight balance
140		Neutron/photon nuclide activity
150		DXTRAN diagnostics
160	default	TFC bin tally analysis
161	default	$f(x)$ tally density plot
162	default	Cumulative $f(x)$ and tally density plot
170		Source distribution frequency tables, surface source
175	shorten	Estimated k_{eff} results by cycle
178		Estimated k_{eff} results by batch size
180		Weight window generator bookkeeping summary controlled by WWG(7), not print card
190	basic	Weight window generator summary
198		Weight windows from multigroup fluxes
200	basic	Weight window generated windows

Example: PRINT 110 40 150

The output file will contain the “basic” tables, plus tables 40, 110, and 150, and not 160, 161, 162, (the “default” tables) and the short version of 175.

Example: PRINT -170 -70 -110

The output file will contain all the “basic” tables, all the “default” tables, the long version of table 175, and all the optional tables except tables 70, 110, and 170 applicable to your problem.

6. MPLOT Plot tally while problem is running

Form: MPLOT MCPLOT keyword=parameter

Default: None.

Use: Optional.

This card specifies a plot of intermediate tally results that is to be produced periodically during the run. The entries are MCPLOT commands for one picture. The = sign is optional. During the run, as determined by the `FREQ n` entry, MCRUN will call MCPLOT to display the current status of one or more of the tallies in the problem. If a `FREQ n` command is not included on the MPLOT card, `n` will be set to 5000. The following commands can not appear on the MPLOT card: RMCTAL, RUNTPE, DUMP, and END. All of the commands on the MPLOT card are executed for each displayed picture, so coplots of more than one bin or tally are possible. No output is sent to COMOUT. MCPLOT will not take plot requests from the terminal and returns to MCRUN after each plot is displayed. See Appendix B for a complete list of MCPLOT commands available.

Another way to plot intermediate tally results is to use the TTY interrupt `<ctrl-c>IMCPLOT` or `<ctrl-c>IM` that allows interactive plotting during the run. At the end of the history that is running when the interrupt occurs, MCRUN will call MCPLLOT, which will take plot requests from the terminal. No output is sent to the COMOUT file. The following commands can not be used: RMCTAL, RUNTPE, DUMP and END.

7. PTRAC Particle Track Output Card

Form: PTRAC keyword=parameter(s) keyword=parameter(s)

Default: See Table 3.4.

Use: Optional.

This card generates an output file, default name PTRAC, of user-filtered particle events. The name PTRAC can be changed on the execution line or within the message block. Using this card without any keywords causes all particle events to be written to the PTRAC file. CAUTION: an extremely large file likely will be created unless NPS is small. Use of one or more keywords listed in Table 3.4 will reduce significantly the PTRAC file size. In Table 3.4 the keywords are arranged into three categories: output control keywords, event filter keywords, and history filter keywords. The output control keywords provide user control of the PTRAC file and I/O. The event filter keywords filter particle events on an event-by-event basis. That is, if the history meets the filter criteria, all filtered events for that history are written to file PTRAC. The PTRAC card keywords can be entered in any order and, in most cases, the corresponding parameter values can appear in any order (exceptions noted below.) The PTRAC card is not legal in a continue-run input file because a change in the PTRAC input would require a readjustment in dynamically allocated storage.

When multiple keywords are entered on the PTRAC card, the filter criteria for each keyword must be satisfied to obtain an output event.

EXAMPLE: PTRAC FILTER=8,9,erg EVENT=sur NPS=1,50
TYPE=e CELL=3,4 will write only surface crossing events for 8-9 MeV electrons generated by histories 1-50 that have entered cells 3 or 4.

CHAPTER 3
Peripheral Cards

Table 3.4
PTRAC Keywords, Parameter Values, and Defaults

Keyword	Parameter Values	Default	Entries
OUTPUT CONTROL KEYWORDS			
BUFFER	Integer > 0	100	1
FILE	asc, bin	bin	1
MAX	Integer \neq 0	10000	1
MEPH	Integer > 0	*	1
WRITE	pos, all	pos	1
EVENT FILTER KEYWORDS			
EVENT	src, bnk, sur, col, ter	*	1-5
FILTER	Real, Integer, Mnemonic	*	2-72
TYPE	n, p, e	*	1-3
HISTORY FILTER KEYWORDS			
NPS	Integer > 0	*	1-2
CELL	Integer > 0	*	Unlimited
SURFACE	Integer > 0	*	Unlimited
TALLY	Integer \neq 0	*	Unlimited
VALUE	Real, Integer	*	Unlimited

BUFFER Determines the amount of storage available for filtered events. A small value results in increased I/O and a decrease in required memory, whereas a large value minimizes I/O and increases memory requirements.

FILE Controls file type. One of the following values can be entered:
asc—generates an ASCII output file.
bin—generates a binary output file. This is the default.

MAX Sets the maximum number of events to write to the PTRAC file. A negative value terminates MCNP when this value is reached.

MEPH Determines the maximum number of events per history to write to the PTRAC file.
Default: write all events.

WRITE Controls what particle parameters are written to the PTRAC file.
pos—only x, y, z location with related cell and material numbers.
all—additionally, u, v, w direction cosines, energy, weight, and time.
If the size of the PTRAC file is a concern and the additional parameters are not needed, the default value of “pos” is recommended.

EVENT Specifies the type of events written to PTRAC. One or more of the following parameter values can be entered:
src—initial source events
bnk—bank events
sur—surface events
col—collision events
ter—termination events
The bank events include secondary sources, e.g., photons produced by neutrons, as well as particles created by variance reduction techniques,

e.g., DXTRAN and energy splitting. See page I-5 for a complete list.

FILTER Specifies additional MCNP variables for filtering. The parameter values consist of one or two numerical entries and a variable mnemonic that corresponds to a variable in the PBLCOM common block. See Table 3.5 for available mnemonics. A single numerical entry requires an exact value.

EXAMPLE: `FILTER=2,icl` writes only those events that occur in cell 2. Two numerical entries represent a range.

EXAMPLE: `FILTER=0,10,x` writes only those events in which the particle's x-coordinate is between 0 and 10 cm. When a range is specified, the first entry must be less than or equal to the second. Multiple sets of numerical entries and mnemonics are also allowed.

EXAMPLE: `FILTER=0.0,10.0,x 0,1,u 1.0,2,erg` writes only those events in which the particle's x-coordinate is between 0 and 10 cm and the particle's x-axis cosine is between 0 and 1 and the particle's energy is between 1 and 2 MeV.

Default: No additional filtering.

TYPE Filters events based on particle type. One or more of the following parameter values can be entered:

n—neutron events; p—photon events; e—electron events

EXAMPLE: `TYPE=p,e` writes only photon and electron events.

Default: Events for all particle types are written.

NPS Sets the range of particle histories for which events will be output. A single value produces filtered events only for the specified history.

EXAMPLE: `NPS=10` writes events only for particle number 10. Two entries indicate a range and will produce filtered events for all histories within that range. The first entry must be less than or equal to the second.

EXAMPLE: `NPS=10,20` writes events for particles 10 through 20.

Default: Events for all histories.

CELL, SURFACE, TALLY The cell, surface, or tally numbers entered after these keywords are used for history filtering. If any track of the history enters listed cells or crosses listed surfaces or contributes to the TFC bin of listed tallies, all filtered events for the history are written to the PTRAC file. See page 3-88 for specification of the TFC bin.

EXAMPLE: `CELL=1,2` writes all filtered events for those histories that enter cell 1 or 2.

EXAMPLE: `TALLY=4` writes all filtered events for those histories that contribute to tally 4 (see VALUE keyword for filter criteria.) The number of entries following CELL, SURFACE, and TALLY is unlimited. A negative TALLY entry indicates that the corresponding VALUE entry is a multiplier rather than an absolute value.

Default: No history filtering.

VALUE Specifies the tally cutoff above which history events will be written. The number of entries must match those of the TALLY keyword.

EXAMPLE: `Tally=4 VALUE=2.0` writes all filtered events of

CHAPTER 3
Peripheral Cards

any history that contributes 2.0 or more to the TFC bin of tally 4. A negative TALLY value indicates that the corresponding VALUE entry is a multiplier.

EXAMPLE: TALLY=-4 VALUE=2.0 writes all filtered events of any history that contributes more than $2.0 \cdot T_a$ to tally 4, where T_a is the average tally of the TFC bin. The values for T_a are updated every DMMP histories. Typically, DMMP=1000. See the PRDMP card, page 3-113. Filtering based on the T_a values will occur only when they become nonzero. Thus, when using a multiplier, PTRAC events may not be written for several thousand particles, or at all, if scores are seldom or never made to the TFC bin of the specified tally. In such cases, it is best to enter an absolute value.

EXAMPLE: TALLY=4 VALUE=0.0 writes all filtered events of every history that scores to tally 4.

Default: A multiplier of 10.0 for each tally associated with the TALLY keyword.

Table 3.5
Mnemonic Values for the FILTER Keyword

Mnemonic	MCNP Variable	Description
X	XXX	X-coordinate of particle position (cm)
Y	YYY	Y-coordinate of particle position (cm)
Z	ZZZ	Z-coordinate of particle position (cm)
U	UUU	Particle X-axis direction cosine
V	VVV	Particle Y-axis direction cosine
W	WWW	Particle Z-axis direction cosine
ERG	ERG	Particle energy (MeV)
WGT	WGT	Particle weight
TME	TME	Time at the particle position (shakes)
VEL	VEL	Speed of the particle (cm/shake)
IMP1	FIML(1)	Neutron cell importance
IMP2	FIML(2)	Photon cell importance
IMP3	FIML(3)	Electron cell importance
SPARE1	SPARE(1)	Spare banked variable
SPARE2	SPARE(2)	Spare banked variable
SPARE3	SPARE(3)	Spare banked variable
ICL	ICL	Problem number of current cell
JSU	JSU	Problem number of current surface
IDX	IDX	Number of current DXTRAN sphere
NCP	NCP	Count of collisions for current branch
LEV	LEV	Geometry level of particle location
III	III	1st lattice index of particle location
JJJ	JJJ	2nd lattice index of particle location
KKK	KKK	3rd lattice index of particle location

8. PERTn Perturbation Card

Form: PERTn:pl keyword=parameter(s) keyword=parameter(s)

- n = unique, arbitrary perturbation number.
- pl = N, P, or N,P. Not available for electrons.
- keyword = See Table 3.5.

Default: Some keywords are required. See Table 3.5.

Use: Optional.

This card allows perturbations in cell material density, composition, or reaction cross-section data. The perturbation analysis uses the first and second order differential operator technique described in Chapter 2, page 2–170. Using this technique, the perturbation estimates are made without actually changing the input material specifications. Multiple perturbations can be applied in the same run, each specified by a separate PERT card. There is no limit to the number of perturbations because dynamic memory is used for perturbation storage. The entire tally output is repeated for each perturbation, giving the estimated differential change in the tally or this change can be added to the unperturbed tally (see the METHOD keyword). For this reason, the number of tallies and perturbations should be kept to a minimum. Perturbations to the k_{eff} estimator can be made by use of a track-length tally estimate of k_{eff} (see the examples below). The CELL keyword that identifies one or more perturbed problem cells is required. Also, either the MAT or RHO keyword must be specified.

Table 3.5
PERT Keywords, Parameter Values, and Defaults

Keyword	Parameter Values	Default	Entries
BASIC KEYWORDS			
CELL	Integer > 0	Required	Unlimited
MAT	Integer > 0	*	1
RHO	Real, integer	*	1
ADVANCED KEYWORDS			
METHOD	$\pm 1, 2, 3$	1	1
ERG	Real, Integer > 0	All Energies	2
RXN	Integer	1	Unlimited

CELL Indicates which cells are perturbed. At least one entry is required, and there is no limit to the number of entries. A comma or space delimiter is required between entries:

CELL=1,2,3,4
CELL=1 10i 12

MAT Specifies the perturbation material number, which must have a corresponding M card. Composition changes can only be made through the

CHAPTER 3

Peripheral Cards

use of this keyword. If the RHO keyword is omitted, the MAT keyword is required. Note in the CAUTIONS below that certain composition changes are prohibited.

RHO Specifies the perturbed density of the cells listed after the CELL keyword. A positive entry indicates units of atoms/cm³ and a negative entry indicates units of g/cm³. If the MAT keyword is omitted, the RHO keyword is required.

METHOD Specifies the number of terms to include in the perturbation estimate.

- 1 — include first and second order (default)
- 2 — include only first order
- 3 — include only second order

A positive entry produces perturbation tallies that give the estimated **differential** change in the unperturbed tally (default). A negative entry **adds** this change to the unperturbed tally. The ability to produce first and second order terms separately enables the user to determine the significance of including the second-order estimator for subsequent runs. If the second-order results are a significant fraction (20-30%) of the total, then higher order terms are necessary to accurately predict the change in the unperturbed tally. In such cases, the magnitude of the perturbation should be reduced to satisfy this condition. Typically, this technique is accurate to within a few percent for up to 30% changes in the unperturbed tally. It is *strongly* recommended that the magnitude of the second order term be determined before the user continues with this capability.

ERG The two entries specify an energy range in which the perturbation is applied. The default range includes all energies. This keyword is usually used with the RXN keyword to perturb a specific cross-section over a particular energy range.

RXN Entries must be ENDF/B reaction types that identify one or more specific reaction cross-sections to perturb. A list of available ENDF/B reaction types is given in Table I, Appendix G. This keyword allows the user to perturb a single reaction cross-section of a single nuclide in a material, all reaction types of a single nuclide, a single reaction for all nuclides in a material, and a set of cross-sections for all nuclides in a material. The default is RXN=1 (total cross section.) The nonstandard special R numbers on page 3-77 can be used.

- RXN=2 elastic cross section
- RXN=-2 absorption cross section

CAUTION

1. There is no limit to the number of perturbations, but they should be kept to a minimum as each perturbation can degrade performance by 10-20%.
2. It is not possible to take a region originally specified as void and put in a material with the perturbation technique. However, you can specify a

- region as containing a material and use the PERT card to make it void by setting RHO=0.
3. It is not possible to introduce a new nuclide into a material composition. However, you can set up the problem with a mixture of all nuclides of interest and use PERT cards to remove one or more (see the examples below).
 4. Use *extreme* caution with the combination of FM tallies and a PERT card. If the perturbed reaction cross-section is also listed on an FM card, the estimated change in the tally is likely invalid because of an additional term that has not yet been implemented. For example, if the FM tally is a track-length k_{eff} estimator and the perturbation is a change in density of the fissile material, then the perturbation estimate will be invalid because both the tally and perturbation involve the fission cross-section. In most cases, this additional term can be determined with an additional FM tally. See Chapter 2, page 2–170.
 5. DXTRAN and point detector tallies are not compatible with the PERT card.

Examples of the PERT Card

Example 1: PERT1:n,p CELL=1 RHO=0.03

This perturbation specifies a density change to 0.03 atoms/cm³ in cell 1. This change is applied to both neutron and photon interactions.

```
Example 2:  3      1 -1  -1  2 -3  4 -5  6      $ mat 1 at 1 g/cm3
            12     1 -1  -7  8 -9 10 -11 12    $ mat 1 at 1 g/cm3
            ...
            C M1 material is semiheavy water
            M1 1001 .334 1002 .333 8016 .333
            C M8 material is heavy water
            M8                1002 .667 8016 .333
            PERT2:n CELL=3,12 MAT=8 RHO=-1.2
```

This perturbation changes the material composition of cells 3 and 12 from material 1 to material 8. The MAT keyword on the PERT card specifies the perturbation material. The material density was also changed from 1.0 to 1.2 g/cm³ to change from water to heavy water.

Example 3: PERT3:n,p CELL=1 10i 12 RHO=0 METHOD=-1

This perturbation makes cells 1 through 12 void for both neutrons and photons. The estimated changes will be added to the unperturbed tallies.

```
Example 4:
            60    13 -2.34  105 -106 -74 73 $ mat 13 at 2.34 g/cm3
            ...
            M13 1001  -.2  8016  -.2 13027  -.2 26000  -.2 29000  -.2
            M15 1001  -.2  8016  -.2 13027  -.2 26000  -.2 29000  -.4
```

CHAPTER 3

Peripheral Cards

```

PERT1:p  CELL=60  MAT=15  RHO=-2.808  RXN=51 9i 61,91
          ERG=1,20
PERT2:p  CELL=60          RHO=-4.68  RXN=2

```

This example illustrates sensitivity analysis. The first PERT card generates estimated changes in tallies caused by a 100% increase in the Cu (n,n') cross section (ENDF/B reaction types 51–61 and 91) above 1 MeV. To effect a 100% increase, double the composition fraction (–.2 to –.4) and multiply the ratio of this increase by the original cell density (RHO=[1.2/1.0] * –2.34 = –2.808 g/cm³, where the composition fraction for material 13 is 1.0 and that for material 15 is 1.2.) A change must be made to RHO to maintain the other nuclides in their original amounts. Otherwise, after MCNP normalizes the M15 card, it would be as follows:

```

M15 1001 -.167 8016 -.167 13027 -.167 26000 -.167 29000 -.333

```

which is different from the composition of the original material M13.

The second PERT card (PERT2:p) gives the estimated tally change for a 100% increase in the elastic (RXN=2) cross section of material 13.
RHO=–2.34 * 2 = –4.68 g/cm³

Example 5:

```

M4 6000.60C .5 6000.50C .5
M6 6000.60C 1
M8          6000.50C 1
PERT1:n    CELL=3    MAT=6    METHOD=-1
PERT2:n    CELL=3    MAT=8    METHOD=-1

```

The perturbation capability can be used to determine the difference between one cross-section evaluation and another. The difference between these perturbation tallies will give an estimate of the effect of using different cross section evaluations.

Example 6:

```

1          1 0.05  -1  2  -3  $ mat 1 at 0.05 x 1024 atoms/cm3
...
M1          1001 .1 8016 .2 92235 .7
M9          1001 .1 8016 .22 92235 .7
F14:n      1
FM14      (-1 1 -6 -7 $ keff estimator for cell 1
PERT1:n    CELL=1  MAT=9  RHO=0.051  METHOD=1
PERT2:n    CELL=1  MAT=9  RHO=0.051  METHOD=-1

```

These perturbations involve a 10% increase in the oxygen atom fraction of material 1 (RHO=0.05 x [1.02/1.0] = 0.051). The effect of this perturbation on tally 14, which is a track length estimate of k_{eff} , will be provided as a differential change (PERT1) as well as with this change added to the unperturbed estimate of k_{eff} (PERT2). Note: if the RHO keyword is omitted from the PERT cards, the ²³⁵U composition will be perturbed, which can produce invalid results (see Caution #4.)

Example 7:

```

1      1  -1.5  -1  2  -3  4  -5  6 $ mat 1 at 1.5 g/cm3
...
M1     1001  -.4333  6000  -.2000  8016  -.3667 $ half water half plastic
           $ half plastic
M2     1001  -.6666           8016  -.3334 $ water
M3     1001  -.2000  6000  -.4000  8016  -.4000 $ plastic
PERT1:n CELL=1  MAT=2  RHO=-1.0  METHOD=-1
PERT2:n CELL=1  MAT=3  RHO=-2.0  METHOD=-1

```

This example demonstrates how to make significant composition changes (e.g., changing a region from water to plastic.) The unperturbed material is made from a combination of the two desired materials, typically half of each. PERT1 gives the predicted tally as if cell 1 were filled with water and PERT2 gives the predicted tally as if cell 1 were filled with plastic. The difference between these perturbation tallies is an estimate of the effect of changing cell 1 from water to plastic.

V. SUMMARY OF MCNP INPUT FILE

A. Input Cards

The following table lists the various input cards and when they are required. Two kinds of defaults are involved in the following table: (1) if a particular entry on a given card has a default value, that value is listed in the appropriate location on the card, and (2) the omission of a card from the input file sometimes has a default meaning, and if so, the default description is preceded by an asterisk.

Table 3.6 Summary of MCNP Input Cards

Use	Card and Defaults	
	<u>General Categories</u>	<u>Page</u>
optional	Message block plus blank terminator	3-1
required	Problem title card	3-4
required	Cell cards plus blank terminator	3-9
required	Surface cards plus blank terminator	3-12
required	Data cards plus blank terminator	3-18
optional	C Comment card	3-4
	<u>Problem type card</u>	page 3-19
(a)	MODE N	
(a)	Required for all but MODE N.	
	<u>Geometry cards</u>	page 3-19
optional	VOL 0	

CHAPTER 3

Summary

optional	AREA	0
optional	U	0
optional	TRCL	0
optional	LAT	0
optional	FILL	0
optional	TRn	none

Variance reduction cards page 3–28

required	IMP	required unless weight windows used
optional	ESPLT	*no energy splitting or roulette
optional	PWT	–1 MODE N P or N P E only
optional	EXT	0
optional	VECT	none
optional	FCL	0
optional	WWE	none
required	WWN	required unless importances used
optional	WWP	5 3 5 0 0
optional	WWG	none
optional	WWGE	single energy interval
optional	PDn	1
optional	DXC	1
optional	BBREM	none electron photon transport only

Source specification cards page 3–39

optional	SDEF	ERG=14 TME=0 POS=0,0,0 WGT=1
optional	SIn	H $I_i \dots I_k$
optional	SPn	D $P_i \dots P_k$
optional	SBn	D $B_i \dots B_k$
optional	DSn	H $J_i \dots J_k$
optional	SCn	none
optional	SSW	SYM 0
optional	SSR	OLD NEW COL m=0
(b)	KCODE	no default 1 5 0 MAX(4500,1.5*NSRCK) 0 MAX(201,2*KCT)
(c)	KSRC	none

(b) neutron criticality problems only.
(c) KCODE only.

Tally specification cards page 3–62

optional	Fna	$R_o = 0$ for $n = 5$
optional	FCn	none
optional	En	very large
optional	Tn	very large
optional	Cn	1
optional	FQn	F D U S M C E T
optional	FMn	1

CHAPTER 3
Summary

optional	DEn/DFn	none
optional	EMn	1
optional	TMn	1
optional	CMn	1
optional	CFn	none
optional	SFn	none
optional	FSn	none
optional	SDn	0
optional	FUn	(Requires SUBROUTINE TALLYX)
optional	TFn	1 1 last last 1 last last last
optional	DD	0.1 1000
optional	DXT	— — — — 0 0 0
optional	FTn	none

Material specification cards page 3–95

optional	Mm	no ZAID default; 0; set internally; first match in XSDIR; .01p; .01e
(d)	DRXS	*fully continuous
(d)	TOTNU	*prompt $\bar{\nu}$ for non-KCODE; total $\bar{\nu}$ for KCODE
(d)	NONU	*fission treated as real fission
optional	AWTAB	*atomic weights from cross-section tables
optional	XSn	none
optional	VOID	none
optional	PIKMT	*no photon–production biasing
optional	MGOPT	*fully continuous
(d)	neutron problems only.	

Energy and Thermal cards page 3–103

optional	PHYS:N	*very large 0
optional	PHYS:P	*100
optional	PHYS:E	*100
(e)	TMP	2.53×10^{-8}
(e)	THTME	0
(e)	MTm	none

(e) neutron problems only.

Problem cutoffs page 3–110

optional	CUT:N	very large 0 –0.5 –0.25 <i>SWTM</i>
optional	CUT:P	very large .001 –0.5 –0.25 <i>SWTM</i>
optional	CUT:E	very large 0 0 0 <i>SWTM</i>
optional	EPLT	cut card energy cutoff
optional	NPS	none
optional	CTME	none

CHAPTER 3

Summary

		User arrays	page 3–113
optional	<u>IDUM</u>	0	
optional	RDUM	0	
		Peripheral cards	page 3–113
optional	<u>PRDMP</u>	end; -15; 0; all; 10 rendezvous points	
optional	LOST	10 10	
optional	DBCN	(15 ¹⁹) ¹⁵²⁹¹⁷ 0 0 0 600 0 0 0 0 100 0 0 152917 5 ¹⁹ 0 0	
optional	FILES	- - sequential formatted -	
optional	PRINT	*short output	
optional	MPLOT	none	
optional	PTRAC	none	
optional	PERT	none	

*This describes the effect of not using this particular card.

B. Storage Limitations

Table 3.5 summarizes some of the more important limitations that have to be considered when setting up a problem. It may be necessary to modify MCNP to change one or more of these restrictions for a particular problem.

Table 3.5
Storage Limitations

Entries in the description of a cell	*1000 after processing
Total number of tallies	NTALMX = 100
Detectors	MXDT = 20
Neutron DXTRAN spheres	MXDX = 5
Photon DXTRAN spheres	MXDX = 5
NSPLT or PSPLT card entries	*10
Entries on IDUM card	*50
Entries on RDUM card	*50

*Set as a dimension in an array

CHAPTER 4

EXAMPLES

In this chapter, cookbook examples of several topics provide instructive, real examples that you can follow and learn from. They should be studied in conjunction with the theory and instructions of Chapters 1, 2, and 3.

You must understand the geometry discussions in Chapters 1 and 2 before studying the following examples. The concept of uniting and intersecting regions of space bounded by surfaces to make a cell must be fully appreciated; the following examples should help solidify this concept.

Following the geometry specification examples are examples of coordinate transformation, repeated structure and lattice geometries, tally options, source specifications, a SOURCE subroutine, and SRCDX subroutines for point detectors and/or DXTRAN spheres. The tally examples include the FMn, FSn, and FTn cards and the TALLYX subroutine for user-defined tallies using the FUn card.

I. GEOMETRY SPECIFICATION

Several more examples of the union and complement operators are given to help you understand these features. In all examples, the cell numbers will be circled; the surface numbers will not be circled but will appear next to the surface they represent. All cells are voids.

All examples in this chapter are available at Los Alamos from CFS under the /x6code/manual/examples/chap4 node. The input file for the first example is called `exp1`, etc. You are encouraged to experiment with these files by plotting and modifying them.

The next several examples become progressively more difficult and usually take advantage of what you learned in the preceding ones. Remember that unless altered by parentheses, the hierarchy of operations is that intersections are performed first and then unions.

Example 1: In Figure 4.1a, surfaces 2 and 4 are cylinders and the others are planes with their positive sides to the right. Cells 1 and 2 are easy to specify:

```
1  0 1 -2 -3
2  0 3 -4 -5
```

Cell 3 is somewhat subtle, and you need to have in mind Figure 1.5 and its explanation. Remember that a union adds regions and an intersection gives you only the areas that overlap or are common to both regions. Regions may be added together more than once—or duplicated—with the union operator.

Let us start the definition of cell 3 at surface 2 (this is not a requirement). The expression `2 -3` defines the following region: everything in the *universe* outside surface 2 intersected with everything to the left of surface 3. This region is hatched in Figure 4.1b. Let us examine in detail how Figure 4.1b was derived. First look at each region separately. The area with a positive sense

CHAPTER 4
Geometry

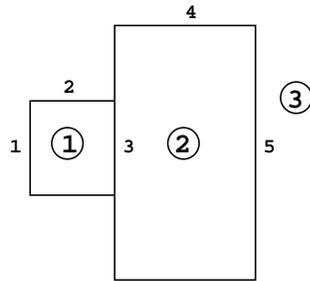


Figure 4.1a

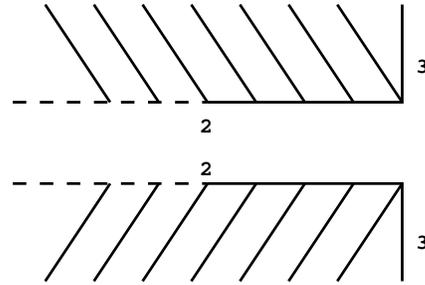


Figure 4.1b

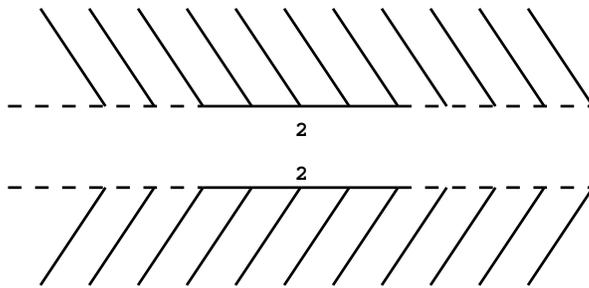


Figure 4.1c



Figure 4.1d

with respect to surface 2 is shown in Figure 4.1c. It includes everything outside surface 2 extending to infinity in all directions. The area with negative sense with respect to surface 2 is undefined so far. The area with negative sense with respect to surface 3 is shown in Figure 4.1d. It includes everything to the left of surface 3 extending to infinity, or half the universe. Recall that an intersection of two regions gives only the area common to **both** regions or the areas that overlap. Superimposing Figures 4.1c and 4.1d results in Figure 4.1e. The cross-hatched regions show the space common to both regions. This is the same area hatched in Figure 4.1b.

Let us now deal with surface 1. To the quantity $2 - 3$ we will add everything with a negative sense with respect to surface 1 as indicated by the expression $2 - 3 : -1$, or $(2 - 3) : -1$ if you prefer. Recall (1) that in the hierarchy of operations, intersections are performed first and then unions (so the parentheses are unnecessary in the previous expression), and (2) that a union of two regions results in a space containing everything in the first region plus everything in the second region; this includes everything common to both regions. Superimposing the region shown in Figure 4.1b and the region to the left of surface 1 results in Figure 4.1f. Our geometry now includes everything hatched plus everything crosshatched and has added part of the tunnel which is interior to surface 2.

By the same method we will deal with surface 4. To the quantity $2 - 3 : -1$ we will add everything with a positive sense with respect to surface 4, written as $2 - 3 : -1 : 4$. Figure 4.1g shows our new geometry. It includes

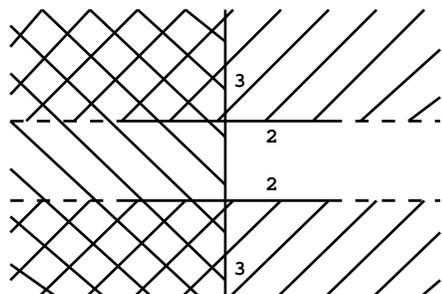


Figure 4.1e

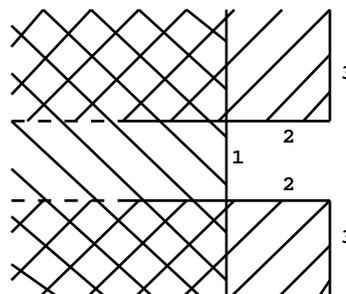


Figure 4.1f

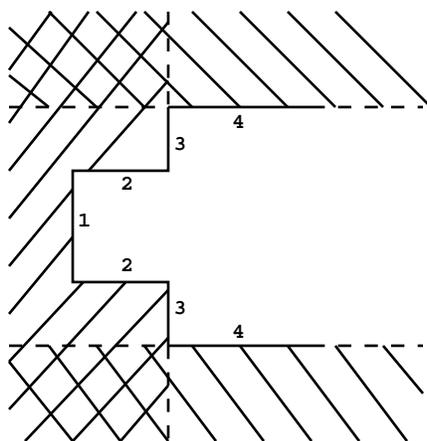


Figure 4.1g

everything in Figure 4.1f plus everything outside surface 4.

Our final step is to block off the large tunnel extending to infinity to the right by adding the region with a positive sense with respect to surface 5 to the region shown in Figure 4.1g. The final expression that defines cell 3 of Figure 4.1a is $2 - 3 : -1 : 4 : 5$.

There is more than one way to define cell 3. Starting with surface 1, we can add the region to the left of 1 to the region outside surface 2 or $-1 : 2$, which is illustrated in Figure 4.1h. We wish to intersect this space with the space having a negative sense with respect to surface 3. Superimposing Figure 4.1h and the region to the left of surface 3 results in Figure 4.1i. The cross-hatched area indicates the area common to both regions and is the result of the intersection. Note that the cross-hatched area of Figure 4.1i is identical to the entire hatched plus crosshatched area of Figure 4.1f. Therefore, we have defined the same geometry in both figures but have used two different approaches to the problem. To ensure that the intersection of -3 is with the quantity $-1 : 2$ as we have illustrated, we must use parentheses giving the expression $(-1 : 2) - 3$. Remember the order in which the operations are performed. Intersections are done before unions unless parentheses

CHAPTER 4
Geometry

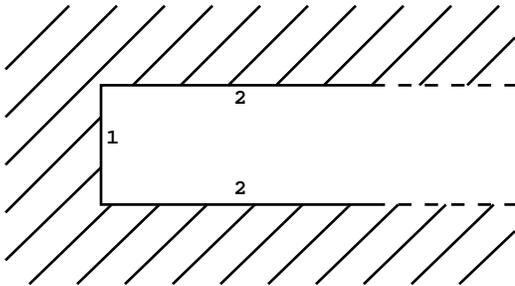


Figure 4.1h

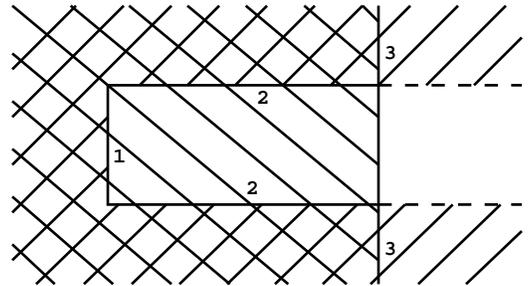


Figure 4.1i

alter the order. The final expression is $(-1 : 2) - 3 : 4 : 5$.

Another tactic uses a somewhat different approach. Rather than defining a small region of the geometry as a starting point and adding other regions until we get the final product, we shall start by defining a block of space and adding to or subtracting from that block as necessary. We arbitrarily choose our initial block to be represented by $4 : -1 : 5$, illustrated in Figure 4.1j.

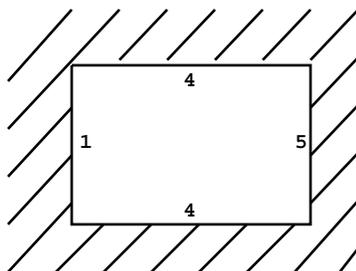


Figure 4.1j

To this block we need to add the space in the upper and lower left corners. The expression $2 - 3$ isolates the space we need to add. Adding $2 - 3$ to our original block, we have $4 : -1 : 5 : (2 - 3)$. The parentheses are not required for correctness in this case but help to illustrate the path our reasoning has followed. Figure 4.1k depicts the union of $2 - 3$ with the block of space we originally chose.

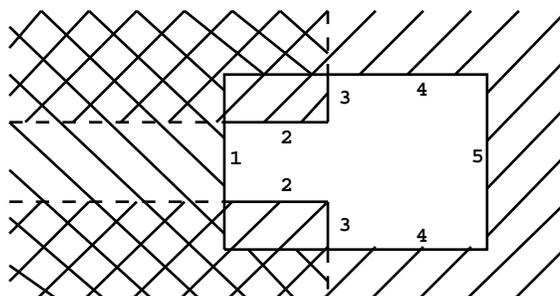


Figure 4.1k

Let us arbitrarily choose a different initial block, $4 : 5 : -3$, all the universe except cell 2. From this region we need to subtract cell 1. If we

intersect the region $(2 : -1)$ with $(4 : 5 : -3)$, as shown in Figure 4.1*l*, we will have introduced an undefined tunnel to the right of surface 5. To correct this error, define an area $(2 : -1 : 3)$ or $(2 : -1 : 5)$ and intersect this region with the initial block.

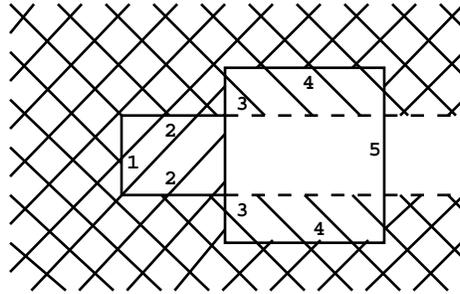


Figure 4.1*l*

Another approach is to intersect the two regions $-1 : 2$ and $-3 : 4$, then add that to the region to the right of surface 5 by $(-1 : 2)(-3 : 4) : 5$. In the above paragraph the expression $(4 : 5 : -3)(2 : -1 : 5)$ can have the common quantity $: 5$ factored out, also resulting in $(-1 : 2)(-3 : 4) : 5$.

Finally, another approach is to forget about the reality of the geometry and for cell 3 take the inverse (or complement) of all the cells bounding cell 3, which is cells 1 and 2. This says that cell 3 is all of the universe excluding that which has already been defined to be in cells 1 and 2. The advantage of this is that cells 1 and 2 are easy to specify and you don't get bogged down in details for cell 3. Cell 3 thus becomes $(-1 : 2 : 3)(-3 : 4 : 5)$. Note that the specifications for cells 1 and 2 are simply reversed. Intersections become unions. positive senses become negative. Then each piece is intersected with the other. There is a complement operator in MCNP which simply is a shorthand notation for the above expression; it is the symbol $\#$, which can be thought of as meaning **not in**. Therefore, cell 3 is specified by $\#1 \#2$, translated as everything in the universe that is not in cell 1 and not in cell 2.

Example 2:

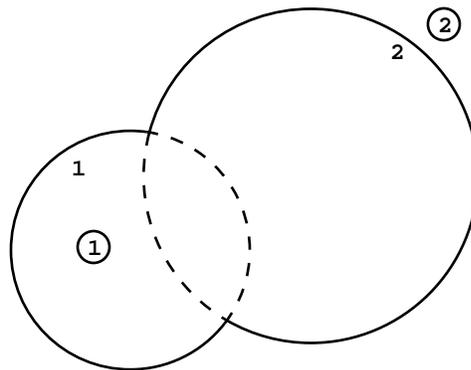


Figure 4.2

Cell 1 is everything interior to the surfaces 1 and 2:

CHAPTER 4
Geometry

$$\begin{array}{cccc} 1 & 0 & -1 & : & -2 \\ 2 & 0 & 1 & & 2 \end{array}$$

Example 3:

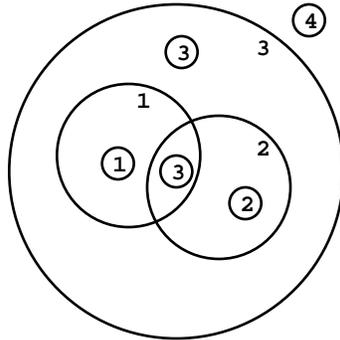


Figure 4.3

In this geometry of four cells defined by three spheres, cell 3 is disconnected. Cell 3 is the region inside surface 3 but outside surfaces 1 and 2 plus the region enclosed between surfaces 1 and 2:

$$\begin{array}{cccc} 1 & 0 & -1 & 2 \\ 2 & 0 & -2 & 1 \\ 3 & 0 & -3 & 1 & 2 & : & -2 & -1 \\ 4 & 0 & 3 & & & & & \end{array}$$

Cell 3 could also be written as

$$3 \quad 0 \quad (-3 \ 1 \ 2) : (-2 \ -1)$$

The parentheses are not required.

Example 4:

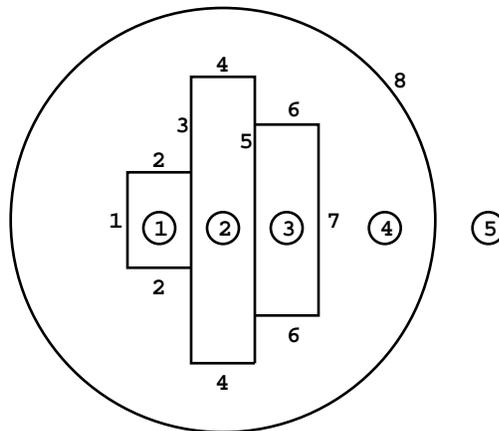


Figure 4.4

In this example all vertical lines are planes with their positive sides to the right and all horizontal lines are cylinders. Cells 1, 2, and 3 are simple;

they are defined by 1 -2 -3, 3 -4 -5, and 5 -6 -7, respectively. Cell 4 is simple if the complement operator is used; it is #1 #2 #3 #5 or #1 #2 #3 -8. Cell 5 is also simple; it is no more than 8 (or verbally, everything in the universe with a positive sense with respect to surface 8).

If cell 5 were defined as just #4, it would be incorrect. That says cell 5 is everything in the universe not in cell 4, which includes cells 1, 2, and 3. The specification #4 #1 #2 #3 is correct but should not be used since it tells MCNP that cell 5 is bounded by surfaces 1 through 7 in addition to surface 8. This will cause MCNP to run significantly more slowly than it should because anytime a particle enters cell 5 or has a collision in it, the intersection of the particle's trajectory with each bounding surface has to be calculated.

Specifying cell 4 exclusively with the complement operator is very convenient and computationally efficient in this case. However, it will be instructive to set up cell 4 explicitly without complements. There are many different ways to specify cell 4; the following approach should not be considered to be *the* way.

First consider cell 4 to be everything outside the big cylinder of surface 4 that is bounded on each end by surfaces 1 and 7. This is specified by (-1:4:7). The parentheses are not necessary but may add clarity. Now all that remains is to add the corners outside cylinders 2 and 6. The corner outside cylinder 2 is (2 -3), whereas it is (5 6) outside cylinder 6. Again the parentheses are optional. These corners are then added to what we already have outside cylinder 4 to get

$$(-1:4:7):(2 -3):(5 6)$$

The region described so far does not include cells 1, 2, or 3 but extends to infinity in all directions. This region needs to be terminated at the spherical surface 8. In other words, cell 4 is everything we have defined so far that is also common with everything inside surface 8 (that is, everything so far intersected with -8). So as a final result,

$$((-1:4:7):(2 -3):(5 6)) -8$$

The inner parentheses can be removed, but the outer ones are necessary (remember the hierarchy of operations) to give us

$$(-1:4:7:2 -3:5 6) -8$$

If the outer parentheses are removed, the intersection of -8 will occur only with 5 and 6, an event that is clearly incorrect.

CHAPTER 4

Geometry

Example 5:

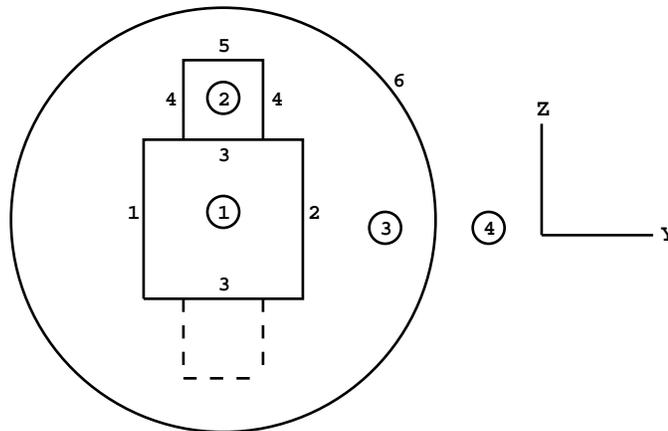


Figure 4.5

This example is similar to the previous one except that a vertical cylinder (surface 4) is added to one side of the horizontal cylinder (surface 3).

Cell 1 is $(1 -3 -2)$, cell 3 is $\#1 \#2 \#4$, and cell 4 is just 6.

Cell 2 is more than might initially meet the eye. It might appear to be simply $(-5 -4 3)$, but this causes a mirror image of the cell 2 we want to show up on the bottom half of cell 1, as represented by the dashed lines in Figure 4.5. We need to add an ambiguity surface to keep cell 2 above the y -axis. Let surface 7 be an ambiguity surface that is a plane at $z = 0$. This surface appears in the MCNP input file as any other surface. Then cell 2 becomes $(-5 -4 3 7)$ for the final result. You should convince yourself that the region above surface 7 intersected with the region defined by $-5 -4 3$ is cell 2 (don't even think of surface 7 as an ambiguity surface but just another surface defining some region in space).

Example 6:

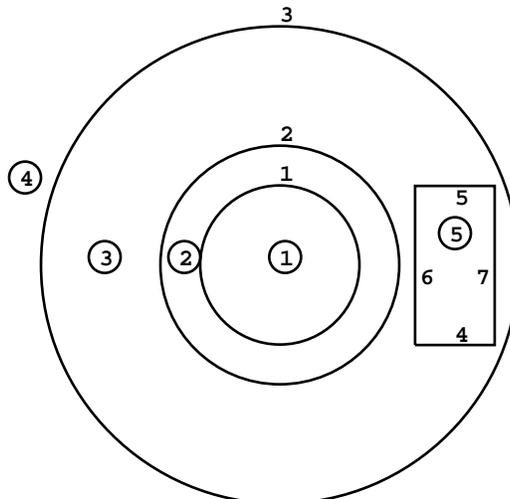


Figure 4.6

CHAPTER 4
Geometry

This is three concentric spheres with a box cut out of cell 3. Surface 8 is the front of the box and 9 is the back of the box. The cell cards are

```

1  0 -1
2  0 -2  1
3  0 -3  2 (-4:5:-6:7:8:-9)
4  0  3
5  0  4 -5 6 -7 -8  9

```

Note that the parentheses are required.

Cell 3 is everything inside surface 3 intersected with everything outside surface 2 but not in cell 5. Therefore, cell 3 could be written as

```
3  0 -3 2 #(4 -5 6 -7 -8 9)
```

or

```
3  0 -3 2 #5
```

or

```
3  0 -3 2 (-4:5:-6:7:8:-9)
```

Example 7:

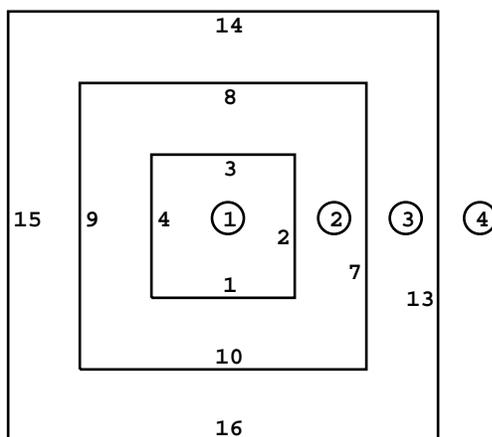


Figure 4.7

This is three concentric boxes, a geometry very challenging to set up using only intersections; it takes a minimum of 14 cells to get around the problem of convex corners when using only intersections. Surfaces 5, 11, and 17 are the back sides of the boxes (smaller to larger, respectively); 6, 12, and 18 are the fronts:

```

1  0 -2 -3  4  1  5 -6
2  0 -7 -8  9 10 11 -12
   (2 :  3 : -4 : -1 : -5 :  6)
3  0 -13 -14 15 16 17 -18
   (7 :  8 : -9 : -10 : -11 : 12)
4  0 13 : 14 : -15 : -16 : -17 : 18

```

This same example set up entirely with intersections can be seen by looking at the input file `box`, which is available at Los Alamos from CFS from the `/x6code/manual/examples/chap4` node.

CHAPTER 4
Geometry

Example 8:

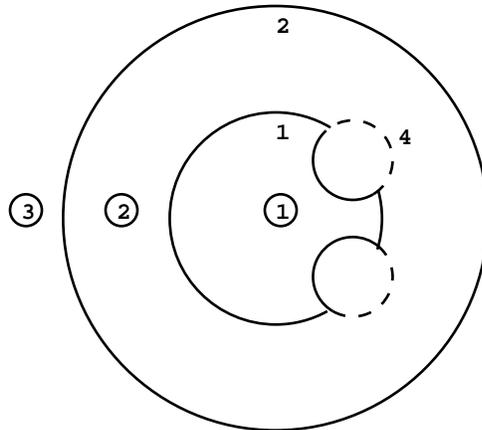


Figure 4.8

This is two concentric spheres with a torus attached to cell 2 and cut out of cell 1:

$$\begin{array}{r} 1 \quad 0 \quad -1 \quad 4 \\ 2 \quad 0 \quad -2 \quad (1 : -4) \\ 3 \quad 0 \quad 2 \end{array}$$

If the torus were attached to cell 1 and cut out of cell 2, this bug-eyed geometry would be:

$$\begin{array}{r} 1 \quad 0 \quad -1 \quad : \quad -4 \\ 2 \quad 0 \quad -2 \quad 1 \quad 4 \\ 3 \quad 0 \quad 2 \end{array}$$

Example 9:

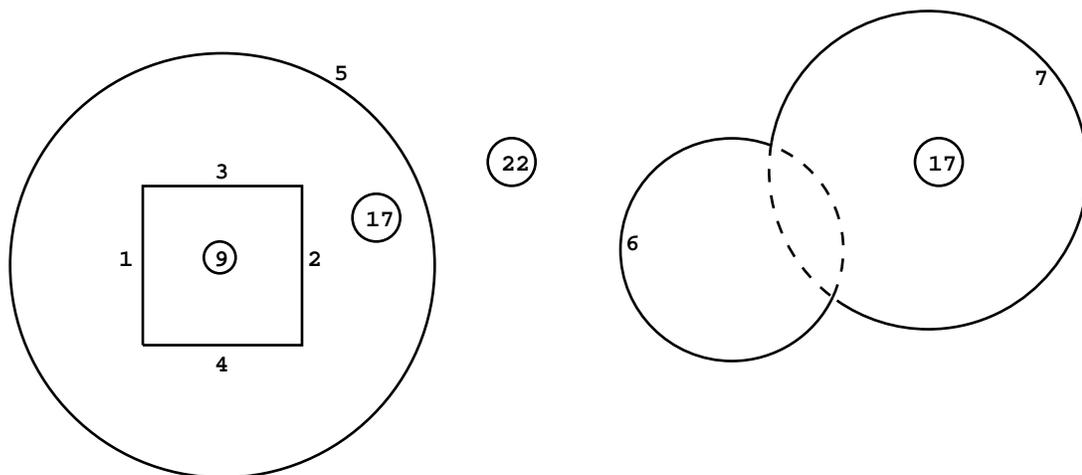


Figure 4.9

Cell 9 is a box cut out of the left part of spherical cell 17; surface 9 is the front of the box and 8 is the rear. Cell 17 is disconnected; the right part is the space interior to the spheres 6 and 7. An F4 tally in cell 17 would be the average flux in all parts of cell 17. An F2 surface tally on surface 7 would

CHAPTER 4
Geometry

be the flux across only the solid portion of surface 7 in the figure. The cell specifications are given by

$$\begin{array}{r} 9 \quad 0 \quad -3 \quad -2 \quad 4 \quad 1 \quad 8 \quad -9 \\ 17 \quad 0 \quad -5 \quad (3 : -4 : -1 : 2 : 9 : -8) : -6 : -7 \\ 22 \quad 0 \quad 5 \quad 6 \quad 7 \end{array}$$

A variation on this problem is for the right portion of cell 17 to be the intersection of the interiors of surfaces 6 and 7 (the region bounded by the dashed lines in the above figure):

$$\begin{array}{r} 9 \quad 0 \quad -3 \quad -2 \quad 4 \quad 1 \quad 8 \quad -9 \\ 17 \quad 0 \quad -5 \quad (3 : -4 : -1 : 2 : 9 : -8) : -6 \quad -7 \\ 22 \quad 0 \quad 5 \quad (6 : 7) \end{array}$$

Example 10:

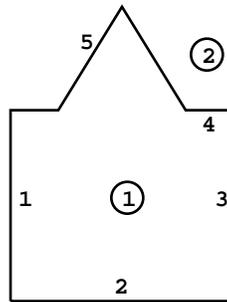


Figure 4.10

This is a box with a cone sitting on top of it. Surface 6 is the front of the box and 7 is the rear. You should understand this example before going on to the next one.

$$\begin{array}{r} 1 \quad 0 \quad 1 \quad 2 \quad -3 \quad (-4 : -5) \quad -6 \quad 7 \\ 2 \quad 0 \quad -1 : -2 : 3 : 4 \quad 5 : 6 : -7 \end{array}$$

Example 11: Surfaces 15 and 16 are cones, surface 17 is a sphere, and cell 2 is disconnected.

$$\begin{array}{r} 1 \quad 0 \quad -1 \quad 2 \quad 3 \quad (-4:-16) \quad 5 \quad -6 \quad (12:13:-14) \\ \quad \quad \quad (10:-9:-11:-7:8) \quad 15 \\ 2 \quad 0 \quad -10 \quad 9 \quad 11 \quad 7 \quad -8 \quad -1:2 \quad -12 \quad 14 \quad -6 \quad -13 \quad 3 \\ 3 \quad 0 \quad -17 \quad (1:-2:-5:6:-3:-15:16 \quad 4) \\ 4 \quad 0 \quad 17 \end{array}$$

CHAPTER 4
Geometry

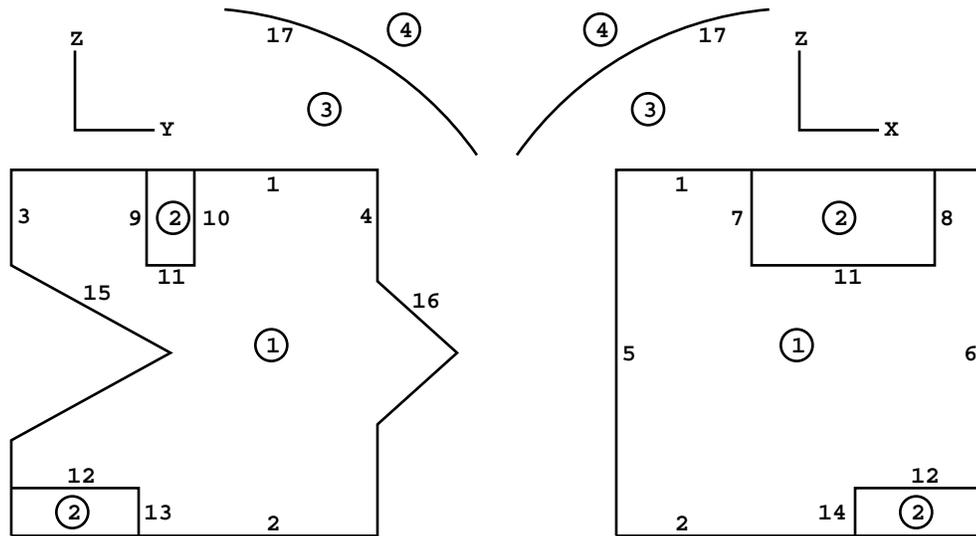


Figure 4.11

Example 12:

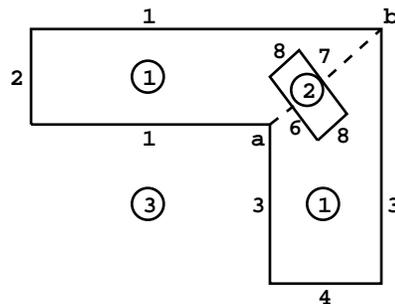


Figure 4.12

Cell 1 consists of two cylinders joined at a 45° angle. Cell 2 is a disk consisting of a cylinder (surface 8) bounded by two planes. Surface 5 is a diagonal plane representing the intersection of the two cylinders. The problem is to specify the disk (cell 2) in one cell formed by the two cylinders (cell 1). A conflict arises in specifying cell 1 since, from the outside cell 3, corner a between surfaces 1 and 3 is convex, but on the other side of the cell the same two surfaces form a concave corner at b . The dilemma is solved by composing cell 1 of two disconnected cells, each bounded by surface 5 between the corners a and b . Surface 5 must be included in the list of surface cards in the MCNP input file. When the two parts are joined to make cell 1, surface 5 does not appear. Convince yourself by plotting it using an origin of 0 0 24 and basis vectors 0 1 1 0 -1 1. See Appendix B for an explanation of plotting commands.

```

1  0 (2 -1 -5 (7:8:-6)):(4 -3 5(-6:8:7))
2  0 -8 6 -7
3  0 (-2:1:5)(-4:3:-5)

```

A more efficient expression for cell 1 is

$$1 \quad 0 \quad (2 \ -1 \ -5:4 \ -3 \ 5)(-6:8:7)$$

Example 13:

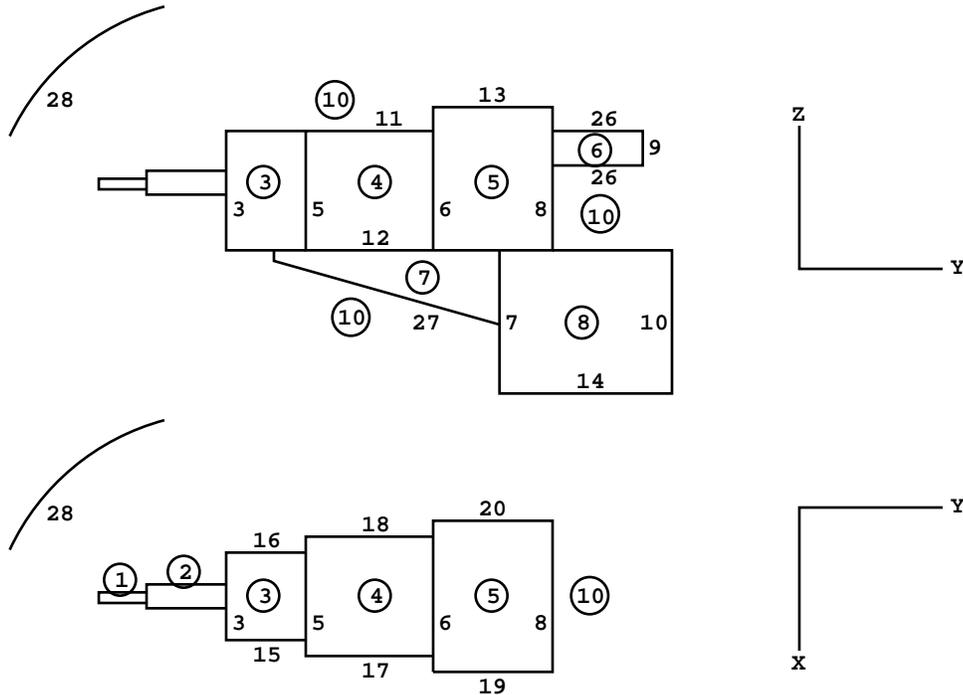


Figure 4.13

This example has the most complicated geometry so far, but it can be described very simply. The input file is called `antares` and is available from the `/x6code/manual/examples/chap4` node.

You can see that Example 13 is similar to Example 1. There is just a lot more of it. It is possible to set this geometry up by any of the ways mentioned in Example 1. However, going around the outer surfaces of the cells inside cell 10 is tedious. There is a problem of visualization and also the problem of coming up with undefined tunnels going off to infinity as in Example 1.

The way to handle this geometry is by the last method in Example 1. Set up the cell/surface relations for each interior cell, then just take the complement for cell 10. For the interior cells,

$$\begin{array}{r}
 1 \quad 0 \quad 1 \quad -2 \quad -23 \\
 2 \quad 0 \quad -3 \quad 25 \quad -24 \quad 2 \\
 3 \quad 0 \quad 3 \quad -5 \quad 12 \quad -15 \quad 16 \quad -11 \\
 4 \quad 0 \quad 5 \quad -6 \quad 12 \quad -17 \quad 18 \quad -11 \\
 5 \quad 0 \quad 6 \quad -8 \quad 12 \quad -13 \quad -19 \quad 20 \\
 6 \quad 0 \quad 8 \quad -9 \quad -26 \\
 7 \quad 0 \quad -12 \quad 4 \quad -7 \quad -27 \\
 8 \quad 0 \quad -12 \quad 7 \quad -10 \quad 14 \quad -21 \quad 22 \\
 9 \quad 0 \quad 2 \quad -3 \quad -25
 \end{array}$$

CHAPTER 4
Geometry

Cell 10 is surrounded by the spherical surface 28. Considering cell 10 to be everything outside cells 1 through 9 but inside surface 28, one can reverse the senses and replace all intersections with unions to produce

```
10  0 (-1:2:23)(3:-25:24:-2)
      (-3:5:-12:15:-16:11)
      (-5:6:-12:17:-18:11)
      (-6:8:-12:13:19:-20)
      (-8:9:26)(12:-4:7:27)
      (12:-7:10:-14:21:-22)
      (-2:3:25) -28
```

Note how easy cell 10 becomes when the complement operator is used:

```
10  0 #1 #2 #3 #4 #5 #6 #7 #8 #9 -28
```

Example 14:

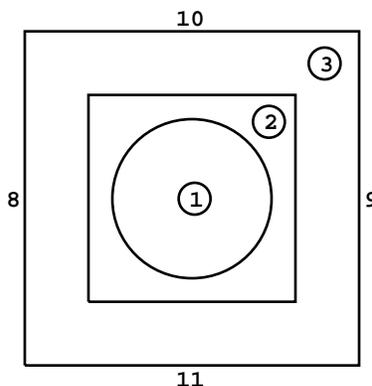


Figure 4.14

This example illustrates some necessary conditions for volume and area calculations. The geometry has three cells, an outer cube, an inner cube, and a sphere at the center. If cell 3 is described as

```
3  0 8 -9 -10 11 -12 13 #2 #1
```

(and #1 must be included to be correct), the volume of cell 3 cannot be calculated. As described, it is not bounded by all planes so it is not a polyhedron, nor is it rotationally symmetric. If cell 3 is described by listing all 12 bounding surfaces explicitly, the volume can be calculated.

II. COORDINATE TRANSFORMATIONS

In most problems, the surface transformation feature of the TRn card will be used with the default value of 1 for M . When $M = 1$ applies, most of the geometry can be set up easily in an (x, y, z) coordinate system and only a small part of the total geometry will be difficult to specify. For example, a box with sides parallel to the (x, y, z) coordinate system is simple to describe,

but inside might be a tilted object consisting of a cylinder bounded by two planes. Since the axis of the cylinder is neither parallel to nor on the x , y , or z axis, a general quadratic must be used to describe the surface of the cylinder. The GQ surface card has 10 entries that are usually difficult to determine. On the other hand, it is simple to specify the entries for the surface card for a cylinder centered on the y -axis. Therefore, we define an auxiliary coordinate system (x', y', z') so the axis of the cylinder is one of the primed axes, y' for example. Now we will use the TRn card to describe the relationship between one coordinate system and the other. $M = 1$ requires that the coordinates of a vector from the (x, y, z) origin to the (x', y', z') origin be given in terms of (x, y, z) .

Only in rare instances will $M = -1$ be needed. Some unusual circumstances may require that a small item of the geometry must be described in a certain system which we will call (x, y, z) , and the remainder of the surfaces would be easily described in an auxiliary system (x', y', z') . The O_i entries on the TRn card are then the coordinates of a vector from the (x', y', z') origin to the (x, y, z) origin given in terms of the primed system.

Example 1: The following example consists of a can whose axis is in the yz plane and is tilted 30° from the y -axis and whose center is at $(0,10,15)$ in the (x, y, z) coordinate system. The can is bounded by two planes and a cylinder, as shown in Figure 4.15.

The surface cards that describe the can in the simple (x', y', z') system are:

1	1	CY	4
2	1	PY	-7
3	1	PY	7

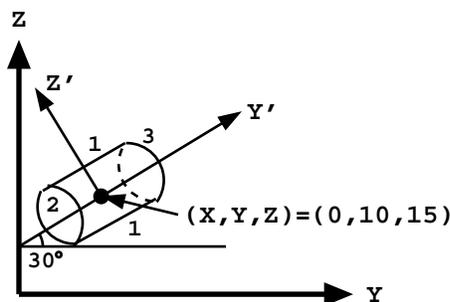


Figure 4.15

The 1 before the surface mnemonics on the cards is the n that identifies which TRn card is to be associated with these surface cards. The TRn card indicates the relationship of the primed coordinate system to the basic coordinate system.

We will specify the origin vector as the location of the origin of the (x', y', z') coordinate system with respect to the (x, y, z) system; therefore, $M = 1$. Since we wanted the center of the cylinder at $(0,10,15)$, the O_i entries are simply 0 10 15. If, however, we had wanted surface 2 to be located at $(x, y, z) = (0,10,15)$, a different set of surface cards would accomplish it. If

CHAPTER 4
Geometry

surface 2 were at $y' = 0$ and surface 3 at $y' = 14$ the O_i entries would remain the same. The significant fact to remember about the origin vector entries is that they describe one *origin* with respect to the other *origin*. The user must locate the surfaces about the auxiliary origin so that they will be properly located in the main coordinate system.

The B_i entries on the TRn card are the cosines of the angles between the axes as listed on page 3–26 in Chapter 3. In this example, the x -axis is parallel to the x' -axis. Therefore, the cosine of the angle between them is 1. The angle between y and x' is 90° with a cosine of 0. The angle between z and x' and also between x and y' is 90° with a cosine of 0. The angle between y and y' is 30° with a cosine of 0.866. The angle between z and y' is 60° with 0.5 being the cosine. Similarly, 90° is between x and z' ; 120° is between y and z' ; and 30° is between z and z' . The complete TRn card is

```
TR1  0 10 15 1 0 0 0 .866 .5 0 -.5 .866
```

An asterisk preceding TRn indicates that the B_i entries are the angles in degrees between the appropriate axes. The entries using the *TRn mnemonic are

```
*TR1  0 10 15 0 90 90 90 30 60 90 120 30
```

The default value of 1 for M , the thirteenth entry, has been used and is therefore not explicitly specified.

The user need not enter values for all of the B_i . As shown on page 3–26, B_i may be specified in any of five patterns. Pattern #1 was used above, but the simplest form for this example is pattern #4 since all the skew surfaces are surfaces of revolution about some axis. The complete input card then becomes

```
*TR1  0 10 15 3J 90 30 60
```

Example 2: The following example illustrates another use of the TRn card. The first part of the example uses the TR1 card and an $M = 1$ transformation; the second part with the TR2 card uses an $M = -1$ transformation. Both parts and transformations are used in the following input file.

EXAMPLE OF SURFACE TRANSFORMATIONS

```

2   0  -4   3  -5
6   0 -14 -13  : -15 41 -42

3   1 PX  -14
4   1 X   -14 10   0 12  14 10
5   1 PX   14
13  2 SX  -15 70
14  2 CX   30
15  2 Y    75  0   30 16
41  2 PY   0
42  2 PY   75

TR1  20 31 37 .223954 .358401 .906308
TR2 -250 -100 -65 .675849 .669131 .309017
      J  J  .918650  J  J  -.246152  -1
```

A. TR1 and M = 1 Case: Cell 2 is bounded by the plane surfaces 3 and 5 and the spheroid surface 4, which is a surface of revolution about the skew axis x' in Figure 4.16.


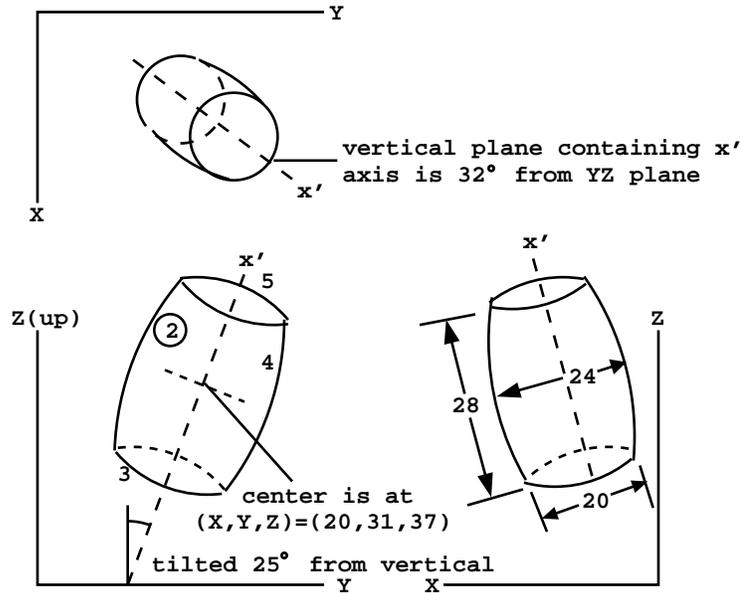


Figure 4.16

To get the coefficients of surfaces 3, 4, and 5, define the x' axis as shown in the drawings (since the surfaces are surfaces of revolution about the x' axis, the orientation of the y' and z' axes does not matter), then set up cell 2 and its surfaces, with coefficients defined in the $x'y'z'$ coordinate system.

On the TR1 card, the origin vector is the location of the origin of the $x'y'z'$ coordinate system with respect to the main xyz system of the problem. The pattern #4 on page 3–26 in Chapter 3 is appropriate since the surfaces are all surfaces of revolution about the x' axis. The components of one vector of the transformation matrix are the cosines of the angles between x' and the x , y , and z axes. They are obtained from spherical trigonometry:

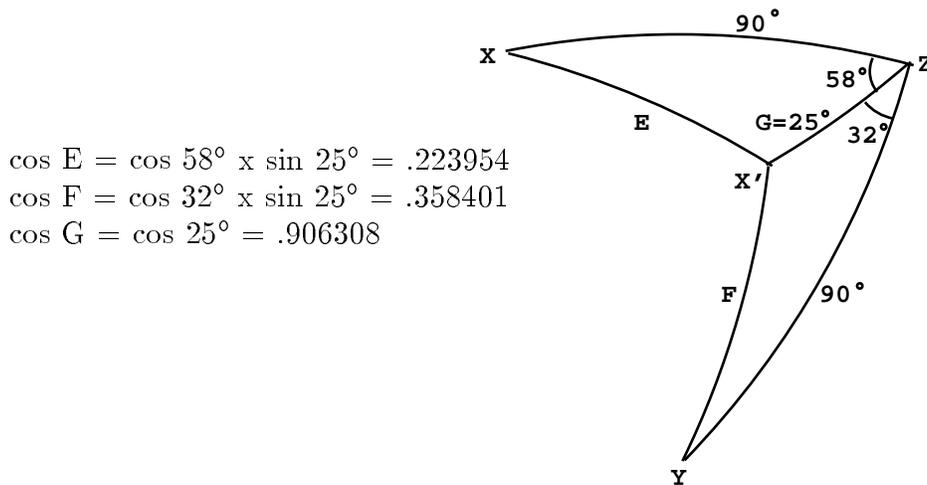

$$\begin{aligned} \cos E &= \cos 58^\circ \times \sin 25^\circ = .223954 \\ \cos F &= \cos 32^\circ \times \sin 25^\circ = .358401 \\ \cos G &= \cos 25^\circ = .906308 \end{aligned}$$

CHAPTER 4
Geometry

B. TR2 and $M = -1$ Case: Cell 6 is the union of a can bounded by spherical surface 13 and cylindrical surface 14 and a conical piece bounded by conical surface 15 and ambiguity surfaces 41 and 42, which are planes. (Surface 42 is required because when surface 15 is defined in $x'y'z'$ it is as a type Y surface, which becomes a cone of one sheet; when it is transformed into the xyz system it becomes a type GQ surface, which in this case is a cone of two sheets. Weird, but that's the way it has to be.) Surfaces 13 and 14 are surfaces of revolution about one axis, and surfaces 15, 41, and 42 are surfaces of revolution about an axis perpendicular to the first axis. Both axes are skewed with respect to the xyz coordinate system of the rest of the geometry.

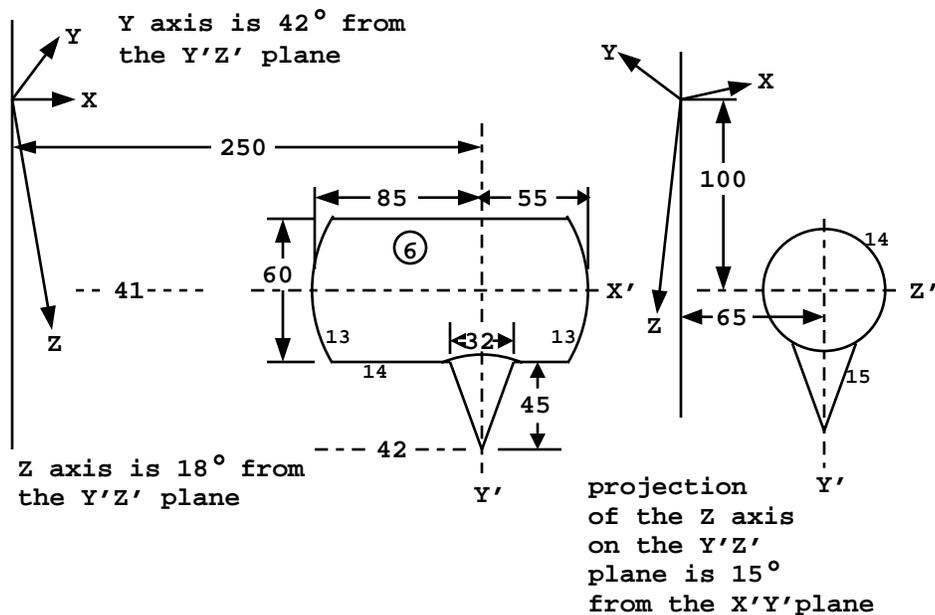


Figure 4.17

Define the auxiliary $x'y'z'$ coordinate system as shown in Figure 4.17. Set up cell 6 with its surfaces specified in the $x'y'z'$ coordinate system as part of the input file and add a second transformation card, TR2.

Since the location of the origin of the xyz coordinate system is known relative to the $x'y'z'$ system (rather than the other way around, as in the first part of the example), it is necessary to use the reverse mapping. This is indicated by setting $M = -1$. In this reverse mapping the origin vector $(-250, -100, -65)$ is the location of the origin of the xyz system with respect to the $x'y'z'$ system. For the components of the transformation matrix, pattern #3 out of the four possible choices from Chapter 3 is most convenient here. The xyz components of z' and the $x'y'z'$ components of z are easy to get. The components of x and of y are not. The whole transformation matrix is shown here with the components that are obtained from Figure 4.17 written in:


$$\begin{array}{r}
 x' \\
 y' \\
 z'
 \end{array}
 \begin{array}{l}
 .675849 \quad \cos 48^\circ = .669131 \quad \cos 72^\circ = .309017 \\
 \cos 15^\circ \times \cos 18^\circ = .918650 \\
 -.246152
 \end{array}$$

The zz' component is $-\text{SQRT}(1. - .309107**2 - .918650**2) = -.246152$, and the xx' component is $\text{SQRT}(1. - .669131**2 - .309017**2) = .675849$, with the signs determined by inspection of the figure.

III. REPEATED STRUCTURE AND LATTICE EXAMPLES

Example 1: This example illustrates the use of transformations with simple repeated structures. The geometry consists of a sphere enclosing two boxes that each contain a cylindrical can. Cell 2 is filled by universe 1. Two cells are in universe 1—the cylindrical can, cell 3, and the space outside the can, cell 4. Cell 2 is defined and the LIKE m BUT card duplicates the structure at another location. The TRCL entry identifies a TRn card that defines the displacement and rotational axis transformation for cell 5. To plot type:

b 1 0 0 0 1 0 ex 11 or 3.5 3.5 0

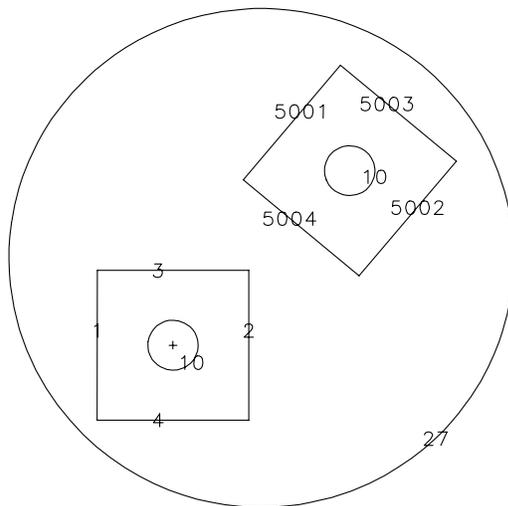

simple repeated structures

1	0 -27		imp:n=1
2	0 1 -2 -3 4 -5 6	fill=1	imp:n=1
3	0 -10 -11 12	u=1	imp:n=1
4	0 #3	u=1	imp:n=1
5	like 2 but trcl=3		
6	0 #2 #5		imp:n=1
7	0 #1		imp:n=0

1	px -3
2	px 3
3	py 3

CHAPTER 4

Geometry

```


4      py  -3
5      pz  4.7
6      pz  -4.7
10     cz  1
11     pz  4.5
12     pz  -4.5
27     s   3.5 3.5 0 10

sdef  pos 3.5 3.5 0
f2:n  1
tr3*  7 7 0 40 130 90 50 40 90 90 0
nps   10000

```

Example 2: This example illustrates the LIKE m BUT construct, the FILL card, the U card, two forms of the TRCL card, and a multiple source cell definition. The following line will plot the view shown on the left:

```
b 1 0 0 0 1 0 ex 21 la 0
```

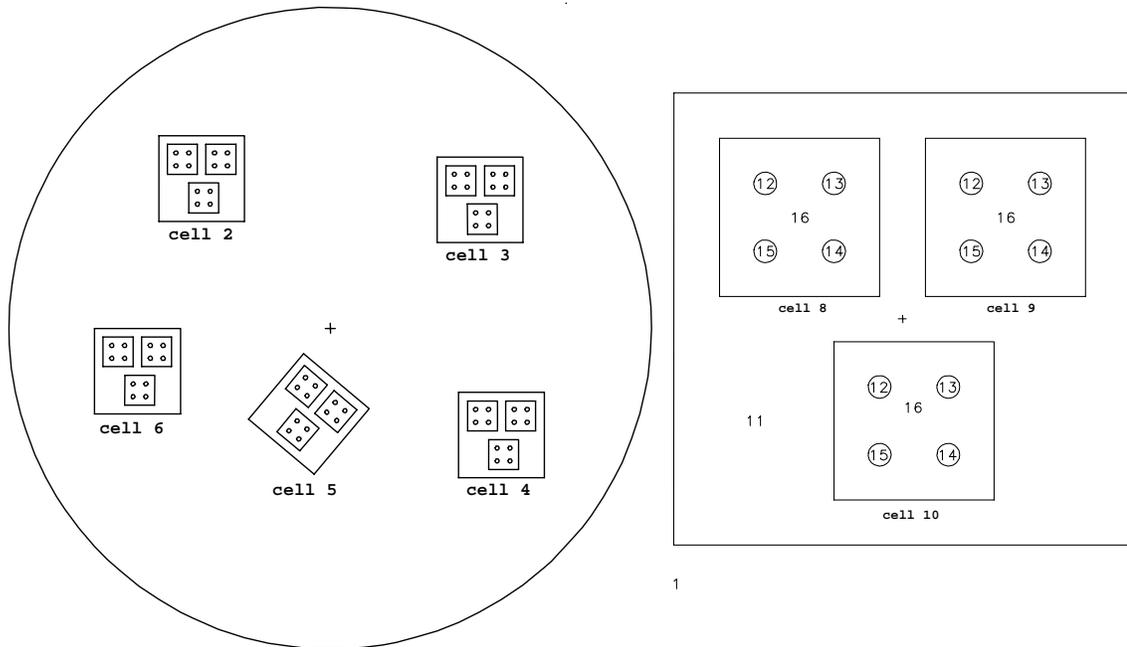

In this example five cells, numbers 2 through 6, are identical except for their locations. Cell 2 is described fully and the other four are declared to be like cell 2 but in different locations. Cell 2 is defined in an auxiliary coordinate system that is centered in the cell for convenience. That coordinate system is related to the main coordinate system of the problem by transformation number 2, as declared by the TRCL=2 entry and the TR2 card. Cells 2 through 6 are all filled with universe number 1. Because no transformation is indicated for that filling, universe 1 inherits the transformation of each cell that it fills, thereby establishing its origin in the center of each of those five cells. Universe 1 contains three infinitely long tubes of square cross section embedded in cell 11, which is unbounded. All four of these infinitely

CHAPTER 4 Geometry

large cells are truncated by the bounding surfaces of each cell that is filled by universe 1, thus making them effectively finite. The transformations that define the locations of cells 8, 9 and 10 are entered directly on the cell cards after the TRCL symbol rather than indirectly through TR cards as was done for cells 2 through 6 to illustrate the two possible ways of doing this. Cells 8, 9 and 10 are each filled with universe 2, which consists of five infinite cells that are truncated by the boundaries of higher level cells. The simplicity and lack of repetition in this example were achieved by careful choice of the auxiliary coordinate systems at all levels. All of the location information is contained in just a few TRCL entries, some direct and some pointing to a few TR cards.

The source definition is given on the SDEF, SIn and SPn cards. The source desired is a cylindrical volume distribution, equally probable in all the cylindrical rods. The energies are given by distribution 1. The entry for CEL shows that level 0 cells are given by distribution 2 and level 1 cells by distribution 3. The zero means that cells are searched for at level 2 and also that the sampled position and direction will apply to the universe indicated by the entry just preceding the first entry that is ≤ 0 . In this case the position and direction will be defined in the coordinate system of the cell sampled by distribution 3 at level 1. The SI2 card lists all the cells at level 0 that will contain the source. SP2 indicates equal probability. SI3 lists the cells in level 1 and the positions on the SI7 card are given in the coordinates of this level. A cylindrical volume distribution is specified by RAD, EXT, AXS, and POS. The radius on the SI5 card is from 0 to .1. The ends of the cylinder are at -2 and 2 (SI6) and the four sets of entries on the SI7 card are the origins of the four cylinders of cells 12–15. These parameters describe exactly the four cells 12–15.

chapter 4 example 2

```

1  1 -.5 -7 #2 #3 #4 #5 #6 imp:n=1
2  0 1 -2 -3 4 5 -6 imp:n=2 trcl=2 fill=1
3  like 2 but trcl=3
4  like 2 but trcl=4
5  like 2 but trcl=5 imp:n=1
6  like 2 but trcl=6
7  0 7 imp:n=0
8  0 8 -9 -10 11 imp:n=1 trcl=(-.9 .9 0) fill=2 u=1
9  like 8 but trcl=(.9 .9 0)
10 like 8 but trcl=(.1 -.9 0)
11 2 -18 #8 #9 #10 imp:n=1 u=1
12 2 -18 -12 imp:n=1 trcl=(-.3 .3 0) u=2
13 like 12 but trcl=(.3 .3 0)
14 like 12 but trcl=(.3 -.3 0)
15 like 12 but trcl=(-.3 -.3 0)
16 1 -.5 #12 #13 #14 #15 u=2 imp:n=1

1  px -2
```

CHAPTER 4
Geometry


2 py 2
3 px 2
4 py -2
5 pz -2
6 pz 2
7 so 15
8 px -.7
9 py .7
10 px .7
11 py -.7
12 cz .1

sdef erg=d1 cel=d2:d3:0 rad=d5 ext=d6 axs=0 0 1 pos=d7

```
# si1 sp1 sb1
  1 0 0
  3 .22 .05
  4 .08 .05
  5 .25 .1
  6 .18 .1
  7 .07 .2
  8 .1 .2
  9 .05 .1
 11 .05 .2
si2 1 2 3 4 5 6
sp2 1 1 1 1 1
si3 1 8 9 10
sp3 1 1 1
si5 0 .1
sp5 -21 1
si6 -2 2
sp6 0 1
si7 1 .3 .3 0 .3 -.3 0 -.3 .3 0 -.3 -.3 0
sp7 1 1 1 1
m1 6000 1
m2 92235 1
drxs
tr2 -6 7 1.2
tr3 7 6 1.1
tr4 8 -5 1.4
tr5* -1 -4 1 40 130 90 50 40 90 90 90 0
tr6 -9 -2 1.3
f4:n 2 3 4 5 6 12 13 14 15
e4 1 3 5 7 9 11 13
sd4 5j 1.8849555921 3r
fq f e
cut:n 1e20 .1
```

```
nps 100000
print
```

Example 3:

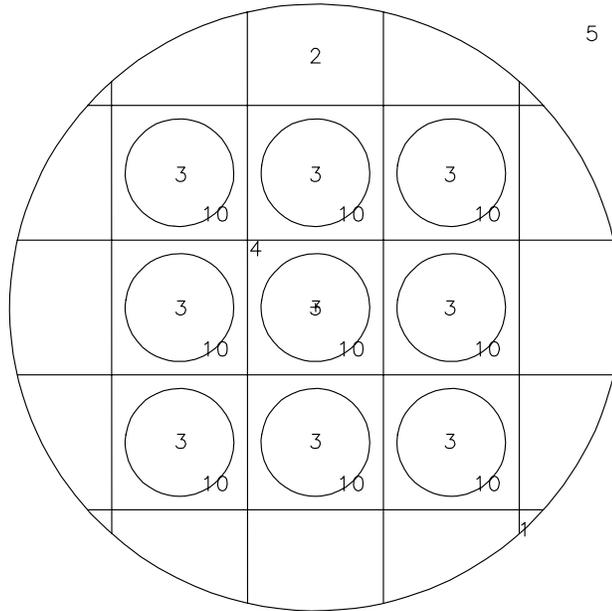

This is a simple example illustrating the use of the FILL, U, and LAT cards to create an object within several cells of a lattice. A hexahedral lattice is contained within a cylinder of radius 45 cm. Cell 1 is the interior of the cylinder, and cell 5 is everything outside (all surfaces are infinite in the z-direction). Cell 1 is filled by universe 1. Cell 2 is defined to be in universe 1. Surfaces 301–304 define the dimensions of the square lattice.

When filling the cells of a lattice, all cells visible, even partially, must be specified by the FILL card. In this case, the “window” created by the cylinder reveals portions of 25 cells (5x5 array). A FILL card with indices of -2 to 2 in the x- and y-directions will place the [0,0,0] element at the center of the array. Universe 2, described by cells 3 and 4, is the interior and exterior, respectively, of an infinite cylinder of radius 8 cm. The cells in universe 1 not filled by universe 2 are filled by universe 1, in effect they are filled by themselves. The following file describes a cylinder that contains a square lattice, with the inner 3x3 array of cells containing a small cylinder in each cell.


```
simple lattice
  1 0 -1 fill=1 imp:n=1
  2 0 -301 302 -303 304 lat=1 u=1 imp:n=1 fill=-2:2 -2:2 0:0
    1 1 1 1 1 1 2 2 2 1 1 2 2 2 1 1 1 1 1 1 1
  3 0 -10 u=2 imp:n=1
  4 0 #3 imp:n=1 u=2
  5 0 1 imp:n=0

  1 cz 45
  10 cz 8
  301 px 10
```

CHAPTER 4
Geometry

302 px -10
303 py 10
304 pz -10

Example 4:

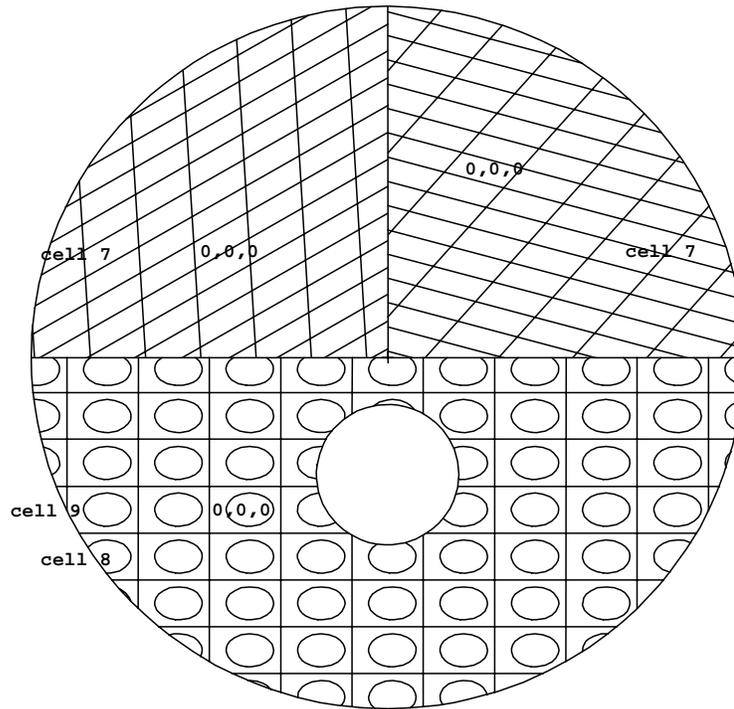

This example illustrates a lattice geometry and uses the FILL entries followed by transformations, the U card, and the LAT card. Cell 2 is the bottom half of the large sphere outside the small sphere (cell 1), is filled by universe 1, and the transformation between the filled cell and the filling universe immediately follows in parentheses.

Cell 6 describes a hexahedral lattice cell (LAT=1) and by the order of specification of its surfaces, also describes the order of the lattice elements. The (0,0,0) element has its center at (-6 -6.5 0) according to the transformation information on the card for cell 2. Element (1,0,0) is beyond surface 5, element (-1,0,0) beyond surface 6, (0,1,0) beyond surface 7, etc. Cell 6 is filled by universe 3, which consists of two cells: cell 8 inside the ellipsoid and cell 9 outside the ellipsoid.

Cell 3 is the top left-hand quarter of the sphere; cell 4 is the top right-hand quarter. Both are filled by universe 2. Both FILL entries are followed by a transformation. The interorigin vector portion of the transformation is between the origin of the filled cell and the origin of the filling universe, with the universe considered to be in the auxiliary coordinate system. The (0,0,0) lattice element is located around the auxiliary origin and the lattice elements are identified by the ordering of the surfaces describing cell 7. The skewed appearance is caused by the rotation part of the transformation.

The source is centered at (0,-5,0) (at the center of cell 1). It is a volumetric source filling cell 1, and the probability of a particle being emitted at a given radius is given by the power law function. For RAD the exponent defaults to 2, so the probability increases as the square of the radius, resulting in a uniform volumetric distribution.

CHAPTER 4
Geometry

example 4

```
1  1  -.6  -1  imp:n=1
2  0  1  -2  -4  fill=1 (-6 -6.5 0) imp:n=1
3  0  2  -3  -4  *fill=2 (-7 5 0 30 60 90 120 30 90) imp:n=1
4  0  2  3  -4  *fill=2 (4 8 0 15 105 90 75 15 90) imp:n=1
5  0  4  imp:n=1
6  0  -5  6  -7  8  -9  10  fill=3 u=1 lat=1 imp:n=1
7  3  -2.7  -11  12  -13  14  -15  16  u=2 lat=1 imp:n=1
8  2  -.8  -17
9  0  17


1  sy -5 3
2  py 0
3  px 0
4  so 15
5  px 1.5
6  px -1.5
7  py 1
8  py -1
9  pz 3
10 -3
11 p 1 -.5 0 1.3
12 p 1 -.5 0 -1.3
13 py .5
14 py -.5
15 pz 3
16 pz -3
17 sq 1 2 0 0 0 0 -1 .2 0 0

sdef pos 0 -5 0 erg d1 rad d2
si1 0 10
sp1 0 1
si2 3
sp2 -21
e0 1 2 3 4 5 6 7 8 9 10 11 12
f2:n 3
sd2 1
f4:n 8 9
sd4 1 1
m1 4009 1
m2 6000 1
m3 13027 1
nps 100000
print
dbcn 0 0 1 4
```

CHAPTER 4

Geometry

Example 5:

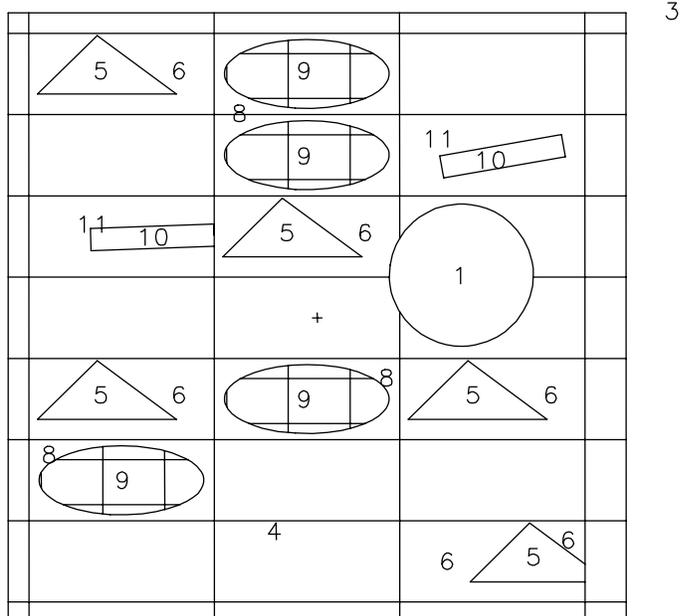

This examples illustrates a more complicated lattice geometry and uses the FILL card followed by the array specification. It builds on the expertise from example 4. There are three “main” cells: cell 1 is inside surface 5, cell 3 is the outside world, and cell 2 is the large square (excluding cell 1) that is filled with a lattice, some of whose elements are filled with 3 different universes.

Universe 1 is a hexahedral lattice cell infinite in the z direction. Looking at the FILL parameters, we see that the lattice has five elements in the first direction numbered from -2 to 2, nine elements in the second direction numbered from -4 to 4 and one element in the third direction. The remaining entries on the card are the array that identifies what universe is in each element, starting in the lower left hand corner with (-2,-4,0), (-1,-4,0), (0,-4,0), etc. An array entry, in this case 1, the same as the number of the universe of the lattice means that element is filled by the material specified for the lattice cell itself. Element (1,-3,0) is filled by universe 2, which is located within the element in accordance with the transformation defined on the TR3 card. Element (-1,-2,0) is filled by universe 3. Cell 7, part of universe 3, is filled by universe 5, which is also a lattice. Note the use of the X card to describe surface 13. The quadratic surface, which is symmetric about the x-axis, is defined by specifying three coordinate pairs on the surface.

The source is a volumetric source of radius 3.6 which is centered in and completely surrounds cell 1. CEL rejection is used to uniformly sample throughout the cell. That is, the source is sampled uniformly in volume and any points outside cell 1 are rejected. The same effect could have been achieved using cookie-cutter rejection. The DRXS card causes the use of discrete reaction libraries for all nuclides if available instead of the usual continuous-energy cross-sections. The PRINT card results in a full output print, and the VOL card sets the volumes of all the cells to unity.

CHAPTER 4
Geometry

example 5

```

1  1  -.6  -5  imp:n=1
2  0  -1  2  -3  4  5  -22  23  imp:n=1  fill=1
3  0  1:-2:3:-4:22:-23  imp:n=0
4  2  -.8  -6  7  -8  9  imp:n=1  lat=1  u=1
   fill=-2:2  -4:4  0:0  1  1  1  1  1  1  1  1  2(3)  1  1  3  1  1  1
   1  2  3  2  1  1  1  1  1  1  1  4(2)  2  1  1  1  1  3  4(1)  1
   1  2  3  1  1  1  1  1  1  1
5  3  -.5  -11  10  12  imp:n=1  u=2
6  4  -.4  11:-10:-12  imp:n=1  u=2
7  0  -13  imp:n=1  u=3  fill=5
8  3  -.5  13  imp:n=1  u=3
9  4  -.4  -14  15  -16  17  imp:n=1  lat=1  u=5
10 3  -.5  -18  19  -20  21  imp:n=1  u=4
11 4  -.4  18:-19:20:-21  imp:n=1  u=4

1  px  15
2  px  -15
3  py  15
4  py  -15
5  s  7  2.1  0  3.5
6  px  4
7  px  -5
8  py  2
9  py  -2
10 p  .7  -.7  0  -2.5
11 p  .6  .8  0  .5
12 py  -1
13 x  -4.5  0  -.5  1.7  3.5  0
14 px  1.6
15 px  -1.4
16 py  1
17 py  -1.2
18 px  3
19 px  -3
20 py  .5
21 py  -.6
22 pz  6
23 pz  -7

sdef  erg  d1  pos  7  2  0  cel=1  rad  d2
si2   3.6
si1   0  10
sp1   0  1
f4:n  10
e4    1  3  5  7  9  11

```

CHAPTER 4
Geometry


```

m1  4009 1
m2  6000 1
m3  13027 1
m4  1001 2 8016 1
nps  100000
dbcn  0 0 1 4
*tr1  0 0 0 10 80 90 100 10 90
*tr2  1 0 0 2 88 90 92 2 90
tr3  3 0 0
vol  1 10r

```

1

Example 6:

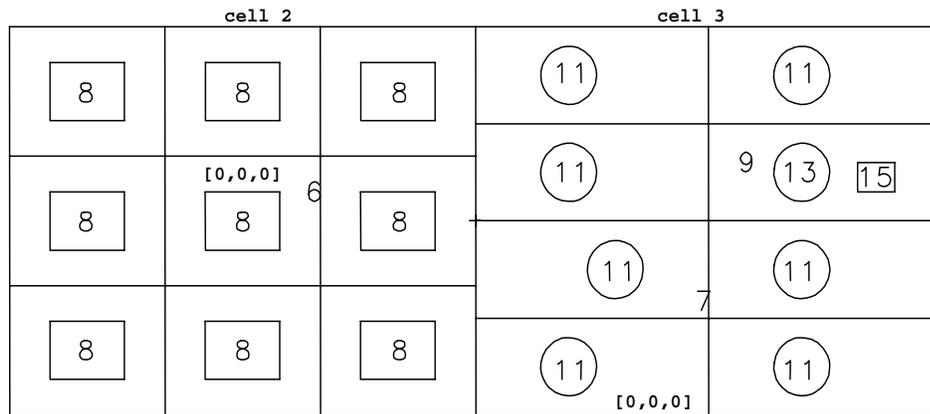

This example primarily illustrates a fairly complex source description in a lattice geometry.

The geometry consists of two “main” cells, each filled with a different lattice. Cell 2, the left half, is filled with a hexahedral lattice, which is in turn filled with a universe consisting of a cell of rectangular cross section and a surrounding cell. The relation of the origin of the filling universe, 1, to the filled cell, 2, is given by the transformation in parentheses following FILL=1. Cell 3, the right half, is filled with a different hexahedral lattice, in turn filled by universes 4 and 5. Lattice cells must be completely specified by an expanded FILL card if the lattice contains a source (cell 5) or by selecting a coordinate system of a higher level universe (SI7 L -2:4:8). Check print table 110 to see the lattice elements that are being sampled. Become familiar with the geometry before proceeding to the source description.

In brief, a volume distributed source located in each of the ten boxes and eight circles (in two dimensions) is desired. The cells involved are given by distribution 6. The S on the SI6 card indicates distribution numbers will follow. The four distributions will describe the cells further. The probabilities for choosing each distribution of cells is given by the SP6 card.

The SI7 card shows the entire path from level 0 to level n for the nine boxes on the left. The expanded FILL notation is used on the cell 4 card to describe which elements of the lattice exist and what universe each one

CHAPTER 4
Geometry

is filled with. All nine are filled by universe 3. SI12 says x is sampled from -4 to 4 and SI14 says y is sampled from -3 to 3 . Used together with the expanded FILL, MCNP will sample source points from all nine lattice elements. Without the expanded FILL, only the $[0,0,0]$ element would have source points. Another method would be to use the following input cards:

```

4 0 -11 12 -14 13 imp:n=1 lat=1 u=1 fill=3
si7 1 -2:4:8
si12 -46 -4
si14 -17 17

```

The minus sign by the 2 means the sampled position and direction will be in the coordinate system of the level preceding the entry ≤ 0 . There is no preceding entry so they will be in the coordinate system of cell 2. If a point is chosen that is not in cell 8, it is rejected and the variable is resampled.

SI8 describes a path from cell 3 to element $(0,0,0)$ of cell 5 to cell 11, from cell 3 to element $(1,0,0)$ to cell 11, etc. Element $(1,2,0)$ is skipped over and will be treated differently. SI9 is the path to cell 13, the circle in element $(1,2,0)$ and SI10 is the path to cell 15, the box in element $(1,2,0)$. All the other source variables are given as a function of cell and follow explanations given in the manual.

example 6

```

1 0 1:-3:-4:5:6:-7 imp:n=0
2 0 -2 3 4 -5 -6 7 imp:n=1 fill=1 (-25 0 0)
3 0 -1 2 4 -5 -6 7 imp:n=1 fill=2 (0 -20 0)
4 0 -11 12 -14 13 imp:n=1 lat=1 u=1 fill=-1:1 -1:1 0:0 3 8r
5 0 -15 2 -18 17 imp:n=1 lat=1 u=2
   fill=0:1 0:3 0:0 4 4 4(5 0 0) 4 4 5 4 4
6 1 -.9 21:-22:-23:24 imp:n=1 u=3
7 1 -.9 19 imp:n=1 u=4
8 2 -18 -21 22 23 -24 imp:n=1 u=3
9 1 -.9 20(31:-32:-33:34) imp:n=1 u=5
11 2 -18 -19 imp:n=1 u=4
13 2 -18 -20 imp:n=1 u=5
15 2 -18 -31 32 33 -34 imp:n=1 u=5

```

```

1 px 50
2 px 0
3 px -50
4 py -20
5 py 20
6 pz 60
7 pz -60
11 px 8.334
12 px -8.334
13 py -6.67
14 py 6.67
15 px 25

```

CHAPTER 4
Geometry

```
17 py 0
18 py 10
19 c/z 10 5 3
20 c/z 10 5 3
21 px 4
22 px -4
23 py -3
24 py 3
31 px 20
32 px 16
33 py 3
34 py 6


m1 6000 .4 8016 .2 11023 .2 29000 .2
m2 92238 .98 92235 .02
sdef erg fcel d1 cel d6 x fcel d11 y fcel d13 z fcel d15
rad fcel d17 ext fcel d19 pos fcel d21 axs fcel d23
ds1 s d2 d3 d4 d5
sp2 -2 1.2
sp3 -2 1.3
sp4 -2 1.4
sp5 -2 1.42
si6 s d7 d8 d9 d10
sp6 .65 .2 .1 .05
si7 l 2:4:8
sp7 1
si8 l 3:5(0 0 0):11 3:5(1 0 0):11 3:5(0 1 0):11 3:5(1 1 0):11
3:5(0 2 0):11 3:5(0 3 0):11 3:5(1 3 0):11
sp8 1 1 1 1 1 1 1
si9 l 3:5(1 2 0):13
sp9 1
si10 l 3:5(1 2 0):15
sp10 1
ds11 s d12 0 0 d25
si12 -4 4
sp12 0 1
ds13 s d14 0 0 d26
si14 -3 3
sp14 0 1
ds15 s d16 0 0 d16
si16 -60 60
sp16 0 1
ds17 s 0 d18 d18 0
si18 0 3
sp18 -21 1
ds19 s 0 d20 d20 0
```

```

si20  -60 60
sp20  0 1
ds21  s 0 d22 d22 0
si22  1 10 5 0
sp22  1
ds23  s 0 d24 d24 0
si24  1 0 0 1
sp24  1
si25  16 20
sp25  0 1
si26  3 6
sp26  0 1
f2:n  1
     e2  .1 1 20
f6:n  2 4 6 8 3 5 7 9 11 13 15
     sd6 1 1 1 1 1 1 1 1 1 1 1
print
nps  5000

```

Example 7:

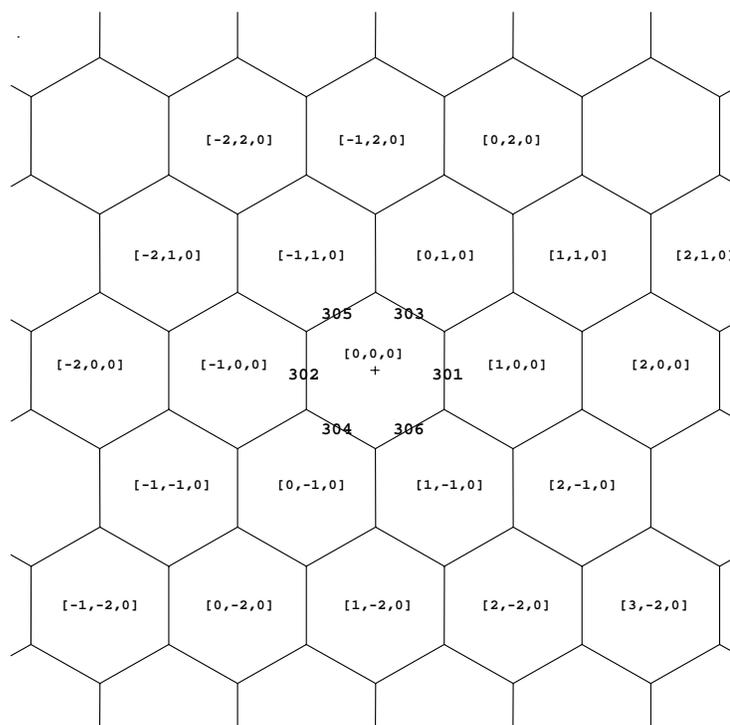

This example illustrates a hexagonal prism lattice and shows how the order of specification of the surfaces on a cell card identifies the lattice elements beyond each surface. The $(0,0,0)$ element is the space described by the surfaces on the cell card, perhaps influenced by a TRCL entry. The user chooses where the $(0,0,0)$ element will be. The user chooses the location of the $(1,0,0)$ element—it is beyond the first surface entered on the cell card. The $(-1,0,0)$ element MUST be in the opposite direction from $(1,0,0)$ and MUST be beyond the second surface listed. The user then chooses where the

CHAPTER 4
Geometry

(0,1,0) element will be—it must be adjacent to the (1,0,0) element—and that surface is listed next. The (0,-1,0) element MUST be diagonally opposite from (0,1,0) and is listed fourth. The fifth and sixth elements are defined based on the other four and must be listed in the correct order: (-1,1,0) and (1,-1,0). Pairs can be picked in any order but the pattern must be adhered to once set. Illustrated is one pattern that could be selected and shows how the numbering of elements in this example progresses out from the center.

hexagonal prism lattice

```

1 0 -1 -19 29 fill=1 imp:n=1
2 0 -301 302 -303 304 -305 306 lat=2 u=1 imp:n=1
3 0 1:19:-29 imp:n=0

1 cz 20
19 pz 31.75
29 pz -31.75
301 px 3.9330
302 px 2.9498
303 p 1 1.7320508076 0 5.8994
304 p 1 1.7320508076 0 3.9330
305 p -1 1.7320508076 0 -.9834
306 p -1 1.7320508076 0 -2.9498


```

```

sdef
f1:n 1
nps 2000

```

Example 8:

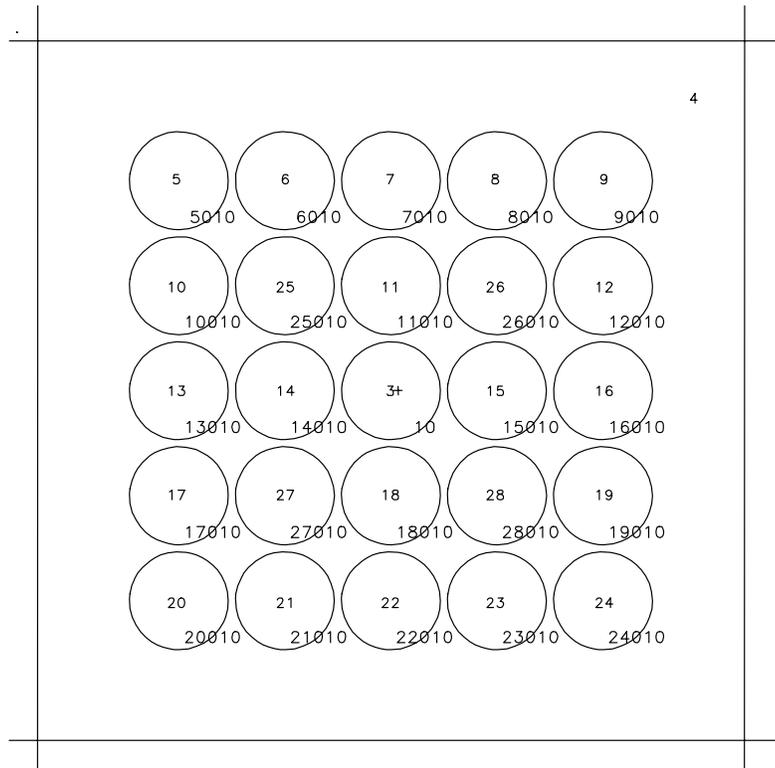

This example shows how the LIKE m BUT and TRCL cards can be

CHAPTER 4
Geometry

used to create an array of nonidentical objects within each cell of a lattice. Only one lattice element is shown in the plot above. A lattice of hexahedral subassemblies, each holding an array of 25 cylindrical rods, is contained within a cylindrical cell. Cell 1 is the space inside the large cylinder and is filled with universe 1. Cell 2 is the only cell in universe 1 and is the hexahedral lattice that fills cell 1. The lattice is a 7x7x1 array, indicated by the array indices on the FILL card, and is filled either by universe 2 or by itself, universe 1. Cell 3, a fuel rod, is in universe 2 and is the space inside the cylindrical rod. The other fuel cells, 5–24, are like cell 3 but at different x,y locations. The material in these 21 fuel cells is slightly enriched uranium. Cells 25–28 are control rods. Cell 25 is like 3 but the material is changed to cadmium, and the density and the x,y location are different. Cells 26–28 are like cell 25 but at different x,y locations. Cell 4 is also in universe 2 and is the space outside all 25 rods. To describe cell 4, each cell number is complimented. Notice in the plot that all the surfaces except for the center one have a new predictable surface number—1000 * cell no + surface no. These numbers could be used in the description of cell 4 if you wanted.

The KCODE and KSRC cards specify the criticality source used in calculating k_{eff} . There are 1000 particles per cycle, the initial guess for k_{eff} is 1, 5 cycles are skipped before the tally accumulation begins, and a total of 10 cycles is run.

example of pwrlat

```

1  0 -1 -19 29 fill=1 imp:n=1
2  2 -1 -301 302 -303 304 lat=1 u=1 imp:n=1 fill=-3:3 -3:3 0:0
   1 1 1 1 1 1 1 1 1 2 2 2 1 1 1 2 2 2 2 2 1 1 2 2 2 2 1
   1 2 2 2 2 2 1 1 1 2 2 2 1 1 1 1 1 1 1 1 1 1
3  1 -18 -10 u=2 imp:n=1
4  2 -1 #3 #5 #6 #7 #8 #9 #10 #11 #12 #13 #14 #15 #16 #17 #18
   #19 #20 #21 #22 #23 #24 #25 #26 #27 #28 imp:n=1 u=2
5  like 3 but trcl=(-6 6 0)
6  like 3 but trcl=(-3 6 0)
7  like 3 but trcl=(0 6 0)
8  like 3 but trcl=(3 6 0)
9  like 3 but trcl=(6 6 0)
10 like 3 but trcl=(-6 3 0)
11 like 3 but trcl=(0 3 0)
12 like 3 but trcl=(6 3 0)
13 like 3 but trcl=(-6 0 0)
14 like 3 but trcl=(-3 0 0)
15 like 3 but trcl=(3 0 0)
16 like 3 but trcl=(6 0 0)
17 like 3 but trcl=(-6 -3 0)
18 like 3 but trcl=(0 -3 0)
19 like 3 but trcl=(6 -3 0)
20 like 3 but trcl=(-6 -6 0)
21 like 3 but trcl=(-3 -6 0)

```

CHAPTER 4

Tallies

```
22 like 3 but trcl=(0 -6 0)
23 like 3 but trcl=(3 -6 0)
24 like 3 but trcl=(6 -6 0)
25 like 3 mat=3 rho=-9 trcl=(-3 3 0)
26 like 25 but trcl=(3 3 0)
27 like 25 but trcl=(-3 -3 0)
28 like 25 but trcl=(3 -3 0)
50 0 1:19:-29 imp:n=0

1 cz 60
10 cz 1.4
19 pz 60
29 pz -60
301 px 10
302 px -10
303 py 10
304 py -10

kcode 1000 1 5 10
ksrc 0 0 0
m1 92235 .02 92238 .98
m2 1001 2 8016 1
m3 48000 1
```

IV. TALLY EXAMPLES

This section contains several examples of the FM_n, FS_n, and FT_n tally cards, a complicated repeated structures/lattice example, and the TALLYX subroutine. Refer also to page 3–75 for the FM_n card, to page 3–83 for the FS_n card, to page 3–93 for the FT_n card, to page 3–69 for the basic repeated structure/lattice tally, and to page 3–87 for TALLYX before trying to understand these examples.

A. FM_n Examples (Simple Form)

Example 1: Consider the following input cards.

```
F4:N 10
FM4 0.04786 999 102
M999 92238.13 1
```

The F4 neutron tally is the track length estimate of the average fluence in cell 10. Material 999 is ²³⁸U with an atomic fraction of 100%.

$C = 0.04786$ normalization factor (such as atom/barn·cm)
 $M = 999$ material number for ²³⁸U as defined on the material card
(with an atom density of 0.04786 atom/barn·cm)
 $R_1 = 102$ ENDF reaction number for radiative capture

cross section (microscopic)

The average fluence is multiplied by the microscopic (n, γ) cross section of ^{238}U (with an atomic fraction of 1.0) and then by the constant 0.04786 (atom/barn·cm). Thus the tally 4 printout will indicate the number of ^{239}U atoms/cm³ produced as a result of (n, γ) capture with ^{238}U .

Standard F6 and F7 tallies can be duplicated by F4 tallies with appropriate FM4 cards. The FM4 card to duplicate F6 is

FM4 C M 1 -4.

For F7 it is

FM4 C M -6 -8.

$C = 10^{-24}$ x number of atoms per gram

$R_1 = 1$ ENDF reaction number for total cross section (barns)

$R_2 = -4$ reaction number for average heating number
(MeV/collision)

$R_1 = -6$ reaction number for total fission cross section (barns)

$R_2 = -8$ reaction number for fission Q (MeV/fission)

This technique applied to F2 tallies can be used to estimate the average heating over a surface rather than over a volume. It provides the surface equivalents of F6 and F7 tallies, which are not available as standard tallies in MCNP.

Example 2: Consider a point detector.

F25:N	0	0	0	0
FM25	0.00253	1001	-6	-8
M1001	92238.13	.9	92235.19	.1

This F25 neutron tally is the fission heating per unit volume of material 1001 at the origin. Material 1001 does not actually have to be in a cell at the origin. The FM25 card constants are:

$C = 0.00253$ atoms per barn·cm (atomic density) of material 1001

$M = 1001$ material number for material being heated

$R_1 = -6$ reaction number for total fission cross section (barn)

$R_2 = -8$ reaction number for fission Q (MeV/fission)

Example 3: Lifetime calculation

F4:N	1			
SD4	1			
FM4	(-1 1 16:17)	\$ bin 1 =	(n,xn) reaction rate	
	(-1 1 -2)	\$ bin 2 =	capture (n,0n) reaction rate	
	(-1 1 -6)	\$ bin 3 =	fission reaction rate	
	(-1 -2)	\$ bin 4 =	prompt removal lifetime=flux/velocity	
M1	92235	-94.73	92238	-5.27

This F4 neutron flux tally from a Godiva criticality problem is multiplied by four FM bins and will generate four separate tally quantities. The user

CHAPTER 4

Tallies

can divide bins 1, 2, and 3 by bin 4 to obtain the (n,xn) lifetime, the (n,0n) lifetime, and the (n,f) lifetime, respectively. The FM4 card entries are:

$C = -1$	multiply by atomic density of material 1
$M = 1$	material number on material card
$R_1 = 16:17$	reaction number for (n,2n) cross section <i>plus</i> reaction number for (n,3n) cross section
$R_2 = -2$	reaction number for capture cross section
$R_3 = -6$	reaction number for total fission cross section
$= 1 - 2$	prompt removal lifetime = flux/velocity = time integral of population

More examples: (Remember $C = -1 = \rho$ for type 4 tally)

F5:N	0	0	0	0	Neutron heating per cm ³ with an atom density of
FM5	ρ	M	1	-4	ρ of material M at a point detector
F5Y:P	10	5	0		Photon heating per cm ³ of material M
FM5	ρ	M	-5	-6	with an atom density ρ at a ring detector
F1:N	1	2	3		Number of neutron tracks crossing
FM1	1	0			surfaces 1, 2, and 3 per neutron started
F35:P	0	0	0	0	Number of photon collisions per source
FM35	1	0			particle that contribute to point detector
M99	3007	1			⁷ Li tritium production per cm ³ in cell 10
F4:N	10				
FM4	-1	99	91		
F104:N	8				Number of reactions per cm ³ of type R in cell 8
FM104	-1	M	R		of material M of atom density ρ

B. FMn Examples (General Form)

Remember that the hierarchy of operation is multiply first and then add and that this hierarchy can not be superseded by the use of parentheses.

Example 1:

F4:N	1				
FM4	$(\rho 1 (1 - 4) (-2)) (\rho 11)$				where $C = \rho =$ atomic
M1	6012.10	1			density (atom/barn·cm)

In this example there are three different tallies, namely

- (a) $\rho 1 1 -4$
- (b) $\rho 1 -2$
- (c) $\rho 1 1$

Thus tally (a) will yield the neutron heating in MeV/cm³ from ¹²C in cell 1. The advantage in performing the multiplication 1 -4 in tally (a) is that the correct statistics are determined for the desired product. This would not be true if tally (a) were to be done as two separate tallies and the product formed by hand after the calculation.

Example 2: F4:N 1
FM4 (0.04635 1 (105:91))
M1 3006.50 0.0742 3007.50 0.9258

In this example we obtain the total tritium production per cm³ from natural lithium (ENDF/B-V evaluation) in cell 1. The constant C on the FM4 card is the atomic density of natural lithium. A subtle point is that the $R = 105$ reaction number contains the reaction data for just the ⁶Li reaction and $R = 91$ contains the reaction data for the ⁷Li reaction (p.524 Appendix G). However, this examples uses both sets of reaction data in the FM4 card to calculate the tritium production in a media composed of both ⁶Li and ⁷Li. Thus, four calculations are carried out (two for ⁶Li using $R = 91, 105$, and two for ⁷Li using $R = 91, 105$), note that two of these calculations (⁶Li with $R = 91$, and ⁷Li with $R = 105$) will contribute nothing to the total tritium production.

Example 3: Suppose we have three reactions— R_1 , R_2 , and R_3 —and wish to add R_2 and R_3 and multiply the result by R_1 . The following would *not* be valid: FMn (C m R_1 ($R_2:R_3$)).
The correct card is: FMn (C m ($R_1 R_2 : R_1 R_3$)).

C. FS*n* Examples

The FS*n* card allows you to subdivide your tally into geometry segments without having to overspecify the problem geometry with unnecessary cells.

The entries on the FS card are the names and senses of surfaces that define how to segment any surface or cell tally.

Example 1: Consider a 1-MeV point isotropic source at the center of a 2 cm cube of carbon. We wish to calculate the flux through a 1-cm² window in the center of one face on the cube. The input file calculating the flux across one entire face is shown in Figure 4.18.

```
EXAMPLE 1, SIMPLE CUBE
1      1 -2.22  1 2 -3 -4 -5 6      IMP:N=1
2      0          #1                IMP:N=0

1      PY 0
2      PZ -1
3      PY 2
4      PZ 1
```

CHAPTER 4

Tallies

5 PX 1
6 PX -1

SDEF POS=0 10 ERG=1
M1 6012.10 -1
F2:N 3

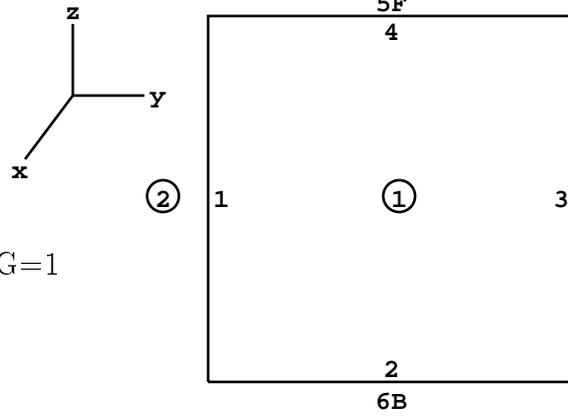


Figure 4.18

Using the FS card, the simple cube geometry is retained, but five more input cards are required,

7 PX .5
8 PX -.5
9 PZ .5
10 PZ -.5
FS2 7 -10 -8 9

The four segmenting surface cards are listed with the other surface cards, but they are not part of the actual geometry and hence do not complicate the cell-surface relationships.

The F2 tally is subdivided into five separate tallies as shown in Figure 4.19: (1) the first tally is the flux of particles crossing surface 3 but with a positive sense to surface 7; (2) the second is the remaining flux with negative sense to surface 7 crossing surface 3 but with a negative sense to surface 10; (3) the third is the remaining flux (negative sense to 7 and positive sense to 10) crossing 3 but with a negative sense to 8; (4) the remaining flux with positive sense to 9; and (5) everything else. In this example, the desired flux in the window is in the fifth subtally—the “everything else” portion.

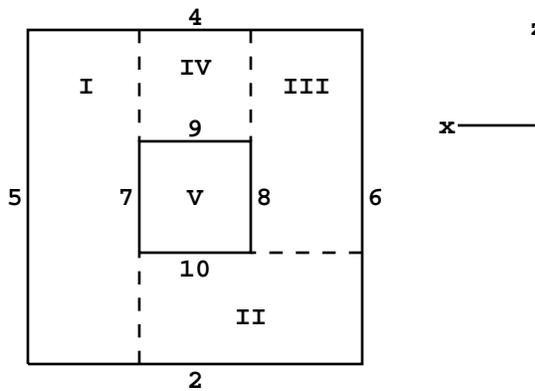


Figure 4.19

The FS segmenting card could have been set up other ways. For example:

FS2 -10 7 9 -8 and
FS2 -8 9 -10 7

Each works, but the order of the subtallies is changed. A way to avoid the five subtallies and to get only the window is to use the TALLYX subroutine described later.

Example 2: Consider a source at the center of a 10-cm radius sphere called cell 1. We want to determine the fission heating in a segment of the sphere defined by the intersection of the 10-cm sphere, an 8-cm inner sphere, and a 20° cone whose vertex is at the source and is about the Y-axis. This is accomplished by using

```
F7:N    1
FS7    -2 -3
```

where surface 2 is the 8-cm surface and surface 3 is the cone. This breaks the F7 tally up into three portions: (1) the heating inside the 8-cm sphere; (2) the heating outside the 8-cm sphere but within the cone—this is the desired portion; and (3) everything else, which is a 2-cm shell just inside the 10-cm sphere but outside the cone.

D. FTn Examples

Example 1: Consider the following input cards.

```
F1:N    2
FT1    FRV    V1 V2 V3
```

The FTn card is the special treatment for tallies card. Various tally treatments are available for certain specific tally requirements. The FTn tally with the FRV card used in conjunction with tally type 1 will redefine the vector normal to the tally surface. In this case, the current over surface 2 (tally type 1) uses the vector V as its reference vector for getting the cosine for binning.

Example 2:

```
F5:P    4
FT5    ICD
FU5    1      3
```

In this example the photon flux at detector 5 is being tallied. However, only the contributions to the detector tally from cells 1 and 3 are of interest. The ICD keyword allows the user to create a separate bin for each cell, and only contributions from one of the specified cells are scored. The FUn card specifies the cells from which tallies are to be made, but TALLYX is not called.

Example 3: When keeping track of charged particle current across a surface, it is sometimes desirable to track both positive and negative score contributions. This is applicable in cases which include electrons and positrons.

CHAPTER 4

Tallies

Consider a photon source that is enclosed in a spherical shell of lead. If a surface current tally is taken over the sphere and it is desirable to tally both the positron and electron current separately, then the special treatment card option is invoked.

```
1      1 -.001124 -11 imp:e=1 imp:p=1
2      2 -11.0 11 -21 imp:e=1 imp:p=1
3      1 -.001124 21 imp:e=0 imp:p=0

11     so 30
21     so 32

m1     6012.c .000125 7014.c .6869 8016.c .301248 18040.c .011717
m2     82000 1.
mode   p e
sdef   pos = 0. 0. 0. erg = 2.5
f1:e   21
ft1    elc 2
nps    10000
```

The input deck shown above models a photon source surrounded by a spherical shell of lead. The space within the lead shell is filled with dry air as is the volume outside the sphere. The centrally located source emits 2.5 MeV photons that travel through the air gap into the lead shell. The F1 surface current tally has been modified with the ELC special tally option. The parameter value of 2 that follows the ELC keyword specifies that positrons and electrons be placed into separate tally user bins. Once this option has been invoked, the user can inspect the output tally bins for the respective scoring of either particle.

Example 4: Consider the following two point sources, each with a different energy distribution:

```
sdef   pos=d1 erg=fpos d2
si1    1 5 3 6 75 3 6
sp1    .3 .7
ds2    s 3 4
si3    h 2 10 14
sp3    d 0 1 2
si4    h .5 2 8
sp4    d 0 3 1
f2:n   2
ft2    scd
fu2    3 4
```

The SCD option used here causes tallies to be binned according to which source distribution was sampled. The FUn card is used to list the distribution

CHAPTER 4

Tallies

numbers of interest. Thus, the tallies in this example are placed in one of two bins, depending on which of the two sources emitted the particle. The two sources may represent two nuclides with different energy distributions, for instance, with the use of the SCD option allowing the user to determine each nuclide's contribution to the final tally.

CHAPTER 4

Tallies

E. Repeated Structure/Lattice Tally Example

An explanation of the basic repeated structure/lattice tally format can be found on page 3–69 in Chapter 3. The example shown here illustrates more complex uses. Figures 4.20(a–f) indicate the tally regions for each tally line. The number of bins generated by MCNP is shown at the end of each tally line following the \$.

```

example 1 -- repeated structure lattice tally example
  1  0  -1  -2  3  13          fill=4
  2  0  -1  -2  3  -13        fill=1
  3  0  -4  5  -6  7          u=1          lat=1
      fill=-2:2  -2:0  0:0    1 1 3 1 1    1 3 2 3 1    3 2 3 2 3
  4  0  -8  9  -10  11       u=2  fill=3  lat=1
  5  1  -0.1  -12           u=3
  6  0   12                u=3
  7  0  -14  -2  3          u=4  fill=3      trcl=(-60 40 0)
  8  like 7 but            trcl=(-30 40 0)
  9  like 7 but            trcl=(0 40 0)
 10  like 7 but            trcl=(30 40 0)
 11  like 7 but            trcl=(60 40 0)
 12  0  #7  #8  #9  #10  #11  u=4
 13  0  1:2:-3

  1  cz 100
  2  pz 100
  3  pz -100
  4  px 20
  5  px -20
  6  py 20
  7  py -20
  8  px 10
  9  px -10
 10  py 10
 11  py -10
 12  cz 5
 13  py 19.9
 14  cz 10

f4:n  5  6  (5  6  3)          $ 3 bins
      (5<3)  (5<(3[-2:2  -2:0  0]))    $ 2 bins
      (5<(7 8 9 10 11))  (5<7 8 9 10 11<1)  (5<1)  $ 7 bins
      (5<u=3)          $ 12 bins
      ((5 6)<3[0 -1 0])  ((5 6)<3[0:0 -1:-1 0:0])  ((5 6)<3[8])
                                          $ 3 bins
      (5<(4[0 0 0]3[8]))(5<4[0 0 0]<3[8])
      (3<(3[1]3[2]3[4]3[5]3[6]3[10]))    $ 3 bins

```

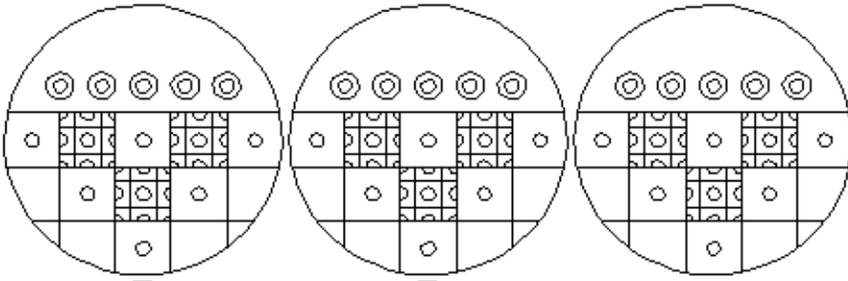


Fig. 4.20a

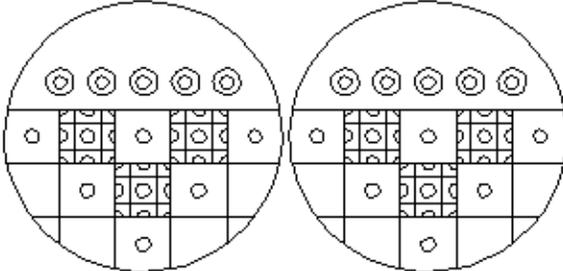


Fig. 4.20b

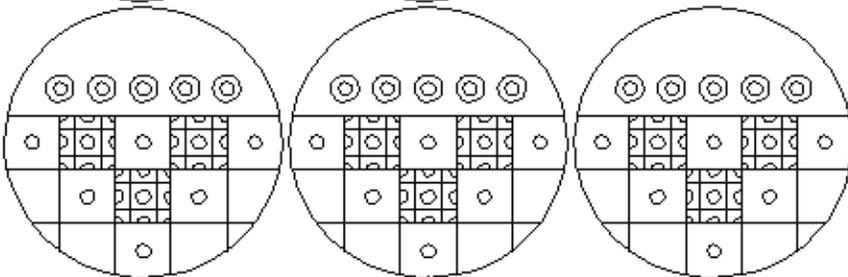


Fig. 4.20c

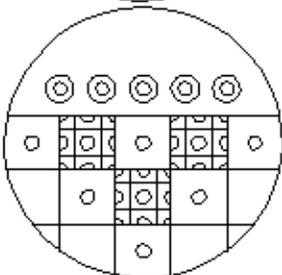


Fig. 4.20d

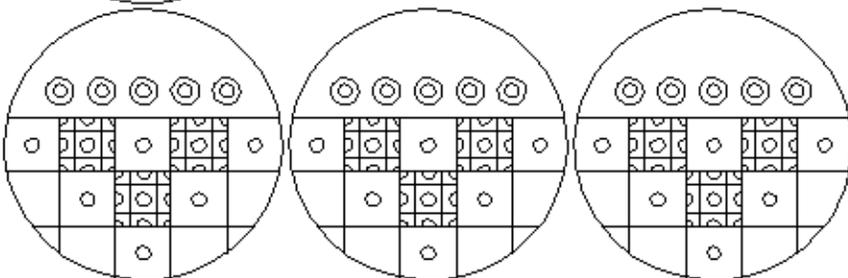


Fig. 4.20e

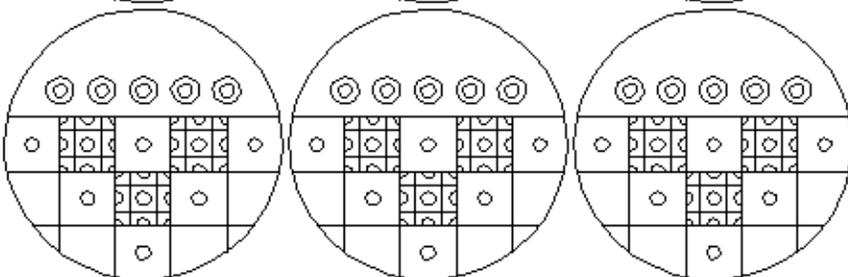


Fig. 4.20f

CHAPTER 4

Tallies

Tally line 1: This first line creates three tally output bins: cell 5, cell 6, and the union of cells 5, 6, and 3. Figure 4.20a indicates the tally regions for this tally line. Notice that cell 3 is filled entirely by cells 5 and 6. Cell 5 plus cell 6 equals cell 3. If a particle is tallied in cell 5 and tallied in cell 3, it will be tallied twice in the bin (5 6 3). CAUTION: A true union IS performed when first level cells overlap (or fill) another cell. This probably is NOT a tally you often want. If an average of cell 3 and region (5 6) outside cell 3 is desired, separate bins must be defined and properly combined using correct volume weighting.

Tally line 2: These two input tally bins result in identical output tallies and demonstrate the use of brackets. The lattice indices are in brackets and include all existing lattice elements, thereby making the two tallies equivalent. The simpler format is preferred and will execute faster. Tally region shown in Fig. 4.20b.

Tally line 3: This line illustrates omission of geometry levels and a single output bin vs multiple bins. All three input bins tally cell 5 within cells 7 through 11. The second bin specifies the entire path explicitly. Because the only place cell 5 exists within cell 1 is in cells 7–11, the 7–11 specification can be omitted, as in the third input bin. In the second input bin, the parentheses around cells 7–11 are omitted, creating multiple output bins. Five tally bins are produced: (5<7<1), (5<8<1), (5<9<1), (5<10<1), and (5<11<1). The sum of these five bins should equal the tally in the first and last output bins on this line. Tally region shown in Fig. 4.20c.

Tally line 4: This line illustrates the universe format. The single input bin includes all possible chains involving cell 5. Because u=3 is not within parentheses, the input is expanded into twelve output bins: (5<3[3], etc. The format 3[3] indicates the third lattice element of cell 3 as entered on the cell 3 FILL array. Note that the third element is filled by universe 3, consisting of cells 5 and 6. Tally region shown in Fig. 4.20d.

Tally line 5: This line illustrates the union of multiple tally cells, (5 6), and various ways of specifying lattice index data. The three input tally bins create three output tally bins with identical values because the three different lattice descriptions refer to the same lattice element, the eighth entry on the FILL array. If the parentheses around (5 6) were removed, two output bins would be created for each input bin, namely (5<3[0 -1 0]) and (6<3[0 -1 0]), etc. Tally region shown in Fig. 4.20e.

Tally line 6: This line illustrates tallies in overlapping regions in repeated structures in a lattice and a tally in lattice elements filled with themselves. Three tally output bins are produced. In the first input bin, a particle is tallied only once when it is in cell 5 and in 4[0 0 0] and in 3[0 -1 0]. Figure 4.20f shows all the cell 5's included in this tally bin. This tally is probably more useful than the overlapping regions in tally line 1. Input bin two demonstrates a tally for a nested lattice. A tally is made when a particle is in cell 5 and in cell 4, element [0 0 0] and in cell 3, element [0 -1 0]. Note that 3[0 -1 0] is indeed filled with cell 4 (u=2). If that were not true, a zero tally would result in this bin. The final input tally bin demonstrated a tally in

lattice elements that are filled with their own universe number. This method is the only way to tally in these elements separate from the rest of cell 3. Tally region shown in Fig. 4.20f.

F. TALLYX Subroutine Examples

An explanation of the TALLYX subroutine arguments can be found on page 3–87 in Chapter 3. Only examples illustrating some uses of TALLYX will be found here.

Example 1: In the example of the FS_n card to get the flux through a window on the face of a cube, instead of using the FS2 card, which established five subtallies, TALLYX could have been used to get only the desired window tally. Two input cards are used:

```
FU2      1
RDUM    -.5 .5 -.5 .5
```

The following subroutine (which is implemented just like a user-provided SOURCE subroutine by replacing lines TX.2 through TX.18) does the job. Note that IB=0 and IBU=1 upon entry into TALLYX.

```
      SUBROUTINE TALLYX(T,IB)
*CALL CM
      IF(X.LT.RDUM(1).OR.X.GT.RDUM(2))IB = -1
      IF(Z.LT.RDUM(3).OR.Z.GT.RDUM(4))IB = -1
      RETURN
      END
```

The subroutine was generalized a bit by using the RDUM input card, although the card could have been avoided by hardwiring the dimensions of the window into TALLYX.

Example 2: Dump 18 words of the GPBLCM array to a BCD file called UOUT each time a neutron crosses surface 15. The input cards are

```
F2:N     15
FU2      1
FILES    7 UOUT
```

The user-provided subroutine is

```
      SUBROUTINE TALLYX(T,IB)
*CALL CM
      WRITE(7,20) (GPBLCM(I),I=1,10),NPA,ICL,JSU,IPT,IEX,NODE,IDX,NCP
20  FORMAT(5E14.6/5E14.6/7I10/2I10)
      RETURN
      END
```

CHAPTER 4

Tallies

Every time surface 15 is crossed and the F2 tally is scored, TALLYX is called and part of the GPBLCM array is written to the file UOUT. If more discrimination is desired, such as dump the GPBLCM array only for neutrons with energy between 2.5 and 4.5 MeV and crossing surface 15 at less than 30° with respect to the normal (assume surface 15 has been defined by a PY card), add the following two lines before the WRITE statement:

```
IF(VVV.LT.0.866)RETURN
IF(ERG.LT.2.5.OR.ERG.GT.4.5)RETURN
```

To write a binary file, the FILES card entries are 7 UOUT S U and the WRITE statement in TALLYX is unformatted:

```
      SUBROUTINE TALLYX(T,IB)
*CALL CM
      WRITE(7) (GPBLCM(I),I=1,10),NPA,ICL,JSU,IPT,IEX,NODE,IDX,NCP
      RETURN
      END
```

The advantage of a BCD file is that it is easy to look at and manipulate, but it requires more I/O time and a larger file. A binary file is more compact than a BCD file and requires less I/O time to write; however, it may be more difficult to use.

Example 3: Calculate the number of neutron tracks exiting cell 20 per source neutron. This is also done in Chapter 5 with the TEST1 example using the FMn card. The input cards are

```
F4:N    20
FU4     1
SD4     1
```

and TALLYX becomes

```
      SUBROUTINE TALLYX(T,IB)
*CALL CM
      T=1.0
      IF(PMF.LT.DLS) IB = -1
      RETURN
      END
```

The quantity T=1.0 is scored every time a track exits cell 20. The variables used in this subroutine, PMF (the distance to collision) and DLS (distance to the boundary), are available to TALLYX from the MCNP COM-MON.

Example 4: Divide the point detector scores into separate tallies (that is, user bins) depending upon which of the 20 cells in a problem geometry caused the contributions. The input cards are

```
F5:N  0  0  0  0
FU5   1 18I  20
```

and TALLYX is

```
      SUBROUTINE TALLYX(T,IB)
*CALL CM
      IBU=ICL9
      RETURN
      END
```

The FU5 card establishes 20 separate user bins, one for each cell in the problem. Note the use of the "nI" input format, described in Chapter 3, which creates 18 linear interpolates between 1 and 20. The variable ICL9 contains, for the current history, the number of the cell which produced the original particle.

Example 5: Determine the quantity $\int \varphi(E)f(E)dE$ in cell 14 where $f(E) = e^{\alpha t}$. The input cards are

```
F4:N  14
FU4    $\alpha$ 
```

where α is a numerical value and TALLYX is

```
      SUBROUTINE TALLYX(T,IB)
*CALL CM
      T=T*EXP(TDS(IPTAL(LIPT+3,1,ITAL)+1)*TME)
      RETURN
      END
```

The FU4 card establishes a single user bin, and the value of α is stored in TDS(IPTAL(LIPT+3,1,ITAL)+1) and used for the tally label.

Example 6: Tally the number of neutrons passing through cell 16 which have had 0,1,2,3, or 4 collisions. The input cards are

```
F4:N  16
FU4   0 1 2 3 4
SD4   1
```

and TALLYX is

```
      SUBROUTINE TALLYX(T,IB)
*CALL CM
      IBU=INT(SPARE1)+1
      IF(IBU.GT.5)IB = -1
      T=WGT
```

CHAPTER 4
Source

```
RETURN
END
```

The subroutine can be generalized by replacing the 5 in the IF statement with IPTAL(LIPT+3,3,ITAL), which is the number of entries on the FU4 card.

If no tracks were put into the bank (from fission, geometry splitting, etc.), INT(SPARE1) could be replaced by NCH(1), the number of neutron collisions per history. However, to be general, use the quantity SPARE1, which goes into the bank with the rest of the banked track parameters. SPARE1 must be set to 0 when a source particle is started and then incremented at collisions. This is done with the following patch in the STARTP and HSTORY subroutines:

```
*I,SP.30
    SPARE1=0.
*I,HS.196
    SPARE1=SPARE1+1.
```

If the IF statement in this TALLYX is omitted, a count will be made of the cases of five or more collisions, and in these cases no score will be tallied but a count will be printed of the times that the tally was unable to be made because IBU was a value where no bin existed.

In the five user bins, T is the number of neutrons per source neutron passing through cell 16 that has undergone 0, 1, 2, 3, or 4 collisions, respectively. Note that the FU4 card has five entries to establish the five user bins and provide labels. Note also that in this example, the neutrons are calculated so that T=T*renormalization factor (which preserves the weight associated with the tracks), where in Example 3 the neutron tracks are calculated so that T=1. Again the value of SPARE1 is available from COMMON. Finally, note that if SPARE1 > 5 (six or more collisions) no tally is made because IB is set to be less than zero. If an E4 card were added, the neutrons would be tallied as a function of energy for each user bin.

V. SOURCE EXAMPLES

Some examples of the general source are given here to illustrate the power and complexity of this feature. Refer to Chapter 3 for the more complete explanation and other examples.

```
Example 1:  SDEF ERG D1  DIR FERG D2
            SUR=1  CEL=2 POS=X Y Z  RAD D5  VEC=U V W
SI1  H    10-7 10-5 ... 13.5 14 ... 20  $ Level 1
SP1  D    0 10-4 ... 10-2 10-1 ... .3
DS2  S    3 ... 3 4 ... 4
SI3   0 .2 ... 1                                $ Level 2
SP3  D    0 10-4 ... .1
SI4   0 .1 ... 1
```

```
SP4  D    0 10-2 ... .1
SI5           37
SP5           -21 1                                $ Optional card
```

Example 1: sdef erg d1 dir ferg d2 sur=1
cel=2 pos=x y z rad d5 vec=u v w

This example of the general source illustrates two levels of dependency. Let us assume a duct streaming problem where the source at the duct opening has been obtained from a reactor calculation. Energies above 13.5 MeV have one angular distribution and energies below 13.5 MeV have a different angular distribution. The source has a uniform spatial distribution on a circular disk of radius 37 cm centered at x, y, z on planar surface 1 going into cell 2.

This example can be expanded by having the source in two ducts instead of one (with the same energy and angular distribution as before). The SI1, SP1, DS2, SI3, SP3, SI4, and SP4 cards remain unchanged. The SDEF card is changed as shown below and the other cards are added.

```
SDEF ERG D1 DIR FERG D2
SUR D6 CEL FSUR D7 POS FSUR D8
RADFSUR D9 VEC FSUR D10
SI6 L 1 7
SP6 D .6 .4
DS7 L 2 8
DS8 L x1y1z1 x2y2z2
DS9 S 11 12
DS10 L u1v1w1 u2v2w2
SI11 0 37
SP11 -21 1
SI12 0 25
SP12 -21 1
```

Example 2: This example is a two-source-cell problem where the material in one cell is uranium and in the other is thorium. The uranium cell has two isotopes, ²³⁵U and ²³⁸U, and the thorium has one, ²³²Th. Each isotope has many photon lines from radioactive decay. The following input cards describe this source.

```
SDEF CEL D1 ERG FCEL D2 ...
SC1 source cells $ Level 1
SI1 L 1 2
SP1 D 2 1
SC2 source "spectra"
DS2 S 3 4
SC3 uranium nuclides $ Level 2
SI3 S 5 6
SP3 D 1 3
```

CHAPTER 4

Source

SC4	thorium nuclide	
SI4	S	7
SP4	D	1
SC5	U235 photon lines	\$ Level 3
SI5	L	$E_1 \dots E_I$
SP5	D	$I_1 \dots I_I$
SC6	U238 photon lines	
SI6	L	$E_1 \dots E_J$
SP6	D	$I_1 \dots I_J$
SC7	Th232 photon lines	
SI7	L	$E_1 \dots E_K$
SP7	D	$I_1 \dots I_K$

Example 3: SDEF SUR D1 CEL FSUR D2 ERG FSUR D6
X FSUR D3 Y FSUR D4 Z FSUR D5

SI1	L	10 0
SP1	.8	.2
DS2	0	88
DS6	S	61 62
SP61	-3	.98 2.2
SP62	-3	1.05 2.7
DS3	S	0 31
SI31	20	30
SP31	0	1
DS4	S	0 41
SI41	-17	36
SP41	0	1
DS5	S	0 51
SI51	-10	10
SP51	0	1

Of the particles from this source, 80% start on surface 10, and the rest start in cell 88. When a particle starts in cell 88, its position is sampled, with rejection, in the rectangular polyhedron bounded by $x = 20$ to 30 , $y = -17$ to 36 , and $z = -10$ to 10 . When a particle starts on surface 10, its cell is found from its position and direction. The energy spectrum of the particles from surface 10 is different from the energy spectrum of the particles from cell 88. A zero after the S option invokes the default variable value.

Example 4: SDEF ERG=D1 DIR FERF D2 SUR=m

SI1	E_1	$E_2 \dots E_k$
SP1	0	$P_2 \dots P_k$
DS2	Q	.3 21 .8 22 1.7 23 20. 24
SP21	-21	1
SP22	-21	1.1
SP23	-21	1.3
SP24	-21	1.8

This is an example of using the Q option. The low-energy particles from surface m come out with a cosine distribution of direction, but the higher-energy particles have a more nearly radial distribution. The energy values on the DS2 card need not be the same as any of the E_i on the SI1 card.

VI. SOURCE SUBROUTINE

When possible, you should take advantage of the standard sources provided by the code rather than write a source subroutine. When you write your own source subroutine, you lose features such as sampling from multiple distributions, using dependent distributions, and having frequency prints for each tabular distribution. Also, subroutine SRCDX is needed.

The standard sources, however, cannot handle all problems. If the general source (SDEF card), surface source (SSR), or criticality source (KCODE card) is unsuitable for a particular application, MCNP provides a mechanism to furnish your own source-modeling capability. The absence of SDEF, SSR, or KCODE cards causes MCNP to call subroutine SOURCE, which you must supply. Subroutine SOURCE specifies the coordinates, direction, weight, energy, and time of source particles as listed and defined on page 3–40. If the value of IPT (particle type) set by STARTP, which calls SOURCE, is not satisfactory, SOURCE must also specify IPT. STARTP sets IPT=1 (neutron) for MODE N, N P, and N P E; sets IPT=2 (photon) for MODE P and P E; and sets IPT=3 (electron) for MODE E. MCNP checks the user's source for consistency of cell, surface, direction, and position. If the source direction is anisotropic and there are point detectors or DXTRAN spheres, an SRCDX subroutine is also required (see page 4–52). The SOURCE subroutine can be put into MCNP with PRPR.

The following example of a subroutine SOURCE uses SIn, SPn, and SBn cards and demonstrates the use of MCNP subroutines SMPSRC, ROTAS, CHKCEL, and the function NAMCHG. The geometry is a 5-cm-long cylinder centered about the y -axis, divided into 5 cells by PY planes at 1-cm intervals. The 1-MeV monoenergetic source is a biased isotropic distribution that is also biased along the y -axis. The input distribution cards are

```

SI1   -1  0  1           $ These 3 cards
SP1    0  1  1           $ represent a biased
SB1    0  1  2           $ isotropic distribution.
SI2    0  1  2  3  4  5 $ These 3 cards
SP2    0  4  2  2  1  1 $ represent a biased
SB2    0  1  1  2  2  4 $ distribution in  $y$ .
RDUM   1                 $ cylindrical radius
IDUM   2  4  6  8  10    $ source cells

```

This problem can be run with the general source by removing the RDUM and IDUM cards and adding:

```

SDEF   ERG=1 VEC=0 1 0  AXS=0 1 0  DIR=D1  EXT=D2  RAD=D3
SI3    0  1           $ represents a covering surface of radius 1
SP3   -21  1         $ samples from the power law with k=1

```

CHAPTER 4 SRCDX

```
*IDENT SRCEX
*D,SO.11
  WGT=1.
C  RDUM(1)--RADIUS OF SOURCE CYLINDER.
C  SAMPLE RADIUS UNIFORM IN AREA.
  R=RDUM(1)*SQRT(RANG())
C  Y COORDINATE POSITION, PROBABILITY AND BIAS ARE
C  DEFINED IN DISTRIBUTION 2 BY THE SI2, SP2, SB2 CARDS.
C  SAMPLE FOR Y.
C  IX RETURNS THE INDEX SAMPLED, AND
C  FR THE INTERPOLATED FRACTION.
C  NEITHER ARE USED IN THIS EXAMPLE.
  CALL SMP SRC(YYY,2,IX,FR)
C  SAMPLE FOR X AND Z.
  TH=2.*PIE*RANG()
  XXX=-R*SIN(TH)
  ZZZ=R*COS(TH)
C  DIRECTION IS ISOTROPIC BUT BIASED IN CONE ALONG Y-AXIS
C  DEFINED AS DISTRIBUTION 1 BY THE SI1, SP1, SB1 CARDS.
C  SAMPLE FOR CONE OPENING C=COS(NU).
C  ROTAS SAMPLES A DIRECTION U,V,W at AN ANGLE ARCCOS(C)
C  FROM THE REFERENCE VECTOR UOLD,VOLD,WOLD
C  AND AT AN AZIMUTHAL ANGLE SAMPLED UNIFORMLY.
  CALL SMP SRC(C,1,IX,FR)
  UOLD=0.
  VOLD=1.
  WOLD=0.
  CALL ROTAS(C)
C  CELL SOURCE - FIND STARTING CELL.
C  IDUM(1)-IDUM(5)--LIST OF SOURCE CELLS (PROGRAM NAME).
  JSU=0
  DO 10 I=1,5
    ICL=NAMCHG(1,IDUM(I))
    CALL CHKCEL(ICL,2,J)
    IF(J.EQ.0) GO TO 20
  10 CONTINUE
  CALL EXPIRE(1,'SOURCE',
  1 'SOURCE IS NOT IN ANY CELLS ON THE IDUM CARD.')
```

```
20 ERG=1.
  TME=0.
```

VII. SRCDX SUBROUTINE

If a user has supplied a subroutine SOURCE that does not emit particles isotropically (uniform emission in all directions) and is using either a detector tally or DXTRAN in the calculations, then subroutine SRCDX must also be supplied to MCNP. The structure of this subroutine is the same as for

subroutine SOURCE, except that usually only a single parameter, *PSC*, needs to be specified for each detector or set of DXTRAN spheres. *PSC* as defined in SRCDX is used to calculate the direct contribution from the source to a point detector, to the point selected for the ring detector, or DXTRAN sphere. Other parameters may also be specified in SRCDX. For example, if a quantity such as particle energy and/or weight is directionally dependent, its value must be specified in both subroutine SOURCE and SRCDX. When using detectors and a subroutine SOURCE with an anisotropic distribution, check the direct source contribution to the detectors carefully to see if it is close to the expected result.

In general, it is best to have as many parameters as possible not directionally dependent in subroutine SOURCE. Directionally dependent parameters must also be dealt with in subroutine SRCDX.

The most general function for emitting a particle from the source in the laboratory system can be expressed as $p(\mu, \varphi)$, where μ is the cosine of the polar angle and φ is the azimuthal angle in the coordinate system of the problem. Most anisotropic sources are azimuthally symmetric and $p(\mu, \varphi) = p(\mu)/2\pi$. The quantity $p(\mu)$ is the probability density function for the μ variable only (that is, $\int p(\mu)d\mu = 1$, $p(\mu) \geq 0$). *PSC* is $p(\mu_o)$, where μ_o is the cosine of the angle between the direction defining the polar angle for the source and the direction to a detector or DXTRAN sphere point in the laboratory system. (MCNP includes the 2π in the calculation automatically.) Note that $p(\mu_o)$ and hence *PSC* may have a value greater than unity and must be non-negative. It is valuable to point out that every source must have a cumulative distribution function based on $p(\mu, \varphi)$ from which to sample angular dependence. The probability density function $p(\mu, \varphi)$ needs only to be considered explicitly for those problems with detectors or DXTRAN.

Table 4.1 gives the equations for *PSC* for six continuous source probability density functions. More discussion of probability density functions is given in the detector theory section of Chapter 2 (see page 2–75). The isotropic case is assumed in MCNP; therefore SRCDX is required only for the anisotropic case.

As an example of calculating μ_o , consider a spherical surface cosine source (type 2 in Table 4.1) with several point detectors in the problem. Assume that a point on the spherical surface has been selected at which to start a particle. The value of μ_o for a detector is given by the scalar (or dot) product of the two directions; that is,

$$\mu_o = uu' + vv' + ww' \quad , \quad (4.1)$$

where u , v , and w are the direction cosines of the line from the source point to the point detector location and u' , v' , and w' are the direction cosines for either the outward normal if the surface source is outward or the inward normal if the source is inward.

If $u = u'$, $v = v'$, and $w = w'$, then $\mu_o = 1$, indicating that the point detector lies on the normal line. The value of *PSC* for the detector point is

Table 4.1

Continuous Source Distributions
and their Associated *PSC*'s

	Source Description	Source Distribution	<i>PSC</i>	Range of μ_o
1.	Isotropic	Uniform	0.5	$-1 \leq \mu_o \leq 1$
2.	Surface Cosine	μ	$2 \mu_o $	$0 \leq \mu_o \leq 1$ (or $-1 \leq \mu_o \leq 0$)
			0	$-1 \leq \mu_o < 0$ (or $0 < \mu \leq 1$)
3.	Point Cosine	$ \mu $	$ \mu_o $	$-1 \leq \mu_o \leq 1$
4.	Point Cosine*	$a + b\mu$	$\frac{2(a+b\mu_o)}{2a+b}$	$0 \leq \mu_o \leq 1$
			$\left(\frac{2(a+b\mu_o)}{2a-b}\right)$	$(-1 \leq \mu_o \leq 0)$
			0	$-1 \leq \mu_o < 0$ (or $0 < \mu_o \leq 1$)
5.	Point Cosine*	$a + b\mu, a \neq 0$	$\frac{a+b\mu_o}{2a}$	$-1 \leq \mu_o \leq 1$
6.	Point Cosine*	$a + b \mu $	$\frac{a+b \mu_o }{2a+b}$	$-1 \leq \mu_o \leq 1$

*The quantities a and b must have values such that *PSC* is always non-negative and finite over the range of μ_o .

$$\begin{aligned}
 PSC &= 2|\mu_o|, \mu_o > 0 \\
 &\quad (\mu_o < 0) \\
 &= 0, \quad \mu_o \leq 0 \\
 &\quad (\mu_o \geq 0)
 \end{aligned}$$

where the parenthetical values of μ_o are for the inward-directed cosine distribution.

For $|\mu_o|$ less than 0.25 in case 2 of Table 4.1, *PSC* is less than 0.5, which is the value for an isotropic source. This means that source emissions for these values of $|\mu_o|$ are less probable than the isotropic case for this source distribution. The converse is also true. Note that if $|\mu_o|$ is greater than 0.5, *PSC* is greater than one, which is perfectly valid.

An example of a subroutine SRCDX with appropriate PRPR lines for a surface outward cosine distribution is shown in Figure 4.21. This is basically the technique that is used in MCNP to calculate *PSC* for a spherical surface source in a cosine distribution; the only difference is that MCNP uses the cosines of the direction from the center of the sphere used to select the source point because this is the normal to the spherical surface. The primed

direction cosines were calculated in Figure 4.21 to aid in illustrating this example. The direction cosines u , v , and w as defined in Equation (4.1) have already been calculated in subroutine DDEET when SRCDX is called and are available through COMMON.

```
*I,SX.5
C CALCULATE PSC FOR AN OUTWARD SURFACE (SPHERE) COSINE
C DISTRIBUTION.
C FIND THE DIRECTION COSINES FOR THIS EXAMPLE BASED
C ON THE SOURCE POINT ON THE SPHERE (X,Y,Z).
    UP = (XXX - RDUM(1))/RDUM(4)
    VP = (YYY - RDUM(2))/RDUM(4)
    WP = (ZZZ - RDUM(3))/RDUM(4)
C (RDUM(1),RDUM(2),RDUM(3)) ARE THE COORDINATES OF THE CENTER
C OF THE SPHERE FROM THE RDUM CARD. RDUM(4) IS THE
C SPHERE RADIUS.
C U, V, AND W HAVE BEEN CALCULATED FOR THE CURRENT
C POINT DETECTOR IN SUBROUTINE DDEET
    PSC=2.*MAX(ZERO,UUU*UP+VVV*VP+WWW*WP)
```

Figure 4.21

The PRPR cards in Figures 4.21 and 4.22 are the recommended procedure for replacing the existing dummy SRCDX subroutine.

For many sources, a discrete probability density function will be used. In this situation, a cumulative distribution function $P(\mu)$ is available and is defined as

$$P(\mu) = \int_{-1}^{\mu} p(\mu') d\mu' \quad \text{and} \quad P_{i+1} = \sum_{j=1,i} p_j \Delta\mu_j \quad ,$$

where p_j is an average value of the probability density function in the interval $\Delta\mu_j$. Thus, the probability density function is a constant p_j in the interval $\Delta\mu_j$. For this case, there are N values of P_i with $P_1 = 0$, $P_{N+1} = 1.0$, and $P_{i-1} < P_i$. Each value of P_i has an associated value of μ_i . Since PSC is the derivative of $P(\mu_o)$, then

$$PSC = \frac{P_i - P_{i-1}}{\mu_i - \mu_{i-1}}, \mu_{i-1} \leq \mu_o < \mu_i \quad . \quad (4.2)$$

This is an average PSC between μ_{i-1} and μ_i and is also an average value of $p(\mu)$ in the specified range of μ .

Frequently, the cumulative distribution function is divided into N equally probable intervals. For this case,

$$PSC = \frac{1}{N} \frac{1}{\mu_i - \mu_{i-1}} \quad .$$

This is precisely the form used in MCNP for calculating contributions to the point detector for elastic scattering with $N = 32$.

CHAPTER 4
SRCDX

An example of a subroutine SRCDX for a discrete probability density function is shown in Figure 4.22. This subroutine would work with the subroutine SOURCE example on page 4–51, and would calculate $PSC = 1/2$ for the isotropic distribution.

A biased anisotropic distribution can also be represented by

```

SI n  μo μ1 . . . μn
SP n  0  p1 . . . pn
SB n  0  q1 . . . qn

```

A reference vector u', v', w' for this distribution is also needed.

The subroutine SOURCE input cards can be modified for this case by changing the SI1, SP1, SB1, and RDUM cards as follows:

```

SI1  -1  0  1      $ These 3 cards
SP1   0  2  1      $ represent a biased
SB1   0  1  2      $ anisotropic distribution.
RDUM  1  0  1  0   $ cylindrical radius and reference vector

```

SOURCE would sample this anisotropic distribution and SRCDX would calculate the appropriate PSC .

```

*I, SX.5
C THE VARIABLY DIMENSIONED BLOCK SPF HOLDS THE SI, SP, SB ARRAYS.
C THE KSD ARRAY IS A POINTER BLOCK TO THE SPF ARRAY.
C THE FOLLOWING STATEMENT FUNCTION IS DEFINED.
      K(I,J)=KSD(LKSD+I,J)
C RDUM(2),RDUM(3),RDUM(4)--DIRECTION COSINES
C FOR THE SOURCE REFERENCE DIRECTION.
      AM=UUU*RDUM(2)+VVV*RDUM(3)+WWW*RDUM(4)
C K(4,1) IS THE LENGTH OF THE DISTRIBUTION.
C K(13,1) IS THE OFFSET INTO THE SPF BLOCK.
      DO 10 I=1,K(4,1)-1
10 IF(SPF(K(13,1)+1,I).LE.AM.AND.SPF(K(13,1)+1,I+1).GE.AM)
1 GO TO 20
      GO TO 30
20 PSC=(SPF(K(13,1)+2,I+1)-SPF(K(13,1)+2,I))/
1 (SPF(K(13,1)+1,I+1)-SPF(K(13,1)+1,I))
      PSC=PSC*SPF(K(13,1)+3,I+1)
      RETURN
30 PSC=0.

```

Figure 4.22

It is extremely important to note that the above case applies only when the source is anisotropic with azimuthal symmetry. For the general case,

$$PSC = 2\pi p(\mu_o, \varphi_o) \quad .$$

The 2π factor must be applied by the user since MCNP assumes azimuthal symmetry and in effect divides the user-defined PSC by 2π .

For a continuous $p(\mu, \varphi)$ function, PSC is calculated as above. In the case of a discrete probability density function,

$$PSC = 2\pi \cdot \overline{p(\mu_o, \varphi_o)} = \frac{2\pi(P_i - P_{i-1})}{(\mu_i - \mu_{i-1})(\varphi_i - \varphi_{i-1})} \\ = \frac{2\pi(P_i - P_{i-1})}{\Delta\mu_i \Delta\varphi_i} \quad ,$$

where $\mu_{i-1} \leq \mu_o < \mu_i$, $\varphi_{i-1} \leq \varphi_o < \varphi_i$ and $\overline{p(\mu_o, \varphi_o)}$ is an average probability density function in the specified values of μ_o and φ_o and $P_i - P_{i-1}$ is the probability of selecting μ_o and φ_o in these intervals. For N equally probable bins and n equally spaced $\Delta\varphi$'s, each $2\pi/n$ wide,

$$PSC = \frac{n}{N} \frac{1}{\Delta\mu_i} \quad .$$

Another way to view this general case is by considering solid angles on the unit sphere. For an isotropic source, the probability $(P_i - P_{i-1})$ of being emitted into a specified solid angle is the ratio of the total solid angle (4π) to the specified solid angle $(\Delta\varphi\Delta\mu)$. Then, $PSC \equiv 0.5$. Thus, for the general case (normed to $PSC \equiv 0.5$ for an isotropic source)

$$PSC = \frac{(0.5)(P_i - P_{i-1})4\pi}{\Delta\mu_i \Delta\varphi_i} = \frac{2\pi(P_i - P_{i-1})}{\Delta\mu_i \Delta\varphi_i} \quad .$$

Note that PSC is greater than 0.5 if the specified solid angle $\Delta\mu\Delta\varphi_i$ is less than $(P_i - P_{i-1})4\pi$. This is the same as the previous general expression.

CAUTIONS:

You are cautioned to be extremely careful when using your own subroutine SOURCE with either detectors or DXTRAN. This caution applies to the calculation of the direct contribution from the source to a point detector, point on a ring, or point on a DXTRAN sphere. Not only is there the calculation of the correct value of PSC for an anisotropic source, but there may also be problems with a biased source.

For example, if an isotropic source is biased to start only in a cone of a specified angle (for example, ψ), the starting weight of each particle should be $WGT * (1 - \cos \psi)/2$, where WGT is the weight of the unbiased source (that is, WGT is the expected weight from a total source). The weight in SRCDX must be changed to the expected weight WGT to calculate the direct contribution to a point detector correctly if PSC is defined to be 0.5.

This example can be viewed in a different way. The probability density function for the above biased source is

$$p(\mu) = \frac{1}{1 - \cos \psi}, \quad \text{for } \cos \psi \leq \mu \leq 1 \\ = 0 \quad \text{for } -1 \leq \mu < \cos \psi \quad .$$

Thus, PSC is this constant everywhere in the cone and zero elsewhere. Multiplying this PSC and biased starting weight gives

CHAPTER 4
SRCDX

$$WGT * (1 - \cos \psi) * 0.5 / (1 - \cos \psi)$$

or $WGT * 0.5$, which is the expected result for an isotropic source.

Another source type that requires caution is for a user supplied source that is energy-angle correlated. For example, assume a source has a Gaussian distribution in energy where the mean of the Gaussian is correlated in some manner with μ . In subroutine SRCDX, the μ_o to a point detector must be calculated and the energy of the starting particle must be sampled from the Gaussian based on this μ_o . This must be done for each point detector in the problem, thus guaranteeing that the direct source contribution to each detector will be from the proper energy spectrum. The original energy of the starting particle, as well as all of the other starting parameters, selected in subroutine SOURCE are automatically restored after the direct source contribution to detectors is made. Thus, the subroutine SOURCE is still sampled correctly.

CHAPTER 5
OUTPUT

WHAT IS COVERED IN CHAPTER 5

This chapter shows annotated output from four test problems and an event log print:

DEMO	illustrates tally flexibility
TEST1	annotated tables produced by PRINT card
CONC	output associated with detectors and detector diagnostics
KCODE	output from a criticality calculation (GODIVA)
Event log	event log and debug prints

Portions of the complete output have been excluded. The line “SKIP nnn LINES IN OUTPUT” indicates these omissions.

The event log and debug prints help find errors if you set up a geometry improperly or modify the code. The DBCN input card also is useful when finding errors but is not discussed here.

MCNP prints out warning messages if needed. Do not ignore these warning messages. Look up the pertinent section in the manual if you need explanation to help you understand what you are being warned about.

I. DEMO PROBLEM AND OUTPUT

DEMO has a point isotropic neutron source (SDEF) in the center of a tungsten cube (M2), with energy uniformly distributed from 0.1 to 10 MeV(SI1,SP1). Flux is calculated across each surface of the cube (F2), across the sum of all surfaces (F22), and across the sum of some of the surfaces (F12). A pulse height tally (F8) is made in the tungsten cell. Selected pages of the output file follow.

The FQ card in the DEMO input file changes the printing order. Depending upon what you are interested, the tally output can be made more readable. FQ2 causes energy to be printed as a function of surface. FQ22 causes surface to be printed as a function of energy. FQ62 prints multiplier bins as a function of energy for the two surfaces desired. The NT and T features also are illustrated in tallies 62 and 22, respectively. The generalized FM62 card used with the F62:N tally is a useful feature for normalization, unit conversion, reaction rate, etc., and has three multipliers instead of one. Finally, the TF62 card causes the tally fluctuation chart for the second surface, the first multiplier bin, and the second energy bin to be printed. By default the fluctuation chart for tally 62 would contain information for the first surface, the first multiplier bin, and the last energy bin.

The F8:E card provides a pulse height tally in cell 1. The F8 tally capability is limited to an analog problem. The default implicit capture is turned off by the CUT:N card. Analog capture is the default for photons and

CHAPTER 5

Output

electrons, so CUT:P and CUT:E cards are not required. The pulse height tally tracks the energy deposited in a cell by both photons and electrons, even if only E or P is on the F8 card. The F8 tally is not available for neutrons and will return an error if attempted. In the following output is a warning that “f8 tally unreliable since neutron transport nonanalog”. This message means some nonanalog events such as (n,2n) may have occurred to the neutron from the source to the production of a photon, not that there is an F8:N tally or that there is some neutron variance reduction in the definition of the problem.

A tally fluctuation chart bin analysis follows each tally. Only an analysis for tally 8 is shown in this example. This analysis checks the variance of the variance as well as the general behavior of the probability density function of each tally and provides an additional set of checks to ensure the reliability of a tally. Ten different statistical checks are run for the tally and presented in tabular form. The results of the ten checks are presented in pass?yes/no table format. These checks do not guarantee the absolute reliability of the tally, but they provide a better method of identifying problems that have not been sampled well. A more complete description of the significance of each entry in the tally fluctuation section is presented in TEST1.

```

1mcrp  version 4b  ld=02/04/97  02/13/97 15:40:10
*****
i=demo out=demo.4bo
1-  demo: a box with flux across surfaces in various combinations
2-  1 2 -1.6 -1 -2 3 4 -5 6
3-  2 0 #1
4-
5-  1 py 1
6-  2 pz 1
7-  3 py -1
8-  4 pz -1
9-  5 px 1
10- 6 px -1
11-
12- cut:n 10000 0 0 0
13- mode n p e
14- sdef pos=0 0 0 cel=1 erg=d1
15- si1 0.1 10
16- sp1 0 1
17- imp:n,p,e 1 0
18- e0 0.2 0.4 0.6 0.8 1
19- f2:n 1 2 3 4 5 6
20- fq2 e f
21- f12:n (1 2) (3 4) (5 6)
22- f22:n 1 2 3 4 5 6 t
23- fq22 f e
24- m1 6000.50c 1
warning, material 1 is used only for a perturbation or tally.
25- m2 74000.55c 1
26- f62:n 1 3
27- fm62 (1 2(1 -4)(-2))(1 1 1)
28- e62 0.2 0.4 0.6 0.8 1 nt
29- fq62 m e
30- tf62 2 5j 2
31- f8:e 1
warning, f8 tally unreliable since neutron transport nonanalog.

```

probid = 02/13/97 15:40:10

CHAPTER 5
DEMO

32- e8 0.001 10i 20
33- nps 104000
34-

warning. tally 8 needs zero energy bin for negative f8 scores.

SKIP 481 LINES IN OUTPUT

1tally 22 nps = 104000

tally type 2 particle flux averaged over a surface. units 1/cm**2
tally for neutrons
areas

surface:	1	2	3	4	5	6	total			
energy:	4.00000E+00	4.00000E+00	4.00000E+00	4.00000E+00	4.00000E+00	4.00000E+00	2.40000E+01			
surface	2.0000E-01	4.0000E-01	6.0000E-01	8.0000E-01	8.0000E-01	8.0000E-01	1.0000E+00			
1	6.33307E-04	0.0756	1.27882E-03	0.0717	1.13639E-03	0.0528	1.17168E-03	0.0521	1.13825E-03	0.0524
2	6.11844E-04	0.0711	1.21984E-03	0.0522	1.25661E-03	0.0487	1.26987E-03	0.0496	1.15210E-03	0.0516
3	6.52386E-04	0.0705	1.07859E-03	0.0576	1.21496E-03	0.0528	1.25657E-03	0.0495	1.05426E-03	0.0537
4	6.60230E-04	0.0686	1.15995E-03	0.0522	1.19812E-03	0.0515	1.10335E-03	0.0526	1.07351E-03	0.0543
5	7.30357E-04	0.0942	1.29205E-03	0.0513	1.18025E-03	0.0653	1.17268E-03	0.0651	1.16323E-03	0.0534
6	6.57953E-04	0.0686	1.15327E-03	0.0508	1.05268E-03	0.0545	1.13600E-03	0.0519	1.18122E-03	0.0643
total	6.57680E-04	0.0312	1.19709E-03	0.0231	1.17317E-03	0.0221	1.18503E-03	0.0217	1.12710E-03	0.0224

energy: total

surface	total	
1	5.35846E-03	0.0273
2	5.51027E-03	0.0237
3	5.25677E-03	0.0248
4	5.19516E-03	0.0244
5	5.53857E-03	0.0284
6	5.18112E-03	0.0258
total	5.34006E-03	0.0102

1analysis of the results in the tally fluctuation chart bin (tfc) for tally 22 with nps = 104000 print table 160
 normed average tally per history = 5.35846E-03 unormed average tally per history = 2.14338E-02
 estimated tally relative error = 0.0273 estimated variance of the variance = 0.0241
 relative error from zero tallies = 0.0238 relative error from nonzero scores = 0.0134
 number of nonzero history tallies = 1743 efficiency for the nonzero tallies = 0.0168
 history number of largest tally = 80376 largest unnormalized history tally = 2.00000E+01
 (largest tally)/(average tally) = 9.33104E+02 (largest tally)/(avg nonzero tally)= 1.56385E+01

CHAPTER 5
DEMO

(confidence interval shift)/mean = 0.0012 shifted confidence interval center = 5.36512E-03
 if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
 estimated quantities value at nps+1 value(nps+1)/value(nps)-1.
 mean 5.35846E-03 0.008962
 relative error 2.72804E-02 0.043224
 variance of the variance 2.40748E-02 0.208737
 shifted center 5.36512E-03 0.000315
 figure of merit 1.69382E+02 -0.081150
 the estimated inverse power slope of the 87 largest tallies starting at 1.54318E+00 is 1.8341
 the history score probability density function appears to have an unsampled region at the largest history scores: please examine.

```
=====
results of 10 statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 22
tfc bin -----relative error----- ----variance of the variance---- --figure of merit-- -pdf-
behavior value decrease decrease rate value behavior slope
desired <0.10 yes 1/sqrt(nps) <0.10 yes 1/nps constant random >3.00
observed random 0.03 yes yes no no no constant random 1.83
passed? yes yes yes yes no no no yes yes no
=====
```

warning. the tally in the tally fluctuation chart bin did not pass 3 of the 10 statistical checks.

SKIP 63 LINES IN OUTPUT

```
1tally 62 nps = 104000
tally type 2 particle flux averaged over a surface.
tally for neutrons
multiplier bin 1: 1.00000E+00 2 1 -4
multiplier bin 2: 1.00000E+00 2 -2
multiplier bin 3: 1.00000E+00 1 1
areas
surface: 1 3
4.00000E+00 4.00000E+00
surface 1 energy: 2.0000E-01 4.0000E-01 6.0000E-01 8.0000E-01 1.0000E+00
mult bin
1 7.35293E-06 0.0742 2.44517E-05 0.0656 3.22180E-05 0.0528 4.31762E-05 0.0522 5.23919E-05 0.0526
2 9.24132E-05 0.0941 9.43567E-05 0.0790 6.81762E-05 0.0529 7.15766E-05 0.0521 7.25394E-05 0.0524
3 2.72372E-03 0.0762 4.97913E-03 0.0735 3.87808E-03 0.0529 3.54540E-03 0.0521 3.09067E-03 0.0523
surface 3
```

CHAPTER 5
DEMO

```

energy:      2.0000E-01      4.0000E-01      6.0000E-01      8.0000E-01      1.0000E+00
mult bin
  1      7.53288E-06 0.0712  2.11302E-05 0.0574  3.43211E-05 0.0528  4.60714E-05 0.0495  4.85327E-05 0.0539
  2      9.60132E-05 0.0879  7.79415E-05 0.0585  7.29403E-05 0.0529  7.66753E-05 0.0495  6.71882E-05 0.0537
  3      2.80624E-03 0.0708  4.17218E-03 0.0578  4.15341E-03 0.0530  3.81221E-03 0.0496  2.86241E-03 0.0537
analysis of the results in the tally fluctuation chart bin (tfc) for tally 62 with nps = 104000 print table 160
normed average tally per history = 2.11302E-05
estimated tally relative error = 0.0574
relative error from zero tallies = 0.0533
number of nonzero history tallies = 351
history number of largest tally = 37754
(largest tally)/(average tally) = 1.81557E+03
(confidence interval shift)/mean = 0.0025
if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
estimated quantities
mean
relative error      2.11302E-05      value at nps+1      value(nps+1)/value(nps)-1.
variance of the variance      5.73925E-02      5.89568E-02      0.017448
shifted center      1.40222E-02      1.89047E-02      0.027256
figure of merit      2.11825E-05      2.11937E-05      0.348204
                    3.82700E+01      3.62661E+01      0.000527
                    -0.052361

```

there is not enough information in the largest history scores (usually less than 500 scores) for a reliable estimate of the slope. the history score probability density function appears to have an unsampled region at the largest history scores: please examine.

```

=====
tfc bin      results of 10 statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 62
--mean--
behavior      value decrease rate      value decrease rate      --variance of the variance----      --figure of merit--      -pdf-
desired      <0.10      yes      1/sqrt(nps)      <0.10      yes      1/nps      decrease rate      value      behavior      slope
observed      0.06      yes      yes      0.01      yes      yes      yes      constant      random      >3.00
passed?      yes      yes      yes      yes      yes      yes      yes      constant      random      0.00
=====

```

warning. the tally in the tally fluctuation chart bin did not pass 1 of the 10 statistical checks.

SKIP 54 LINES IN OUTPUT

```

1tally 8      nps = 104000
tally type 8      pulse height distribution.
tally for neutrons photons electrons
units number

```

cell 1

```

energy
1.0000E-03 1.88654E-02 0.0224
1.8191E+00 1.50288E-02 0.0251
3.6372E+00 2.98077E-04 0.1796
5.4553E+00 9.61538E-05 0.3162
7.2734E+00 2.88462E-05 0.5773
9.0915E+00 9.61538E-06 1.0000
1.0910E+01 9.61538E-06 1.0000
1.12728E+01 0.00000E+00 0.0000
1.4546E+01 0.00000E+00 0.0000
1.6364E+01 0.00000E+00 0.0000
1.8182E+01 0.00000E+00 0.0000
2.0000E+01 0.00000E+00 0.0000
total 3.43365E-02 0.0164

```

```

analysis of the results in the tally fluctuation chart bin (tfc) for tally 8 with nps = 104000 print table 160
normed average tally per history = 3.43365E-02 unnormed average tally per history = 3.43365E-02
estimated tally relative error = 0.0164 estimated variance of the variance = 0.0003
relative error from zero tallies = 0.0164 relative error from nonzero scores = 0.0000
number of nonzero history tallies = 3571 efficiency for the nonzero tallies = 0.0343
history number of largest tally = 13 largest unnormalized history tally = 1.00000E+00
(largest tally)/(average tally) = 2.91235E+01 (largest tally)/(avg nonzero tally) = 1.00000E+00
(confidence interval shift)/mean = 0.0001 shifted confidence interval center = 3.43410E-02
if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
estimated quantities value at nps value(nps+1)/value(nps)-1.
mean 3.43365E-02 3.43458E-02 0.000270
relative error 1.64444E-02 1.64420E-02 -0.000145
variance of the variance 2.51529E-04 2.51451E-04 -0.000310
shifted center 3.43410E-02 3.43410E-02 0.000000
figure of merit 4.66157E+02 4.66292E+02 0.000290
the 100 largest history tallies appear to have a maximum value of about 1.00000E+00
the large score tail of the empirical history score probability density function appears to have no unsampled regions.
=====
results of 10 statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 8
tfc bin --mean-- -----relative error----- ----variance of the variance---- --figure of merit-- -pdf-
behavior value decrease decrease rate value decrease behavior value behavior slope
desired random <0.10 yes 1/sqrt(nps) <0.10 yes decrease rate constant random >3.00

```

CHAPTER 5
DEMO

```

observed random 0.02 yes yes 0.00 yes yes constant random 10.00
passed? yes yes yes yes yes yes yes
=====

```

this tally meets the statistical criteria used to form confidence intervals: check the tally fluctuation chart to verify.
the results in other bins associated with this tally may not meet these statistical criteria.
estimated asymmetric confidence interval(1,2,3 sigma): 3.3776E-02 to 3.4906E-02; 3.3212E-02 to 3.5470E-02; 3.2647E-02 to 3.6035E-02
estimated symmetric confidence interval(1,2,3 sigma): 3.3772E-02 to 3.4901E-02; 3.3207E-02 to 3.5466E-02; 3.2643E-02 to 3.6030E-02
fom = (histories/minute)*(f(x) signal-to-noise ratio)**2 = (1.311E+04)*(1.886E-01)**2 = (1.311E+04)*(3.556E-02) = 4.662E+02

```

1 some tally scores were not made for various reasons:
      beyond last bin not in
      tally angle energy time user
      2 0 93547 0 0
      12 0 93547 0 0
      22 0 93547 0 0
      62 0 31134 0 0

```

1status of the statistical checks used to form confidence intervals for the mean for each tally bin
tally result of statistical checks for the tfc bin (the first check not passed is listed) and error magnitude check for all bins
2 missed 3 of 10 tfc bin checks: the variance of the variance does not monotonically decrease over the last half of problem
passed all bin error check: 36 tally bins all have relative errors less than 0.10 with no zero bins
12 missed 3 of 10 tfc bin checks: the variance of the variance does not monotonically decrease over the last half of problem
passed all bin error check: 18 tally bins all have relative errors less than 0.10 with no zero bins
22 missed 3 of 10 tfc bin checks: the variance of the variance does not monotonically decrease over the last half of problem
passed all bin error check: 42 tally bins all have relative errors less than 0.10 with no zero bins
62 missed 1 of 10 tfc bin checks: there is insufficient tfc bin tally information to estimate the large tally slope reliably
passed all bin error check: 30 tally bins all have relative errors less than 0.10 with no zero bins
8 passed the 10 statistical checks for the tally fluctuation chart bin result
missed all bin error check: 13 tally bins had 5 bins with zeros and 5 bins with relative errors exceeding 0.10
the 10 statistical checks are only for the tally fluctuation chart bin and do not apply to other tally bins.
the tally bins with zeros may or may not be correct: compare the source, cutoffs, multipliers, et cetera with the tally bins.
warning. 4 of the 5 tally fluctuation chart bins did not pass all 10 statistical checks.
warning. 1 of the 5 tallies had bins with relative errors greater than recommended.
1tally fluctuation charts

```

      tally 2 tally 12 tally 22
      nps mean error vov slope fom mean error vov slope fom error vov slope fom
      8000 5.3351E-03 0.0855 0.0075 0.0 281 5.6745E-03 0.0580 0.0033 0.0 610 5.3351E-03 0.0855 0.0075 0.0 281
      16000 5.3653E-03 0.0605 0.0039 0.0 254 5.6055E-03 0.0416 0.0020 3.2 537 5.3658E-03 0.0605 0.0039 0.0 254

```


CHAPTER 5
TEST1

II. TEST1 PROBLEM AND OUTPUT

TEST1 defines a disk of concrete 100 cm thick, with a 75-cm radius. A 14.19 MeV neutron source is incident at a point in the center of a face of the disk and normal to it. Several neutron and photon tallies are made on surface 18 and in cell 17. There is no energy cutoff and the simple physics treatment that includes implicit capture is used for photons with energy greater than 0.001 MeV.

The disk is divided into 16 slabs, each 6.25 cm thick, as seen in Fig. 5.1. The neutron importance of each slab, or cell, varies from 0 in cell 1 to 32 in cell 17. Photon importances are set equal to neutron importances. The problem ran 10,000 particles and the tally means, errors, and *FOMs* shown in the tally fluctuation charts seem to be stable.

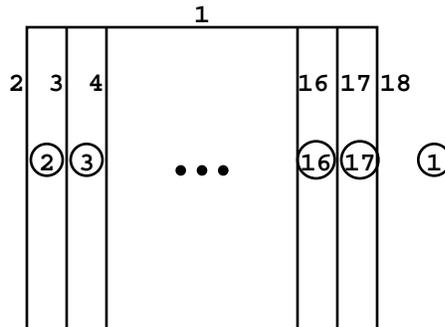


Figure 5.1

The weight window generator was used to generate a better importance function for subsequent runs. The resulting cards are printed at the end of the TEST1 output file and can be copied into an input file to be run a second time. Generation of weight windows did not affect the results of TEST1 but did slow down the calculation by 14%. When the importances in TEST1 were replaced by the generated weight windows (WWP and WWN cards), the problem took 14.27 minutes to run 10000 particles vs 10.01 minutes for TEST1. However, the photon *FOMs* increased by a factor of 2 to 3 and the errors decreased by half, while the means appeared to stay stable. The neutron means, errors, and *FOMs* stayed approximately the same, indicating that they were already well chosen to optimize tally 12.

Following is a partial output from TEST1. The symbol **X** appearing left of the table title indicates that table does not appear unless the PRINT option or card is used. If **Nn**, where *n* is an integer, appears before an item on a page or below a column, that item is explained or discussed in Note **Nn** in the text following the output.

CHAPTER 5
TEST1

```

N1 1mcnp      version 4b      1d=02/04/97      02/13/97 15:59:43
*****
N2 i=test1 outp=tst1.4bo      probid = 02/13/97 15:59:43
*****
N3 1- test1: 100 cm thick concrete disk with 15 splitting surfaces
2- c
3- 1 0 1 : -2 : 18 imp:n,p=0
4- 2 1 -2.2505 -1 -3 2 imp:n,p=1
5- 3 1 -2.2505 -1 -4 3 imp:n,p=1
6- 4 1 -2.2505 -1 -5 4 imp:n,p=1
7- 5 1 -2.2505 -1 -6 5 imp:n,p=1
8- 6 1 -2.2505 -1 -7 6 imp:n,p=1
9- 7 1 -2.2505 -1 -8 7 imp:n,p=1
10- 8 1 -2.2505 -1 -9 8 imp:n,p=2
11- 9 1 -2.2505 -1 -10 9 imp:n,p=2
12- 10 1 -2.2505 -1 -11 10 imp:n,p=2
13- 11 1 -2.2505 -1 -12 11 imp:n,p=4
14- 12 1 -2.2505 -1 -13 12 imp:n,p=4
15- 13 1 -2.2505 -1 -14 13 imp:n,p=4
16- 14 1 -2.2505 -1 -15 14 imp:n,p=8
17- 15 1 -2.2505 -1 -16 15 imp:n,p=8
18- 16 1 -2.2505 -1 -17 16 imp:n,p=16
19- 17 1 -2.2505 -1 -18 17 imp:n,p=32
20-
21- 1 cy 75
22- 2 py 0
23- 3 py 6.25
24- 4 py 12.5
25- 5 py 18.75
26- 6 py 25.
27- 7 py 31.25
28- 8 py 37.5
29- 9 py 43.75
30- 10 py 50.
31- 11 py 56.25
32- 12 py 62.5
33- 13 py 68.75

```

CHAPTER 5
TEST1

```

34- 14 py 75.
35- 15 py 81.25
36- 16 py 87.5
37- 17 py 93.75
38- 18 py 100.
39-
40- mode n p
41- c the following is Los alamos concrete
42- m1 1001.60c 8.47636e-2
43- 8016.60c 6.04086e-1
44- 11023.60c 9.47250e-3
45- 12000.60c 2.99826e-3
46- 13027.60c 2.48344e-2
47- 14000.60c 2.41860e-1
48- 19000.60c 6.85513e-3
49- 20000.60c 2.04808e-2
50- 26054.60c 2.74322e-4
51- 26056.60c 4.26455e-3
52- 26057.60c 9.76401e-5
53- 26058.60c 1.30187e-5
54- sdef pos=0 0 0 cel=2 wgt=1 vec=0 1 0 sur=2 dir=1 erg=14.19
55- pwt 0 -10 -9 -8 -7 -6 -5 -4 -3 -2 -1.7 -1.4 -1 -.7 -.4 -.3 -.2
56- f1:p 18
57- f11:n 18
58- fc12 optimize weight window generator on tally 12
59- f12:p 18
60- e12 20
61- wwg 12 2 .5 0 1e8 0
62- f6:n,p 17
63- e6 .00001 .0001 .001 .01 .05 .1 .5 1 13i 15 20
64- f16:n 17
65- f26:p 17
66- f34:n 17
67- fm34 -1 1 1 1 -4
68- e0 .0001 .001 .01 .05 .1 .5 1 13i 15 20
69- phys:n 15 0
N4
N5
N6

```

70- phys:p .001
 71- nps 10000
 72- print

print table 10

X 1source
 N7 values of defaulted or explicitly defined source variables

cel	2.0000E+00	
sur	2.0000E+00	
erg	1.4190E+01	
tme	0.0000E+00	
dir	1.0000E+00	
pos	0.0000E+00	0.0000E+00 0.0000E+00
x	0.0000E+00	
y	0.0000E+00	
z	0.0000E+00	
rad	0.0000E+00	
ext	0.0000E+00	
axs	0.0000E+00	0.0000E+00 0.0000E+00
vec	0.0000E+00	1.0000E+00 0.0000E+00
ccc	0.0000E+00	
nrm	1.0000E+00	
ara	0.0000E+00	
wgt	1.0000E+00	
eff	1.0000E-02	
par	0.0000E+00	

order of sampling source variables.

cel sur pos vec dir erg tme

print table 30

X 1tally 11
 N8 tally type 1 number of particles crossing a surface.

tally for neutrons

N9 warning. energy bin limits adjusted for tally 11

surfaces 18

N10 energy bins

0.00000E+00	to	1.00000E-04	mev
1.00000E-04	to	1.00000E-03	mev
1.00000E-03	to	1.00000E-02	mev
1.00000E-02	to	5.00000E-02	mev

CHAPTER 5
TEST1

```

5.00000E-02 to 1.00000E-01 mev
1.00000E-01 to 5.00000E-01 mev
5.00000E-01 to 1.00000E+00 mev
1.00000E+00 to 2.00000E+00 mev
2.00000E+00 to 3.00000E+00 mev
3.00000E+00 to 4.00000E+00 mev
4.00000E+00 to 5.00000E+00 mev
5.00000E+00 to 6.00000E+00 mev
6.00000E+00 to 7.00000E+00 mev
7.00000E+00 to 8.00000E+00 mev
8.00000E+00 to 9.00000E+00 mev
9.00000E+00 to 1.00000E+01 mev
1.00000E+01 to 1.10000E+01 mev
1.10000E+01 to 1.20000E+01 mev
1.20000E+01 to 1.30000E+01 mev
1.30000E+01 to 1.40000E+01 mev
1.40000E+01 to 1.50000E+01 mev
total bin

```

SKIP 158 LINES IN OUTPUT

X lmaterial composition

material

number	component nuclide, atom fraction
1	1001, 8.47636E-02 8016, 6.04086E-01 11023, 9.47250E-03 12000, 2.99826E-03
	13027, 2.48344E-02 14000, 2.41860E-01 19000, 6.85513E-03 20000, 2.04808E-02
	26054, 2.74322E-04 26056, 4.26455E-03 26057, 9.76401E-05 26058, 1.30187E-05

print table 40

material

number	component nuclide, mass fraction
1	1001, 4.53200E-03 8016, 5.12597E-01 11023, 1.15530E-02 12000, 3.86599E-03
	13027, 3.55481E-02 14000, 3.60364E-01 19000, 1.42190E-02 20000, 4.35460E-02
	26054, 7.84989E-04 26056, 1.26547E-02 26057, 2.94921E-04 26058, 4.00121E-05

print table 50

X lcell volumes and masses

N11

cell	atom	gram	density	atom	density	input volume	calculated volume	mass	pieces	reason volume
1	1	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0	not calculated
2	2	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	1.10447E+05	2.48560E+05	2.48560E+05	1	infinite
3	3	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	1.10447E+05	2.48560E+05	2.48560E+05	1	

CHAPTER 5
TEST1

4	4	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
5	5	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
6	6	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
7	7	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
8	8	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
9	9	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
10	10	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
11	11	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
12	12	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
13	13	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
14	14	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
15	15	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
16	16	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1
17	17	7.18983E-02	2.25050E+00	0.00000E+00	1.10447E+05	2.48560E+05	1

X 1surface areas

print table 50

	surface	input area	calculated area	reason area not calculated
1	1	0.00000E+00	4.71239E+04	
2	2	0.00000E+00	1.76715E+04	
3	3	0.00000E+00	1.76715E+04	
4	4	0.00000E+00	1.76715E+04	
5	5	0.00000E+00	1.76715E+04	
6	6	0.00000E+00	1.76715E+04	
7	7	0.00000E+00	1.76715E+04	
8	8	0.00000E+00	1.76715E+04	
9	9	0.00000E+00	1.76715E+04	
10	10	0.00000E+00	1.76715E+04	
11	11	0.00000E+00	1.76715E+04	
12	12	0.00000E+00	1.76715E+04	
13	13	0.00000E+00	1.76715E+04	
14	14	0.00000E+00	1.76715E+04	
15	15	0.00000E+00	1.76715E+04	
16	16	0.00000E+00	1.76715E+04	
17	17	0.00000E+00	1.76715E+04	
18	18	0.00000E+00	1.76715E+04	

X 1cells

print table 60

CHAPTER 5
TEST1

cell	mat	atom	gram	density	volume	mass	pieces	neutron	photon	photon	wt
		density	density					importance	importance	generation	
1	0	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0	0.0000E+00	0.0000E+00	0.000E+00	0.000E+00
2	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	1.0000E+00	1.0000E+00	-1.000E+01	-1.000E+01
3	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	1.0000E+00	1.0000E+00	-9.000E+00	-9.000E+00
4	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	1.0000E+00	1.0000E+00	-8.000E+00	-8.000E+00
5	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	1.0000E+00	1.0000E+00	-7.000E+00	-7.000E+00
6	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	1.0000E+00	1.0000E+00	-6.000E+00	-6.000E+00
7	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	1.0000E+00	1.0000E+00	-5.000E+00	-5.000E+00
8	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	2.0000E+00	2.0000E+00	-4.000E+00	-4.000E+00
9	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	2.0000E+00	2.0000E+00	-3.000E+00	-3.000E+00
10	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	2.0000E+00	2.0000E+00	-2.000E+00	-2.000E+00
11	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	4.0000E+00	4.0000E+00	-1.700E+00	-1.700E+00
12	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	4.0000E+00	4.0000E+00	-1.400E+00	-1.400E+00
13	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	4.0000E+00	4.0000E+00	-1.000E+00	-1.000E+00
14	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	8.0000E+00	8.0000E+00	-7.000E-01	-7.000E-01
15	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	8.0000E+00	8.0000E+00	-4.000E-01	-4.000E-01
16	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	1.6000E+01	1.6000E+01	-3.000E-01	-3.000E-01
17	1	7.18983E-02	2.25050E+00	1.10447E+05	2.48560E+05	2.48560E+05	1	3.2000E+01	3.2000E+01	-2.000E-01	-2.000E-01

N12 total

X 1surfaces

N13	surface	trans	type	surface	coefficients
1	1	cy		7.5000000E+01	
2	2	py		0.0000000E+00	
3	3	py		6.2500000E+00	
4	4	py		1.2500000E+01	
5	5	py		1.8750000E+01	
6	6	py		2.5000000E+01	
7	7	py		3.1250000E+01	
8	8	py		3.7500000E+01	
9	9	py		4.3750000E+01	
10	10	py		5.0000000E+01	
11	11	py		5.6250000E+01	
12	12	py		6.2500000E+01	
13	13	py		6.8750000E+01	
14	14	py		7.5000000E+01	

print table 70

1.76715E+06 3.97696E+06

CHAPTER 5
TEST1

15 15 py 8.1250000E+01
 16 16 py 8.7500000E+01
 17 17 py 9.3750000E+01
 18 18 py 1.0000000E+02

1 cell temperatures in mev for the free-gas thermal neutron treatment. print table 72
 N14 all non-zero importance cells with materials have a temperature for thermal neutrons of 2.5300E-08 mev.
 minimum source weight = 1.0000E+00 maximum source weight = 1.0000E+00

3 warning messages so far. print table 98

N15 1physical constants

name	value	description
huge	1.0000000000000E+37	infinity
pie	3.1415926535898E+00	pi
euler	5.7721566490153E-01	euler constant
avogad	6.0220434469282E+23	avogadro number (molecules/mole)
aneut	1.0086649670000E+00	neutron mass (amu)
avgdn	5.9703109000000E-01	avogadro number/neutron mass (1.e-24*molecules/mole/amu)
slite	2.9979250000000E+02	speed of light (cm/shake)
planck	4.1357320000000E-13	planck constant (mev shake)
fscon	1.3703930000000E+02	inverse fine structure constant h*c/(2*pi*e**2)
gpt(1)	9.3958000000000E+02	neutron mass (mev)
gpt(3)	5.1100800000000E-01	electron mass (mev)
fission q-values:	nuclide	q(mev) nuclide q(mev)
	90232	171.91 91233 175.57
	92233	180.84 92234 179.45
	92235	180.88 92236 179.50
	92237	180.40 92238 181.31
	92239	180.40 92240 180.40
	93237	183.67 94238 186.65
	94239	189.44 94240 186.36
	94241	188.99 94242 185.98
	94243	187.48 95241 190.83
	95242	190.54 95243 190.25
	96242	190.49 96244 190.49
	other	180.00

the following compilation options were used:
 pointer

CHAPTER 5
TEST1

cheap
unix
sun
plot
mcplot
gkssim
xlib

default datapath: /usr/local/codes/mcnp/xsdir

N16 1cross-section tables

table	length			print table 100
		tables from file endf602		
1001.60c	2322	1-h-1 from endf-vi.1	mat 125	11/25/93
8016.60c	50346	8-o-16 from endf/b-vi	mat 8	11/25/93
11023.60c	48471	11-na-23 from endf/b-vi.1		11/25/93
12000.60c	52785	12-mg-nat from endf/b-vi	mat1125	11/25/93
13027.60c	49407	13-al-27 from endf/b-vi	mat1200	11/25/93
14000.60c	100118	14-si-nat from endf/b-vi	mat1325	11/25/93
19000.60c	23390	19-k-nat from endf/b-vi	mat1400	11/25/93
20000.60c	70573	20-ca-nat from endf/b-vi	mat1900	11/25/93
26054.60c	120443	endf/b-vi.1 fe54a	mat2000	11/25/93
26056.60c	172174	endf/b-vi.1 fe56a	mat2625	11/25/93
26057.60c	133044	endf/b-vi.1 fe57a	mat2631	11/25/93
26058.60c	92535	endf/b-vi.1 fe58a	mat2634	11/25/93
		tables from file mcplib022	mat2637	11/25/93
1000.02p	623			01/15/93
8000.02p	623			01/15/93
11000.02p	635			01/15/93
12000.02p	643			01/15/93
13000.02p	643			01/15/93
14000.02p	643			01/15/93
19000.02p	643			01/15/93
20000.02p	651			01/15/93
26000.02p	651			01/15/93
total	921363			01/15/93

N17 any neutrons with energy greater than emax = 1.50000E+01 from the source or from a collision will be resampled.
 N18 neutron cross sections outside the range from 0.0000E+00 to 1.5000E+01 mev are expunged.

CHAPTER 5
TEST1

```

3 warning messages so far.
X 1 starting mcrun.      dynamic storage = 1030356 words,      4121424 bytes.      cp0 = 0.46      print table 110
N21 test1: 100 cm thick concrete disk with 15 splitting surfaces
nps  x      y      z      cell  surf  u      v      w      energy  weight  time
1  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
2  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
3  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
4  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
5  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
6  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
7  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
8  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
9  0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
10 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
11 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
12 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
13 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
14 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
15 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
16 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
17 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
18 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
19 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
20 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
21 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
22 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
23 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
24 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
25 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
26 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
27 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
28 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
29 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
30 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
31 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00
32 0.000E+00  0.000E+00  0.000E+00  2      2  0.000E+00  1.000E+00  0.000E+00  1.419E+01  1.000E+00  0.000E+00

```

CHAPTER 5
TEST1

33	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
34	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
35	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
36	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
37	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
38	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
39	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
40	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
41	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
42	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
43	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
44	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
45	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
46	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
47	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
48	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
49	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00
50	0.000E+00	0.000E+00	0.000E+00	2	2	0.000E+00	1.000E+00	0.000E+00	1.419E+01	1.000E+00	0.000E+00

1problem summary

run terminated when 10000 particle histories were done.

+

test1: 100 cm thick concrete disk with 15 splitting surfaces

02/13/97 16:10:54

probid = 02/13/97 15:59:43

N22 neutron creation	tracks	weight (per source particle)	energy (per source particle)	neutron loss	tracks	weight (per source particle)	energy (per source particle)
source	10000	1.000E+00	1.4190E+01	N25 escape	13482	4.0556E-01	9.9248E-01
weight window	0	0.		energy cutoff	0	0.	0.
N23 cell importance	36082	2.5362E-01	0.	time cutoff	0	0.	0.
N24 weight cutoff	0	8.0569E-02	9.3488E-02	weight window	0	0.	0.
energy importance	0	0.	5.4038E-02	N26 cell importance	24177	2.5496E-01	1.0412E-01
dextran	0	0.	0.	N27 weight cutoff	8671	8.0526E-02	5.5391E-02
forced collisions	0	0.	0.	energy importance	0	0.	0.
exp. transform	0	0.	0.	dextran	0	0.	0.
upscattering	0	0.	1.0907E-07	forced collisions	0	0.	0.
				exp. transform	0	0.	0.
				N28 downscattering	0	0.	8.2666E+00

CHAPTER 5
TEST1

source particles per minute	9.9930E+02	dynamic storage	1030356 words,	4121424 bytes.					
random numbers generated	20867675	most random numbers used was	37587 in history	3230					
range of sampled source weights = 1.0000E+00 to 1.0000E+00									
neutron activity in each cell									
	tracks entering	population	collisions	collisions * weight (per history)	number weighted energy	flux weighted energy	average track weight (relative)	average track mfp (cm)	print table 126
cell									
2	18257	10457	42961	2.8443E+00	4.4263E-03	6.7892E+00	7.2993E-01	6.4554E+00	
3	21513	9067	63792	3.8399E+00	1.8345E-03	4.4278E+00	6.5046E-01	5.5122E+00	
4	22078	8031	73863	4.1689E+00	1.0127E-03	3.1768E+00	6.0256E-01	4.9058E+00	
5	20923	7335	75787	4.0886E+00	6.3896E-04	2.4111E+00	5.6843E-01	4.5159E+00	
6	18561	7000	70651	3.6338E+00	4.2237E-04	1.8462E+00	5.3856E-01	4.1697E+00	
7	16003	7762	62093	3.0841E+00	3.1217E-04	1.4945E+00	5.1739E-01	3.9364E+00	
8	26275	13111	105645	2.5470E+00	2.3612E-04	1.2193E+00	4.9915E-01	3.7430E+00	
9	20497	8758	84318	1.9764E+00	1.9107E-04	1.0345E+00	4.8251E-01	3.6188E+00	
10	15914	8069	66245	1.5037E+00	1.5616E-04	8.6714E-01	4.6760E-01	3.5029E+00	
11	24438	12462	102688	1.1504E+00	1.3173E-04	7.3767E-01	4.5920E-01	3.4101E+00	
12	18413	7802	77343	8.5188E-01	1.1468E-04	6.3175E-01	4.5117E-01	3.3360E+00	
13	13652	6979	57670	6.2376E-01	9.3815E-05	5.4480E-01	4.4107E-01	3.2364E+00	
14	19511	10745	83464	4.4144E-01	8.0298E-05	4.8528E-01	4.3075E-01	3.1768E+00	
15	13092	7376	55798	2.9155E-01	7.3913E-05	4.6635E-01	4.2559E-01	3.1480E+00	
16	15838	11236	68401	1.7714E-01	7.8556E-05	4.9248E-01	4.2155E-01	3.1815E+00	
17	14378	12036	60291	7.7956E-02	9.6081E-05	5.8850E-01	4.1987E-01	3.2946E+00	
total	299343	148226	1151010	3.1301E+01					
	N35	N36	N37	N38	N39	N40	N41	N42	
1photon activity in each cell									
cell	tracks entering	population	collisions	collisions * weight (per history)	number weighted energy	flux weighted energy	average track weight (relative)	average track mfp (cm)	print table 126
2	691	1509	3631	2.1554E+00	1.6879E+00	1.6879E+00	7.6916E+00	7.4112E+00	
3	1133	1735	5014	2.7456E+00	1.5621E+00	1.5621E+00	7.1173E+00	7.1210E+00	
4	1319	1732	5326	2.6601E+00	1.4957E+00	1.4957E+00	6.4585E+00	6.8997E+00	
5	1325	1714	5196	2.4113E+00	1.4173E+00	1.4173E+00	5.9083E+00	6.7070E+00	
6	1277	1590	4820	1.9845E+00	1.3388E+00	1.3388E+00	5.1741E+00	6.5949E+00	
7	1141	1563	4333	1.4930E+00	1.4067E+00	1.4067E+00	4.3897E+00	6.6996E+00	
8	2109	2949	8006	1.1748E+00	1.4681E+00	1.4681E+00	3.6918E+00	6.8162E+00	

CHAPTER 5
TEST1

9	9	1960	2583	7308	9.1916E-01	1.4071E+00	1.4071E+00	3.0403E+00	6.6675E+00
10	10	1881	2648	7007	6.9987E-01	1.3596E+00	1.3596E+00	2.3534E+00	6.5497E+00
11	11	3540	4947	12494	5.1591E-01	1.3369E+00	1.3369E+00	1.8982E+00	6.5215E+00
12	12	3263	4335	11268	3.6525E-01	1.3753E+00	1.3753E+00	1.5465E+00	6.6581E+00
13	13	3096	4400	10783	2.9257E-01	1.3204E+00	1.3204E+00	1.2595E+00	6.5156E+00
14	14	5554	8147	19259	2.1047E-01	1.3193E+00	1.3193E+00	9.7164E-01	6.4714E+00
15	15	4509	7476	16592	1.3866E-01	1.4002E+00	1.4002E+00	7.3585E-01	6.7201E+00
16	16	7120	12418	25399	9.0790E-02	1.4084E+00	1.4084E+00	6.2132E-01	6.7527E+00
17	17	8902	16070	27916	4.8459E-02	1.4943E+00	1.4943E+00	5.9440E-01	7.0195E+00
	total	48820	75816	174352	1.7906E+01				

N43

X 1neutron weight balance in each cell -- external events

N44	cell	entering	source	energy	time	exiting	total	print table 130	
				cutoff	cutoff			exponential	total
								transform	
2	2	4.9648E-01	1.0000E+00	0.0000E+00	0.0000E+00	-1.3736E+00	1.2292E-01		
3	3	1.5200E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.4183E+00	1.0170E-01		
4	4	1.4115E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.3297E+00	8.1857E-02		
5	5	1.2426E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.1745E+00	6.8030E-02		
6	6	1.0381E+00	0.0000E+00	0.0000E+00	0.0000E+00	-9.8653E-01	5.1615E-02		
7	7	8.5306E-01	0.0000E+00	0.0000E+00	0.0000E+00	-8.1073E-01	4.2332E-02		
8	8	6.7345E-01	0.0000E+00	0.0000E+00	0.0000E+00	-6.3977E-01	3.3687E-02		
9	9	5.0594E-01	0.0000E+00	0.0000E+00	0.0000E+00	-4.7989E-01	2.6046E-02		
10	10	3.8113E-01	0.0000E+00	0.0000E+00	0.0000E+00	-3.6052E-01	2.0607E-02		
11	11	2.8477E-01	0.0000E+00	0.0000E+00	0.0000E+00	-2.7039E-01	1.4382E-02		
12	12	2.1039E-01	0.0000E+00	0.0000E+00	0.0000E+00	-1.9959E-01	1.0802E-02		
13	13	1.5234E-01	0.0000E+00	0.0000E+00	0.0000E+00	-1.4439E-01	7.9462E-03		
14	14	1.0632E-01	0.0000E+00	0.0000E+00	0.0000E+00	-1.0062E-01	5.6998E-03		
15	15	7.0354E-02	0.0000E+00	0.0000E+00	0.0000E+00	-6.6782E-02	3.5717E-03		
16	16	4.2100E-02	0.0000E+00	0.0000E+00	0.0000E+00	-3.9890E-02	2.2107E-03		
17	17	1.9022E-02	0.0000E+00	0.0000E+00	0.0000E+00	-1.7990E-02	1.0320E-03		
	total	9.0076E+00	1.0000E+00	0.0000E+00	0.0000E+00	-9.4132E+00	5.9444E-01		

X 1neutron weight balance in each cell -- variance reduction events

cell	weight	cell	weight	energy	dxtran	forced	exponential	total
	window	importance	cutoff	importance	collision	transform		
2	2	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.1664E-04
3	3	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	6.4170E-05

4	4	0.0000E+00	0.0000E+00	2.7717E-04	0.0000E+00	0.0000E+00	0.0000E+00	2.7717E-04
5	5	0.0000E+00	0.0000E+00	2.0517E-05	0.0000E+00	0.0000E+00	0.0000E+00	2.0517E-05
6	6	0.0000E+00	0.0000E+00	7.2782E-04	0.0000E+00	0.0000E+00	0.0000E+00	7.2782E-04
7	7	0.0000E+00	-5.8595E-04	-1.9900E-04	0.0000E+00	0.0000E+00	0.0000E+00	-7.8495E-04
8	8	0.0000E+00	0.0000E+00	1.2173E-04	0.0000E+00	0.0000E+00	0.0000E+00	1.2173E-04
9	9	0.0000E+00	0.0000E+00	-2.7806E-04	0.0000E+00	0.0000E+00	0.0000E+00	-2.7806E-04
10	10	0.0000E+00	-9.9061E-04	-2.8246E-04	0.0000E+00	0.0000E+00	0.0000E+00	-1.2731E-03
11	11	0.0000E+00	0.0000E+00	-6.1295E-05	0.0000E+00	0.0000E+00	0.0000E+00	-6.1295E-05
12	12	0.0000E+00	0.0000E+00	-2.2695E-04	0.0000E+00	0.0000E+00	0.0000E+00	-2.2695E-04
13	13	0.0000E+00	5.1937E-05	-1.8192E-04	0.0000E+00	0.0000E+00	0.0000E+00	-1.2998E-04
14	14	0.0000E+00	0.0000E+00	-2.0492E-05	0.0000E+00	0.0000E+00	0.0000E+00	-2.0492E-05
15	15	0.0000E+00	1.0933E-04	1.1295E-04	0.0000E+00	0.0000E+00	0.0000E+00	2.2227E-04
16	16	0.0000E+00	7.1878E-05	8.2692E-05	0.0000E+00	0.0000E+00	0.0000E+00	1.5457E-04
17	17	0.0000E+00	0.0000E+00	2.7907E-06	0.0000E+00	0.0000E+00	0.0000E+00	2.7907E-06
total		0.0000E+00	-1.3434E-03	4.3016E-05	0.0000E+00	0.0000E+00	0.0000E+00	-1.3004E-03

print table 130

X 1neutron weight balance in each cell -- physical events

cell	(n, xn)	fission	capture	loss to (n, xn)	loss to fission	total
2	2	1.2693E-02	-1.2915E-01	-6.3465E-03	0.0000E+00	-1.2280E-01
3	3	7.3045E-03	-1.0542E-01	-3.6522E-03	0.0000E+00	-1.0177E-01
4	4	4.5440E-03	-8.4406E-02	-2.2720E-03	0.0000E+00	-8.2134E-02
5	5	1.5039E-03	-6.8803E-02	-7.5196E-04	0.0000E+00	-6.8051E-02
6	6	1.0648E-03	-5.2875E-02	-5.3242E-04	0.0000E+00	-5.2342E-02
7	7	1.2633E-03	-4.2179E-02	-6.3164E-04	0.0000E+00	-4.1547E-02
8	8	7.5817E-04	-3.4188E-02	-3.7909E-02	0.0000E+00	-3.3809E-02
9	9	3.8982E-04	-2.5963E-02	-1.9491E-04	0.0000E+00	-2.5768E-02
10	10	1.6792E-04	-1.9417E-02	-8.3959E-05	0.0000E+00	-1.9333E-02
11	11	2.0897E-04	-1.4426E-02	-1.0449E-04	0.0000E+00	-1.4321E-02
12	12	9.4443E-05	-1.0622E-02	-4.7221E-05	0.0000E+00	-1.0575E-02
13	13	0.0000E+00	-7.8162E-03	0.0000E+00	0.0000E+00	-7.8162E-03
14	14	2.5891E-05	-5.6923E-03	-1.2945E-05	0.0000E+00	-5.6793E-03
15	15	3.3405E-05	-3.8107E-03	-1.6703E-05	0.0000E+00	-3.7940E-03
16	16	7.2190E-06	-2.3689E-03	-3.6095E-06	0.0000E+00	-2.3653E-03
17	17	1.8857E-06	-1.0357E-03	-9.4287E-07	0.0000E+00	-1.0348E-03
total		3.0061E-02	-6.0817E-01	-1.5031E-02	0.0000E+00	-5.9314E-01

print table 130

X 1photon weight balance in each cell -- external events

CHAPTER 5
TEST1

cell	entering	source	energy	time	exiting	total
2	4.8516E-01	0.0000E+00	0.0000E+00	0.0000E+00	-8.1201E-01	-3.2685E-01
3	7.6140E-01	0.0000E+00	0.0000E+00	0.0000E+00	-9.6061E-01	-1.9922E-01
4	8.3995E-01	0.0000E+00	0.0000E+00	0.0000E+00	-8.9224E-01	-5.2290E-02
5	7.7779E-01	0.0000E+00	0.0000E+00	0.0000E+00	-8.0730E-01	-2.9506E-02
6	6.6224E-01	0.0000E+00	0.0000E+00	0.0000E+00	-6.4857E-01	1.3670E-02
7	5.0715E-01	0.0000E+00	0.0000E+00	0.0000E+00	-4.9910E-01	8.0464E-03
8	3.9454E-01	0.0000E+00	0.0000E+00	0.0000E+00	-3.9118E-01	3.3545E-03
9	3.1255E-01	0.0000E+00	0.0000E+00	0.0000E+00	-3.0172E-01	1.0835E-02
10	2.4301E-01	0.0000E+00	0.0000E+00	0.0000E+00	-2.2835E-01	1.4657E-02
11	1.8177E-01	0.0000E+00	0.0000E+00	0.0000E+00	-1.7504E-01	6.7328E-03
12	1.3598E-01	0.0000E+00	0.0000E+00	0.0000E+00	-1.2778E-01	8.2032E-03
13	1.0184E-01	0.0000E+00	0.0000E+00	0.0000E+00	-9.6129E-02	5.7106E-03
14	7.5484E-02	0.0000E+00	0.0000E+00	0.0000E+00	-6.9003E-02	6.4815E-03
15	5.1504E-02	0.0000E+00	0.0000E+00	0.0000E+00	-4.7170E-02	4.3340E-03
16	3.4264E-02	0.0000E+00	0.0000E+00	0.0000E+00	-3.1872E-02	2.3917E-03
17	1.9723E-02	0.0000E+00	0.0000E+00	0.0000E+00	-1.8495E-02	1.2287E-03
total	5.5844E+00	0.0000E+00	0.0000E+00	0.0000E+00	-6.1066E+00	-5.2221E-01

cell	weight	variance	reduction	events	dxtran	forced	exponential	total
2	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-5.4943E-04
3	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-4.9676E-04
4	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-2.4727E-04
5	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	3.6802E-04
6	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-7.2968E-04
7	0.0000E+00	9.1029E-04	7.9096E-04	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	1.7013E-03
8	0.0000E+00	0.0000E+00	2.7698E-04	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	2.7698E-04
9	0.0000E+00	0.0000E+00	2.3362E-04	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	2.3362E-04
10	0.0000E+00	-1.6273E-03	-5.0596E-04	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-2.1333E-03
11	0.0000E+00	0.0000E+00	2.8628E-06	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	2.8628E-06
12	0.0000E+00	0.0000E+00	-7.3762E-07	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-7.3762E-07
13	0.0000E+00	1.1631E-03	-6.1774E-05	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	1.1013E-03
14	0.0000E+00	0.0000E+00	-2.2473E-04	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-2.2473E-04
15	0.0000E+00	-3.7494E-04	-1.4553E-04	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-5.2047E-04
16	0.0000E+00	-3.2247E-04	2.4992E-05	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-2.9748E-04

X 1photon weight balance in each cell -- variance reduction events print table 130

X 1photon weight balance in each cell -- physical events		bremsstrahlung		p-annihilation		electron x-rays		fluorescence		capture		pair production		total	
cell	neutrons	fraction	atom	collisions	total	collisions	* weight	weight lost	weight gain	weight gain	weight gain	weight gain	weight gain	weight gain	weight gain
	from	atom	fraction	total	total	total	to capture	to capture	by fission	by fission	by fission	by fission	by fission	by fission	by fission
17	0.0000E+00	0.0000E+00	1.1727E-05	1.1727E-05	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	1.1727E-05
total	0.0000E+00	-2.5140E-04	-1.2527E-03	-1.2527E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.5041E-03
print table 130															
2	4.6576E-01	1.4659E-01	5.6978E-02	5.6978E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	3.2740E-01
3	3.9580E-01	1.6493E-01	3.5395E-02	3.5395E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	1.9971E-01
4	2.7661E-01	1.2965E-01	3.3985E-02	3.3985E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	5.2537E-02
5	2.1966E-01	1.3030E-01	4.1378E-02	4.1378E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	2.9138E-02
6	1.5952E-01	9.1329E-02	2.3990E-02	2.3990E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.2941E-02
7	1.2292E-01	6.7725E-02	2.6644E-02	2.6644E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-9.7476E-03
8	9.6539E-02	5.9017E-02	1.4330E-02	1.4330E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-3.6315E-03
9	6.6856E-02	4.5890E-02	1.3764E-02	1.3764E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.1068E-02
10	4.6076E-02	3.1718E-02	1.4030E-02	1.4030E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.2524E-02
11	3.4487E-02	2.5950E-02	8.5937E-03	8.5937E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-6.7356E-03
12	2.6160E-02	1.8727E-02	3.7373E-03	3.7373E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-8.2025E-03
13	1.7870E-02	1.4456E-02	4.7095E-03	4.7095E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-6.8119E-03
14	1.2469E-02	9.8423E-03	2.8321E-03	2.8321E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-6.2567E-03
15	8.3203E-03	7.0913E-03	1.8918E-03	1.8918E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-3.8135E-03
16	5.1638E-03	4.9782E-03	1.4037E-03	1.4037E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-2.0942E-03
17	2.3419E-03	2.9959E-03	7.3502E-04	7.3502E-04	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	-1.2404E-03
total	1.9565E+00	9.5118E-01	2.8442E-01	2.8442E-01	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	5.2372E-01
print table 140															
X 1neutron activity of each nuclide in each cell, per source particle															
N45	cell	nuclides	atom	fraction	collisions	total	collisions	* weight	weight lost	weight gain	weight gain	weight gain	weight gain	weight gain	weight gain
2	2	1001.60c	8.4764E-02	8.4764E-02	10238	5.8823E-01	2.1463E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
		8016.60c	6.0409E-01	6.0409E-01	22092	1.5034E+00	6.1256E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
		11023.60c	9.4725E-03	9.4725E-03	472	3.1877E-02	1.1666E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
		12000.60c	2.9983E-03	2.9983E-03	132	8.8361E-03	4.5499E-04	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
		13027.60c	2.4834E-02	2.4834E-02	786	5.6188E-02	2.6371E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	3.4810E-04
		14000.60c	2.4186E-01	2.4186E-01	7892	5.6162E-01	5.0469E-02	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	5.5828E-03
		19000.60c	6.8551E-03	6.8551E-03	273	1.9088E-02	3.3639E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
		20000.60c	2.0481E-02	2.0481E-02	729	5.2650E-02	6.4792E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	6.9295E-05
		26054.60c	2.7432E-04	2.7432E-04	15	9.5659E-04	9.5529E-05	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
		26056.60c	4.2645E-03	4.2645E-03	329	2.1301E-02	1.0808E-03	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	3.4627E-04
		26057.60c	9.7640E-05	9.7640E-05	3	2.4055E-04	1.4269E-06	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00

CHAPTER 5
TEST1

SKIP 182 LINES IN OUTPUT											
cell	nuclides	atom	fraction	total collisions	* weight	collisions to capture	weight lost to capture	total from neutrons	weight from neutrons	avg photon energy	
2	2	1000.02p	8.4764E-02	19	1.2397E-02	4.0483E-08	1	1.0000E-03	2.2246E+00		
		8000.02p	6.0409E-01	1525	1.0126E+00	4.1995E-02	174	1.7400E-01	4.4156E+00		
		11000.02p	9.4725E-03	33	1.8835E-02	2.3731E-03	6	6.0000E-03	1.3193E+00		
		12000.02p	2.9983E-03	19	1.2555E-02	1.6985E-03	3	3.0000E-03	1.9604E+00		
		26058.60c	1.3019E-05	0	0.0000E+00	0.0000E+00	0	0.0000E+00	0.0000E+00		
17	17	1001.60c	8.4764E-02	23391	2.9615E-02	2.2226E-04	0	0.0000E+00	0.0000E+00		
		8016.60c	6.0409E-01	27172	3.5504E-02	7.1325E-05	0	0.0000E+00	0.0000E+00		
		11023.60c	9.4725E-03	535	7.3127E-04	3.9198E-05	0	0.0000E+00	0.0000E+00		
		12000.60c	2.9983E-03	135	1.7549E-04	2.5201E-06	0	0.0000E+00	0.0000E+00		
		13027.60c	2.4834E-02	545	7.1376E-04	4.2711E-05	0	0.0000E+00	0.0000E+00		
		14000.60c	2.4186E-01	6865	9.0969E-03	3.5049E-04	0	0.0000E+00	9.4287E-07		
		19000.60c	6.8551E-03	291	3.7207E-04	1.3238E-04	0	0.0000E+00	0.0000E+00		
		20000.60c	2.0481E-02	733	9.5058E-04	7.2605E-05	0	0.0000E+00	0.0000E+00		
		26054.60c	2.7432E-04	14	1.9907E-05	6.4056E-06	0	0.0000E+00	0.0000E+00		
		26056.60c	4.2645E-03	602	7.7008E-04	9.2959E-05	0	0.0000E+00	0.0000E+00		
		26057.60c	9.7640E-05	8	7.6245E-06	2.8950E-06	0	0.0000E+00	0.0000E+00		
		26058.60c	1.3019E-05	0	0.0000E+00	0.0000E+00	0	0.0000E+00	0.0000E+00		
	total			1151010	3.1301E+01	6.0817E-01	0	0.0000E+00	1.5031E-02		
	N46 total over all cells for each nuclide			total collisions	* weight	weight lost to capture	weight gain by fission	weight gain by (n, xn)			
		1001.60c		412466	9.8007E+00	5.5471E-02	0.0000E+00	0.0000E+00			
		8016.60c		535184	1.5203E+01	1.9884E-01	0.0000E+00	0.0000E+00			
		11023.60c		11044	3.3966E-01	1.2237E-02	0.0000E+00	1.6552E-04			
		12000.60c		2762	8.1928E-02	1.6257E-03	0.0000E+00	8.0808E-05			
		13027.60c		13195	4.4490E-01	1.9356E-02	0.0000E+00	5.0209E-04			
		14000.60c		144136	4.5354E+00	2.2184E-01	0.0000E+00	1.2518E-02			
		19000.60c		5560	1.5617E-01	3.5783E-02	0.0000E+00	6.6908E-05			
		20000.60c		15403	4.5555E-01	3.8880E-02	0.0000E+00	6.9295E-05			
		26054.60c		335	1.0480E-02	1.2463E-03	0.0000E+00	0.0000E+00			
		26056.60c		10793	2.6848E-01	2.2475E-02	0.0000E+00	1.5740E-03			
		26057.60c		117	3.4438E-03	3.7158E-04	0.0000E+00	5.4288E-05			
		26058.60c		15	7.2414E-04	4.7804E-05	0.0000E+00	0.0000E+00			
	X 1photon activity of each nuclide in each cell, per source particle			total collisions	* weight	weight lost to capture	total from neutrons	weight from neutrons	avg photon energy	print table 140	
		1000.02p	8.4764E-02	19	1.2397E-02	4.0483E-08	1	1.0000E-03	2.2246E+00		
		8000.02p	6.0409E-01	1525	1.0126E+00	4.1995E-02	174	1.7400E-01	4.4156E+00		
		11000.02p	9.4725E-03	33	1.8835E-02	2.3731E-03	6	6.0000E-03	1.3193E+00		
		12000.02p	2.9983E-03	19	1.2555E-02	1.6985E-03	3	3.0000E-03	1.9604E+00		

CHAPTER 5
TEST1

13000.02p	2.4834E-02	137	7.8305E-02	1.3221E-02	14	1.4000E-02	2.8510E+00
14000.02p	2.4186E-01	1401	8.0447E-01	1.5540E-01	233	2.3276E-01	2.6560E+00
19000.02p	6.8551E-03	64	2.7205E-02	1.0433E-02	8	8.0000E-03	2.8242E+00
20000.02p	2.0481E-02	306	1.4395E-01	6.1082E-02	16	1.6000E-02	2.2534E+00
26000.02p	2.7432E-04	8	3.5092E-03	5.4438E-04	1	1.0000E-03	1.8346E+00
26000.02p	4.2645E-03	114	3.9380E-02	2.5094E-02	10	9.9948E-03	3.3319E+00
26000.02p	9.7640E-05	3	1.4356E-03	1.2000E-03	0	0.0000E+00	0.0000E+00
26000.02p	1.3019E-05	2	7.4893E-04	4.0284E-04	0	0.0000E+00	0.0000E+00
SKIP 182 LINES IN OUTPUT							
17	1000.02p	196	3.7289E-04	1.3463E-09	371	2.3188E-04	2.2246E+00
	8000.02p	12051	2.1953E-02	8.2359E-04	204	1.4183E-04	4.4511E+00
	11000.02p	295	4.7226E-04	4.9105E-05	246	1.7301E-04	1.7564E+00
	12000.02p	120	1.9474E-04	2.1977E-05	22	1.5153E-05	2.9788E+00
	13000.02p	997	1.6088E-03	2.7000E-04	161	1.1128E-04	3.2779E+00
	14000.02p	10834	1.8332E-02	3.2492E-03	1359	9.5087E-04	3.4145E+00
	19000.02p	582	8.7412E-04	3.2773E-04	249	2.7499E-04	3.0908E+00
	20000.02p	1972	3.2580E-03	1.3908E-03	279	1.8450E-04	3.0983E+00
	26000.02p	46	1.1881E-04	5.6355E-05	10	1.8833E-05	1.5833E+00
	26000.02p	800	1.2379E-03	7.3988E-04	335	2.3089E-04	3.3020E+00
	26000.02p	17	2.2165E-05	1.3188E-05	6	8.6796E-06	9.0121E-01
	26000.02p	6	1.3965E-05	3.9218E-06	0	0.0000E+00	0.0000E+00
total		174352	1.7906E+01	2.5262E+00	14591	1.9565E+00	3.1769E+00
total over all cells for each nuclide		total	collisions	weight lost	total from	weight from	avg photon
		collisions	* weight	to capture	neutrons	neutrons	energy
	1000.02p	1214	1.3870E-01	4.7992E-07	1298	5.8991E-02	2.2246E+00
	8000.02p	74738	8.2697E+00	3.1602E-01	1437	5.1181E-01	4.3659E+00
	11000.02p	1811	1.7886E-01	1.7570E-02	1028	6.3687E-02	1.3829E+00
	12000.02p	664	6.3325E-02	7.9243E-03	58	7.3428E-03	2.5136E+00
	13000.02p	6133	6.0950E-01	9.3263E-02	753	9.4768E-02	3.2763E+00
	14000.02p	67352	6.7178E+00	1.2293E+00	6285	9.5989E-01	2.7987E+00
	19000.02p	3754	3.2416E-01	1.1685E-01	1245	8.4519E-02	2.9432E+00
	20000.02p	12725	1.1199E+00	4.5715E-01	1126	9.1964E-02	2.7529E+00
	26000.02p	5961	4.8401E-01	2.8813E-01	1361	8.3565E-02	2.9282E+00
					N47		

N48 1summary of photons produced in neutron collisions
cell number of weight per energy per avg photon mev/gm per weight/neut energy/neut

CHAPTER 5
TEST1

energy interval	photons	source neut		source neut		energy		source neut		collision		collision	
		frequency	distribution	frequency	distribution	photons	weight	frequency	distribution	frequency	distribution	frequency	distribution
20.000	0	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
15.000	0	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
10.000	22	1.50778E-03	1.50778E-03	6.70597E-03	6.70597E-03	3.42747E-03	3.42747E-03	3.42747E-03	3.42747E-03	3.42747E-03	3.42747E-03	3.42747E-03	3.42747E-03
9.000	41	2.80995E-03	4.31773E-03	5.70157E-03	5.70157E-03	2.91411E-03	2.91411E-03	6.34158E-03	6.34158E-03	6.34158E-03	6.34158E-03	6.34158E-03	6.34158E-03
8.000	83	5.68844E-03	1.00062E-02	1.49618E-02	1.49618E-02	7.64709E-03	7.64709E-03	1.39887E-02	1.39887E-02	1.39887E-02	1.39887E-02	1.39887E-02	1.39887E-02
7.000	758	5.19498E-02	6.19560E-02	9.63565E-02	9.63565E-02	4.92484E-02	4.92484E-02	6.32371E-02	6.32371E-02	6.32371E-02	6.32371E-02	6.32371E-02	6.32371E-02
6.000	1223	8.38188E-02	1.45775E-01	2.58592E-01	2.58592E-01	1.32168E-01	1.32168E-01	1.95405E-01	1.95405E-01	1.95405E-01	1.95405E-01	1.95405E-01	1.95405E-01
5.000	490	3.35823E-02	1.79357E-01	6.23369E-02	6.23369E-02	3.18608E-02	3.18608E-02	2.27266E-01	2.27266E-01	2.27266E-01	2.27266E-01	2.27266E-01	2.27266E-01
4.000	1765	1.20965E-01	3.00322E-01	1.43613E-01	1.43613E-01	7.34017E-02	7.34017E-02	3.00667E-01	3.00667E-01	3.00667E-01	3.00667E-01	3.00667E-01	3.00667E-01
3.000	2383	1.63320E-01	4.63642E-01	2.71758E-01	2.71758E-01	1.38897E-01	1.38897E-01	4.39565E-01	4.39565E-01	4.39565E-01	4.39565E-01	4.39565E-01	4.39565E-01
2.000	3023	2.07183E-01	6.70824E-01	3.06614E-01	3.06614E-01	1.56712E-01	1.56712E-01	5.96277E-01	5.96277E-01	5.96277E-01	5.96277E-01	5.96277E-01	5.96277E-01
1.000	2589	1.77438E-01	8.48263E-01	4.27295E-01	4.27295E-01	2.18393E-01	2.18393E-01	8.14670E-01	8.14670E-01	8.14670E-01	8.14670E-01	8.14670E-01	8.14670E-01
0.500	871	5.96943E-02	9.07957E-01	1.55296E-01	1.55296E-01	7.93729E-02	7.93729E-02	8.94043E-01	8.94043E-01	8.94043E-01	8.94043E-01	8.94043E-01	8.94043E-01
0.100	684	4.68782E-02	9.54835E-01	1.26445E-01	1.26445E-01	6.46268E-02	6.46268E-02	9.58670E-01	9.58670E-01	9.58670E-01	9.58670E-01	9.58670E-01	9.58670E-01
0.010	575	3.94079E-02	9.94243E-01	7.30052E-02	7.30052E-02	3.73134E-02	3.73134E-02	9.95983E-01	9.95983E-01	9.95983E-01	9.95983E-01	9.95983E-01	9.95983E-01
total	14591	1.95654E+00	6.21579E+00	3.17693E+00	3.17693E+00								

0.000 84 5.75697E-03 1.00000E+00 7.85884E-03 4.01670E-03 1.00000E+00
total 14591 1.00000E+00 1.95654E+00 1.00000E+00

N49 tally 11 nps = 10000

tally type 1 number of particles crossing a surface.
tally for neutrons

surface 18

energy
1.0000E-04 4.80689E-03 0.0420
1.0000E-03 3.33141E-04 0.0999
1.0000E-02 2.39153E-04 0.1025
5.0000E-02 2.01211E-04 0.1136
1.0000E-01 1.53882E-04 0.1506
5.0000E-01 3.29590E-04 0.0985
1.0000E+00 2.55885E-04 0.0997
2.0000E+00 3.94192E-04 0.0931
3.0000E+00 4.24802E-04 0.0916
4.0000E+00 1.19778E-04 0.1350
5.0000E+00 1.51599E-04 0.1570
6.0000E+00 6.01094E-05 0.1972
7.0000E+00 9.65357E-05 0.1976
8.0000E+00 4.72324E-05 0.2435
9.0000E+00 3.15372E-05 0.3700
1.0000E+01 2.61108E-05 0.3152
1.1000E+01 3.84340E-05 0.2955
1.2000E+01 3.12997E-05 0.2529
1.3000E+01 5.73757E-05 0.2130
1.4000E+01 1.70551E-04 0.1679
1.5000E+01 8.30026E-05 0.3025
total 8.05231E-03 0.0388

analysis of the results in the tally fluctuation chart bin (tfc) for tally 11 with nps = 10000 print table 160
N50 normed average tally per history = 8.05231E-03 N51 unnormed average tally per history = 8.05231E-03
estimated tally relative error = 0.0388 N52 estimated variance of the variance = 0.0051
N53 relative error from zero tallies = 0.0279 N54 relative error from nonzero scores = 0.0270
number of nonzero history tallies = 1139 N55 efficiency for the nonzero tallies = 0.1139
history number of largest tally = 6950 N56 largest unnormalized history tally = 5.92916E-01
(largest tally)/(average tally) = 7.36330E+01 (largest tally)/(avg nonzero tally) = 8.38680E+00

CHAPTER 5
TEST1

6 missed 1 of 10 tfc bin checks: the slope of decrease of largest tallies is less than the minimum acceptable value of 3.0 missed all bin error check: 23 tally bins had 0 bins with zeros and 12 bins with relative errors exceeding 0.10

the 10 statistical checks are only for the tally fluctuation chart bin and do not apply to other tally bins. the tally bins with zeros may or may not be correct: compare the source, cutoffs, multipliers, et cetera with the tally bins.

warning. 4 of the 7 tally fluctuation chart bins did not pass all 10 statistical checks.

warning. 6 of the 7 tallies had bins with relative errors greater than recommended.

N75 1tally fluctuation charts

nps	tally 11				tally 16				tally 34						
	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
1000	6.8072E-03	0.1382	0.0726	0.0	57	6.7391E-09	0.2460	0.1370	0.0	18	1.5166E-08	0.2460	0.1370	0.0	18
2000	6.8861E-03	0.0915	0.0282	0.0	62	7.4512E-09	0.1710	0.0645	0.0	18	1.6769E-08	0.1710	0.0645	0.0	18
3000	7.1248E-03	0.0720	0.0164	0.0	67	8.9037E-09	0.1424	0.0535	0.0	17	2.0038E-08	0.1424	0.0535	0.0	17
4000	6.7569E-03	0.0634	0.0122	0.0	65	8.4878E-09	0.1290	0.0550	0.0	16	1.9102E-08	0.1290	0.0550	0.0	16
5000	7.1989E-03	0.0560	0.0099	5.1	65	9.0751E-09	0.1085	0.0390	10.0	17	2.0424E-08	0.1085	0.0390	10.0	17
6000	7.6398E-03	0.0496	0.0074	8.0	68	9.9494E-09	0.0933	0.0265	10.0	19	2.2391E-08	0.0933	0.0265	10.0	19
7000	7.8230E-03	0.0465	0.0081	4.7	67	9.9149E-09	0.0866	0.0225	10.0	19	2.2313E-08	0.0866	0.0225	10.0	19
8000	7.9128E-03	0.0432	0.0070	4.8	68	9.9754E-09	0.0797	0.0190	10.0	20	2.2450E-08	0.0797	0.0190	10.0	20
9000	7.9452E-03	0.0411	0.0059	6.1	66	9.9723E-09	0.0746	0.0165	10.0	20	2.2443E-08	0.0746	0.0165	10.0	20
10000	8.0523E-03	0.0388	0.0051	10.0	66	1.0180E-08	0.0698	0.0144	10.0	20	2.2910E-08	0.0698	0.0144	10.0	20

nps	tally 1				tally 12				tally 26						
	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
1000	8.5863E-03	0.1544	0.1226	0.0	45	8.4686E-07	0.1552	0.1275	0.0	45	3.9399E-08	0.1423	0.0524	0.0	53
2000	8.7149E-03	0.1066	0.0485	0.0	46	8.1577E-07	0.1054	0.0539	0.0	47	4.4489E-08	0.0987	0.0244	0.0	53
3000	9.4611E-03	0.1175	0.2025	0.0	25	8.6388E-07	0.1060	0.0965	0.0	31	4.8401E-08	0.1123	0.2219	0.0	27
4000	9.6117E-03	0.1053	0.1390	0.0	23	8.6788E-07	0.0937	0.0738	0.0	30	4.8554E-08	0.0971	0.1387	0.0	28
5000	1.0912E-02	0.0968	0.0907	2.9	22	9.6249E-07	0.0860	0.0576	9.2	28	5.4291E-08	0.0918	0.0882	2.4	24
6000	1.1467E-02	0.0806	0.0747	2.5	26	1.0195E-06	0.0722	0.0449	4.6	32	5.7294E-08	0.0779	0.0684	2.5	28
7000	1.1192E-02	0.0734	0.0658	2.3	27	1.0034E-06	0.0658	0.0388	4.0	33	5.5645E-08	0.0707	0.0614	2.5	29
8000	1.1275E-02	0.0662	0.0568	2.4	29	1.0117E-06	0.0599	0.0326	3.9	35	5.5654E-08	0.0644	0.0527	2.6	30
9000	1.1908E-02	0.0641	0.0451	2.3	27	1.0568E-06	0.0580	0.0286	5.2	33	5.9078E-08	0.0643	0.0497	2.5	27
10000	1.1936E-02	0.0602	0.0386	2.5	28	1.0605E-06	0.0547	0.0242	7.4	33	5.9628E-08	0.0601	0.0426	2.4	28

nps	tally 6				fom
	mean	error	vov	slope	
1000	4.6138E-08	0.1382	0.0463	0.0	57
2000	5.1940E-08	0.0961	0.0246	0.0	56
3000	5.7305E-08	0.1027	0.1675	0.0	33

CHAPTER 5
TEST1

4000	5.7042E-08	0.0892	0.1063	2.8	33
5000	6.3366E-08	0.0831	0.0722	2.5	30
6000	6.7243E-08	0.0705	0.0550	2.6	34
7000	6.5560E-08	0.0640	0.0487	2.7	35
8000	6.5630E-08	0.0583	0.0416	2.8	37
9000	6.9050E-08	0.0580	0.0407	2.6	33
10000	6.9807E-08	0.0543	0.0346	2.6	34

N76 Ineutron weight-window lower bounds from the weight-window generator
energy: 1.000E+02

cell	
1	-1.000E+00
2	5.000E-01
3	4.069E-01
4	3.094E-01
5	2.607E-01
6	2.135E-01
7	1.710E-01
8	1.306E-01
9	9.801E-02
10	7.908E-02
11	6.018E-02
12	4.403E-02
13	2.664E-02
14	2.316E-02
15	1.689E-02
16	1.322E-02
17	1.282E-02

lphoton weight-window lower bounds from the weight-window generator
energy: 1.000E+02

cell	
1	-1.000E+00
2	0.000E+00
3	8.241E-01
4	5.847E-01
5	5.856E-01
6	2.953E-01

print table 190

print table 190

7 2.336E-01
 8 1.880E-01
 9 1.145E-01
 10 6.819E-02
 11 4.706E-02
 12 3.003E-02
 13 2.047E-02
 14 1.285E-02
 15 7.776E-03
 16 4.880E-03
 17 2.918E-03

N77 1weight-window cards from the weight-window generator

each card has ten leading blanks that must be removed by a text editor.

print table 200

```

wpp:n 5 3 5
wwe:n 1.0000E+02
wnn 1:n -1.0000E+00 5.0000E-01 4.0686E-01 3.0945E-01 2.6074E-01
      2.1349E-01 1.7098E-01 1.3061E-01 9.8013E-02 7.9079E-02
      6.0184E-02 4.4026E-02 2.6636E-02 2.3158E-02 1.6887E-02
      1.3218E-02 1.2821E-02
wpp:p 5 3 5
wwe:p 1.0000E+02
wnn 1:p -1.0000E+00 0.0000E+00 8.2409E-01 5.8465E-01 5.8564E-01
      2.9529E-01 2.3364E-01 1.8795E-01 1.1454E-01 6.8187E-02
      4.7063E-02 3.0026E-02 2.0470E-02 1.2853E-02 7.7759E-03
      4.8797E-03 2.9177E-03
  
```

```

*****
N78 dump no. 2 on file runtpc nps = 10000 coll = 1325362 ctm = 10.01 nrn = 20867675
  
```

9 warning messages so far.

N79 run terminated when 10000 particle histories were done.

```

computer time = 10.70 minutes
mcpn version 4b 02/04/97
  
```

```

02/13/97 16:11:09 probid = 02/13/97 15:59:43
  
```

CHAPTER 5
TEST1

Notes:

- N1:** The first line of the output file indentifies the code name and version. LD=xx identifies the code version date. The last two entries are the date and time the run was made.
- N2:** This is an echo of the execution line.
- N3:** The numbers in this first column are sequential line numbers for the input file. They may be useful if you make changes to the file with an editor.
- N4:** Defines a source at the point 0,0,0 on surface 2. The particles will enter cell 2. The entry CEL=2 is not needed, but if you choose to use it and type in the wrong cell number, the code will give you an error message. The weight of each source particle is 1, the default. VEC and DIR determine the starting direction. In this problem, the source is monodirectional in the y direction. All source particles have a starting energy of 14.19 MeV.
- N5:** The PWT card controls the number and weight of neutron-induced photons produced at neutron collisions.
- N6:** Energy bins for all tallies but F6 and F12. 13I means put 13 interpolates between 1 and 15 MeV. These energy bins are printed in PRINT TABLE 30.
- Table 10-
- N7:** All source variables defined explicitly or by default are printed. The order of sampling of the source variables is also printed, which is important for sources that are dependent upon functions.
- Table 30-
- N8:** This entry identifies which particle type and tally type is used (neutron, photon, or electron).
- N9:** This warning is generated because the upper limit of the E0 card of 20 MeV is higher than the maximum energy specified on the PHYS:N card.
- N10:** The energy bins are specified by the E0, E6, and E12 cards. Tallies F1, F11, F16, F26, and F34 have energy bins specified by the E0 card. F6 and F12 have energy bins specified by the E6 and E12 cards.
- Table 50-
- N11:** A cell can be composed of physically separate regions or pieces joined with the union operator. Improperly defined cells can be composed unintentionally of more than one piece (for example, a surface is extended unknowingly and forms a cell). If a cell is composed of more than one piece, a warning message is given and you should verify that the number of pieces is correct or incorrect.

-Table 60-

N12: If you know the mass or volume of a geometry or parts of it, you can compare the known volume or mass with what MCNP calculates to verify the correctness of your geometry. Be careful, however, that volumes or masses that MCNP cannot calculate (but supplies a value such as unity) do not affect the totals.

-Table 70-

N13: These entries are the surface coefficients used by the code and are not necessarily the entries on the surface cards.

-Table 72-

N14: This is the temperature calculated by MCNP for cells 2–17. Because there was not a TMPn:N card in the input file, room temperature (2.53E–08 MeV) is assumed. Cell 1 has zero importance and is therefore not affected. The minimum and maximum source weights are also printed here because they are sometimes dependent upon cell volumes and cannot be printed earlier. When the source is biased in any way, there will be a fluctuation in starting source weights. The minimum source weight is used in the weight cutoff game when negative weight cutoffs are entered on the CUT cards. By playing the weight cutoff game relative to the minimum source weight, the weight cutoff in each cell is the same regardless of starting source weight. Note that if the source weight can go to zero, the minimum source weight is set to 1.E-10 times the value of the WGT parameter on the SDEF card.

-Table 98-

N15: The physical constants used in MCNP and changeable in parameter statements in COMMON blocks are listed here. The compilation options are also listed. Knowing how the code was compiled is very useful if it runs slowly (pointer option), runs out of space (pointer option not used), doesn't plot (plot option wrong for your machine or run-time libraries for plotting located differently on your machine), or can't find the data libraries (wrong datapath—so you must use “setenv DATAPATH ...” on Unix systems).

-Table 100-

N16: The cross-section table list shows the nuclear data used in the problem. The C appended to the neutron data indicates continuous energy. A D would indicate discrete reactions. A P indicates photon data, and an E indicates electron data. Note that photon and electron data are all elemental (1000.02P) rather than isotopic (1001.60C). Warnings are printed in MODE N P problems if the photon production cross sections are unavailable or are in the less accurate equiprobable bin format. Note that electron data are loaded even though electrons are not transported in this MODE N P problem. The electron data are used for the thick target Bremsstrahlung model.

CHAPTER 5

TEST1

- N17:** If a neutron is born at an energy greater than E_{max} as set by the PHYS:N card, that neutron is rejected and the event (such as fission) is resampled until an energy below E_{max} is obtained.
- N18:** Any neutron cross sections outside the energy range of the problem as specified by the PHYS:N and CUT:N cards are deleted.
- N19:** This is the electron range and straggling table for material 1 (Los Alamos concrete). It lists 133 electron energies in ascending order (only some are shown in this listing) and gives the respective stopping powers due to collision and radiation and the range of the electron in the material. Radiation yield is the fraction of the electron's kinetic energy which is converted into bremsstrahlung energy. The electron physics is turned on in this MODE N P problem for the thick target bremsstrahlung model.
- N20:** At the end of the cross section processing, and before histories are started, the first dump is made to the RUNTPE file. This dump contains all the fixed information about the problem, namely the problem specification and all nuclear data. Subsequent dumps to RUNTPE will contain only information that accumulates as histories are run, such as tally information and particle statistics for summary and ledger tables.

-Table 110-

- N21:** This table gives starting information about the first 50 source particles. X, Y, and Z tells the initial position. CELL identifies what cell the particle started in or was directed into. SURF identifies what surface the particle started on, if any. U, V, and W identifies the starting direction cosines. The starting time, weight and energy of the particles are also given.

-Problem Summary-

- N22:** This is the summary page of the problem. It is a balance sheet with the left side showing how particle tracks, weight, and energy were created and right side showing how they were lost. The problem summary is for accounting only, because most entries, such as "tracks," have no physical meaning and trying to give physical interpretation to these numerical quantities may be dangerous. The weight and energy columns contain the physical results. Because the summary contains net creation and loss, physical interpretation must be done with care.
- N23:** 36082 represents the increased number of tracks obtained and banked from cell splitting, which occurs when the ratio of importances of the cell entered to the cell exited is greater than one. If the ratio is less than one, Russian roulette is played. If the track survives the roulette, its increase in weight and energy are recorded as a gain. If it loses, it is recorded as a loss in all three categories on the loss side of the table.

- N24:** The creation from weight cutoff represents the weight and energy gained from winning the weight cutoff Russian roulette game. No tracks are created because the original track continues with an increased weight.
- N25:** Any tracks that enter a cell of zero importance are considered to have escaped the geometry and are recorded here. This is the physical leakage from the system. The precision of this result is unknown because no relative error is calculated as is with a tally.
- N26:** Loss to importance sampling results from losing the Russian roulette game played when crossing a surface into a cell of lower importance. The weight and energy losses should agree with gains in **N23** with perfect sampling.
- N27:** Loss to weight cutoff comes from losing the weight cutoff Russian roulette game. With perfect sampling, the weight and energy lost here should equal the weight and energy gained in **N24**. What is accumulated in the three loss entries is the number, weight, and weight times energy of the tracks lost to weight cutoff. The weight entry in the table is normalized by the number of source particles and the energy entry by the total weight of source particles. Thus the average weight of each track lost to the weight cutoff is: weight entry * NPS/number of tracks lost: $0.080526 * 10000 / 8671 = 0.09287$. The small average track weight is caused by the scaling of the weight cutoff criteria by the ratio of the source cell importance to the collision cell importance. The average energy of a particle lost to weight cutoff per source particle is: energy entry/weight entry * average source starting weight: $(0.055391/0.080526) * 1.0 = 0.68786$. The same normalizing procedure applies to all energy entries in both the creation and loss columns of this table.
- N28:** In a scattering event only energy is changed. Energy difference = energy in – energy out. If this difference is positive, it is entered as downscattering on the loss side; if negative, as in a thermal neutron upscatter, it is entered on the creation side as upscattering. Thermal neutron scatter always results in a small energy gain or loss. (Elastic collisions in the center-of-mass system gain or lose energy in the laboratory system.) Higher energy scatter usually is an energy loss mechanism. This energy is only for the track being followed. If the collision is a fission or (n, xn) , the tracks in addition to one outgoing track are recorded in the three creation columns of the fission and (n, xn) rows.
- N29:** Tracks are lost to capture only if the analog capture option is used (PHYS or CUT card). In this problem, implicit capture was used to remove a fraction of each particle's weight at each collision. The energy lost is the incident energy of the particle times the weight lost to capture. The weight lost to absorption $(n,0n)$ is a physically meaningful quantity. No relative error is calculated.

CHAPTER 5

TEST1

- N30:** Note that the total gain and the total loss of the track quantities is exactly the same in all problems.
- N31:** Whereas all neutrons in this problem started at time zero, the average time of escape is also the prompt neutron escape lifespan and the average time of capture is also the prompt capture (n,0n) lifespan. As there is no fission in the problem, escape and capture are the only two physical removal mechanisms; thus the average time to capture or escape is both the prompt removal lifespan and the prompt removal lifetime. See Chapter 2, page 2–152. These quantities are absorption estimates averaged over all histories; track length estimates can be calculated with the FM card. The “average time of” is always measured relative to time zero and is mostly of use in setting a time cutoff, time bins, or getting a better feel for what is happening in the problem.
- N32:** The second entry of the net multiplication is the relative error or the multiplication corresponding to one standard deviation. In this problem, the net multiplication, which is the sum of the source weight and the weight from (n, xn) reactions, is $1.0150 \pm 0.1\%$. The net multiplication is not the criticality eigenvalue k_{eff} of the system. See page 2–159 for further discussion of this subject.
- N33:** Pair production causes the loss of 1022 tracks with a weight of 0.14221. The electron from pair production is assumed to immediately annihilate and lose all its energy in the cell, unless it is followed in MODE P E. The positron is annihilated (p-annihilation), producing two photons (2044 tracks with weight 0.28442), each with energy 0.511 MeV isotropic in direction.
- N34:** For a MODE N P problem, the “average time of” for a photon is relative to zero time, and not the time when the photon was produced. Thus the “average time of” escape or capture includes the mean time to creation.

-Table 126-

- N35:** Tracks entering a cell refers to all tracks entering a cell, including source particles. If a track leaves a cell and later reenters that same cell, it is counted again.
- N36:** Population in a cell is the number of tracks entering a cell plus source particles and does not include reentrant tracks. Comparing N35 to N36 will indicate the amount of back scattering in the problem. An often successful rule of thumb for choosing importances is to select them so that population is kept roughly constant in all cells between the source and tally regions. Information, once lost, cannot be regained. The 13111 particles in cell 8 can contain no more information than the 7000 particles in cell 6 because all particles in cell 8 are progeny of the particles in cell 6. Oversplitting or undersplitting has occurred between cell 6 and cell 8.

- N37:** The number of collisions in a cell is important for a detector tally or anything involving collision rate. A lack of collisions may indicate a need to force them. This quantity is not normalized by cell volume. In some problems most of the computer time is spent modeling collisions. Cells with excessive numbers of collisions are possibly oversampled. This often happens when many thermal neutrons rattle around and contribute little of significance to the problem solution. In such cases energy-dependent weight windows are most effective, followed by energy roulette, exponential transform, time cutoff, or energy cutoff. Note that the last two methods may introduce a bias into the problem. Subdividing the cell into smaller cells with different importances also is effective.
- N38:** The collision times the weight of the particles having the collisions is an indication of how important the collisions were.
- N39:** The next four items are determined in the HSTORY subroutine after the distance D to the next collision or surface is determined. The time DT to traverse this distance is determined from $DT=D/VEL$ where VEL is the speed of the particle. Furthermore, the flux Φ is equal to the number density $n(E)$ times the speed.

The energy ERG averaged over the number density of particles is determined by

$$\frac{\iint n(E, t) \cdot E dE dt}{\iint n(E, t) dE dt} \quad \text{or} \quad \frac{\sum(WGT * DT * ERG)}{\sum(WGT * DT)}$$

- N40:** The energy averaged over the flux density is

$$\frac{\iint \Phi(E, t) \cdot E dE dt}{\iint \Phi(E, t) dE dt} \quad \text{or} \quad \frac{\sum(WGT * D * ERG)}{\sum(WGT * D)}$$

It is very difficult, and perhaps meaningless, to determine an average energy because a large spectrum involving several orders of magnitude is frequently involved leading to the problem of representing this by one number. That is why it has been calculated by the two methods of items 39 and 40. If the number-averaged energy is significantly lower than the flux-averaged energy (as is true in this problem), it indicates a large number of low-energy particles. As the energy cutoff in this problem is raised, these two average energies come into closer agreement.

- N41:** The relative average track weight is $I_c \sum(WGT * D) / (I_s \sum D)$, where I_c and I_s are the importances of the cell and the source cell. By making the average track weight relative to the cell importance, the weight reduction from importance splitting is removed. For most problems with proper cell importances, the average track weight is constant from cell to cell and deviations indicate a poor importance function. The variation in average track weight for the photons in

CHAPTER 5
TEST1

the following table suggests that the photon importances (all unity) are poor. With weight windows, the average track weight should be within the weight window bounds.

N42: The average track mean free path is

$$\frac{\int \Phi(E)/\Sigma_t(E)dE}{\int \Phi(E)dE} = \frac{\sum WGT * D/TOTM}{\sum WGT * D} ,$$

where $TOTM = \Sigma_t(E)$ is the total macroscopic cross section. The mean free path is strongly dependent upon energy and so this average mean free path may be quite meaningless. A rule of thumb for guessing at importances is that they should double approximately every mean free path. This is usually a very poor rule, but it is sometimes better than nothing. The average track mean free path is thus useful for making poor guesses at cell importances. It is also useful for determining the fictitious radius of point detectors, the outer radius of DXTRAN spheres, exponential transform stretching parameters, the necessity of forced collisions, etc. Occasionally this quantity may even provide physical insight into your problem.

N43: For photons, the number-weighted energy and flux-weighted energy are equal because a photon has a constant velocity regardless of energy. See **N35** – **N42**.

-Table 130-

N44: The next six tables (three for neutrons and three for photons) show all possible ways a particle's weight may be changed in each cell. In addition to telling you what is happening to the particle and where, this information can be useful in debugging a problem.

Note that the neutron weight entering cell 17 is 0.019022, whereas in Table 126 the average relative track weight in cell 17 is 0.42155. This apparent discrepancy is resolved by realizing that the average weight in Table 126 is for a track, while it is for a history in Table 130. Furthermore, in Table 126 the weight is relative, whereas it is absolute here in Table 130. If the average track weight is multiplied by the tracks entering cell 17 (14378) and then divided by both the number of source particles (10,000) and the importance ratio (32), the two weights are in close agreement. Most of the totals over the cells can be compared directly with the weight gain, loss or difference in the Problem Summary. The average value of $\bar{\nu}$ in a problem with fissionable material can be obtained by taking the ratio of fission neutrons to fission loss in the neutron physical events table.

-Table 140-

N45: The activity of each nuclide per cell can tell you how important various nuclides, such as trace elements, are to the problem and may aid in selecting cross-section libraries when memory is limited. This chapter only shows a partial listing of this table.

- N46:** This table is the activity summed over all cells in the problem.
- N47:** This column shows the total number of photons produced by each isotope in the problem. The earlier entries in this column show photon production per isotope in each cell.
- N48:** This table is printed only for MODE N P or MODE N P E. It gives you an idea of how many photons were produced in each cell and the energy spectrum of the photons averaged over the problem. Because photons are produced only at neutron collisions, there is a correlation between the number of collisions in a cell, the PWT card, and this table. The previous table showing the photon activity for the problem includes isotope-dependent neutron-induced photon production information.

TALLY AND TALLY FLUCTUATION CHARTS

- N49:** All tallies here are caused by the F1, F11, F12, F6, F16, F26, and F34 cards in the input file. The F11 tally gives the neutron current summed in both directions integrated over a surface. This tally says that between 13 and 14 MeV, the current is $1.70551E-04 \pm 16.8\%$ within one standard deviation.
- N50:** The normed average tally per history is the average tally normalized over the tally surface or volume in the tally bin specified in the tally fluctuation chart and includes all tally multipliers. In this case, it is the total energy bin tally by default.
- N51:** The unnormed average tally per history does not always include all multipliers. It is the tally used for statistical analysis and is for the same TFC bin as the normed tally.
- N52:** This is the variance of the variance which checks the tally for any effects of inadequately sampled problems. It can pick up tally errors due to insufficient sampling of high weight scores which can cause an underestimated mean and RE. The typical acceptable VOV is 0.1 or less in order to provide a reliable confidence interval.
- N53:** This is the relative error component from histories which do not contribute to the tally (zero history scores).
- N54:** This is the relative error from only the non-zero history scores.
- N55:** This is the fraction of total NPS that resulted in nonzero score tallies.
- N56:** If there was a great difference between the largest and average tally, the large weight particles would represent important phenomena that have been undersampled and/or poor variance reduction technique selection. To understand what causes the large weight particles, the history number of the largest is printed so that this history can be rerun to get its event log. When the undersampled event is identified, the variance reduction should be modified and the problem rerun. Improved variance reduction usually causes fewer source histories to

CHAPTER 5
TEST1

be run per minute because more time is spent sampling the formerly undersampled important phenomena outside the source. The final result will be an improved (higher) FOM and a lower largest/average tally ratio. As the largest/average tally ratio approaches unity, the problem approaches an ideal zero variance solution. In practice, performing the steps discussed above is an art usually beyond all but the most experienced users and is often difficult, time-consuming, frustrating, and sometimes unsuccessful. An alternative is to let MCNP determine the better importance function for the next run with the weight window generator, as has been done in this problem. Use of the generated weight windows printed in PRINT TABLE 190 caused a factor of three improvement in problem efficiency when the problem was rerun.

- N57: This ratio expresses the confidence interval shift as a fraction of the mean. The confidence interval is shifted in the case of an asymmetric probability density function.
- N58: This table provides the user with the information on how the tfc bins would be effected by a high magnitude score occurring on the next history. This can reveal the impact of an infrequent high weight score distorting the tfc bin quantities. The three columns show the value at the current NPS, the value at the next NPS (which is the value of the highest past nonzero score), and the ratio of the highest value over the previous lower value.
- N59: These two lines summarize briefly the behavior of the tail of the probability density function. MCNP checks the slope of the high score tail in order to discern whether the problem has been sampled well. If the tail of the probability density function is not decreasing at a fast enough rate, then MCNP will flag this as an insufficiently sampled problem.
- N60: This is the tfc statistical check table which provides the results of ten checks that are used to test the tally for reliability. MCNP checks the behavior of the mean, relative error, variance of the variance, figure of merit and the probability density function. The table presents the desired, observed and actual results along with the pass/no pass message for each test.
- N61: This column shows the desired, observed, and actual behavior of the mean. Random behavior of the mean is desired because an ideal random quantity should exhibit a normal distribution of values around an average value. MCNP checks for non-monotonic (no increasing or decreasing trend) behavior of the mean for the last half of the problem. If the behavior of the mean meets this criteria, then it passes this test. The tally was increasing over the last half of the problem so it did not pass this check. When run for 20000 histories, the desired behavior was achieved.

- N62:** This column checks if the relative error is below the limit required to provide a reliable confidence interval.
- N63:** This column checks if the relative error is decreasing over the length of the problem.
- N64:** This column checks for the decrease rate of the relative error as a function of the number of histories(NPS). If the relative error is decreasing at the desired rate for the last half of the problem, then it passes this check.
- N65:** This column checks if the variance of the variance (VOV) is below the prescribed value of 0.1.
- N66:** This column checks for a monotonically decreasing VOV for the last half of the problem.
- N67:** This column is the check for the rate of decrease of the VOV for the last half of the problem.
- N68:** This column checks for a statistically constant value of the figure of merit (FOM) for the last half of the problem.
- N69:** This column checks the FOM for random behavior.
- N70:** This column checks the probability density function (PDF) for the slope of the 25 to 200 largest history scores. If the slope is greater than 3 then the second moment of the PDF exists and the central limit theorem is satisfied. Basically, this means that as the NPS increases, a more reliable confidence interval is formed because the problem is sampled more.
- N71:** A warning that not all the statistical checks were passed. If they had been satisfied, a range of confidence intervals for the unshifted asymmetric distribution is provided. Three ranges are given for the confidence intervals of 1, 2, and 3 standard deviations. A second line would display the ranges for the shifted symmetric confidence intervals.
- N72:** This plot is the unnormed probability density for tally 11. The central mean is denoted by the line of m's. If a problem has been undersampled, this plot will often show "holes," or unsampled regions of the PDF. If the slope is less than 10, this plot will also show a curve of S's which represent the Pareto curve fit to the PDF. This allows the user to visually compare the curve fit to the calculated distribution. If sufficient room exists on this page of output, plots of the normed and unnormed cumulative tallies will be included.

-Table 162-

- N73:** This plot is the cumulative number of tallies in the tally fluctuation chart bin. The ordinate and abscissa values are printed in the left-hand columns and are read as, "766 scores were made with a value of 7.94328E-02 or less and these 766 scores accounted for 67.252% of

CHAPTER 5
TEST1

the total tally.” This plot is followed by a plot of the cumulative tally in the tally fluctuation chart bin. These entries are read as “Of the total tally value 8.05231E-03, 2.765E-3 (or 34.339%) was from tallies with values less than 7.943E-02.”

N74: Only tally 11 was shown to save space. After all the tallies are printed a summary of statistical checks for all of the tallies is given.

N75: The tally fluctuation charts always should be studied to see how stable or reliable the tally mean, relative error, variance of the variance, slope, and *FOM* are, indicating how the problem is converging as a function of history number, NPS. The *FOM* is defined as $1/\sigma^2t$, where σ is the relative error and t is the computer time in minutes. In a well-behaved problem, t is proportional to the number of histories run, N , and σ is proportional to $1/\sqrt{N}$. Thus the *FOM* should rapidly approach a constant value as it does in this problem. Big changes in the *FOM* indicate sampling problems that need attention.

The order of printing tallies is: neutron, photon, combined neutron/photon, electron, and combined photon/electron. Notice that the combined heating tally F6 is exactly the sum of the neutron, F16, and photon, F26, heating tallies.

-Table 190-

N76: This table is a list of the lower weight window bounds generated by the WWG card. These window bounds are themselves estimated quantities and must be well converged or they can cause more harm than good. When well converged, they can improve efficiency dramatically. Use of these printed weight windows results in an increase of three in the *FOM* for tally 12 when the problem was rerun. Note that the number of histories per minute is often lower in the more efficient problem because more time is spent sampling important regions of the problem phase space.

These weight windows were chosen to optimize tally 12 as specified on the WWG card. In the subsequent run using these weight windows, the *FOM* of tally 12 improved by three as did the other photon tallies, and tallies 16 and 34 were slightly degraded. The weight window generator optimizes the importance function for one tally at the expense of all others, if necessary.

The lower bound for the photon weight window in cell 2 is zero, meaning that no photon in cell 2 ever contributed to tally 12 in this run. If the zero is unchanged in the run using these windows, the weight cutoff game will be played in cell 2, sometimes with disastrous consequences. Thus a guess should be made for a lower bound rather than leaving the zero value. A good guess is 10, which is several times higher than the weight window generated for its nearest neighboring cell.

The generated weight windows may be thought of as a forward

adjoint solution and thus can provide considerable insight into the physics of a problem. Low weight windows indicate important regions. A low window on a cell bounding the outside world often indicates that the geometry was truncated and more cells need to be added outside the present geometry. Weight windows that differ greatly between adjacent cells indicate poor weight window convergence or, more likely, a need to subdivide the geometry into smaller phase space units that will have different importances.

Energy dependent weight windows are also available.

-Table 200-

- N77:** The weight window cards from the weight window generator can, with some file editing, be used to replace the IMP:N and IMP:P cards in the next run of this problem. Zero windows should be replaced with a good guess. Windows differing greatly from those in neighboring cells should be replaced also (there are no such cases in this problem). In MODE N P problems the WWN1:P card should be copied to a PWT card for optimum photon generation in the next run. Note that the space between WWN and 1:N must be removed.
- N78:** With this initial run there are two dumps on the RUNTPE. The first dump occurs at the end of the XACT overlay. The second dump is done at the problem end. A continue-run will pick up from this second dump and add a third dump to the RUNTPE when it finishes. CTM = 10.01 is the computer time in minutes used in the transport portion of the problem.
- N79:** One or more reasons are always given as to why the run was terminated. If there are no errors, most runs terminate after the desired number of particles are run or by a time limit. Computer time = 10.70 minutes is the total time for the problem, including initiation, output, etc.

CHAPTER 5
CONC

III. CONC PROBLEM AND OUTPUT

This simple problem illustrates how to use and interpret results from detectors. It also shows how the statistical checks can reveal deficiencies in the output of an otherwise well-behaved problem. The problem consists of a spherical shell of concrete with a 390-cm outer radius and a 360-cm inner radius. A 14 MeV point isotropic neutron source is at 0,0,0, the center of the void region. It is a neutron-only problem (MODE N), with a neutron lower energy cutoff at 12 MeV. A surface flux tally is used in addition to point and ring detectors.

Even though this is a simple problem, it is difficult, and even inappropriate, for the F65 point detector. Detectors are inappropriate when particles can be transported readily to the region of interest and another type of tally, such as the F2 surface flux tally, can be used. Also, detectors do not work well close to or in scattering regions. A detailed discussion of this problem is presented in Chapter 2, page 2–111.

The following notes on the output describe the pertinent details dealing with the point detector results. The notes will provide a description of the tfc bin checks that test the tally for its reliability. This problem dramatically illustrates the importance of the VOV (variance of the variance) and the PDF (probability density function) slope checks in determining the reliability of the results.

The following notes apply to the CONC problem output file. Only the default print tables appear because there is no PRINT card.

CHAPTER 5
CONC

```

1mcrp  version 4b  ld=02/04/97  03/06/97 16:05:26  probid = 03/06/97 16:05:26
*****
N1  i=conc n=conc.4b
1-   conc: 30-cm thick concrete shell; 14 MeV point source in the center
2-   1 0 -1 imp:n=1
3-   2 1 -2.3 1 -2 imp:n=1
4-   3 0 2 -3 imp:n=1
5-   4 0 3 -4 imp:n=1
6-   5 0 4 imp:n=0
7-
8-   1 so 360
9-   2 so 390
10-  3 so 420
11-  4 so 4000
12-
13-  sdef
14-  m1 1001.60c 1.68756E-01
15-      8016.60c 5.62493E-01
16-      11023.60c 1.18366E-02
17-      12000.60c 1.39951E-03
18-      13027.60c 2.14316E-02
19-      14000.60c 2.04076E-01
20-      19000.60c 5.65495E-03
21-      20000.60c 1.86720E-02
22-      26054.60c 2.47295E-04
23-      26056.60c 3.91067E-03
24-      26057.60c 9.38014E-05
25-      26058.60c 1.19384E-05
26-      6012.50c 1.41730E-03
27-  c
28-  c surface, point, and ring tallies
29-  f2:n 4
30-  f12:n 3
31-  f22:n 2
32-  f25:n 0 -4000 0 0
33-  f35:n 0 4000 0 0

```

CHAPTER 5
CONC

```

34- f45:n 0 -420 0 0
35- f55:n 0 420 0 0
N2  f65:n 0 -390 0 -0.5
37- f75:n 0 390 0 -0.5
38- f85y:n 0 4000 0
N3  f95y:n 0 420 0
40- f105y:n 0 390 -0.5
41- e0 12.5 2i 14.
N4  dd 0.1 1e100
43- c
44- c cutoff the neutrons at 12 MeV
N5  cut:n j 12
46- nps 14000
47-
1cells

```

print table 60

cell	mat	atom		gram		neutron	
		density	volume	density	volume	pieces	importance
1	0	0.00000E+00	0.00000E+00	0.00000E+00	1.95432E+08	0.00000E+00	1 1.0000E+00
2	1	8.14382E-02	2.30000E+00	5.30427E+07	1.21998E+08	1 1.0000E+00	1 1.0000E+00
3	0	0.00000E+00	0.00000E+00	6.18642E+07	0.00000E+00	1 1.0000E+00	1 1.0000E+00
4	0	0.00000E+00	0.00000E+00	2.67772E+11	0.00000E+00	1 1.0000E+00	1 1.0000E+00
5	0	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0 0.0000E+00	0 0.0000E+00
total				2.68083E+11	1.21998E+08		

minimum source weight = 1.0000E+00 maximum source weight = 1.0000E+00

print table 100

1cross-section tables	table	length	tables from file	endf602
1001.60c	488	1-h-1	from endf-vi.1	
8016.60c	7725	8-o-16	from endf/b-vi	mat 125 11/25/93
11023.60c	1433	11-na-23	from endf/b-vi.1	mat1125 11/25/93
12000.60c	5743	12-mg-nat	from endf/b-vi	mat1200 11/25/93
13027.60c	5790	13-al-27	from endf/b-vi	mat1325 11/25/93
14000.60c	7846	14-si-nat	from endf/b-vi	mat1400 11/25/93
19000.60c	1981	19-k-nat	from endf/b-vi	mat1900 11/25/93
20000.60c	8534	20-ca-nat	from endf/b-vi	mat2000 11/25/93
26054.60c	6047	endf/b-vi.1	fe54a	mat2625 11/25/93

CHAPTER 5
CONC

```

26056.60c 17615 endf/b-vi.1 fe56a          mat2631 11/25/93
26057.60c 7045  endf/b-vi.1 fe57a          mat2634 11/25/93
26058.60c 5702  endf/b-vi.1 fe58a          mat2637 11/25/93
          tables from file rmccs2
6012.50c 3844  njoy                      ( 1306) 79/07/31.
total 79793

```

neutron cross sections outside the range from 1.2000E+01 to 1.0000E+37 mev are expunged.
decimal words of dynamically allocated storage

```

general          9040
tallies         79300
bank            6803
cross sections  79793
total          128568 = 514272 bytes

```

```

*****
dump no. 1 on file conc.4br nps = 0 coll = 0 ctm = 0.00 nrn = 0

```

N6 Iproblem summary

run terminated when 14000 particle histories were done.

```

+ conc: 30-cm thick concrete shell; 14 MeV point source in the center      probid = 03/06/97 16:06:40
0                                     03/06/97 16:05:26

```

neutron creation	tracks	weight (per source particle)	energy	neutron loss	tracks	weight (per source particle)	energy
source	14000	1.0000E+00	1.4000E+01	escape	1568	8.6876E-02	1.1939E+00
weight window	0	0.	0.	energy cutoff	12673	6.7294E-01	3.6320E+00
cell importance	0	0.	0.	time cutoff	0	0.	0.
weight cutoff	0	0.	0.	weight window	0	0.	0.
energy importance	0	0.	0.	cell importance	0	0.	0.
dxtran	0	0.	0.	weight cutoff	16	2.6504E-04	3.3844E-03
forced collisions	0	0.	0.	energy importance	0	0.	0.
exp. transform	0	0.	0.	dxtran	0	0.	0.
upscattering	0	0.	0.	forced collisions	0	0.	0.
(n,xn)	514	2.5795E-02	6.2067E-02	exp. transform	0	0.	0.
fission	0	0.	0.	downscattering	0	0.	5.5765E+00
				capture	0	2.5297E-01	3.4795E+00
				loss to (n,xn)	257	1.2898E-02	1.7868E-01
				loss to fission	0	0.	0.

CHAPTER 5
CONC

total 14514 1.0259E+00 1.4064E+01 total 14514 1.0259E+00 1.4064E+01
 number of neutrons banked 0 cutoffs
 neutron tracks per source particle 1.0367E+00 average time of (shakes) tco 1.0000E+34
 neutron collisions per source particle 1.8890E+00 escape 7.9538E+01 tco 1.0000E+34
 total neutron collisions 26446 capture 7.2934E+00 eco 1.2000E+01
 net multiplication 1.0129E+00 0.0008 capture or escape 2.5762E+01 wc1 -5.0000E-01
 computer time so far in this run 1.11 minutes any termination 1.3250E+01 wc2 -2.5000E-01
 computer time in mcrun 1.00 minutes maximum number ever in bank 0
 source particles per minute 1.4068E+04 bank overflows to backup file 0
 random numbers generated 421786 dynamic storage 128572 words, 514288 bytes.
 range of sampled source weights = 1.0000E+00 to 1.0000E+00 most random numbers used was 160 in history 4334
 1neutron activity in each cell

cell	tracks entering	population	collisions	collisions * weight (per history)	number weighted energy	flux weighted energy	average track weight (relative)	average track mfp (cm)
1	14145	14000	0	0.0000E+00	1.3989E+01	1.3989E+01	9.9715E-01	0.0000E+00
2	14145	14000	26446	1.6648E+00	1.3745E+01	1.3755E+01	8.8157E-01	8.0847E+00
3	1568	1568	0	0.0000E+00	1.3679E+01	1.3687E+01	7.5956E-01	0.0000E+00
4	1568	1568	0	0.0000E+00	1.3733E+01	1.3740E+01	7.7460E-01	0.0000E+00
total	31426	31136	26446	1.6648E+00				

SKIP 718 LINES IN OUTPUT

1tally 65 nps = 14000
 tally type 5 particle flux at a point detector. units 1/cm**2
 tally for neutrons
 detector located at x,y,z = 0.00000E+00-3.90000E+02 0.00000E+00
 energy
 1.2500E+01 6.95656E-10 0.7722
 1.3000E+01 9.43523E-10 0.6869
 1.3500E+01 2.27344E-10 0.4054
 1.4000E+01 1.31533E-08 0.0096
 total 1.50198E-08 0.0620
 detector located at x,y,z = 0.00000E+00-3.90000E+02 0.00000E+00
 uncollided neutron flux
 energy
 1.2500E+01 0.00000E+00 0.0000
 1.3000E+01 0.00000E+00 0.0000

```

1.35000E+01 0.00000E+00 0.00000
1.40000E+01 1.29226E-08 0.00000
total 1.29226E-08 0.00000
N7 detector score diagnostics
times average score transmissions cumulative fraction of
*a* 1.00000E-01 4071 0.22336 1.91294E-11 0.00127
*b* 1.00000E+00 13841 0.98277 1.27537E-08 0.85040
2.00000E+00 12 0.98343 1.78407E-11 0.85158
5.00000E+00 6 0.98376 2.03013E-11 0.85294
1.00000E+01 7 0.98414 5.12260E-11 0.85635
1.00000E+02 23 0.98541 8.76880E-10 0.91473
1.00000E+03 2 0.98552 1.09590E-09 0.98769
1.00000E+38 0 0.98552 0.00000E+00 0.98769
1st 200 histories 264 1.00000 1.84875E-10 1.00000
average tally per history = 1.50198E-08 largest score = 7.92170E-06
(largest score)/(average tally) = 5.27417E+02 nps of largest score = 6698
score contributions by cell
cell misses hits tally per history weight per hit
1 1 0 *c* 14000 1.29226E-08 1.29226E-08
2 2 19611 *d* 4226 2.09721E-09 6.94769E-09
total 19611 *e* 18226 1.50198E-08 1.15372E-08
score misses
russian roulette on pd 0
psc=0. 1929
russian roulette in transmission 562
underflow in transmission 0
hit a zero-importance cell 0
energy cutoff 17120
1analysis of the results in the tally fluctuation chart bin (tfc) for tally 65 with nps = 14000 print table 160
normed average tally per history = 1.50198E-08 unormed average tally per history = 1.50198E-08
estimated tally relative error = 0.0620 estimated variance of the variance = 0.4479
relative error from zero tallies = 0.0000 relative error from nonzero scores = 0.0620
number of nonzero history tallies = 14000 efficiency for the nonzero tallies = 1.0000
history number of largest tally = 6698 largest unnormalized history tally = 9.96753E-06
(largest tally)/(average tally) = 6.63626E+02 (largest tally)/(avg nonzero tally) = 6.63626E+02
*f*

```


CHAPTER 5
CONC

line	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
3.16-07	1 1.10+03	3.041	*****	*****	1916	4.7567E-08	0.0876	0.0068	0.0	1916	4.7567E-08	0.0876	0.0068	0.0	1916
3.98-07	0 0.00+00	0.000			1693	4.2275E-10	0.0653	0.0039	0.0	1693	4.2275E-10	0.0653	0.0039	0.0	1693
5.01-07	3 2.08+03	3.318	*****	*****	1735	4.3409E-10	0.0525	0.0025	0.0	1735	4.3409E-10	0.0525	0.0025	0.0	1735
6.31-07	0 0.00+00	0.000			1782	4.4451E-10	0.0448	0.0018	0.0	1782	4.4451E-10	0.0448	0.0018	0.0	1782
7.94-07	0 0.00+00	0.000			1727	4.3402E-10	0.0407	0.0015	0.0	1727	4.3402E-10	0.0407	0.0015	0.0	1727
1.00-06	0 0.00+00	0.000			1707	4.3257E-10	0.0373	0.0013	0.0	1707	4.3257E-10	0.0373	0.0013	0.0	1707
1.26-06	2 5.52+02	2.742	*****	****	1690	4.3106E-10	0.0346	0.0011	0.0	1690	4.3106E-10	0.0346	0.0011	0.0	1690
1.58-06	1 2.19+02	2.341	*****	*****	1656	4.2402E-10	0.0327	0.0010	0.0	1656	4.2402E-10	0.0327	0.0010	0.0	1656
2.00-06	1 1.74+02	2.241	*****	*****	1668	4.2702E-10	0.0307	0.0009	0.0	1668	4.2702E-10	0.0307	0.0009	0.0	1668
2.51-06	0 0.00+00	0.000			1674	4.2944E-10	0.0290	0.0008	0.0	1674	4.2944E-10	0.0290	0.0008	0.0	1674
3.16-06	1 1.10+02	2.041	*****		1690	4.3427E-10	0.0275	0.0007	0.0	1690	4.3427E-10	0.0275	0.0007	0.0	1690
3.98-06	0 0.00+00	0.000			1693	4.3401E-10	0.0264	0.0006	0.0	1693	4.3401E-10	0.0264	0.0006	0.0	1693
5.01-06	0 0.00+00	0.000			1695	4.3445E-10	0.0253	0.0006	0.0	1695	4.3445E-10	0.0253	0.0006	0.0	1695
6.31-06	0 0.00+00	0.000			1683	4.3241E-10	0.0244	0.0005	0.0	1683	4.3241E-10	0.0244	0.0005	0.0	1683
7.94-06	1 4.37+01	1.641	**												
1.00-05	1 3.47+01	1.541	*												
total	14000 1.00+00														

SKIP 554 LINES IN OUTPUT

1tally fluctuation charts

mps	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
1000	4.7068E-10	0.0876	0.0068	0.0	1916	4.7567E-08	0.0876	0.0075	0.0	1915	5.8922E-08	0.0971	0.0685	0.0	1559
2000	4.2275E-10	0.0653	0.0039	0.0	1693	4.2930E-08	0.0656	0.0046	0.0	1677	5.3176E-08	0.0715	0.0290	0.0	1411
3000	4.3409E-10	0.0525	0.0025	0.0	1735	4.3773E-08	0.0526	0.0028	0.0	1730	5.3670E-08	0.0562	0.0154	0.0	1517
4000	4.4451E-10	0.0448	0.0018	0.0	1782	4.5086E-08	0.0449	0.0020	0.0	1773	5.5571E-08	0.0481	0.0109	0.0	1542
5000	4.3402E-10	0.0407	0.0015	0.0	1727	4.3893E-08	0.0408	0.0017	0.0	1719	5.3928E-08	0.0434	0.0081	6.1	1515
6000	4.3257E-10	0.0373	0.0013	0.0	1707	4.3604E-08	0.0373	0.0014	0.0	1699	5.3513E-08	0.0397	0.0064	4.5	1502
7000	4.3106E-10	0.0346	0.0011	0.0	1690	4.3644E-08	0.0347	0.0012	0.0	1679	5.3608E-08	0.0368	0.0051	5.8	1493
8000	4.2402E-10	0.0327	0.0010	0.0	1656	4.2792E-08	0.0328	0.0011	0.0	1645	5.2434E-08	0.0346	0.0043	6.8	1472
9000	4.2702E-10	0.0307	0.0009	0.0	1668	4.3025E-08	0.0308	0.0010	0.0	1659	5.2555E-08	0.0324	0.0036	4.9	1499
10000	4.2944E-10	0.0290	0.0008	0.0	1674	4.3157E-08	0.0291	0.0008	0.0	1667	5.2550E-08	0.0305	0.0030	3.6	1519
11000	4.3427E-10	0.0275	0.0007	0.0	1690	4.3540E-08	0.0276	0.0007	0.0	1687	5.2867E-08	0.0288	0.0026	4.3	1550
12000	4.3401E-10	0.0264	0.0006	0.0	1693	4.3602E-08	0.0264	0.0007	0.0	1691	5.2961E-08	0.0275	0.0023	5.3	1559
13000	4.3445E-10	0.0253	0.0006	0.0	1695	4.3746E-08	0.0253	0.0006	0.0	1691	5.3617E-08	0.0276	0.0109	3.2	1428
14000	4.3241E-10	0.0244	0.0005	0.0	1683	4.3519E-08	0.0244	0.0006	0.0	1681	5.3284E-08	0.0265	0.0098	3.5	1430

CHAPTER 5
CONC

mps	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
1000	4.3003E-10	0.1894	0.3080	2.2	410	4.4792E-10	0.1596	0.1612	2.6	577	1.5987E-08	0.1572	0.4035	1.3	595
2000	4.9422E-10	0.1342	0.1158	2.0	400	3.9840E-10	0.1174	0.1139	2.3	523	2.2806E-08	0.3296	0.8828	1.3	66
3000	4.6236E-10	0.1055	0.0852	2.0	430	4.3304E-10	0.0968	0.0813	2.3	511	5.1530E-08	0.6212	0.9507	1.2	12
4000	4.6662E-10	0.0921	0.0610	2.1	421	4.5852E-10	0.0905	0.0804	2.2	437	4.2554E-08	0.5646	0.9482	1.2	11
5000	4.4901E-10	0.0802	0.0520	2.0	444	4.5054E-10	0.0778	0.0664	2.4	472	3.8499E-08	0.5004	0.9401	1.2	11
6000	4.3176E-10	0.0711	0.0479	2.4	470	4.3363E-10	0.0689	0.0611	2.7	500	3.4036E-08	0.4717	0.9401	1.3	11
7000	4.5114E-10	0.0658	0.0388	2.7	466	4.3277E-10	0.0621	0.0514	2.9	523	4.6830E-08	0.4339	0.4898	1.3	11
8000	4.3486E-10	0.0610	0.0362	2.9	475	4.3543E-10	0.0587	0.0403	3.4	513	4.2681E-08	0.4166	0.4898	1.4	10
9000	4.2029E-10	0.0572	0.0339	3.1	480	4.3790E-10	0.0553	0.0347	3.7	513	3.9306E-08	0.4021	0.4898	1.4	9.7E+00
10000	4.1498E-10	0.0541	0.0308	3.1	483	4.2707E-10	0.0520	0.0326	4.1	523	3.6630E-08	0.3884	0.4897	1.4	9.4E+00
11000	4.1164E-10	0.0515	0.0284	3.1	484	4.4293E-10	0.0494	0.0268	4.4	526	3.4458E-08	0.3753	0.4897	1.5	9.1E+00
12000	4.1067E-10	0.0487	0.0257	3.9	496	4.4056E-10	0.0468	0.0244	4.6	536	3.3080E-08	0.3587	0.4883	1.4	9.1E+00
13000	4.0983E-10	0.0459	0.0239	4.5	514	4.3922E-10	0.0458	0.0241	5.1	517	3.2244E-08	0.3400	0.4862	1.3	9.4E+00
14000	4.1441E-10	0.0444	0.0210	4.6	510	4.3043E-10	0.0438	0.0232	5.2	523	3.1520E-08	0.3236	0.4823	1.4	9.6E+00

tally 55

mps	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
1000	1.2948E-08	0.0640	0.4349	1.3	3591	1.3031E-08	0.0062	0.9837	1.8	382281	1.2970E-08	0.0018	0.9031	2.0	4355709
2000	1.6116E-08	0.1796	0.5871	1.3	223	1.3893E-08	0.0567	0.9588	1.7	2242	1.3262E-08	0.0162	0.5148	1.9	27467
3000	2.0729E-08	0.1568	0.1859	1.3	195	1.3747E-08	0.0391	0.8777	1.7	3136	1.3798E-08	0.0351	0.7769	1.6	3875
4000	1.9257E-08	0.1297	0.1702	1.4	213	1.3659E-08	0.0306	0.7616	1.7	3815	1.5296E-08	0.1119	0.9120	1.6	285
5000	1.8678E-08	0.1139	0.1421	1.4	220	1.3993E-08	0.0351	0.4095	1.6	2320	1.4827E-08	0.0924	0.9121	1.5	335
6000	1.9004E-08	0.1117	0.1478	1.4	190	1.3822E-08	0.0296	0.4095	1.6	2703	1.4793E-08	0.0789	0.8353	1.5	381
7000	1.8810E-08	0.1009	0.1282	1.5	198	1.6194E-08	0.1116	0.5009	1.5	162	1.4715E-08	0.0684	0.8145	1.5	431
8000	2.1095E-08	0.1475	0.5038	1.3	81	1.5802E-08	0.1001	0.5010	1.5	176	1.5333E-08	0.0791	0.4496	1.4	283
9000	2.2176E-08	0.1323	0.4022	1.3	90	1.5509E-08	0.0907	0.5007	1.4	191	1.5320E-08	0.0713	0.4263	1.4	309
10000	2.1091E-08	0.1252	0.4022	1.2	90	1.5300E-08	0.0828	0.4994	1.4	206	1.5084E-08	0.0652	0.4263	1.4	332
11000	2.2194E-08	0.1247	0.2687	1.2	82	1.5096E-08	0.0763	0.4994	1.4	220	1.5189E-08	0.0616	0.3624	1.4	338
12000	2.2296E-08	0.1184	0.2341	1.3	84	1.5018E-08	0.0706	0.4906	1.4	236	1.5033E-08	0.0571	0.3618	1.4	361
13000	2.4274E-08	0.1530	0.3679	1.3	46	1.5158E-08	0.0661	0.4480	1.4	248	1.6616E-08	0.1152	0.6972	1.4	82
14000	2.4154E-08	0.1456	0.3420	1.4	47	1.5020E-08	0.0620	0.4479	1.4	262	1.6359E-08	0.1087	0.6972	1.4	85

tally fluctuation charts

mps	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
1000	4.6893E-10	0.1150	0.0940	3.1	1110	3.7894E-08	0.3062	0.6184	1.7	157	3.1655E-08	0.2324	0.5702	1.3	272
2000	4.5071E-10	0.0754	0.0503	3.3	1267	3.1910E-08	0.1915	0.5058	1.8	197	7.0026E-08	0.5600	0.9385	1.3	23

CHAPTER 5
CONC

3000	4.5901E-10	0.0597	0.0296	4.2	1344	2.8192E-08	0.1470	0.4726	1.9	221	5.7102E-08	0.4603	0.9189	1.3	23
4000	4.7243E-10	0.0551	0.0277	2.9	1177	2.8978E-08	0.1196	0.3186	1.9	250	4.8966E-08	0.4030	0.9156	1.4	22
5000	4.6252E-10	0.0503	0.0241	2.9	1128	3.4948E-08	0.1418	0.3532	1.9	142	4.9120E-08	0.3254	0.8720	1.4	27
6000	4.5707E-10	0.0467	0.0221	3.7	1089	3.6619E-08	0.1239	0.2512	2.0	154	4.5316E-08	0.2943	0.8673	1.5	27
7000	4.4496E-10	0.0430	0.0201	3.8	1091	3.5555E-08	0.1108	0.2390	2.2	164	4.7860E-08	0.2480	0.7483	1.6	33
8000	4.3427E-10	0.0397	0.0182	4.3	1122	3.6111E-08	0.1029	0.1883	2.4	167	4.4972E-08	0.2312	0.7456	1.7	33
9000	4.3578E-10	0.0376	0.0157	4.6	1112	3.5384E-08	0.0944	0.1804	2.6	176	5.1731E-08	0.2129	0.4267	1.9	35
10000	4.3122E-10	0.0353	0.0143	4.9	1131	3.8466E-08	0.1031	0.1700	2.4	133	5.0118E-08	0.1987	0.4189	1.9	36
11000	4.3632E-10	0.0339	0.0130	5.6	1113	3.8983E-08	0.0956	0.1499	2.4	140	4.9698E-08	0.1836	0.4060	2.0	38
12000	4.3565E-10	0.0325	0.0119	7.5	1113	3.8267E-08	0.0900	0.1450	2.5	145	4.9341E-08	0.1737	0.3705	2.0	39
13000	4.3031E-10	0.0310	0.0112	8.9	1126	3.8663E-08	0.0851	0.1280	2.6	150	5.0503E-08	0.1675	0.2987	2.0	39
14000	4.3184E-10	0.0297	0.0102	10.0	1136	3.8499E-08	0.0801	0.1235	2.8	157	4.8699E-08	0.1614	0.2976	2.1	39

 dump no. 2 on file conc.4br nps = 14000 coll = 26446 ctm = 1.00 nrn = 421786

9 warning messages so far.
 run terminated when 14000 particle histories were done.
 computer time = 1.20 minutes
 mcnp version 4b 02/04/97

03/06/97 16:06:47 probid = 03/06/97 16:05:26

CHAPTER 5 CONC

Notes:

- N1:** MCNP was run with the name execute line option that renames the output file conc.4bo and the continue-run file conc.4br.
- N2:** The point detector for tally 65 is placed on surface 2 (at 0,-390,0) with a sphere of exclusion of .5 mean free paths. This tally is a good example of what NOT to do when using point detectors. First of all, the point detector (or ring detector) should not be placed directly on a surface, especially if the cell on one side has a zero importance. As a rule of thumb, the point detector should lie just inside or outside a surface. Another significant item about this tally is that the radius of the sphere of exclusion is expressed as 0.5 mean free paths. It is generally not recommended to use a radius expressed in mean free paths because this increases the variance of the tally. However, the radius can be entered in mean free paths if the user does not know what other value to use. The fictitious sphere radius of 0.5 mean free paths (approximately 4.3 cm) assumes a uniform isotropic flux within the sphere. Although this assumption will smooth out the detector response, it is false. The fictitious sphere should never be in more than one material medium as it is here because the material is assumed to be uniform throughout the sphere. This point detector is included in the example to demonstrate how MCNP can sometimes be fooled into giving supposedly accurate results.
- N3:** The ring detector for tally 95 is about the y-axis centered at the origin. The radius of the ring is 420 cm and it is coincident with surface 3. The radius of the sphere of exclusion for this detector is set to 0. Because the detector lies in a void region, it will not produce erroneous results if coincident with a geometric surface.
- N4:** The DD card controls the Russian roulette games that are played for all detector problems unless explicitly turned off. The first entry of this card, 0.1, designates the level at which Russian roulette will be played. For the first 200 histories, all contributions to the detector are counted. The average then is computed and is updated whenever the tally fluctuation chart entry is computed. Russian roulette is played on all contributions below 0.1 times the computed average. This Russian roulette game is one of the few default MCNP variance reduction schemes and typically speeds up detector problems by an order of magnitude. The second entry on the DD card causes a diagnostic message to be printed if a tally greater than $0.1 * 1e100$ is reached (which in this case is never). If this second entry is too high, the diagnostic messages will never be printed, conversely, if this number is too low, the output will be cluttered with these messages.
- N5:** The cutoff card for this problem uses the default time cutoff value and an energy cutoff of 12.0 MeV. If a neutron time is greater than the time entry or if the neutron energy is below 12 MeV, the particle

is terminated. These cutoff parameters can reduce computational time, but they should be used with caution. In some applications, ignoring neutrons and photons beneath a certain energy cutoff will not significantly affect the tally. But, if these lower energy interactions are important (fission and photon interactions) then the final result may be truncated.

- N6:** The problem summary table provides an accounting of particle track, weight, and energy creation and loss. For this problem, the largest neutron loss was caused by energy cutoff. There is a total of 26,446 collisions for 14,000 source histories. The net multiplication of 1.0129 is caused by (n,xn) reactions; the system is clearly not supercritical because there is no fissionable material. The weight per escaping source particle is 0.086876, meaning that the flux on the shell of radius 4000 cm is approximately $0.086876/(4*\pi*4000^2) = 4.321E-10$ neutrons/cm². The energy cutoff terminated 12673 tracks out of 14000 starting particles, making for a very fast problem run time.
- N7:** The letters *a*, etc, throughout the diagnostics table correspond to the notes, (a),(b), etc. There were 18226 detector contributions (e). 14000 were from the source (there were 14000 hits from cell 1)(c) and 4226 from collisions inside cell 2 (d). According to the problem summary there were 26446 collisions. Thus the DD card roulette game eliminated 84% of the collision contributions. Of the 4226 collisions that did contribute to the tally, 4071 (a) made a tally less than the $1E - 1$ cutoff (it was conservatively estimated that their contributions would be higher so that they would not be rouletted). These 4071 transmissions to the detector contributed only 0.127% of the cumulative fraction of total tally(a). The majority of the total tally was contributed by transmissions with an average score of 1.0 or less (b); these scores accounted for 85.04% of the total tally. The remaining fraction of the tally was contributed by the transmissions with scores greater than 1.0. The largest tally is 663.63 times larger than the average tally(f).
- N8:** This section describes how the tfc bins would be affected if the largest previously sampled score was encountered on the next history. The “value at nps” column shows the tfc bin values of the current history, while the “value at nps+1” column shows the results after the largest previous history has been added to the tally. The last column shows the relative change of the tfc bin values from the nps value to the nps+1 value. The effect of having a very large score on the next history appears to have an overall detrimental effect on these tfc values. The relative error increased by 20% while the figure of merit decreased by 31%. One positive effect is that the VOV decreased by 29.8% (to 0.314281), however, it was still not beneath the required value of 0.1.
- N9:** This problem passed only five of the ten tfc bin statistical checks,

CHAPTER 5 CONC

clearly a bad sign. The relative error (RE) was more than 5%. The VOV was not below the required 0.1 maximum and is not decreasing as $1/nps$. The probability density function (PDF) slope was not greater than 3. Both indicate that the problem was not sampled adequately. Undersampling of infrequent high scoring tallies gives a result with an underpredicted RE and variance. The VOV is more sensitive to large tally score fluctuations than the RE, and is one good indicator of confidence interval reliability. The PDF slope check confirms whether the PDF function's high score tail is decreasing with at least a $1/x^3$ dependence. If the high score tail follows this criteria, then the Central Limit Theorem is satisfied and the distribution should converge to a normal distribution if enough histories are run. It can be seen that a low relative error and variance do not always guarantee a reliable result. These ten statistical checks do not ensure a totally reliable result; they just provide a more rigorous check of the tally reliability.

- N10:** This plot is the unnormed probability density for tally 65. It is a log-log plot of the PDF that is shown by asterisks, along with the central mean (denoted by the line of m's). The curve of S's denotes the Pareto curve fit to the PDF distribution. This curve is included so that the user can see if the fit is fairly accurate when compared to the calculated distribution. To the left of the plot are the columns that show the abscissa, number, number density and the ordinate of the PDF.
- N11:** These are the tfc bin results for the tally 65 point detector. The RE is just above 5%, the FOM is decent, and the answer is wrong. To ensure a reliable confidence interval, the acceptable value of the VOV is 0.1. As mentioned previously, the VOV checks the higher moments (3rd and 4th) of the PDF because they are more sensitive to any aberrations in the PDF caused by insufficient sampling. For this tally, the VOV of 0.4479 clearly does not fall below the acceptable limit of 0.1. To achieve a reliable confidence interval, the slope of the PDF must be greater than or equal to three in order to produce a distribution that has a $1/x^3$ behavior. The tally also fails this criterion, indicating that the Central Limit Theorem is not satisfied. Tally 65 appears to have converged to a flux of 1.5020E-08. However, surface tally 22 at 390 cm is 5.3284E-08 and the still-unconverged ring detector tally 105 at 390 cm is 4.8699E-08. Tally 65 appears from its relative error to be close to convergence but it is actually low by a factor of 4! Tallies 2 and 85 at 4000 cm appear close to the flux approximated from the problem summary (see note **N6**), namely 4.321E-10. Tallies 25 and 35, both point detectors, are close to the true flux, but still more than one standard deviation low, even though their VOV and slope appear to be good.

COMMENTS: How should the CONC problem be better specified?

First, detectors are inappropriate for this problem and should not be used. The shell should be divided into four spherically concentric geometrical regions with outwardly increasing importances of 1, 2, 4 and 8. Then for every source particle, approximately one particle would cross the outer surface of the shell and score, instead of the present 14381 out of 100000.

How could detectors be made to work better in this problem? In any problem with symmetry, a ring detector rather than a point detector should be used to at least take advantage of the symmetry. The fictitious sphere radius could be made smaller so that the $1/r^2$ singularity made about as much difference as the fluctuation in PSC value. Perhaps this fictitious sphere radius would be 1 cm. Most importantly, the source direction could be biased to direct particles at the ring, causing a lot more collisions in the vicinity of the detector.

CHAPTER 5

KCODE

IV. KCODE

The problem selected to illustrate the output from a criticality calculation is the one-dimensional model of the GODIVA critical assembly, composed of about 94% ^{235}U . This assembly is one of several fast neutron critical assemblies discussed in LA-4208 entitled “Reevaluated Critical Specifications of Some Los Alamos Fast-Neutron Systems” by G. E. Hansen and H. C. Paxton (September 1964).

An MCNP input file that models GODIVA and performs only the criticality calculation with no separate tallies would be only 11 lines long. The KCODE card indicates that the problem is a criticality calculation for the k_{eff} eigenvalue. To perform this same calculation with neutron-induced photon production, add the MODE N P card. Any tallies that are made in a criticality problem are normalized to the starting weight (default) or number of particles as defined by the user (see Chapter 2, section VIII for details). Tallies should be scaled for the appropriate steady state neutron generation rate.

Following is a partial listing of the output from a KCODE calculation. The pages selected emphasize the criticality aspects of the problem.

CHAPTER 5
KCODE

```

1mcp version 4b ld=02/04/97 02/13/97 16:13:57 probid = 10/01/93 11:04:27
*****
i=kcode outp=kcod.4bo
N1 1- bare U(94) sphere ref. LA-4208, G.E. Hansen and H.C.Paxton, 1969, pg 4
2- 1 10 0.048146 -1 imp:n=1
3- 2 0 1 imp:n=0
4-
5- 1 so 8.7037
6-
7- m10 92235.60c 0.045217 92238.60c 0.0024355 92234.60c 0.0004935
N2 8- kcode 3000 1. 5 35
N3 warning. tallies are normed per fission neutron for one generation.
N4 9- ksrc 0 0 0
10- print
11- c
12- c tallies
13- c
14- c use the 16-group Hansen-Roach energy structure as the default
15- c
N5 16- e0 1-7 4-7 1-6 3-6 1-5 3-5 1-4 5.5-4 3-3 1.7-2 0.1 0.4 0.9 1.4 3 20
17- c
18- f1:n 1
19- f4:n 1
20- f14:n 1
21- fc14 total neutron fluence, total fissions, total fission neutrons,
22- total neutron absorptions, and neutron heating (mev/gram)
23- fq14 e m
N6 24- fm14 (2761.85) (-2761.85 10 (-6) (-6 -7) (-2)) (-0.053183 10 1 -4)
25- f24:n 1
26- fc24 total neutron fluence, total fissions, total fission neutrons,
27- total neutron absorptions, and neutron heating (mev/gram)
28- e24 1.67-4 4.54-4 1.235-3 3.35-3 9.12-3 0.0248 0.0676 0.184
29- 0.303 0.50 0.823 1.353 1.738 2.232 2.865 3.68 6.07 7.79
30- 10 12 13.5 15 20
31- fq24 e m
32- fm24 (2761.85) (-2761.85 10 (-6) (-6 -7) (-2)) (-0.053183 10 1 -4)

```

CHAPTER 5
KCODE

```

33- f6:n 1
34- f7:n 1
35- f34:n 1
36- sd34 1
37- fq34 m f
38- fm34 (-1 10 -6 -7) (-1 10 16:17) (-1 10 -2) (-1 10 -6) (1 -2)
39- e34 20 nt
    print table 90

N7 1 initial source from ksrc card.
    original number of points 1
    points not in any cell 0
    points in cells of zero importance 0
    points in void cells 0
    points in ambiguous cells 0
    total points rejected 0
    points remaining 1
    points after expansion or contraction 3000
    nominal source size 3000
    initial guess for k(eff.) 1.000000
    cycles to skip before tallying 5
    number of keff cycles that can be stored 201
    total fission mubar data are being used.

SKIP 187 LINES IN OUTPUT
    print table 40

N8 1 material composition
    material
    number component nuclide, atom fraction 92238, 5.05857E-02 92234, 1.02501E-02
    material
    number component nuclide, mass fraction 92235, 9.39164E-01 92238, 5.12020E-02 92234, 1.02002E-02
    N9 1 cell volumes and masses
    cell atom gram density atom density gram density input volume calculated volume mass pieces
    1 1 4.81460E-02 1.88030E+01 0.00000E+00 0.00000E+00 2.76185E+03 5.19311E+04 1
    2 2 0.00000E+00 0.00000E+00 0.00000E+00 0.00000E+00 0.00000E+00 0.00000E+00
    print table 50
    reason volume not calculated
    infinite

SKIP 76 LINES IN OUTPUT
    print table 100
    N10 1 cross-section tables

```

CHAPTER 5
KCODE

```

table      length      tables from file endf602
92234.60c  77043      92-u-234 from endf-vi
92235.60c  229233     92-u-235 from lanl proposed endf-vi.2
92238.60c  179624     92-u-238 from endf-vi.2
total      485900

decimal words of dynamically allocated storage
general      83822
tallies      48944
bank         6803
cross sections  485900
total        598421 = 2393684 bytes

*****
dump no.    1 on file runtime      nps = 0 coll = 0 cycle = 0
N12 source distribution written to file srctp
      1 warning message so far.

N13 1 starting mcrun.      dynamic storage = 598425 words, 2393700 bytes.      cp0 = 0.09      print table 110
      bare U(94) sphere ref. LA-4208, G.E. Hansen and H.C.Paxton, 1969, pg 4

nps      x      y      z      cell      surf      u      v      w      energy      weight      time
1  0.000E+00  0.000E+00  0.000E+00  1  0  5.085E-01  4.733E-01  7.193E-01  2.209E+00  1.000E+00  0.000E+00
2  0.000E+00  0.000E+00  0.000E+00  1  0  8.952E-01  -4.447E-01  -2.944E-02  4.904E+00  1.000E+00  0.000E+00
3  0.000E+00  0.000E+00  0.000E+00  1  0  -6.184E-01  -4.495E-01  6.446E-01  3.809E-01  1.000E+00  0.000E+00
4  0.000E+00  0.000E+00  0.000E+00  1  0  9.710E-01  -5.665E-02  -2.323E-01  1.331E+00  1.000E+00  0.000E+00
5  0.000E+00  0.000E+00  0.000E+00  1  0  5.861E-01  1.496E-01  -7.963E-01  1.902E+00  1.000E+00  0.000E+00
6  0.000E+00  0.000E+00  0.000E+00  1  0  -6.489E-02  -1.626E-01  9.845E-01  4.410E-01  1.000E+00  0.000E+00
7  0.000E+00  0.000E+00  0.000E+00  1  0  -7.068E-02  3.263E-02  -9.970E-01  4.750E-01  1.000E+00  0.000E+00
8  0.000E+00  0.000E+00  0.000E+00  1  0  -3.915E-01  4.664E-01  -7.932E-01  4.136E+00  1.000E+00  0.000E+00
9  0.000E+00  0.000E+00  0.000E+00  1  0  -2.368E-01  9.215E-01  -3.079E-01  7.453E-02  1.000E+00  0.000E+00
10 0.000E+00  0.000E+00  0.000E+00  1  0  1.946E-01  -3.204E-01  9.271E-01  3.128E+00  1.000E+00  0.000E+00
11 0.000E+00  0.000E+00  0.000E+00  1  0  -6.698E-01  -7.177E-01  -1.905E-01  1.014E+00  1.000E+00  0.000E+00
12 0.000E+00  0.000E+00  0.000E+00  1  0  -8.398E-01  -4.129E-01  3.524E-01  1.395E+00  1.000E+00  0.000E+00
13 0.000E+00  0.000E+00  0.000E+00  1  0  -1.714E-01  -8.572E-01  4.857E-01  7.748E-01  1.000E+00  0.000E+00
14 0.000E+00  0.000E+00  0.000E+00  1  0  -2.489E-01  -5.118E-01  -8.222E-01  1.101E+00  1.000E+00  0.000E+00
15 0.000E+00  0.000E+00  0.000E+00  1  0  -2.959E-01  2.119E-01  9.314E-01  1.951E+00  1.000E+00  0.000E+00
16 0.000E+00  0.000E+00  0.000E+00  1  0  1.395E-01  -9.829E-01  1.202E-01  2.186E+00  1.000E+00  0.000E+00
17 0.000E+00  0.000E+00  0.000E+00  1  0  6.909E-01  -7.110E-01  1.307E-01  1.865E+00  1.000E+00  0.000E+00

*****
N11 cross sections  485900
total        598421 = 2393684 bytes
      nps = 0 coll = 0 cycle = 0 ctm = 0.00 nrm = 0
*****

```

CHAPTER 5
KCODE

18	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-6.580E-01	5.320E-01	-5.329E-01	1.229E+00	1.000E+00	0.000E+00
19	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-9.903E-01	-1.380E-01	1.353E-02	1.305E+00	1.000E+00	0.000E+00
20	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	7.462E-01	4.859E-01	-4.551E-01	1.000E+00	1.000E+00	0.000E+00
21	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-1.977E-01	9.797E-01	3.360E-02	3.990E+00	1.000E+00	0.000E+00
22	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-9.117E-01	-3.647E-01	-1.891E-01	2.665E-01	1.000E+00	0.000E+00
23	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-4.287E-01	8.361E-01	-3.423E-01	1.156E+00	1.000E+00	0.000E+00
24	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	1.080E-01	3.412E-01	-9.338E-01	2.669E+00	1.000E+00	0.000E+00
25	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-9.111E-01	-9.012E-03	-4.122E-01	2.185E+00	1.000E+00	0.000E+00
26	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-2.568E-01	-6.391E-01	-7.249E-01	4.225E+00	1.000E+00	0.000E+00
27	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-2.912E-01	8.086E-01	5.113E-01	1.079E+00	1.000E+00	0.000E+00
28	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	1.472E-01	-9.514E-01	2.705E-01	3.461E+00	1.000E+00	0.000E+00
29	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-6.135E-01	-7.645E-01	-1.978E-01	1.836E+00	1.000E+00	0.000E+00
30	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-5.702E-01	5.651E-01	-5.963E-01	4.556E-01	1.000E+00	0.000E+00
31	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-6.607E-01	5.373E-01	-5.242E-01	6.415E-01	1.000E+00	0.000E+00
32	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-9.742E-02	-3.639E-01	-9.263E-01	2.764E+00	1.000E+00	0.000E+00
33	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-1.965E-01	-3.145E-01	-9.287E-01	2.785E-01	1.000E+00	0.000E+00
34	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	4.097E-01	8.465E-01	-3.399E-01	9.097E-01	1.000E+00	0.000E+00
35	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-4.048E-02	8.831E-01	4.675E-01	3.360E-01	1.000E+00	0.000E+00
36	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	3.371E-01	-9.269E-01	-1.652E-01	6.376E-01	1.000E+00	0.000E+00
37	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-1.867E-01	9.756E-01	-1.155E-01	2.186E+00	1.000E+00	0.000E+00
38	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-2.616E-01	2.336E-01	-9.365E-01	7.314E-01	1.000E+00	0.000E+00
39	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	9.780E-01	-7.641E-02	-1.939E-01	2.997E-01	1.000E+00	0.000E+00
40	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	2.580E-01	-7.076E-01	6.578E-01	1.444E+00	1.000E+00	0.000E+00
41	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-3.212E-01	-7.678E-01	-5.543E-01	1.914E+00	1.000E+00	0.000E+00
42	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	5.039E-01	-1.460E-01	8.513E-01	1.502E+00	1.000E+00	0.000E+00
43	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	6.080E-01	5.487E-01	5.738E-01	5.971E+00	1.000E+00	0.000E+00
44	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-2.932E-01	9.304E-01	-2.199E-01	1.827E+00	1.000E+00	0.000E+00
45	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-8.475E-01	-3.993E-01	-3.497E-01	1.928E+00	1.000E+00	0.000E+00
46	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	1.200E-01	-9.195E-01	-3.743E-01	1.351E+00	1.000E+00	0.000E+00
47	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	7.085E-01	5.879E-01	3.904E-01	2.288E+00	1.000E+00	0.000E+00
48	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	4.261E-01	9.046E-01	9.254E-03	1.230E+00	1.000E+00	0.000E+00
49	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	5.431E-01	4.270E-01	-7.230E-01	1.433E+00	1.000E+00	0.000E+00
50	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1	0	-1.053E-01	-9.805E-01	1.658E-01	6.572E-01	1.000E+00	0.000E+00

!estimated keff results by cycle

cycle 1 k(collission) 1.338407 prompt removal lifetime(abs) 8.7319E-01 source points generated 4044
 cycle 2 k(collission) 1.150562 prompt removal lifetime(abs) 7.2873E-01 source points generated 2603

print table 175

CHAPTER 5
KCODE

cycle	3	k(collission)	1.069187	prompt removal lifetime(abs)	6.6009E-01	source points generated	2732
cycle	4	k(collission)	1.017572	prompt removal lifetime(abs)	6.3852E-01	source points generated	2852
cycle	5	k(collission)	1.013657	prompt removal lifetime(abs)	6.2357E-01	source points generated	2910
cycle	6	k(collission)	1.006509	prompt removal lifetime(abs)	6.2631E-01	source points generated	2962
estimator	7	ave of	2 cycles	combination	simple average	combined average	corr
k(collission)	0.985639	0.996074	0.0105	k(col/abs)	0.000000	0.000000	0.0000
k(absorption)	0.989073	0.997161	0.0081	k(abs/tk ln)	0.000000	0.000000	0.0000
k(trk length)	0.991975	0.999241	0.0073	k(tk ln/col)	0.000000	0.000000	0.0000
rem life(col)	6.1596E-01	6.2189E-01	0.0095				
rem life(abs)	6.1659E-01	6.2145E-01	0.0078	life(col/abs)	0.0000E+00	0.0000E+00	0.0000
source points generated	2940						
estimator	8	ave of	3 cycles	combination	simple average	combined average	corr
k(collission)	1.009235	1.000461	0.0074	k(col/abs)	1.000910	1.004774	0.9947
k(absorption)	1.009755	1.001359	0.0063	k(abs/tk ln)	1.003627	0.995489	0.9622
k(trk length)	1.019200	1.005894	0.0078	k(tk ln/col)	1.003178	1.001153	0.9291
rem life(col)	6.2549E-01	6.2309E-01	0.0058				
rem life(abs)	6.2604E-01	6.2298E-01	0.0051	life(col/abs)	6.2304E-01	6.2270E-01	0.9871
source points generated	3087						
estimator	9	ave of	4 cycles	combination	simple average	combined average	corr
k(collission)	1.002354	1.000934	0.0053	k(col/abs)	1.001615	1.005994	0.9879
k(absorption)	1.005103	1.002295	0.0045	k(abs/tk ln)	1.002863	1.002228	0.7773
k(trk length)	0.996041	1.003431	0.0061	k(tk ln/col)	1.002183	1.001309	0.8099
rem life(col)	6.1844E-01	6.2193E-01	0.0045	k(col/abs/tk ln)	1.002220	1.006713	0.0077
rem life(abs)	6.1793E-01	6.2172E-01	0.0042	life(col/abs/tl)	6.2126E-01	6.3475E-01	0.0026
source points generated	2936						
estimator	10	ave of	5 cycles	combination	simple average	combined average	corr
k(collission)	0.993067	0.999361	0.0044	k(col/abs)	1.000081	1.004924	0.9889
k(absorption)	0.994823	1.000800	0.0038	k(abs/tk ln)	1.000750	1.000824	0.8151
k(trk length)	0.989775	1.000700	0.0054	k(tk ln/col)	1.000030	0.999263	0.8339
rem life(col)	6.0136E-01	6.1781E-01	0.0075	k(col/abs/tk ln)	1.000287	1.005025	0.0057
rem life(abs)	6.0137E-01	6.1765E-01	0.0073	life(col/abs/tl)	6.1760E-01	6.1606E-01	0.0061
source points generated	2981						
SKIP 185 LINES IN OUTPUT							
estimator	34	ave of	29 cycles	combination	simple average	combined average	corr
k(collission)	1.000077	0.999117	0.0024	k(col/abs)	0.998876	0.998678	0.9910
k(absorption)	0.999463	0.998634	0.0024	k(abs/tk ln)	0.998706	0.998734	0.6399

CHAPTER 5
KCODE

k(trk length) 0.984294 0.998779 0.0021 k(tk ln/col) 0.998948 0.0021 0.998875 0.0021 0.6641
 rem life(col) 6.1133E-01 6.1831E-01 0.0042 k(col/abs/TK ln) 0.998843 0.0021 0.998262 0.0021
 rem life(abs) 6.1014E-01 6.1841E-01 0.0043 life(col/abs/tl) 6.1850E-01 0.0039 6.1902E-01 0.0032

source points generated 2954
 N15 estimator cycle 35 ave of 30 cycles combination simple average combined average corr
 k(collission) 0.986986 0.998712 0.0024 k(col/abs) 0.998469 0.0024 0.998278 0.0025 0.9912
 k(absorption) 0.986379 0.998226 0.0024 k(abs/TK ln) 0.998264 0.0020 0.998278 0.0020 0.6531
 k(trk length) 0.984486 0.998302 0.0021 k(tk ln/col) 0.998507 0.0020 0.998423 0.0020 0.6759
 rem life(col) 6.1095E-01 6.1807E-01 0.0041 k(col/abs/TK ln) 0.998413 0.0021 0.997816 0.0021
 rem life(abs) 6.1138E-01 6.1818E-01 0.0042 life(col/abs/tl) 6.1819E-01 0.0038 6.1840E-01 0.0032

source points generated 2856 cycle = 35
 source distribution written to file srctp source particle weight for summary table normalization = 90000.00
 1problem summary (active cycles only)
 N16 run terminated when 35 kcode cycles were done.

0 bare U(94) sphere ref. LA-4208, G.E. Hansen and H.C.Paxton, 1969, pg 4 probid = 02/13/97 16:22:51
 02/13/97 16:13:57

neutron creation	tracks	weight (per source particle)	energy particle	neutron loss	tracks	weight (per source particle)	energy particle
source	89610	1.0000E+00	2.0685E+00	escape	76983	5.7374E-01	9.2650E-01
weight window	0	0.	0.	energy cutoff	0	0.	0.
cell importance	0	0.	0.	time cutoff	0	0.	0.
weight cutoff	0	3.3195E-02	1.1772E-02	weight window	0	0.	0.
energy importance	0	0.	0.	cell importance	0	0.	0.
dextran	0	0.	0.	weight cutoff	13003	3.2964E-02	1.2007E-02
forced collisions	0	0.	0.	energy importance	0	0.	0.
exp. transform	0	0.	0.	dextran	0	0.	0.
upscattering	0	0.	0.	forced collisions	0	0.	0.
(n,xn)	752	5.2850E-03	3.8560E-03	exp. transform	0	0.	0.
fission	0	0.	0.	downscattering	0	0.	0.
total	90362	1.0385E+00	2.0842E+00	capture	0	4.4856E-02	2.7566E-02
number of neutrons banked			448	loss to (n,xn)	376	2.6425E-03	2.0978E-02
neutron tracks per source particle	1.0040E+00			loss to fission	0	3.8428E-01	5.7079E-01
				total	90362	1.0385E+00	2.0842E+00
				average time of (shakes)			
				escape	6.0327E-01		
				cutoffs			
				tco	1.0000E+34		

CHAPTER 5
KCODE

```

neutron collisions per source particle 4.0638E+00      capture      1.0121E+00      eco      0.0000E+00
total neutron collisions      365743      capture or escape 6.3291E-01      wc1      -5.0000E-01
net multiplication      1.0026E+00 0.0003      any termination 6.7266E-01      wc2      -2.5000E-01
computer time so far in this run      8.53 minutes      maximum number ever in bank      1
computer time in mcrun      8.43 minutes      bank overflows to backup file      0
source particles per minute      1.2437E+04      dynamic storage 598425 words,      2393700 bytes.
random numbers generated      5274385      most random numbers used was      423 in history      71092
range of sampled source weights = 7.4184E-01 to 1.1525E+00
ineutron activity in each cell

cell      tracks      population      collisions      collisions      number      flux      average      average
entering      source      * weight      (per history)      energy      weighted      energy      (relative)      track weight      track mfp
1 1 89610 89986 365743 2.6519E+00 8.5833E-01 1.4896E+00 6.7557E-01 2.6271E+00      (cm)
total 89610 89986 365743 2.6519E+00
ineutron weight balance in each cell -- external events      print table 126
cell      entering      source      energy      time      exiting      total      exponential      total
1 1 0.0000E+00 1.0000E+00 0.0000E+00 0.0000E+00 -5.7374E-01 4.2626E-01      transform
total 0.0000E+00 1.0000E+00 0.0000E+00 0.0000E+00 -5.7374E-01 4.2626E-01
ineutron weight balance in each cell -- variance reduction events      print table 130
cell      weight      window      importance      cell      importance      dxtran      forced      exponential      total
1 1 0.0000E+00 0.0000E+00 2.3035E-04 0.0000E+00 0.0000E+00 0.0000E+00 0.0000E+00 2.3035E-04
total 0.0000E+00 0.0000E+00 2.3035E-04 0.0000E+00 0.0000E+00 0.0000E+00 0.0000E+00 2.3035E-04
ineutron weight balance in each cell -- physical events      print table 130
cell      (n,xn)      fission      capture      loss to      loss to      total
1 1 5.2850E-03 0.0000E+00 -4.4856E-02 -2.6425E-03 -3.8428E-01 -4.2649E-01
total 5.2850E-03 0.0000E+00 -4.4856E-02 -2.6425E-03 -3.8428E-01 -4.2649E-01
ineutron activity of each nuclide in each cell, per source particle      print table 140
cell      nuclides      atom      fraction      atom      collisions      * weight      weight lost      weight loss      weight gain
1 1 92235.60c 9.3916E-01 342763 2.4845E+00 4.2600E-02 3.7767E-01 2.4913E-03
92238.60c 5.0586E-02 18983 1.3802E-01 1.5278E-03 3.3803E-03 1.5117E-04
92234.60c 1.0250E-02 3997 2.9397E-02 7.2824E-04 3.2269E-03 0.0000E+00
total 365743 2.6519E+00 4.4856E-02 3.8428E-01 2.6425E-03

```

CHAPTER 5
KCODE

total over all cells for each nuclide	total collisions	collisions * weight	weight lost to capture	weight loss to fission	weight gain by (n,xn)
92234.60c	3997	2.9397E-02	7.2824E-04	3.2269E-03	0.0000E+00
92235.60c	342763	2.4845E+00	4.2600E-02	3.7767E-01	2.4913E-03
92238.60c	18983	1.3802E-01	1.5278E-03	3.3803E-03	1.5117E-04

N17 1keff results for: bare U(94) sphere ref. LA-4208, G.E. Hansen and H.C.Paxton, 1969, pg 4 probid = 02/13/97 16:13:57
the initial fission neutron source distribution used the 1 source points that were input on the ksrc card.

the criticality problem was scheduled to skip 5 cycles and run a total of 35 cycles with nominally 3000 neutrons per cycle.
this problem has run 5 inactive cycles with 15231 neutron histories and 30 active cycles with 89610 neutron histories.
this calculation has completed the requested number of keff cycles using a total of 104841 fission neutron source histories.

all cells with fissionable material were sampled and had fission neutron source points.
the results of the w test for normality applied to the individual collision, absorption, and track-length keff cycle values are:
the k(collision) cycle values appear normally distributed at the 95 percent confidence level
the k(absorption) cycle values appear normally distributed at the 95 percent confidence level
the k(trk length) cycle values appear normally distributed at the 95 percent confidence level

| the final estimated combined collision/absorption/track-length keff = 0.99782 with an estimated standard deviation of 0.00213
|
| the estimated 68, 95, & 99 percent keff confidence intervals are 0.99566 to 0.99997, 0.99345 to 1.00218, and 0.99192 to 1.00371
|
| the final combined (col/abs/tl) prompt removal lifetime = 6.1840E-09 seconds with an estimated standard deviation of 1.9865E-11
|
|-----

the estimated average keffs, one standard deviations, and 68, 95, and 99 percent confidence intervals are:

keff estimator	keff	standard deviation	68	95	99
collision	0.99871	0.00238	0.99630 to 1.00112	0.99384 to 1.00358	0.99215 to 1.00528
absorption	0.99823	0.00236	0.99583 to 1.00062	0.99339 to 1.00306	0.99171 to 1.00474
track length	0.99830	0.00208	0.99620 to 1.00040	0.99405 to 1.00255	0.99257 to 1.00403
col/absorp	0.99828	0.00250	0.99574 to 1.00081	0.99315 to 1.00341	0.99136 to 1.00520
abs/trk len	0.99828	0.00203	0.99623 to 1.00033	0.99413 to 1.00243	0.99268 to 1.00388
col/trk len	0.99842	0.00204	0.99635 to 1.00049	0.99423 to 1.00261	0.99277 to 1.00407
col/abs/trk len	0.99782	0.00213	0.99566 to 0.99997	0.99345 to 1.00218	0.99192 to 1.00371

N18 if the largest of each keff occurred on the next cycle, the keff results and 68, 95, and 99 percent confidence intervals would be:

keff estimator	keff	standard deviation	68	95	99
collision	0.99987	0.00258	0.99726 to 1.00248	0.99460 to 1.00513	0.99278 to 1.00695

CHAPTER 5
KCODE

absorption 0.99937 0.00256 0.99678 to 1.00196 0.99415 to 1.00460 0.99234 to 1.00641
 track length 0.99903 0.00214 0.99687 to 1.00120 0.99466 to 1.00340 0.99315 to 1.00491
 col/abs/trk len 0.99850 0.00225 0.99622 to 1.00077 0.99389 to 1.00309 0.99228 to 1.00468

N19 the estimated average prompt removal lifetimes, one standard deviations, and 68, 95, and 99 percent confidence intervals are (sec):

estimator	lifetime	std. dev.	68
collision	6.18069E-09	2.54581E-11	6.1549E-09 to 6.2064E-09
absorption	6.18177E-09	2.56840E-11	6.1558E-09 to 6.2078E-09
track length	6.18330E-09	2.03833E-11	6.1627E-09 to 6.2039E-09
col/absorp	6.17853E-09	2.59470E-11	6.1523E-09 to 6.2048E-09
abs/trk len	6.18446E-09	1.93218E-11	6.1649E-09 to 6.2040E-09
col/trk len	6.18527E-09	1.94083E-11	6.1656E-09 to 6.2049E-09
col/abs/trk len	6.18401E-09	1.98652E-11	6.1639E-09 to 6.2041E-09

absorption estimates of prompt lifetimes (sec):

escape	capture	removal		
lifespans	6.03267E-09	1.01213E-08	5.94482E-09	6.18188E-09
fraction	5.72097E-01	4.47277E-02	3.83176E-01	1.00000E+00
lifetime(abs)	1.08055E-08	1.38209E-07	1.61330E-08	6.18177E-09
lifetime(c/a/t)	1.08094E-08	1.38259E-07	1.61389E-08	6.18401E-09

N20 1average keff results summed over 2 cycles each to form 15 batch values of keff

batch start	end	keff estimators by batch	average keff estimators and deviations	print table 178
number	cycle	k(coll)	k(rem)	col/abs/tl keff
1	6	0.99607	0.99716	0.99924
2	8	1.00579	1.00743	1.00762
3	10	1.00204	1.00250	0.99646
4	12	1.00387	1.00205	1.00331
5	14	1.02040	1.01852	1.01637
6	16	0.97960	0.97845	0.99347
7	18	0.99115	0.99146	0.99477
8	20	0.98789	0.98758	0.99397
9	22	1.00871	1.00680	1.00379
10	24	0.98929	0.98692	0.99389

11	26	0.99675	0.99643	0.99048
12	28	0.98850	0.98848	0.98845
13	30	1.00642	1.00419	1.00107
14	32	1.01066	1.01250	1.00726

11	26	0.99832	0.00343	0.99775	0.00341	0.99940	0.00232	0.99950	0.00270
12	28	0.99751	0.00324	0.99698	0.00321	0.99848	0.00231	0.99839	0.00266
13	30	0.99819	0.00306	0.99754	0.00301	0.99868	0.00213	0.99833	0.00250
14	32	0.99908	0.00297	0.99860	0.00298	0.99930	0.00207	0.99938	0.00224

CHAPTER 5
KCODE

15	34	35	0.99353	0.99292	0.98439	0.99871	0.00279	0.99823	0.00280	0.99830	0.00217	0.99825	0.00248
average keff results summed over		3 cycles each to form		10 batch values of keff		average keff estimators and deviations		k(track) st dev		col/abs/tl keff		k(c/a/t) st dev	
batch start		end		keff estimators by batch		k(coll) st dev		k(abs) st dev		k(track) st dev		col/abs/tl keff	
number	cycle	cycle	k(coll)	k(abs)	k(track)	k(coll)	st dev	k(abs)	st dev	k(track)	st dev	col/abs/tl keff	st dev
1	6	8	1.00046	1.00136	1.00569	1.00130	0.00084	1.00236	0.00100	1.00111	0.00479	1.00155	0.00202
2	9	11	1.00214	1.00337	0.99632	1.00242	0.00122	1.00239	0.00058	1.00286	0.00328	0.99988	0.00277
3	12	14	1.00466	1.00245	1.00638	1.00130	0.00142	1.00102	0.00143	1.00274	0.00232	0.99916	0.00278
4	15	17	0.99791	0.99689	1.00238	0.99895	0.00259	0.99867	0.00260	1.00071	0.00271	0.99748	0.00275
5	18	20	0.98955	0.98928	0.99260	0.99950	0.00219	0.99911	0.00217	1.00100	0.00223	0.99852	0.00287
6	21	23	1.00229	1.00129	1.00242	0.99853	0.00209	0.99797	0.00215	1.00010	0.00209	0.99825	0.00254
7	24	26	0.99267	0.99116	0.99473	0.99751	0.00208	0.99698	0.00211	0.99848	0.00243	0.99852	0.00287
8	27	29	0.99036	0.99006	0.98715	0.99875	0.00222	0.99818	0.00222	0.99951	0.00237	0.99825	0.00254
9	30	32	1.00871	1.00779	1.00771	0.99871	0.00198	0.99823	0.00198	0.99830	0.00244	0.99825	0.00254
10	33	35	0.99836	0.99861	0.98744	6 batch values of keff							
average keff results summed over		5 cycles each to form		6 batch values of keff		average keff estimators and deviations		k(track) st dev		col/abs/tl keff		k(c/a/t) st dev	
batch start		end		keff estimators by batch		k(coll) st dev		k(abs) st dev		k(track) st dev		col/abs/tl keff	
number	cycle	cycle	k(coll)	k(abs)	k(track)	k(coll)	st dev	k(abs)	st dev	k(track)	st dev	col/abs/tl keff	st dev
1	6	10	0.99936	1.00080	1.00070	1.00564	0.00627	1.00553	0.00473	1.00460	0.00390	1.00285	0.00094
2	11	15	1.01191	1.01026	1.00850	0.99895	0.00761	0.99867	0.00738	1.00071	0.00449	0.99777	0.00507
3	16	20	0.98557	0.98495	0.99295	0.99848	0.00540	0.99789	0.00528	1.00029	0.00320	0.99769	0.00365
4	21	25	0.99709	0.99554	0.99901	0.99763	0.00427	0.99706	0.00417	0.99818	0.00326	0.99769	0.00365
5	26	30	0.99424	0.99375	0.98974	0.99871	0.00365	0.99823	0.00360	0.99830	0.00266	0.99769	0.00365
6	31	35	1.00410	1.00406	0.99892	5 batch values of keff							
average keff results summed over		6 cycles each to form		3 batch values of keff		average keff estimators and deviations		k(track) st dev		col/abs/tl keff		k(c/a/t) st dev	
batch start		end		keff estimators by batch		k(coll) st dev		k(abs) st dev		k(track) st dev		col/abs/tl keff	
number	cycle	cycle	k(coll)	k(abs)	k(track)	k(coll)	st dev	k(abs)	st dev	k(track)	st dev	col/abs/tl keff	st dev
1	6	11	1.00130	1.00236	1.00111	1.00130	0.00001	1.00102	0.00135	1.00274	0.00164	0.99661	0.00218
2	12	17	1.00129	0.99967	1.00438	0.99950	0.00179	0.99911	0.00206	1.00100	0.00198	0.99900	0.00345
3	18	23	0.99592	0.99528	0.99751	0.99751	0.00237	0.99698	0.00258	0.99848	0.00288	0.99661	0.00218
4	24	29	0.99151	0.99061	0.99094	0.99871	0.00219	0.99823	0.00235	0.99830	0.00224	0.99900	0.00345
5	30	35	1.00354	1.00320	0.99757	3 batch values of keff							
average keff results summed over		10 cycles each to form		3 batch values of keff		average keff estimators and deviations		k(track) st dev		col/abs/tl keff		k(c/a/t) st dev	
batch start		end		keff estimators by batch		k(coll) st dev		k(abs) st dev		k(track) st dev		col/abs/tl keff	
number	cycle	cycle	k(coll)	k(abs)	k(track)	k(coll)	st dev	k(abs)	st dev	k(track)	st dev	col/abs/tl keff	st dev
1	6	15	1.00564	1.00553	1.00460	0.99848	0.00715	0.99789	0.00764	1.00029	0.00431	0.99661	0.00218
2	16	25	0.99133	0.99024	0.99598	3 batch values of keff							

CHAPTER 5
KCODE

3 26 35 0.99917 0.99890 0.99433 0.99871 0.00414 0.99823 0.00443 0.99830 0.00318

average keff results summed over 15 cycles each to form 2 batch values of keff

batch start end keff estimators by batch average keff estimators and deviations

number cycle cycle k(coll) k(abs) k(track) k(coll) st dev k(abs) st dev k(track) st dev

1 6 20 0.99895 0.99867 1.00071

2 21 35 0.99848 0.99778 0.99589 0.99871 0.00023 0.99823 0.00044 0.99830 0.00241

N21 1average individual and combined collision/absorption/track-length keff results for 5 different batch sizes

cycles per number of average keff estimators and deviations normality average k(c/a/t) k(c/a/t) confidence intervals

keff batch k batches k(col) st dev k(abs) st dev k(trk) st dev co/ab/trk k(c/a/t) st dev 95

1 30 | 0.9987 0.0024 0.9982 0.0024 0.9983 0.0021 95/95/95| 0.99782 0.00213 0.99345-1.00218 0.99192-1.00371

2 15 | 0.9987 0.0028 0.9982 0.0028 0.9983 0.0022 95/95/95| 0.99825 0.00248 0.99284-1.00366 0.99067-1.00583

3 10 | 0.9987 0.0020 0.9982 0.0020 0.9983 0.0024 95/95/95| 0.99825 0.00254 0.99224-1.00427 0.98935-1.00715

5 6 | 0.9987 0.0036 0.9982 0.0036 0.9983 0.0027 95/95/95| 0.99769 0.00365 0.98606-1.00932 0.97635-1.01903

6 5 | 0.9987 0.0022 0.9982 0.0024 0.9983 0.0022 95/95/95| 0.99900 0.00345 0.98416-1.01385 0.96476-1.03324

N22 1individual and average keff estimator results by cycle

keff neutron keff estimators by cycle average keff estimators and deviations

cycle histories k(coll) k(abs) k(track) k(coll) st dev k(abs) st dev k(track) st dev k(c/a/t) st dev fom

1 3000 | 1.33841 1.33818 1.33112 | 0.99607 0.01043 0.99716 0.00809 0.99924 0.00727 |

2 4044 | 1.15056 1.14890 1.15344 | 1.00046 0.00745 1.00136 0.00628 1.00589 0.00787 |

3 2603 | 1.06919 1.07038 1.06775 | 1.00093 0.00529 1.00229 0.00454 1.00343 0.00608 |

4 2732 | 1.01757 1.01779 1.02535 | 0.99936 0.00439 1.00080 0.00382 1.00070 0.00545 |

5 2852 | 1.01366 1.01166 1.00926 | 1.00130 0.00408 1.00236 0.00349 1.00111 0.00447 |

6 2910 | 1.00651 1.00525 1.00651 | 1.00145 0.00345 1.00213 0.00296 1.00189 0.00385 |

7 2962 | 0.98564 0.98907 0.99197 | 1.00194 0.00303 1.00228 0.00257 1.00166 0.00335 |

8 2940 | 1.00923 1.00975 1.01920 | 1.00242 0.00271 1.00239 0.00226 1.00286 0.00319 |

9 3087 | 1.00235 1.00510 0.99604 | 1.00564 0.00403 1.00553 0.00374 1.00460 0.00334 |

10 2936 | 0.99307 0.99482 0.98978 | 1.00264 0.00472 1.00257 0.00449 1.00248 0.00369 |

11 2981 | 1.01101 1.01017 1.00314 | 1.00130 0.00451 1.00102 0.00439 1.00274 0.00338 |

12 3091 | 1.00232 1.00075 1.00661 | 1.00130 0.00408 1.00236 0.00349 1.00111 0.00447 |

13 2936 | 1.00543 1.00334 1.00000 | 1.00145 0.00345 1.00213 0.00296 1.00189 0.00385 |

14 2958 | 1.00625 1.00326 1.01253 | 1.00194 0.00303 1.00228 0.00257 1.00166 0.00335 |

15 3016 | 1.03454 1.03378 1.02020 | 1.00242 0.00271 1.00239 0.00226 1.00286 0.00319 |

16 3035 | 0.97265 0.97292 0.98127 | 1.00564 0.00403 1.00553 0.00374 1.00460 0.00334 |

17 2840 | 0.98655 0.98399 1.00567 | 1.00264 0.00472 1.00257 0.00449 1.00248 0.00369 |

18 2840 | 0.98655 0.98399 1.00567 | 1.00130 0.00451 1.00102 0.00439 1.00274 0.00338 |

19 2981 | 1.01101 1.01017 1.00314 | 1.00130 0.00408 1.00236 0.00349 1.00111 0.00447 |

20 3091 | 1.00232 1.00075 1.00661 | 1.00145 0.00345 1.00213 0.00296 1.00189 0.00385 |

21 2936 | 1.00543 1.00334 1.00000 | 1.00194 0.00303 1.00228 0.00257 1.00166 0.00335 |

22 2958 | 1.00625 1.00326 1.01253 | 1.00242 0.00271 1.00239 0.00226 1.00286 0.00319 |

23 3016 | 1.03454 1.03378 1.02020 | 1.00564 0.00403 1.00553 0.00374 1.00460 0.00334 |

24 3035 | 0.97265 0.97292 0.98127 | 1.00264 0.00472 1.00257 0.00449 1.00248 0.00369 |

25 2840 | 0.98655 0.98399 1.00567 | 1.00130 0.00451 1.00102 0.00439 1.00274 0.00338 |

26 2981 | 1.01101 1.01017 1.00314 | 1.00130 0.00408 1.00236 0.00349 1.00111 0.00447 |

27 3091 | 1.00232 1.00075 1.00661 | 1.00145 0.00345 1.00213 0.00296 1.00189 0.00385 |

28 2936 | 1.00543 1.00334 1.00000 | 1.00194 0.00303 1.00228 0.00257 1.00166 0.00335 |

29 2958 | 1.00625 1.00326 1.01253 | 1.00242 0.00271 1.00239 0.00226 1.00286 0.00319 |

30 3016 | 1.03454 1.03378 1.02020 | 1.00564 0.00403 1.00553 0.00374 1.00460 0.00334 |

31 3035 | 0.97265 0.97292 0.98127 | 1.00264 0.00472 1.00257 0.00449 1.00248 0.00369 |

32 2840 | 0.98655 0.98399 1.00567 | 1.00130 0.00451 1.00102 0.00439 1.00274 0.00338 |

CHAPTER 5
KCODE

20	15	+	(--- -----k-----)	+
21	16		(- -----k-----)	
22	17		(- -----k-----)	
23	18		(- -----k-----)	
24	19		(----- -----k-----)	
25	20		(----- -----k-----)	
26	21		(----- -----k-----)	
27	22		(----- -----k-----)	
28	23		(----- -----k-----)	
29	24		(----- -----k-----)	
30	25	+ <td>(----- -----k-----)</td> <td>+ </td>	(----- -----k-----)	+
31	26		(----- -----k-----)	
32	27		(----- -----k-----)	
33	28		(----- -----k-----)	
34	29		(----- -----k-----)	
35	30		(----- -----k-----)	

skip	active	neutrons	active	average keff	track-length keffs	for different numbers of inactive cycles	skipped for fission source settling					
cycles	cycles	k(col)	st dev	k(abs)	st dev	k(trk)	st dev	normality	average k(c/a/t)	k(c/a/t)	confidence intervals	
0	35	104841	1.0157	0.0108	1.0152	0.0108	1.0153	0.0106	1.01465	0.01143	0.99137-1.03794	0.98335-1.04596
1	34	101841	1.0062	0.0053	1.0058	0.0053	1.0060	0.0053	1.00526	0.00562	0.99380-1.01673	0.98983-1.02069
2	33	97797	1.0019	0.0031	1.0014	0.0031	1.0016	0.0029	1.00170	0.00309	0.99538-1.00802	0.99320-1.01021
3	32	95194	0.9998	0.0023	0.9993	0.0023	0.9995	0.0021	0.99898	0.00220	0.99449-1.00348	0.99292-1.00504
4	31	92462	0.9992	0.0024	0.9987	0.0023	0.9987	0.0020	0.99804	0.00210	0.99373-1.00235	0.99223-1.00386
5	30*	89610	0.9987	0.0024	0.9982	0.0024	0.9983	0.0021	0.99782	0.00213	0.99345-1.00218	0.99192-1.00371
6	29	86700	0.9984	0.0024	0.9980	0.0024	0.9980	0.0021	0.99760	0.00218	0.99312-1.00208	0.99155-1.00365
7	28	83738	0.9989	0.0025	0.9983	0.0025	0.9982	0.0022	0.99785	0.00234	0.99303-1.00268	0.99133-1.00438
8	27	80798	0.9985	0.0026	0.9979	0.0026	0.9975	0.0021	0.99678	0.00232	0.99201-1.00156	0.99031-1.00326
9	26	77711	0.9984	0.0027	0.9976	0.0026	0.9975	0.0022	0.99642	0.00250	0.99123-1.00160	0.98938-1.00345
10	25	74775	0.9986	0.0028	0.9977	0.0027	0.9978	0.0023	0.99668	0.00271	0.99106-1.00230	0.98904-1.00432
11	24	71794	0.9981	0.0028	0.9972	0.0028	0.9976	0.0024	0.99642	0.00278	0.99063-1.00221	0.98853-1.00431
12	23	68703	0.9979	0.0029	0.9970	0.0029	0.9972	0.0024	0.99619	0.00285	0.99023-1.00214	0.98806-1.00431
13	22	65767	0.9975	0.0031	0.9968	0.0031	0.9971	0.0026	0.99614	0.00294	0.99000-1.00229	0.98775-1.00454

CHAPTER 5
KCODE

14	21	62809	0.9971	0.0032	0.9964	0.0032	0.9963	0.0026	195/95/95	0.99599	0.00294	0.98982-1.00217	0.98753-1.00445
15	20	59793	0.9953	0.0027	0.9946	0.0027	0.9952	0.0024	195/95/95	0.99484	0.00256	0.98944-1.00023	0.98742-1.00225
16	19	56758	0.9964	0.0025	0.9957	0.0026	0.9959	0.0024	195/95/95	0.99611	0.00251	0.99080-1.00142	0.98879-1.00343
17	18	53918	0.9970	0.0026	0.9964	0.0027	0.9953	0.0025	195/95/95	0.99606	0.00261	0.99049-1.00164	0.98836-1.00377
18	17	50933	0.9974	0.0028	0.9967	0.0028	0.9949	0.0026	195/95/95	0.99595	0.00285	0.98984-1.00206	0.98748-1.00442
19	16	47933	0.9977	0.0029	0.9970	0.0030	0.9954	0.0027	195/95/95	0.99657	0.00304	0.99000-1.00313	0.98741-1.00572
20	15	44952	0.9985	0.0030	0.9978	0.0031	0.9959	0.0028	195/95/95	0.99708	0.00313	0.99026-1.00391	0.98752-1.00665
21	14	41974	0.9991	0.0032	0.9983	0.0032	0.9956	0.0030	195/95/95	0.99739	0.00361	0.98944-1.00534	0.98617-1.00861
22	13	38953	0.9973	0.0028	0.9966	0.0030	0.9948	0.0031	195/95/95	0.99798	0.00312	0.99103-1.00494	0.98809-1.00787
23	12	35827	0.9975	0.0030	0.9969	0.0032	0.9943	0.0034	195/95/99	0.99794	0.00345	0.99012-1.00575	0.98671-1.00916
24	11	32868	0.9975	0.0033	0.9969	0.0035	0.9949	0.0036	195/95/99	0.99795	0.00369	0.98944-1.00646	0.98557-1.01032
25	10	29957	0.9992	0.0031	0.9989	0.0032	0.9943	0.0040	195/95/99	0.99951	0.00418	0.98961-1.00941	0.98486-1.01416
26	9	26988	0.9991	0.0034	0.9988	0.0035	0.9941	0.0044	195/95/99	0.99953	0.00477	0.98787-1.01120	0.98186-1.01721
27	8	23920	0.9998	0.0038	0.9995	0.0039	0.9953	0.0048	195/95/99	0.99987	0.00522	0.98646-1.01329	0.97883-1.02092
28	7	20976	1.0013	0.0041	1.0010	0.0042	0.9956	0.0056	195/95/95	1.00311	0.00602	0.98641-1.01982	0.97541-1.03082
29	6	17938	1.0035	0.0040	1.0032	0.0042	0.9976	0.0062	195/95/95	1.00569	0.00604	0.98646-1.02493	0.97040-1.04099
30	5	15006	1.0041	0.0049	1.0041	0.0051	0.9989	0.0074	195/95/95	1.00571	0.00756	0.97319-1.03822	0.93072-1.08070
31	4	11917	1.0021	0.0057	1.0027	0.0063	0.9958	0.0087	195/95/95	0.99777	0.00726	0.90549-1.09006	0.53556-1.45999
32	3	8922	0.9984	0.0061	0.9986	0.0068	0.9874	0.0031					
33	2	5929	0.9935	0.0065	0.9929	0.0065	0.9844	0.0001					

N26 the minimum estimated standard deviation for the col/abs/tl keff estimator occurs with 4 inactive cycles and 31 active cycles.
 N27 the first active half of the problem skips 5 cycles and uses 15 active cycles; the second half skips 20 and uses 15 cycles.
 the col/abs/trk-len keff, one standard deviation, and 68, 95, and 99 percent intervals for each active half of the problem are:

problem	keff	standard deviation	68	95	99
first half	1.00015	0.00301	0.99702 to 1.00327	0.99358 to 1.00671	0.99094 to 1.00935
second half	0.99708	0.00313	0.99383 to 1.00034	0.99026 to 1.00391	0.98752 to 1.00665
final result	0.99782	0.00213	0.99566 to 0.99997	0.99345 to 1.00218	0.99192 to 1.00371

the first and second half values of k(collison/absorption/track length) appear to be the same at the 68 percent confidence level.
 N28 1plot of the estimated col/abs/track-length keff one standard deviation interval by active cycle number (| = final keff = 0.99782)
 inactive active 0.99 1.00 1.02 1.01 1.00 1.02 1.03

CHAPTER 5
KCODE

3.0000E-05 0.00000E+00 0.0000
 1.0000E-04 0.00000E+00 0.0000
 5.5000E-04 0.00000E+00 0.0000
 3.0000E-03 2.45055E-05 0.5996
 1.7000E-02 4.75888E-04 0.1103
 1.0000E-01 1.41007E-02 0.0204
 4.0000E-01 9.42929E-02 0.0077
 9.0000E-01 1.39742E-01 0.0067
 1.4000E+00 8.86731E-02 0.0094
 3.0000E+00 1.46097E-01 0.0073
 2.0000E+01 9.03340E-02 0.0097
 total 5.73740E-01 0.0019

1analysis of the results in the tally fluctuation chart bin (tfc) for tally 1 with nps = 104841 print table 160
 normed average tally per history = 5.73740E-01 unnormed average tally per history = 5.73740E-01
 estimated tally relative error = 0.0019 estimated variance of the variance = 0.0000
 relative error from zero tallies = 0.0014 relative error from nonzero scores = 0.0013
 number of nonzero history tallies = 76779 efficiency for the nonzero tallies = 0.8531
 history number of largest tally = 82359 largest unnormalized history tally = 1.75112E+00
 (largest tally)/(average tally) = 3.05211E+00 (largest tally)/(avg nonzero tally) = 2.60375E+00
 (confidence interval shift)/mean = 0.0000 shifted confidence interval center = 5.73740E-01

if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
 nps = 89610 for this table because 5 keff cycles and 15231 histories were skipped before tally accumulation.

estimated quantities	value at nps	value at nps+1	value(nps+1)/value(nps)-1.
mean	5.73740E-01	5.73753E-01	0.000023
relative error	1.88749E-03	1.87471E-03	-0.006771
variance of the variance	1.26117E-05	1.28808E-05	0.021342
shifted center	5.73740E-01	5.73740E-01	0.000000
figure of merit	3.49344E+04	3.54123E+04	0.013680

the estimated slope of the 62 largest tallies starting at 1.07232E+00 appears to be decreasing at least exponentially.
 the empirical history score probability density function appears to be increasing at the largest history scores: please examine.
 the large score tail of the empirical history score probability density function appears to have no unsampled regions.

```
=====
results of 10 statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 1
tfc bin      --mean--      -----relative error-----      ----variance of the variance----      --figure of merit--      -pdf-
behavior      value decrease      value decrease      value decrease rate      value behavior      slope
desired      random      <0.10      yes      1/sqrt(nps)      <0.10      yes      1/nps      constant      random      >3.00
=====
```

CHAPTER 5
KCODE

```

observed random 0.00 yes yes 0.00 yes yes constant random 10.00
passed? yes yes yes yes yes yes yes yes
=====

```

this tally meets the statistical criteria used to form confidence intervals: check the tally fluctuation chart to verify.
the results in other bins associated with this tally may not meet these statistical criteria.
estimated asymmetric confidence interval(1,2,3 sigma): 5.7266E-01 to 5.7482E-01; 5.7157E-01 to 5.7591E-01; 5.7049E-01 to 5.7699E-01
estimated symmetric confidence interval(1,2,3 sigma): 5.7266E-01 to 5.7482E-01; 5.7157E-01 to 5.7591E-01; 5.7049E-01 to 5.7699E-01
fom = (histories/minute)*(f(x) signal-to-noise ratio)**2 = (1.120E+04)*(1.766E+00)**2 = (1.120E+04)*(3.119E+00) = 3.493E+04

```

SKIP TABLES 161 and 162 IN OUTPUT
SKIP 248 LINES IN OUTPUT
N30 1tally 6 nps = 104841
tally type 6 track length estimate of heating. units mev/gram
tally for neutrons
number of histories used for normalizing tallies = 90000.00
masses

```

```

cell 1 cell: 1
energy 5.19311E+04
1.0000E-07 0.00000E+00 0.0000
4.0000E-07 0.00000E+00 0.0000
1.0000E-06 0.00000E+00 0.0000
3.0000E-06 0.00000E+00 0.0000
1.0000E-05 0.00000E+00 0.0000
3.0000E-05 0.00000E+00 0.0000
1.0000E-04 2.30913E-08 1.0000
5.5000E-04 6.37214E-08 0.5896
3.0000E-03 3.73769E-07 0.2458
1.7000E-02 4.47681E-06 0.0734
1.0000E-01 6.23380E-05 0.0167
4.0000E-01 2.56572E-04 0.0071
9.0000E-01 2.76926E-04 0.0061
1.4000E+00 1.77315E-04 0.0078
3.0000E+00 3.02033E-04 0.0058
2.0000E+01 1.67870E-04 0.0080
total 1.24799E-03 0.0020

```

CHAPTER 5
KCODE

analysis of the results in the tally fluctuation chart bin (tfc) for tally 6 with nps = 104841 print table 160
 normed average tally per history = 1.24799E-03 unnormed average tally per history = 6.48096E+01
 estimated tally relative error = 0.0020 estimated variance of the variance = 0.0000
 relative error from zero tallies = 0.0002 relative error from nonzero scores = 0.0020
 number of nonzero history tallies = 89610 efficiency for the nonzero tallies = 0.9957
 history number of largest tally = 27261 largest unnormalized history tally = 3.98710E+02
 (largest tally)/(average tally) = 6.15202E+00 (largest tally)/(avg nonzero tally) = 6.12536E+00
 (confidence interval shift)/mean = 0.0000 shifted confidence interval center = 1.24800E-03
 if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
 nps = 89610 for this table because 5 keff cycles and 15231 histories were skipped before tally accumulation.
 estimated quantities value at nps+1 value(nps+1)/value(nps)-1.
 mean 1.24799E-03 0.000057
 relative error 1.98551E-03 -0.005803
 variance of the variance 3.94738E-05 0.029057
 shifted center 1.24800E-03 0.000000
 figure of merit 3.15703E+04 0.011707

the estimated slope of the 200 largest tallies starting at 2.19591E+02 appears to be decreasing at least exponentially.
 the large score tail of the empirical history score probability density function appears to have no unsampled regions.

=====

results of 10 statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 6

tfc bin	--mean--	value	decrease	rate	value	decrease	rate	value	behavior	--figure of merit--	-pdf-
behavior	random	<0.10	yes	1/sqrt(nps)	<0.10	yes	1/nps	constant	random	value	slope
desired	random	0.00	yes	yes	0.00	yes	yes	constant	random	constant	>3.00
observed	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	10.00
passed?	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes

=====

this tally meets the statistical criteria used to form confidence intervals: check the tally fluctuation chart to verify.
 the results in other bins associated with this tally may not meet these statistical criteria.

estimated asymmetric confidence interval(1,2,3 sigma): 1.2455E-03 to 1.2505E-03; 1.2430E-03 to 1.2530E-03; 1.2406E-03 to 1.2554E-03
 estimated symmetric confidence interval(1,2,3 sigma): 1.2455E-03 to 1.2505E-03; 1.2430E-03 to 1.2529E-03; 1.2406E-03 to 1.2554E-03
 fom = (histories/minute)*(f(x) signal-to-noise ratio)**2 = (1.120E+04)*(1.679E+00)**2 = (1.120E+04)*(2.818E+00) = 3.157E+04

SKIP TABLES 161 AND 162 IN OUTPUT

N31 1tally 7 nps = 104841
 tally type 7 track length estimate of fission heating. units mev/gram
 tally for neutrons
 number of histories used for normalizing tallies = 90000.00

masses
cell: 1
5.19311E+04

cell 1
energy
1.0000E-07 0.00000E+00 0.0000
4.0000E-07 0.00000E+00 0.0000
1.0000E-06 0.00000E+00 0.0000
3.0000E-06 0.00000E+00 0.0000
1.0000E-05 0.00000E+00 0.0000
3.0000E-05 0.00000E+00 0.0000
1.0000E-04 2.46815E-08 1.0000
5.5000E-04 6.81034E-08 0.5894
3.0000E-03 3.99556E-07 0.2458
1.7000E-02 4.78463E-06 0.0734
1.0000E-01 6.65757E-05 0.0167
4.0000E-01 2.74090E-04 0.0071
9.0000E-01 2.95420E-04 0.0061
1.4000E+00 1.89979E-04 0.0078
3.0000E+00 3.25052E-04 0.0058
2.0000E+01 1.82079E-04 0.0081
total 1.33847E-03 0.0020

analysis of the results in the tally fluctuation chart bin (tfc) for tally 7 with nps = 104841 print table 160
normed average tally per history = 1.33847E-03 unnormed average tally per history = 6.95084E+01
estimated tally relative error = 0.0020 estimated variance of the variance = 0.0000
relative error from zero tallies = 0.0002 relative error from nonzero scores = 0.0020
number of nonzero history tallies = 89610 efficiency for the nonzero tallies = 0.9957
history number of largest tally = 27261 largest unnormalized history tally = 4.25489E+02
(largest tally)/(average tally) = 6.12140E+00 (largest tally)/(avg nonzero tally) = 6.09488E+00
(confidence interval shift)/mean = 0.0000 shifted confidence interval center = 1.33848E-03
if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
nps = 89610 for this table because 5 keff cycles and 15231 histories were skipped before tally accumulation.
value at nps value at nps+1
estimated quantities 1.33847E-03 0.000057
mean 1.33855E-03 -0.005824
relative error 1.98265E-03 0.028849
variance of the variance 3.92779E-05 0.028849

CHAPTER 5
KCODE

```

shifted center          1.33848E-03          0.000000
figure of merit        3.16614E+04          3.20335E+04          0.011751
the estimated slope of the 200 largest tallies starting at 2.34844E+02 appears to be decreasing at least exponentially.
the large score tail of the empirical history score probability density function appears to have no unsampled regions.
=====

```

```

results of 10 statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 7
-----relative error-----
tfc bin  behavior  value  decrease  decrease rate  value  decrease  decrease rate  value  decrease  decrease rate  --figure of merit--  -pdf-
desired  random  <0.10  yes  1/sqrt(nps)  <0.10  yes  1/nps  <0.10  yes  1/nps  constant  random  slope
observed  random  0.00  yes  yes  0.00  yes  yes  0.00  yes  yes  constant  random  >3.00
passed?   yes  10.00  yes
=====

```

this tally meets the statistical criteria used to form confidence intervals: check the tally fluctuation chart to verify.
the results in other bins associated with this tally may not meet these statistical criteria.
estimated asymmetric confidence interval(1,2,3 sigma): 1.3358E-03 to 1.3411E-03; 1.3332E-03 to 1.3438E-03; 1.3305E-03 to 1.3464E-03
estimated symmetric confidence interval(1,2,3 sigma): 1.3358E-03 to 1.3411E-03; 1.3332E-03 to 1.3438E-03; 1.3305E-03 to 1.3464E-03
fom = (histories/minute)*(f(x) signal-to-noise ratio)**2 = (1.120E+04)*(1.681E+00)**2 = (1.120E+04)*(2.827E+00) = 3.166E+04

SKIP TABLES 161 AND 162 IN OUTPUT
N32 1tally 14 nps = 104841

+ total neutron fluence, total fissions, total fission neutrons,
total neutron absorptions, and neutron heating (mev/gram)

```

tally type 4 track length estimate of particle flux.
tally for neutrons
number of histories used for normalizing tallies = 90000.00
multiplier bin 1: 2.76185E+03
multiplier bin 2: -2.76185E+03 10 -6
multiplier bin 3: -2.76185E+03 10 -6 -7
multiplier bin 4: -2.76185E+03 10 -2
multiplier bin 5: -5.31830E-02 10 1 -4
volumes

```

```

cell: 1
cell 1  cell: 2.76185E+03
mult bin: 1 2 3 4 5
energy
1.0000E-07 0.00000E+00 0.0000 0.000000E+00 0.0000 0.000000E+00 0.0000 0.000000E+00 0.0000 0.000000E+00 0.0000

```

```

4.0000E-07 0.00000E+00 0.00000 0.00000 0.00000E+00 0.00000 0.00000E+00 0.00000 0.00000E+00 0.00000
1.0000E-06 0.00000E+00 0.00000 0.00000E+00 0.00000 0.00000E+00 0.00000E+00 0.00000 0.00000E+00 0.00000
3.0000E-06 0.00000E+00 0.00000 0.00000E+00 0.00000 0.00000E+00 0.00000E+00 0.00000 0.00000E+00 0.00000
1.0000E-05 0.00000E+00 0.00000 0.00000E+00 0.00000 0.00000E+00 0.00000E+00 0.00000 0.00000E+00 0.00000
3.0000E-05 0.00000E+00 0.00000 0.00000E+00 0.00000 0.00000E+00 0.00000E+00 0.00000 0.00000E+00 0.00000
1.0000E-04 6.48710E-06 1.0000 7.08613E-06 1.0000 1.72335E-05 1.0000 1.99730E-06 1.0000 2.30913E-08 1.0000
5.5000E-04 2.08367E-05 0.5188 1.95527E-05 0.5894 4.75520E-05 0.5894 5.93874E-06 0.5554 6.37214E-08 0.5896
3.0000E-03 4.22401E-04 0.2550 1.14713E-04 0.2458 2.78983E-04 0.2458 5.89105E-05 0.2754 3.73769E-07 0.2458
1.7000E-02 1.02140E-02 0.0745 1.37368E-03 0.0734 3.33984E-03 0.0734 5.02192E-04 0.0732 4.47681E-06 0.0734
1.0000E-01 2.39377E-01 0.0166 1.91141E-02 0.0167 4.63735E-02 0.0167 5.99617E-03 0.0168 6.23380E-05 0.0167
4.0000E-01 1.32414E+00 0.0070 7.86924E-02 0.0071 7.86924E-02 0.0071 1.93156E-01 0.0071 1.67386E-02 0.0072 2.56572E-04 0.0071
9.0000E-01 1.64312E+00 0.0061 8.48215E-02 0.0061 8.48215E-02 0.0061 2.11397E-01 0.0061 1.14629E-02 0.0062 2.76926E-04 0.0061
1.4000E+00 9.96503E-01 0.0078 5.45481E-02 0.0078 5.45481E-02 0.0078 1.38857E-01 0.0078 4.98438E-03 0.0079 1.77315E-04 0.0078
3.0000E+00 1.59842E+00 0.0058 9.33281E-02 0.0058 9.33281E-02 0.0058 2.47755E-01 0.0058 4.50830E-03 0.0062 3.02033E-04 0.0058
2.0000E+01 9.42152E-01 0.0080 5.22775E-02 0.0081 5.22775E-02 0.0081 1.57079E-01 0.0082 5.52150E-04 0.0095 1.67870E-04 0.0080
total 6.75438E+00 0.0019 3.84297E-01 0.0020 9.98302E-01 0.0020 4.48116E-02 0.0036 1.24799E-03 0.0020
analysis of the results in the tally fluctuation chart bin (tfc) for tally 14 with nps = 104841 print table 160
normed average tally per history = 6.75438E+00 unormed average tally per history = 1.86546E+04
estimated tally relative error = 0.0019 estimated variance of the variance = 0.0000
relative error from zero tallies = 0.0002 relative error from nonzero scores = 0.0019
number of nonzero history tallies = 89610 efficiency for the nonzero tallies = 0.9957
history number of largest tally = 27261 largest unnormalized history tally = 1.05402E+05
(largest tally)/(average tally) = 5.65019E+00 (largest tally)/(avg nonzero tally)= 5.62571E+00
(confidence interval shift)/mean = 0.0000 shifted confidence interval center = 6.75439E+00
if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
nps = 89610 for this table because 5 keff cycles and 15231 histories were skipped before tally accumulation.
estimated quantities value at nps+1 value(nps+1)/value(nps)-1.
mean 6.75438E+00 6.75473E+00 0.000052
relative error 1.93328E-03 1.92130E-03 -0.006194
variance of the variance 3.17279E-05 3.25810E-05 0.026888
shifted center 6.75439E+00 6.75439E+00 0.000000
figure of merit 3.32992E+04 3.37156E+04 0.012504
the estimated slope of the 200 largest tallies starting at 5.91590E+04 appears to be decreasing at least exponentially.
the large score tail of the empirical history score probability density function appears to have no unsampled regions.
=====

```

results of 10 statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 14

CHAPTER 5
KCODE

```

tfc bin      --mean--      -----relative error-----      ----variance of the variance----      --figure of merit--      -pdf-
behavior     random      value <0.10  decrease rate  decrease rate  decrease rate  value  behavior  slope
desired      random      yes 1/sqrt(nps)  yes 1/nps      yes 1/nps      constant  random  >3.00
observed     random      yes 1/sqrt(nps)  yes 1/nps      yes 1/nps      constant  random  10.00
passed?      yes        yes 1/sqrt(nps)  yes 1/nps      yes 1/nps      yes       yes     10.00
=====

```

this tally meets the statistical criteria used to form confidence intervals: check the tally fluctuation chart to verify.
the results in other bins associated with this tally may not meet these statistical criteria.
estimated asymmetric confidence interval(1,2,3 sigma): 6.7413E+00 to 6.7675E+00; 6.7283E+00 to 6.7805E+00; 6.7152E+00 to 6.7936E+00
estimated symmetric confidence interval(1,2,3 sigma): 6.7413E+00 to 6.7674E+00; 6.7283E+00 to 6.7805E+00; 6.7152E+00 to 6.7936E+00
fom = (histories/minute)*(f(x) signal-to-noise ratio)**2 = (1.120E+04)*(1.724E+00)**2 = (1.120E+04)*(2.973E+00) = 3.330E+04

SKIP TABLES 161 AND 162 IN OUTPUT

N33 1tally 24 nps = 104841

+

total neutron fluence, total fissions, total fission neutrons,
total neutron absorptions, and neutron heating (mev/gram)

tally type 4 track length estimate of particle flux.

tally for neutrons

number of histories used for normalizing tallies = 90000.00

```

multiplier bin 1: 2.76185E+03
multiplier bin 2: -2.76185E+03 10 -6
multiplier bin 3: -2.76185E+03 10 -6 -7
multiplier bin 4: -2.76185E+03 10 -2
multiplier bin 5: -5.31830E-02 10 1 -4
volumes

```

cell: 1

2.76185E+03

cell 1

```

mult bin: 1 2 3 4 5
energy
1.6700E-04 8.18057E-06 0.8196 8.80966E-06 0.8278 2.14251E-05 0.8278 2.38632E-06 0.8527 2.86957E-08 0.8281
4.5400E-04 1.91433E-05 0.5577 1.78291E-05 0.6391 4.33604E-05 0.6391 5.54971E-06 0.5902 5.81170E-08 0.6392
1.2350E-03 6.07170E-05 0.5435 2.12665E-05 0.5768 5.17200E-05 0.5768 1.19204E-05 0.6668 6.93002E-08 0.5768
3.3500E-03 4.72902E-04 0.2443 1.18165E-04 0.2367 2.87377E-04 0.2367 5.59923E-05 0.2637 3.85031E-07 0.2367
9.1200E-03 2.83792E-03 0.1238 4.58919E-04 0.1244 1.11609E-03 0.1244 1.71117E-04 0.1234 1.49537E-06 0.1244
2.4800E-02 1.70742E-02 0.0569 1.92024E-03 0.0574 4.66500E-03 0.0574 6.84338E-04 0.0575 6.25891E-06 0.0574
6.7600E-02 1.13049E-01 0.0238 9.57721E-03 0.0238 2.32124E-02 0.0238 3.11306E-03 0.0239 3.12368E-05 0.0238

```

CHAPTER 5
KCODE

```

1.8400E+01 4.77301E-01 0.0119 3.21478E-02 0.0120 7.83905E-02 0.0120 8.49805E-03 0.0121 1.04816E-04 0.0120
3.0300E-01 5.41459E-01 0.0108 3.17298E-02 0.0108 7.79106E-02 0.0108 6.62113E-03 0.0108 1.03446E-04 0.0108
5.0000E-01 8.25101E-01 0.0088 4.47472E-02 0.0088 1.10555E-01 0.0088 7.53116E-03 0.0088 1.45945E-04 0.0088
8.2300E-01 1.04346E+00 0.0078 5.33121E-02 0.0078 1.32987E-01 0.0078 6.95677E-03 0.0078 1.74074E-04 0.0078
1.3530E+00 1.12009E+00 0.0074 6.05472E-02 0.0074 1.53719E-01 0.0074 5.78426E-03 0.0074 1.97055E-04 0.0074
1.7380E+00 5.56103E-01 0.0106 3.19303E-02 0.0106 8.27612E-02 0.0106 2.18862E-03 0.0107 1.03367E-04 0.0106
2.2320E+00 5.35866E-01 0.0108 3.17849E-02 0.0108 8.40115E-02 0.0108 1.56489E-03 0.0109 1.02912E-04 0.0108
2.8650E+00 4.99009E-01 0.0112 2.91478E-02 0.0112 7.89454E-02 0.0112 9.59202E-04 0.0113 9.42806E-05 0.0112
3.6800E+00 4.10825E-01 0.0124 2.27398E-02 0.0124 6.35512E-02 0.0124 4.45297E-04 0.0127 7.33502E-05 0.0124
6.0700E+00 4.89416E-01 0.0116 2.52888E-02 0.0116 7.53828E-02 0.0116 2.01674E-04 0.0124 8.11432E-05 0.0116
7.7900E+00 8.49373E-02 0.0281 5.69229E-03 0.0283 1.91541E-02 0.0284 1.21655E-05 0.0283 1.81851E-05 0.0283
1.0000E+01 3.01200E-02 0.0475 2.50831E-03 0.0475 9.12851E-03 0.0475 3.32058E-06 0.0474 7.99652E-06 0.0475
1.2000E+01 5.47503E-03 0.1057 4.46728E-04 0.1057 1.75896E-03 0.1057 5.57595E-07 0.1058 1.41500E-06 0.1057
1.3500E+01 1.26859E-03 0.2229 1.10081E-04 0.2223 4.62543E-04 0.2222 1.05122E-07 0.2245 3.45585E-07 0.2223
1.5000E+01 2.50356E-04 0.4270 2.42502E-05 0.4283 1.07514E-04 0.4291 1.42096E-08 0.4214 7.56288E-08 0.4282
2.0000E+01 1.71723E-04 0.7408 1.69180E-05 0.7407 7.82823E-05 0.7397 5.96715E-09 0.7524 5.24817E-08 0.7409
total 6.75438E+00 0.0019 3.84297E-01 0.0020 9.98302E-01 0.0020 4.48116E-02 0.0036 1.24799E-03 0.0020

analysis of the results in the tally fluctuation chart bin (tfc) for tally 24 with nps = 104841 print table 160
normed average tally per history = 6.75438E+00
estimated tally relative error = 0.0019
relative error from zero tallies = 0.0002
number of nonzero history tallies = 89610
history number of largest tally = 27261
(largest tally)/(average tally) = 5.65019E+00
(confidence interval shift)/mean = 0.0000
if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
nps = 89610 for this table because 5 keff cycles and 15231 histories were skipped before tally accumulation.
estimated quantities value at nps+1 value(nps+1)/value(nps)-1.
mean 6.75438E+00 6.75473E+00 0.000052
relative error 1.93328E-03 1.92130E-03 -0.006194
variance of the variance 3.17279E-05 3.25810E-05 0.026888
shifted center 6.75439E+00 6.75439E+00 0.000000
figure of merit 3.32992E+04 3.37156E+04 0.012504

the estimated slope of the 200 largest tallies starting at 5.91590E+04 appears to be decreasing at least exponentially.
the large score tail of the empirical history score probability density function appears to have no unsampled regions.
=====

```

CHAPTER 5
KCODE

```

tfc bin          results of 10 statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 24
--mean--
behavior         --variance of the variance---- --figure of merit--
desired         value decrease rate          value constant      slope
observed        <0.10 yes 1/sqrt(nps)        <0.10 yes 1/nps      constant random  >3.00
passed?         0.00 yes yes                          0.00 yes yes        constant random  10.00
=====
yes             yes yes                          yes yes              yes random        yes
=====

```

this tally meets the statistical criteria used to form confidence intervals: check the tally fluctuation chart to verify.
the results in other bins associated with this tally may not meet these statistical criteria.
estimated asymmetric confidence interval(1,2,3 sigma): 6.7413E+00 to 6.7675E+00; 6.7283E+00 to 6.7805E+00; 6.7152E+00 to 6.7936E+00
estimated symmetric confidence interval(1,2,3 sigma): 6.7413E+00 to 6.7674E+00; 6.7283E+00 to 6.7805E+00; 6.7152E+00 to 6.7936E+00
fom = (histories/minute)*(f(x) signal-to-noise ratio)**2 = (1.120E+04)*(1.724E+00)**2 = (1.120E+04)*(2.973E+00) = 3.330E+04

SKIP TABLES 161 AND 162 IN OUTPUT

N34 tally 34 nps = 104841

tally type 4 track length estimate of particle flux.

tally for neutrons

number of histories used for normalizing tallies = 90000.00

```

multiplier bin 1: -1.00000E+00 10 -6 -7
multiplier bin 2: -1.00000E+00 10 16 : 17
multiplier bin 3: -1.00000E+00 10 -2
multiplier bin 4: -1.00000E+00 10 -6
multiplier bin 5: 1.00000E+00 -2
volumes

```

cell: 1

1.00000E+00

energy bin: 0. to 2.00000E+01

cell: 1

mult bin

```

1 9.98302E-01 0.0020
2 2.71930E-03 0.0237
3 4.48116E-02 0.0036
4 3.84297E-01 0.0020
5 6.18330E-01 0.0032

```

analysis of the results in the tally fluctuation chart bin (tfc) for tally 34 with nps = 104841 print table 160

normed average tally per history = 9.98302E-01

estimated tally relative error = 0.0020

unnormed average tally per history = 9.98302E-01

estimated variance of the variance = 0.0000

CHAPTER 5
KCODE

relative error from zero tallies = 0.0002
 number of nonzero history tallies = 89610
 history number of largest tally = 27261
 (largest tally)/(average tally) = 5.82031E+00
 (confidence interval shift)/mean = 0.0000
 if the largest history score sampled so far were to occur on the next history, the tfc bin quantities would change as follows:
 nps = 89610 for this table because 5 keff cycles and 15231 histories were skipped before tally accumulation.
 estimated quantities value at nps+1 value(nps+1)/value(nps)-1.
 mean 9.98302E-01 0.000054
 relative error 1.96617E-03 -0.005966
 variance of the variance 3.95441E-05 0.026073
 shifted center 9.98305E-01 0.000000
 figure of merit 3.21945E+04 0.012039
 the estimated slope of the 200 largest tallies starting at 3.38242E+00 appears to be decreasing at least exponentially.
 the large score tail of the empirical history score probability density function appears to have no unsampled regions.

=====

tfc bin	10	statistical checks for the estimated answer for the tally fluctuation chart (tfc) bin of tally 34
behavior	random	random
desired	random	random
observed	random	random
passed?	yes	yes

-----relative error-----
 value decrease rate value decrease rate
 <0.10 yes 1/sqrt(nps) <0.10 yes 1/nps
 0.00 yes yes 0.00 yes yes
 yes yes yes yes yes yes

-----variance of the variance-----
 value decrease rate value decrease rate
 constant random constant random
 >3.00 10.00

-----figure of merit-----
 value behavior slope
 constant random random
 >3.00 10.00

=====

this tally meets the statistical criteria used to form confidence intervals: check the tally fluctuation chart to verify.
 the results in other bins associated with this tally may not meet these statistical criteria.
 estimated asymmetric confidence interval(1,2,3 sigma): 9.9634E-01 to 1.0003E+00; 9.9438E-01 to 1.0022E+00; 9.9242E-01 to 1.0042E+00
 estimated symmetric confidence interval(1,2,3 sigma): 9.9634E-01 to 1.0003E+00; 9.9438E-01 to 1.0022E+00; 9.9241E-01 to 1.0042E+00
 fom = (histories/minute)*(f(x) signal-to-noise ratio)**2 = (1.120E+04)*(1.695E+00)**2 = (1.120E+04)*(2.874E+00) = 3.219E+04

SKIP TABLES 161 AND 162 IN OUTPUT

1 status of the statistical checks used to form confidence intervals for the mean for each tally bin
 tally result of statistical checks for the tfc bin (the first check not passed is listed) and error magnitude check for all bins
 1 passed the 10 statistical checks for the tally fluctuation chart bin result 2 bins with relative errors exceeding 0.10
 4 missed all bin error check: 17 tally bins had 8 bins with zeros and 6 bins with relative errors exceeding 0.10
 missed the 10 statistical checks for the tally fluctuation chart bin result 3 bins with relative errors exceeding 0.10
 6 missed all bin error check: 17 tally bins had 6 bins with zeros and 3 bins with relative errors exceeding 0.10
 missed the 10 statistical checks for the tally fluctuation chart bin result

CHAPTER 5
KCODE

7 missed all bin error check: 17 tally bins had 6 bins with zeros and 3 bins with relative errors exceeding 0.10
 passed the 10 statistical checks for the tally fluctuation chart bin result

14 missed all bin error check: 17 tally bins had 6 bins with zeros and 3 bins with relative errors exceeding 0.10
 passed the 10 statistical checks for the tally fluctuation chart bin result

24 missed all bin error check: 85 tally bins had 30 bins with zeros and 15 bins with relative errors exceeding 0.10
 passed the 10 statistical checks for the tally fluctuation chart bin result

34 missed all bin error check: 120 tally bins had 0 bins with zeros and 45 bins with relative errors exceeding 0.10
 passed the 10 statistical checks for the tally fluctuation chart bin result

the 10 statistical checks are only for the tally bins all have relative errors less than 0.10 with no zero bins
 the tally bins with zeros may or may not be correct: compare the source, cutoffs, multipliers, et cetera with the tally bins.
 warning. 6 of the 7 tallies had bins with relative errors greater than recommended.

N35 1tally fluctuation charts

nps	tally 1				tally 4				tally 6						
	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
8000	0.0000E+00	0.0000	0.0000	0.0	0.0E+00	0.0000E+00	0.0000	0.0000	0.0	0.0E+00	0.0000E+00	0.0000	0.0000	0.0	0.0E+00
16000	5.6457E-01	0.0217	0.0012	10.0	29807	2.4567E-03	0.0209	0.0024	10.0	31921	1.2501E-03	0.0213	0.0031	10.0	30846
24000	5.7279E-01	0.0062	0.0001	10.0	33028	2.4629E-03	0.0063	0.0003	10.0	31869	1.2570E-03	0.0064	0.0004	10.0	30327
32000	5.7308E-01	0.0044	0.0001	5.6	34435	2.4519E-03	0.0045	0.0002	10.0	32736	1.2505E-03	0.0046	0.0002	7.8	31134
40000	5.7348E-01	0.0036	0.0000	10.0	34636	2.4516E-03	0.0037	0.0001	10.0	33036	1.2517E-03	0.0038	0.0002	10.0	31236
48000	5.7232E-01	0.0031	0.0000	10.0	34670	2.4549E-03	0.0032	0.0001	10.0	33314	1.2531E-03	0.0033	0.0001	10.0	31539
56000	5.7315E-01	0.0028	0.0000	10.0	34272	2.4547E-03	0.0029	0.0001	10.0	32901	1.2528E-03	0.0030	0.0001	10.0	31199
64000	5.7397E-01	0.0026	0.0000	10.0	34506	2.4513E-03	0.0026	0.0001	10.0	32732	1.2510E-03	0.0027	0.0001	10.0	31052
72000	5.7347E-01	0.0024	0.0000	10.0	34719	2.4501E-03	0.0024	0.0001	10.0	33064	1.2505E-03	0.0025	0.0001	10.0	31349
80000	5.7446E-01	0.0022	0.0000	10.0	34920	2.4484E-03	0.0023	0.0000	10.0	33081	1.2497E-03	0.0023	0.0001	10.0	31385
88000	5.7464E-01	0.0021	0.0000	10.0	35059	2.4448E-03	0.0021	0.0000	10.0	33175	1.2476E-03	0.0022	0.0000	10.0	31464
96000	5.7382E-01	0.0020	0.0000	10.0	34951	2.4483E-03	0.0020	0.0000	10.0	33350	1.2494E-03	0.0021	0.0000	10.0	31596
104000	5.7373E-01	0.0019	0.0000	10.0	34948	2.4453E-03	0.0019	0.0000	10.0	33314	1.2478E-03	0.0020	0.0000	10.0	31588
104841	5.7374E-01	0.0019	0.0000	10.0	34934	2.4456E-03	0.0019	0.0000	10.0	33299	1.2480E-03	0.0020	0.0000	10.0	31570

nps	tally 7				tally 14				tally 24						
	mean	error	vov	slope	fom	mean	error	vov	slope	fom	mean	error	vov	slope	fom
8000	0.0000E+00	0.0000	0.0000	0.0	0.0E+00	0.0000E+00	0.0000	0.0000	0.0	0.0E+00	0.0000E+00	0.0000	0.0000	0.0	0.0E+00
16000	1.3405E-03	0.0213	0.0031	10.0	30925	6.7849E+00	0.0209	0.0024	10.0	31921	6.7849E+00	0.0209	0.0024	10.0	31921
24000	1.3482E-03	0.0064	0.0004	10.0	30413	6.8021E+00	0.0063	0.0003	10.0	31869	6.8021E+00	0.0063	0.0003	10.0	31869
32000	1.3412E-03	0.0046	0.0002	7.9	31224	6.7719E+00	0.0045	0.0002	10.0	32736	6.7719E+00	0.0045	0.0002	10.0	32736
40000	1.3424E-03	0.0038	0.0002	10.0	31329	6.7709E+00	0.0037	0.0001	10.0	33036	6.7709E+00	0.0037	0.0001	10.0	33036

CHAPTER 5
KCODE

48000	1.3439E-03	0.0033	0.0001	10.0	31632	6.7802E+00	0.0032	0.0001	10.0	33314	6.7802E+00	0.0032	0.0001	10.0	33314
56000	1.3436E-03	0.0029	0.0001	10.0	31289	6.7795E+00	0.0029	0.0001	10.0	32901	6.7795E+00	0.0029	0.0001	10.0	32901
64000	1.3418E-03	0.0027	0.0001	10.0	31141	6.7702E+00	0.0026	0.0001	10.0	32732	6.7702E+00	0.0026	0.0001	10.0	32732
72000	1.3411E-03	0.0025	0.0001	10.0	31440	6.7669E+00	0.0024	0.0001	10.0	33064	6.7669E+00	0.0024	0.0001	10.0	33064
80000	1.3403E-03	0.0023	0.0001	10.0	31475	6.7620E+00	0.0023	0.0000	10.0	33081	6.7620E+00	0.0023	0.0000	10.0	33081
88000	1.3381E-03	0.0022	0.0000	10.0	31553	6.7522E+00	0.0021	0.0000	10.0	33175	6.7522E+00	0.0021	0.0000	10.0	33175
96000	1.3400E-03	0.0021	0.0000	10.0	31687	6.7617E+00	0.0020	0.0000	10.0	33350	6.7617E+00	0.0020	0.0000	10.0	33350
104000	1.3383E-03	0.0020	0.0000	10.0	31679	6.7535E+00	0.0019	0.0000	10.0	33314	6.7535E+00	0.0019	0.0000	10.0	33314
104841	1.3385E-03	0.0020	0.0000	10.0	31661	6.7544E+00	0.0019	0.0000	10.0	33299	6.7544E+00	0.0019	0.0000	10.0	33299

tally 34

nps	mean	error	vov	slope	fom
8000	0.0000E+00	0.0000	0.0000	0.0	0.0E+00
16000	9.9708E-01	0.0211	0.0032	10.0	31327
24000	1.0061E+00	0.0064	0.0003	10.0	30910
32000	1.0006E+00	0.0046	0.0002	10.0	31779
40000	1.0007E+00	0.0037	0.0001	10.0	31942
48000	1.0022E+00	0.0032	0.0001	10.0	32212
56000	1.0022E+00	0.0029	0.0001	10.0	31807
64000	1.0008E+00	0.0027	0.0001	10.0	31645
72000	1.0003E+00	0.0025	0.0001	10.0	31962
80000	9.9981E-01	0.0023	0.0001	10.0	31987
88000	9.9805E-01	0.0022	0.0000	10.0	32074
96000	9.9947E-01	0.0021	0.0000	10.0	32212
104000	9.9812E-01	0.0020	0.0000	10.0	32204
104841	9.9830E-01	0.0020	0.0000	10.0	32194

 dump no. 2 on file runtpc nps = 104841 coll = 365743 ctm = 8.43 nrn = 5274385
 2 warning messages so far.
 run terminated when 35 kcode cycles were done.
 computer time = 8.83 minutes
 mcpn version 4b 02/04/97
 02/13/97 16:23:12 probid = 02/13/97 16:13:57

CHAPTER 5 KCODE

Notes:

- N1:** This model of a one-dimensional Godiva was suggested by the LANL Nuclear Criticality Safety Group ESH-6 and is from LA-4208.
- N2:** The KCODE card indicates this is a criticality calculation with a nominal source size of 3000 particles, an estimate of k_{eff} of 1.0, skip 5 cycles before averaging k_{eff} or tallying, and run a total of 35 cycles if computer time permits. A tally batch size of 30 is large enough to ensure that the standard normal distribution confidence interval statements at the 1σ and 2σ levels should apply. A total of 3000 particles were selected to run the problem in less than 10 minutes. Tally normalization will be by the starting source weight by default.

To normalize a criticality calculation by the steady-state power level of a reactor, use the following conversion:

$$\begin{aligned} & \left(\frac{1\text{joule/sec}}{\text{watt}}\right)\left(\frac{1\text{MeV}}{1.602E-13\text{joules}}\right)\left(\frac{\text{fission}}{180\text{MeV}}\right) \\ & = 3.467E10\text{fission/watt-sec} \end{aligned}$$

Therefore, to produce P watts of power, one needs $3.467E10P$ fissions per second. This produces $3.467E10 \times P \times \bar{\nu}$ neutrons/s, which is the source strength for this power level, or a source strength of $9E10P$ neutrons/s. The normalization should be in the tally on the FM card and NOT in the source on an SDEF card.

- N3:** This warning is a reminder. The tallies must be scaled by the steady state power level of the critical system in units of fission neutrons per unit time. For example, if Godiva is operating at a power level of 100 watts, the tally scaling factor would be $(100 \times 3.467 \times 10^{10} \text{ fission/s}) (2.5977 \text{ neutrons/fission}) = 9.0 \times 10^{12} \text{ neutrons/s}$. (The value $\bar{\nu} = 2.5977$ comes from the 2nd and 3rd bins of tally 14, $\bar{\nu} = .998302/.384297$.) The tallies will then have the same time units. Tallies for subcritical systems do not include any multiplication effects because fission is treated as an absorption. Tallies can be estimated for subcritical systems by multiplying the results by the system multiplication $1/(1-k_{eff})$. See Chapter 2 Sec. VIII for further discussion of this topic.
- N4:** One source location at the center of the 94% enriched uranium sphere is used to begin the first cycle. When an SRCTP file is used, the KSRC card should be removed.

The sources for each generation are the fission locations and neutron energies from fission found in the previous generation. Therefore, in a k_{eff} calculation the fission distribution converges to a stable distribution as a function of space. For complicated problem geometries, the fission distribution must converge for the calculated k_{eff} to converge. This effect is minimized by sampling a larger number of particles per generation. Usually the first generation source is not

too important because subsequent later sources will have converged. If the user source selects good source points on the KSRC card, the problem will converge to a stable k_{eff} in fewer generations. It is critical that the source points have converged before k_{eff} s and tallies are calculated to ensure proper mean k_{eff} s and confidence intervals.

- N5:** The Hansen-Roach energy structure (E0 card) is used as the energy bins for all tallies except 24 and 34 because E24 and E34 cards exist. The energy structure on the E24 card is the one used with the MENDF5 and MENDF6 30-group multigroup libraries distributed with MCNP.
- N6:** This note shows the use of the FM card to calculate the quantities described by the FC14 comment card. The volume of the sphere is 2761.85 cc and is used as a multiplier to obtain total tallies. The negative sign in front of the multiplier causes the atom density to be included in the calculation. The number 0.053183 is the reciprocal of the uranium density of 18.8030 g/cc and converts the flux tally to MeV/g. An alternative way to remove the units of volume is shown in tally 34 where the SD34 card divides the tally by a volume of one instead of by the real volume.
- N7:** This table gives detailed information about the criticality source from the KSRC card, including points accepted and rejected. Entries from the KCODE card are echoed. Table 90 shows that total (as opposed to prompt) fission $\bar{\nu}$ data are being used by default to account for the effect of delayed neutrons. Delayed neutron generation is combined with prompt neutron generation and the prompt fission neutron energy spectrum is used. Delayed neutrons typically have a softer spectrum than prompt neutrons; therefore, MCNP will predict a slightly harder fission energy spectrum. This is usually a small effect and is not significant.
- N8:** No warning of unnormalized fractions was issued because the sum of the material fractions from the M10 card is the same as the atom density in cell 1.
- N9:** The density and volume were used in determining the multipliers for the FM card.
- N10:** The cross-section tables show that all three isotopes use the total $\bar{\nu}$.
- N11:** If cross-section space required is too large, thinned or discrete reaction cross-section sets can be used for isotopes with small atom fractions (see Print Table 40), although we recommend just buying more disk space. Note that the required dynamically-allocated storage is given in both decimal words and bytes, but the fixed-dimension storage and code executable sizes are not given.
- N12:** An SRCTP file has been generated for possible use in future versions of the problem.

CHAPTER 5

KCODE

- N13:** Print Table 110, showing the first 50 histories, indicates that all source points are at the origin as specified on the KSRC card. The directions are isotropic and the energy is sampled from a fission spectrum for the first cycle.
- N14:** Five cycles are skipped before averaging of k_{eff} and prompt removal lifetimes. Tallies, photon production, DXTRAN summary and activity tables, and other options are also turned off during the first five cycles. Cycle 6 is the first active cycle. Cycle 7 begins simple averages over active cycles. Cycle 8 begins 2-combined estimators that require a minimum of three active cycles. Cycle 9 begins 3-combined estimators of k_{eff} and prompt removal lifetimes.
- N15:** There are three k_{eff} and prompt removal lifetime estimators, and they use the collision, absorption, and track length methods discussed in Chapter 2.VIII.B. All combinations of these estimators are included. The positive correlations of the various k_{eff} and prompt removal lifetime estimators result in almost no reduction in the relative errors for the combined estimators. The estimator with the smallest relative error is generally selected. After 35 total cycles and 30 averaging cycles, all of the k_{eff} and prompt removal lifetime values agree well at unity and have an estimated relative error at the 1σ level of 0.0020. File SRCTP contains the 2856 source points that were generated during cycle 35.
- N16:** The problem summary provides information for the 30 active cycles. The source particle weight for summary table normalization is the requested 30 cycles x 3000 histories/cycle = 90,000 histories. Whenever the default tally normalization by source particle weight is used, the source weight is always exactly 1.000. The neutrons created from fission are zero because the actual fission neutrons produced are written to the source for the next cycle. In a noncriticality problem with a point source, this value would be nonzero. The loss side of the table gives general guidelines about what happened in the problem. The values will not agree exactly with separate tallies in the problem because the point source used in the first cycle required several cycles to approach the correct spatial distribution of fission neutron sources. The loss to fission category is for the weight lost to fission, which is treated as a terminal event for the criticality calculation. Parasitic capture is listed separately. No tracks are lost to either the capture or loss to fission categories because implicit capture is being used (the default for EMCNF with no PHYS:N card present is 0). Capture and absorption both mean (n,0n).
- N17:** Hundreds, often thousands, of values of k_{eff} are printed in a single KCODE problem. This page is the summary page which features the single best estimate of k_{eff} clearly outlined: “the final estimated combined collision/absorption/track-length keff = 0.99782”. This summary page also includes a check to determine if each cell with

fissionable material had tracks entering, collisions, and fission source points to assess problem sampling. Fissionable cells that have no entering tracks may indicate geometry errors on the part of the user, excessive detail in the user's problem setup, or undersampling that can lead to an underestimate of k_{eff} . Normality tests are made of the active k_{eff} values for each estimator. If the k_{eff} estimates are not normally distributed, then all the Monte Carlo assumptions based upon the Central Limit Theorem may be suspect. In particular, the estimated relative errors and confidence intervals may not be believable. See the discussion in Chapter 2.

- N18:** The summary page also gives a table of k_{eff} and confidence intervals if the largest value of k_{eff} for each estimator were to occur on the next cycle. This information provides an indication of the “upper bound” of k_{eff} in a worst-case sampling scenario.
- N19:** Three estimates (col/abs/trk len) and all combinations are made of the prompt removal lifetimes, including standard deviations, just as is done for k_{eff} . Lifetimes are quoted in seconds rather than shakes. Then the lifespans and lifetimes are summarized. The escape and capture lifespans are exactly the same as the “average time of” in the summary table if all source particles start at time zero. The removal lifespan is identical to the prompt removal lifetime. The slight difference between removal lifespan and removal lifetime (abs) is because the lifespan is history averaged and the removal lifetime (abs) is batch averaged. The removal lifetime (c/a/t) is slightly different because the collision and track length estimators are included. The “fraction” f_i , where i =escape, capture (n,0n), and fission, is the weight lost per source particle from the summary table normalized so that $f_e + f_c + f_f = 1.0$. The lifetimes are defined as $\tau_x = \tau_r / f_x$ where x =e,c,f. That is, the escape, capture, and fission lifetimes are defined in terms of their loss fractions f_x and the removal lifetime τ_r , and have nothing to do with their respective lifespans. The lifespans are the average time from source to an event; the lifetimes are the average time between fission or the mean time between captures (n,0n). An absorption estimator is used to calculate the lifespans. Thus the absorption estimate of the lifetime is presented for consistency. The best lifetime estimator is the 3-combined covariance-weighted lifetime (c/a/t).
- N20:** This table shows alternate batch size values. It shows k_{eff} and its variance as it would have been calculated with a different number of k_{eff} cycles per batch to assess k_{eff} correlation effects. This table saves making dozens of independent MCNP calculations to get the same information. For this problem there are seven different batch combinations: 30 batches of 1 cycle, 15 batches of 2 cycles, 10 batches of 3 cycles, 6 batches of 5 cycles, 5 batches of 6 cycles, 3 batches of 10 cycles, and 2 batches of 15 cycles. The batch size table is not the

CHAPTER 5

KCODE

same as running 15 active cycles with 6000 histories each or 10 active cycles with 9000 histories each. Rather it is intended to see if the variance (and confidence interval) changes much by averaging over cycles to reduce the cycle-to-cycle correlation. If there is a significant change in the variance (over 30%) then there may be too much correlation between cycles. In that case the more conservative variance and confidence interval may be the larger values of the variance and confidence interval from the batch size table summary (N21).

- N21:** The above alternate batch size results are summarized with confidence intervals and a normality check. The confidence intervals can be compared to assess if there appears to be a substantial cycle-to-cycle correlation effect. Because the estimated standard deviation itself has a statistical uncertainty, it is recommended to use collapses that produce at least 30 batches.
- N22:** This is the k_{eff} -by-cycle table. The individual and average k_{eff} estimator results by cycle repeats the information printed while the run was in progress (see notes N14 and N15) in a more readable format. A k_{eff} figure of merit is also included.
- N23:** The largest and smallest values for each of the three k_{eff} estimators and the cycle at which they occurred is provided.
- N24:** The k_{eff} -by-cycle table results for the combined col/abs/track-length estimator are plotted. The final k_{eff} value (0.99782) is marked with the vertical line. This plot should be examined for any trends in the average k_{eff} . The plot shown appears to have such a trend, indicating the problem should be run further.
- N25:** This is the k_{eff} -by-number-of-active-cycles table. It provides a summary of what the results for each estimator and the combined col/abs/track-length would be had there been a different number of settle or skip cycles and active cycles. The combination actually used in this problem, 5 settle cycles and 30 active cycles, is marked with an asterisk (*).
- N26:** The skip/active cycle resulting in the minimum k_{eff} error is identified. In this problem it would have been better to have 4 settle cycles and 31 active cycles rather than 5 and 30. If the best combination is significantly greater than the number of cycles actually skipped the normal spatial mode may not have been achieved in the skipped cycles and the problem should be rerun.
- N27:** The k_{eff} and its estimated relative error for the first and second active halves of the problem are checked to see if they appear to be statistically the same value.
- N28:** The active cycle table (N25) is plotted. The final k_{eff} value (0.99782) is marked with the vertical line.

- N29:** The total leakage tally agrees exactly with the total weight lost to escape in the problem summary table, see note **N16**.
- N30:** The heating in the uranium sphere does not include any estimate from photons. To account for photons, a coupled neutron/photon criticality problem must be run using a MODE N P card. An F7 fission heating tally may give a good approximation, see note **N31**.
- N31:** The F7 fission heating tally is larger than the F6 total heating tally because the F7 tally includes photons and the F6 tally does not. The fission heating estimate assumes that all photons are deposited locally. The difference between the F6 and F7 tally is discussed on page 2–72. Because Godiva is an optically thick system to photons, the F7 tally should be a good approximation to the total heating. A MODE N P calculation of this problem produced a neutron heating (F6) of 1.242×10^{-3} (0.0020) MeV/g and a photon heating of 6.491×10^{-5} (0.0038), which adds to about the estimate of the F7 tally, 1.338×10^{-3} (0.0020) (the estimated relative errors are listed in parentheses). If the 100 watt power level normalization in note 3 is used to scale tally 7, (100 W) (1.338×10^{-3} MeV/g) (51931 g) (9.0×10^{10} neutrons/s) (1.602×10^{-13} W/MeV/s) = 100.182 watts. Thus, the source normalization and tally are consistent with the 100 watt assumed power level.
- N32:** The F14 flux tally has five multiplier bins. The first is the volume-integrated fluence that is identical to tally F4 multiplied by the volume. The fluence below 0.1 MeV is small because there is no moderator. The second multiplier bin is the total number of fissions and differs from the total weight lost to fission in the problem summary table in that the tally is a track length estimator and the summary table uses absorption estimators. Multiplier bin 3 is the total number of fission neutrons produced and agrees exactly with the track length k_{eff} estimator described in notes N15 and N17. The estimated relative errors differ because k_{eff} (trk len) is batch averaged while the tally is history averaged. Dividing multiplier bin 3 by multiplier bin 2 gives the average value of $\bar{\nu}$ of 2.5977 neutrons produced per fission. Multiplier bin 4 estimates absorption (n,0n), which agrees with the problem summary weight lost to capture (n,0n) with a slight difference between the tally track length estimator and the problem summary absorption estimator. Multiplier bin 6 is the total neutron heating tally that agrees exactly with the F6 tally.
- N33:** Tally 24 is the same as tally 14 except for the energy group structure.
- N34:** Tally 34 illustrates how a track length estimate of any prompt neutron lifetime can be made and also demonstrates the SD card. The SD card sets the tally divisor to one, not the volume, which has the same effect as multiplying by the volume. Note how the first multiplier bin, the track length estimate of k_{eff} , is identical to the third

CHAPTER 5

KCODE

multiplier bin in tallies 14 and 24, both of which multiplied by the real volume, 2761.85, rather than use the SD card to divide by a volume of one. The second multiplier bin is the $(n,2n) + (n,3n)$ reaction rate; that is, the track length estimate of the total loss to (n,xn) , which is in good agreement with the absorption estimate in the problem summary table. Multiplier bins 3 and 4 are the absorption $(n,0n)$ and fission rates, which agree exactly with multiplier bins 4 and 2 in tallies 14 and 24 and differs from the weight lost to capture $(n,0n)$ and fission in the problem summary table only by the difference between track length estimators and absorption estimators. Multiplier bin 5 multiplies the tally by $1/v$, where v is the neutron speed, to get the track length estimate of the time-averaged neutron population. Multiplier bin 5 agrees exactly with the track length estimate of the prompt removal lifetime, note N19. Track length estimates of the prompt (n,xn) , capture $(n,0n)$, and fission lifetimes can be obtained by dividing multiplier bin 5, the prompt removal lifetime, by bins 2, 3, and 4, respectively. The track length estimator results will agree very closely with the (abs) and (c/a/t) estimates (note N19) of the prompt capture and fission lifetimes.

N35: The tally fluctuation charts confirm stable, efficient tallies in the bins monitored. The charts confirm that the first five cycles (15231 histories) were skipped because of the zeros after 8000 particles were run and the large reduction in the estimated relative error between 16000 and 24000 histories.

A few final points should be made about KCODE calculations. To make a KCODE calculation using the SRCTP source points file produced by a previous run, remove the KSRC card from the input file. To do a continue-run, the standard MCNP rules apply. Having an input file beginning with CONTINUE is optional. If the previous run terminated because all the cycles requested by the KCODE card were completed, another KCODE card in a continue-run input file with a new total (not how many more) number of cycles to run is needed. Otherwise, only one more cycle will be run and the code will stop again. The SRCTP file is not required for a KCODE continue-run because the source points information is contained on the RUNTPE file.

V. EVENT LOG AND GEOMETRY ERRORS

MCNP cannot detect a geometry error while processing data from the INP file. Particles must actually be run and when a particle gets to a place in the geometry that is not correctly specified, it gets lost—it simply does not know where to go next. When ten particles get lost, MCNP stops. If this happens, you will get in the output file a debug print and event-log print for each of ten lost particles. The default of ten lost particles for printing and termination can be changed with the LOST card but is generally an unwise thing to do.

See page 3–8 for a more complete discussion of how to use the plotter and set up a problem to flood the geometry with particles to check for geometry errors.

A. *Event Log*

An event-log print is produced by a lost particle and also by the third and fourth entries on the DBCN card. When a particle gets lost, the history is rerun and event-log printing is turned on during the rerun, making some of the summary information slightly incorrect. The following example is from the file CONC2, which is the same as the CONC problem with all of the tallies taken out. CONC2 runs only two histories and an event log is forced by a DBCN card. The shell is given an importance of two to cause particles to split when they leave the source cell and enter the shell. The event log is reproduced on the next page.

In column 1 of the event log, SRC is source, S is surface, C is collision, T is termination, BNK is return a track from the bank, and R refers to the reaction type used. See Table F.8 in Appendix F for a full description of the TYR Block, which explains the value for R.

CHAPTER 5
Event Log

1 event log for particle history no. 6647299061401												
cell	x	y	z	u	v	w	erg	wgt	ncx	ncy	ncz	nrn
src	1	0.000+00	0.000+00	0.000+00	5.085-01	4.733-01	7.193-01	1.400+01	1.000+00			2
s	2	1.831+02	1.704+02	2.590+02	5.085-01	4.733-01	7.193-01	1.400+01	5.000-01	surf=	1 npa= 1	2
c	2	1.841+02	1.714+02	2.604+02	-2.302-01	9.676-01	1.039-01	5.760+00	3.832-01	14000.60c	r= -1	10
t	2	1.841+02	1.714+02	2.604+02	-2.302-01	9.676-01	1.039-01	5.760+00	3.832-01	energy cutoff		10
bnk	2	1.831+02	1.704+02	2.590+02	5.085-01	4.733-01	7.193-01	1.400+01	5.000-01	n imp split		10
c	2	1.837+02	1.709+02	2.598+02	-6.893-02	5.267-01	8.473-01	1.369+01	4.315-01	8016.60c	r= -99	17
c	2	1.826+02	1.786+02	2.722+02	-7.468-01	6.133-01	2.574-01	6.209+00	3.706-01	8016.60c	r= -1	25
t	2	1.826+02	1.786+02	2.722+02	-7.468-01	6.133-01	2.574-01	6.209+00	3.706-01	energy cutoff		25
2 event log for particle history no. 130407176137285												
cell	x	y	z	u	v	w	erg	wgt	ncx	ncy	ncz	nrn
src	1	0.000+00	0.000+00	0.000+00	8.952-01	-4.447-01	-2.944-02	1.400+01	1.000+00			27
s	2	3.223+02	-1.601+02	-1.060+01	8.952-01	-4.447-01	-2.944-02	1.400+01	5.000-01	surf=	1 npa= 1	27
c	2	3.239+02	-1.609+02	-1.065+01	4.894-01	-4.941-01	7.186-01	1.337+01	4.315-01	8016.60c	r= -99	34
c	2	3.268+02	-1.638+02	-6.379+00	3.521-02	-5.238-01	8.511-01	1.318+01	3.666-01	8016.60c	r= -99	41
c	2	3.273+02	-1.706+02	4.542+00	-8.751-01	4.809-01	5.465-02	1.206+01	2.788-01	14000.60c	r= -99	48
s	1	3.193+02	-1.662+02	5.039+00	-8.751-01	4.809-01	5.465-02	1.206+01	2.788-01	surf=	1 npa= 0	49
s	2	-3.091+02	1.791+02	4.429+01	-8.751-01	4.809-01	5.465-02	1.206+01	2.788-01	surf=	1 npa= 0	49
c	2	-3.118+02	1.806+02	4.445+01	-8.487-01	4.124-01	-3.311-01	1.199+01	2.422-01	13027.60c	r= -99	56
t	2	-3.118+02	1.806+02	4.445+01	-8.487-01	4.124-01	-3.311-01	1.199+01	2.422-01	energy cutoff		56
bnk	2	3.223+02	-1.601+02	-1.060+01	8.952-01	-4.447-01	-2.944-02	1.400+01	5.000-01	n imp split		56
c	2	3.228+02	-1.603+02	-1.062+01	7.289-01	-6.728-01	-1.264-01	1.392+01	4.315-01	8016.60c	r= -99	63
c	2	3.319+02	-1.688+02	-1.220+01	8.532-01	-5.113-01	-1.026-01	1.391+01	3.441-01	20000.60c	r= -99	70
c	2	3.349+02	-1.705+02	-1.256+01	8.348-01	-5.275-01	-1.580-01	1.390+01	3.035-01	11023.60c	r= -99	77
c	2	3.364+02	-1.715+02	-1.285+01	9.181-01	-3.018-01	2.570-01	1.089+01	3.035-01	1001.60c	r= -99	97
t	2	3.364+02	-1.715+02	-1.285+01	9.181-01	-3.018-01	2.570-01	1.089+01	3.035-01	energy cutoff		97

The first neutron starts with the correct parameters and immediately crosses surface 1 into cell 2 as we would expect because cell 1 is a void. The cell importance increases to 2 in cell 2 and the original particle is split into two tracks, one of which is put in the bank (NPA=1) and the other followed. If there had been a four-for-one split instead of two-for-one as we have here, NPA would be 3 indicating one entry into the bank representing three tracks.

The next event is a collision for the track that is being followed. It has an inelastic collision in the center of mass system ($r = -1$) with silicon (14000.60c) in cell 2. Its energy after the collision is 5.760 MeV, which results in a termination because the energy cutoff in the problem is 12 MeV.

At this point the bank is checked for any tracks and one is found that got there as a result of importance sampling. “n imp split” means the particle was put in the bank at random number $nrn=2$ from a split occurring at a surface. That track is started at the point where it was created and it has an elastic collision in the center of mass system ($r = -99$) with oxygen (8016.60c). Its energy after the collision is 13.69 MeV. A second collision with oxygen follows in the center of mass system, but this time it is inelastic with one neutron out. The energy after collision is 6.209 MeV, resulting in its termination due to energy cutoff.

The second source particle is started. It is split, has two collisions with oxygen, one collision with silicon, and crosses surface 1 back into cell 1. The particle then crosses back into cell 2, has one collision and is terminated because of energy cutoff. The second track of this second source neutron is returned from the bank. It has four collisions, falls below the energy cutoff, and is terminated.

By default only 600 lines of the event log are printed for each history. This value can be changed by the fifth entry on the DBCN card.

B. Debug Print

In addition to getting the event-log print for a lost particle, you will also get a debug print that gives you additional information. It tells you what the geometry description is in terms of cell/surface relations at the point the particle got lost. Sometimes the problem is an incorrectly specified sense.

If the geometry of Figure 4.11 in Chapter 4, page 4–5, is specified incorrectly such that the undefined tunnel going off to the right of surface 5 remains, you will get the following debug print:

CHAPTER 5

Event Log

```
1  lost particle no. 1      no cell found in subroutine newcel      history no.      21
the neutron currently being tracked has reached surface      5. there
appears to be no cell on the other side of the surface from cell      2
at that point.
the neutron is in cell      2.
x,y,z coordinates:      -9.88564E-01      5.00000E+00      1.68033E-01
u,v,w direction cosines:      -1.97652E-01      9.79696E-01      3.35962E-02
energy = 1.40000E+01      weight = 1.00000E+00      time = 9.77199E-02
sqrt(z**2+x**2) = 1.00274E+00
the distance to surface      5 from the last event is 2.04145E+00
the distance to collision from the last event is 1.00000E+37
the number of neutron collisions so far in this history is      0.
the cells so far found on the other side of surface      5 of cell      2
(and the surface with respect to which the point x,y,z had the wrong sense) are:
(see chapter 5 of the mcnp manual.)
3
```

The x, y, z coordinates give the location of the particle when it got lost. If the geometry is plotted with x, y, z as the origin, the geometry in the vicinity of the lost particle can be examined. Dashed lines in the plot indicate the improperly specified portion of the geometry (see page 3–8).

The last paragraph of the debug print pinpoints the geometry error. The particle has just exited cell 2 by crossing surface 5. The only known cell on the other side of surface 5 from cell 2 is cell 3. However, cell 3 has been defined as (2:–1) (4:5:–3). The particle is in the undefined tunnel region (–2 5), not in cell 3. If cell 3 were only the area to the right of surface 5 and defined without the union operator, the debug print would be even more specific, listing 3 (2) to indicate that the particle has the wrong sense with respect to surface 2 of cell 3.

APPENDICES

APPENDIX A

Appendix B

MCNP GEOMETRY AND TALLY PLOTTING

MCNP has two plotting capabilities. The first, PLOT, is used to plot two-dimensional slices of a problem geometry specified in the INP file. The second, MCPLOT, plots tally results produced by MCNP and cross-section data used by MCNP. Section I of this appendix addresses system issues external to MCNP related to graphics. Section II discusses how to invoke the PLOT features. Section III discusses how to invoke the MCPLOT features. A complete explanation of each set of input commands is given. Lines the user will type are shown in **lower case typewriter type**. Press the RETURN key after each input line.

I. SYSTEM GRAPHICS INFORMATION

The implementation of plotting in MCNP may differ slightly from installation to installation. Table B-1 lists the graphics systems and features supported by MCNP. These graphics libraries are device-independent in general and give considerable flexibility in processing graphical output. Table B-2 shows supported graphics/computer system combinations.

Table B-1
Supported Graphics Features

	Metafile	Color	Locate and Cursor commands	Auto Sizing
X-window	p	x	x	x
CGS	x		x	
GKS	x	x	x	
DISSPLA	x		x	
LAHEY	p	x		

x=supported p=metafile is standard postscript file

Table B-2
Graphics/Computer System Combinations

	X-window	CGS	GKS	DISSPLA	LAHEY
UNICOS	s	s	s	s	u
SunOS	s	s			u
AIX	s	s	s		u
HPUX	s	s			u
VMS	u	s		s	u
ULTRIX	s	s			u
DOS	s	u		u	s
Solaris	s	s			u
IRIX	s	s			u

s=supported u=unavailable blank=not tested

MCNP uses the ANSI GKS (Graphics Kernel System¹) standard for graphics. If GKS is not available or is defective, subroutines that simulate

APPENDIX B PLOT

GKS can be called. This is done for all other graphics systems listed in Table B-1, of which most use routines compatible with Tektronix output devices. (The TERM command sets the output device type.) See also Appendix C.

A. X-*Windows*

The X-window graphics library allows the user to send/receive graphics output to/from remote hosts as long as the window manager on the display device supports the X protocol (e.g., OPENWINDOWS, MOTIF, etc.). Prior to running MCNP, perform the following steps to use these capabilities. Note that these steps use UNIX C-shell commands.

(1) On the host that will execute MCNP, enter:

```
setenv DISPLAY displayhost:0
```

where *displayhost* is the name of the host that will receive the graphics.

(2) In the CONSOLE window of the display host enter:

```
xhost executehost
```

where *executehost* is the name of the host that will execute MCNP.

With either the 'setenv' or 'xhost' commands, the host IP address can be used in place of the host name; for example,

```
setenv DISPLAY 128.10.1:0
```

This method is useful when one remote system does not recognize the host name of another.

REFERENCE

1. "American National Standard for Information Systems-Computer Graphics-Graphical Kernel System (GKS) Functional Description," ANSI X3.124-1985, ANSI, INC.

II. THE PLOT GEOMETRY PLOTTER

The geometry plotter is used to plot two-dimensional slices of a problem geometry specified in the INP file. This feature of MCNP is invaluable for debugging geometries. You should first verify your geometry model with the MCNP geometry plotter before running the transport part of MCNP, especially with a complicated geometry in which it is easy to make mistakes. The time required to plot the geometry model is small compared with the potential time lost working with an erroneous geometry.

In this appendix, plot options and keywords are shown in upper case, but are usually typed by the user in lower case.

A. *PLOT Input and Execute Line Options*

To plot geometries with MCNP, enter the following command:

```
mcnp ip inp=filename options
```

where 'ip' stands for initiate and plot. "*Options*" is explained in the next paragraph. The most common method of plotting is with an interactive graphics terminal. MCNP will read the input file, perform the normal checks for consistency, and then the plot prompt *plot*> appears.

The following four options can be entered on the execution line:

APPENDIX B PLOT

NOTEK	Suppress plotting at the terminal and send all plots to the graphics metafile, PLOTM. For production and batch situations and when the user's terminal has no graphics capability. Available only with certain graphics systems.
COM=aaaa	Use file aaaa as the source of plot requests. When an EOF is read, control is transferred to the terminal. In a production or batch situation, end the file with an END command to prevent transfer of control. Never end the COM file with a blank line. If COM is absent, the terminal is used as the source of plot requests.
PLOTM=aaaa	Name the graphics metafile aaaa. The default name is PLOTM. For some systems (see Table B-1) this metafile is a standard postscript file and is named PLOTM.PS. When CGS is being used, there can be no more than six characters in aaaa.
COMOUT=aaaa	Write all plot requests to file aaaa. The default name is COMOUT. MCNPLOT writes the COMOUT file in order to give the user the opportunity to do the same plotting at some later time, using all or part of the old COMOUT file as the COM file in the second run.

Unique names for the output files, PLOTM and COMOUT, will be chosen by MCNP to avoid overwriting existing files.

MCNP can be run in a batch environment without much difficulty, but the user interaction with the plotter is significantly reduced. If you are not using an interactive graphics terminal, use the NOTEK option on the MCNP execution line or set TERM=0 along with other PLOT commands when first prompted by PLOT. Every view you plot will be put in a local graphics metafile or postscript file called PLOTn where n begins at M and goes to the next letter in the alphabet if PLOTM exists. In the interactive mode, plots can be sent to this graphics metafile with the FILE keyword (see the keyword description in section B for a complete explanation.) At Los Alamos, the metafile can be sent to various hard copy devices with PPAGES. For some graphics systems (see Table B-1), the PLOTn.PS file is a postscript file that can be sent to a postscript printer.

A plot request consists of a sequence of commands terminated by a carriage return. A command consists of a keyword, usually followed by some parameters. Lines can be continued by typing an & before the carriage return but each keyword and its parameters must be complete on one line. Keywords and parameters are blank-delimited, no more than 80 characters per line. Commas and equal signs are interpreted as blanks. Keywords can be shortened to any degree not resulting in ambiguity but must be spelled correctly. Parameters following the keywords cannot be abbreviated. Numbers can be entered in free form format and do not require a decimal point for floating point data. Keywords and parameters remain in effect until you change them.

APPENDIX B PLOT

Before describing the individual plotting commands, it may help to explain the mechanics of two-dimensional plotting. To obtain a two-dimensional slice of a geometry, you must decide where the slice should be taken and how much of the slice should be viewed on the terminal screen. The slice is actually a two-dimensional plane that may be arbitrarily oriented in space; therefore, the first problem is to decide the plane position and orientation. In an orthogonal three-dimensional coordinate system the three axes are perpendicular to each other. An orthogonal axis system is defined with a set of BASIS vectors on the two-dimensional plane used to slice the geometry to determine the plot orientation. The first BASIS vector is the horizontal direction on the screen. The second BASIS vector is the vertical direction on the screen. The surface normal for the plane being viewed is perpendicular to the two BASIS vectors.

How much of the slice to view is determined next. The center of the view plane is set with ORIGIN, which serves two purposes: first, for planes not corresponding to simple coordinate planes, it determines the position of the plane being viewed, and second, the origin becomes the center of the cross-sectional slice being viewed. For example, for a Y-Z plot, the X-coordinate given with the PX command determines the location of the PX plane. The ORIGIN is given as an X, Y, and Z coordinate and is the center of the plot displayed. Because planes are infinite and only a finite area can be displayed at any given time, you must limit the extent of the cross-sectional plane being displayed with the EXTENT command. For instance, a plane defined with PX=X₁ at an ORIGIN of X₁, Y₁, and Z₁ would produce a Y-Z plane at X=X₁, centered at Y₁ and Z₁ using the default BASIS vectors for a PX plane of 0 1 0 and 0 0 1. If the EXTENT entered is Y₂ and Z₂, the plot displayed would have a horizontal extent from Y₁-Y₂ to Y₁+Y₂ and a vertical extent of Z₁-Z₂ to Z₁+Z₂.

The BASIS vectors are arbitrary vectors in space. This may seem confusing to the new user, but the majority of plots are PX, PY, or PZ planes where the BASIS vectors are defaulted. For the majority of geometry plots, these simple planes are sufficient and you do not have to enter BASIS vectors.

All the plot parameters for the MCNP plotter have defaults. You can respond to the first MCNP prompt with a carriage return and obtain a plot. The default plot is a PX plane centered at 0,0,0 with an extent of -100 to +100 on Y and -100 to +100 on Z. The Y axis will be the horizontal axis of the plot, and the Z axis will be the vertical axis. Surface labels are printed. This default is the equivalent of entering the command line:

```
origin 0 0 0 extent 100 100 basis 0 1 0 0 0 1 label 1 0
```

By resetting selected plot parameters, you can obtain any desired plot. Most parameters remain set until you change them, either by the same command with new values or by a conflicting command.

Warning: Placing the plot plane exactly on a surface of the geometry is not a good idea. Several things can result. Some portion of the geometry may be displayed in dotted lines, which usually indicates a geometry error. Some portion of the geometry may simply not show up at all. Very infrequently

the code may crash with an error. To prevent all these unpleasanties, move the plot plane some tiny amount away from surfaces.

B. Plot Commands Grouped by Function

This section is a detailed description of each of the PLOT keywords and its parameters. You only have to type enough of the keyword so that it is unique but as much as you type must be spelled correctly. The parameters must be typed in full as given here.

1. Device-control Commands

Normally PLOT draws plots on the user's terminal and nowhere else. By means of the following commands the user can specify that plots not be drawn on his terminal and/or that they be sent to a graphics metafile or postscript file for processing later by a graphics utility program that will send the plots to other graphics devices.

- TERM n m The first parameter of this command sets the output device type. Values for this parameter are not consistent from one graphics vendor to another. The n parameter is not used with any graphics systems other than those shown below. The following values are allowed for n:
- 0 terminal with no graphics capability. No plots will be drawn on the terminal, and all plots will be sent to the graphics metafile. TERM 0 is equivalent to putting NOTEK on MCNP's execute line.
 - 1 Tektronix 4010 using CGS.
 - 2 Tektronix 4014 using CGS.
 - 3 Tektronix 4014E using CGS. This is the default.
 - 4115 Tektronix using GKS and UNICOS. This is the default.
 - 1 Tektronix using the AIX PHIGS GKS library. This is the default.
 Check with your vendor for the proper terminal type if you are using a GKS library.

The optional parameter m is the baud rate of the terminal. The default value is 9600.
- FILE aa Send or don't send plots to the graphics metafile PLOTM or postscript file PLOTM.PS according to the value of the parameter aa. The graphics metafile is not created until the first FILE command is entered. FILE has no effect in the NOTEK or TERM 0 cases. The allowed values of aa are:
- blank only the current plot is sent to the graphics metafile.
 - ALL the current plot and all subsequent plots are sent to the metafile until another FILE command is entered.
 - NONE the current plot is not sent to the metafile nor are any subsequent plots until another FILE command is entered.
- VIEWPORT aa Make the viewport rectangular or square according to the value of aa. The default is RECT. This option does

APPENDIX B PLOT

not affect the appearance of the plot. It only determines whether space is provided beside the plot for a legend and around the plot for scales. The allowed values of aa are:

RECT allows space beside the plot for a legend and around the plot for scales.

SQUARE the legend area, the legend and scales are omitted, making it possible to print a sequence of plots on some sort of strip medium so as to produce one long picture free from interruptions by legends.

2. General Commands

& Continue reading commands for the current plot from the next input line. The & must be the last thing on the line.

RETURN If PLOT was called by MCPLOT, control returns to MCPLOT. Otherwise RETURN has no effect.

MCPLOT Call or return to MCPLOT.

END Terminate execution of PLOT.

3. Inquiry Commands

When one of these commands is encountered, the requested display is made and then PLOT waits for the user to enter another line, which can be just a carriage return, before resuming. The same thing will happen if PLOT sends any kind of warning or comment to the user as it prepares the data for a plot.

OPTIONS Display a list of the PLOT command keywords and available or ? or HELP colors.

STATUS Display the current values of the plotting parameters.

4. Plot Commands

Plot commands define the values of the parameters used in drawing the next plot. Parameters entered for one plot remain in effect for subsequent plots until they are overridden, either by the same command with new values or by a conflicting command.

BASIS $X_1 Y_1 Z_1 \quad X_2 Y_2 Z_2$

Orient the plot so that the direction $(X_1 Y_1 Z_1)$ points to the right and the direction $(X_2 Y_2 Z_2)$ points up. The default values are 0 1 0 0 0 1, causing the Y-axis to point to the right and the Z-axis to point up.

ORIGIN VX VY VZ

Position the plot so that the origin, which is in the middle of the plot, is at the point (VX, VY, VZ) . The default values are 0 0 0.

EXTENT EH EV

Set the scale of the plot so that the horizontal distance from the origin to either side of the plot is EH and the vertical distance

APPENDIX B
PLOT

from the origin to the top or bottom is EV. If EV is omitted, it will be set equal to EH. If EV is not equal to EH, the plot will be distorted. The default values are 100 and 100.

- PX VX Plot a cross section of the geometry in a plane perpendicular to the X-axis at a distance VX from the origin. This command is a shortcut equivalent of BASIS 0 1 0 0 0 1 ORIGIN VX vy vz, where vy and vz are the current values of VY and VZ.
- PY VY Plot a cross section of the geometry in a plane perpendicular to the Y-axis at a distance VY from the origin.
- PZ VZ Plot a cross section of the geometry in a plane perpendicular to the Z-axis at a distance VZ from the origin.

LABEL S C DES

Put labels of size S on the surfaces and labels of size C in the cells. Use the quantity indicated by DES for the cell labels. C and DES are optional parameters. The sizes are relative to 0.01 times the height of the view surface, which is the size of the smallest size of hardware characters on the Tektronix 4014. If S or C is zero, then that kind of label will be omitted. If S or C is not zero, it must be in the range from 0.2 to 100. The defaults are S=1, C=0 and DES=CEL. The values of DES follow, where :p can be :N for neutrons, :P for photons and :E for electrons.

CEL	cell names
IMP:p	importances
RHO	atom density
DEN	mass density
VOL	volume
FCL:p	forced collision
MAS	mass
PWT	photon-production weight
MAT	material number
TMPn	temperature (n=index of time)
WWNn:p	weight window lower bound (n=energy interval)
EXT:p	exponential transform
PDn	detector contribution (n=tally number)
DXC:p	DXTRAN contribution
U	universe
LAT	lattice type
FILL	filling universe
NONU	fission turnoff

SCALES n Put scales and a grid on the plot. Scales and grids are incompatible with VIEWPORT SQUARE. n can have the following values:

- 0 neither scales nor a grid. This is the default.
- 1 scales on the edges.
- 2 scales on the edges and a grid on the plot.

COLOR n Turn color on or off and set the resolution. n can have the

APPENDIX B PLOT

following values:

on turn color on.

off turn color off.

$50 \leq n \leq 3000$ set the color resolution to n . A larger value increases resolution and drawing time.

SHADE $M_1 =$ parameter $M_2 =$ parameter ...

Make the cells containing problem material number M_i a particular color. Use the LABEL command to display material numbers. Parameter designates the desired color (e.g., green, blue, etc.).

OPTIONS will list available colors if your display is a color monitor. See page B-1 for supported graphics systems.

5. Zoom Commands

Zoom commands redefine the origin, basis and extent relative to the current origin, basis and extent. The new origin, basis and extent will be used for all subsequent plots until they are again redefined, either by zoom commands or by plot commands. The zoom commands are usually used to zoom in on some feature of the plot.

CENTER DH DV

Change the origin of the plot by the amount DH in the horizontal direction and by the amount DV in the vertical direction. This command is usually used to define the center of a portion of the current plot that the user wants to enlarge.

FACTOR F Enlarge the plot by the factor $1/F$. F must be greater than 10^{-6} .

THETA TH Rotate the plot counterclockwise by the angle TH, in degrees.

CURSOR Present the graphics cursor and prepare to receive cursor input from the user. This command is available only if the terminal has a graphics cursor capability. The user defines a rectangular area to be enlarged by moving the cursor to one corner of the rectangle and entering the cursor trigger, then moving it to the diagonally opposite corner of the rectangle and entering the cursor trigger again. On most terminals the cursor trigger is any key other than the carriage return followed by a carriage return. If the extents were equal before the cursor command was entered, the smaller of the two extents defined by the cursor input is made equal to the larger one. The CURSOR command should be the only command on the input line.

RESTORE Restore the origin and extent to the values they had before the most recent CURSOR command. The RESTORE command should be the only command on the input line. It

cannot be used to undo the effects of the CENTER, FACTOR and THETA commands.

LOCATE Present the graphics cursor and prepare to receive cursor input from the user. This command is available only if the terminal has a graphics cursor capability. The user moves the cursor to a point in the picture and enters the cursor trigger. The x,y,z coordinates of the point are displayed. The LOCATE command should be the only command on the input line.

C. Geometry Debugging and Plot Orientation

Surfaces appearing on a plot as dashed lines usually indicate that adjoining space is improperly defined. Dashed lines caused by a geometry error can indicate space that has been defined in more than one cell or space that has never been defined. These geometry errors need to be corrected. Dashed lines can occur because the plot plane corresponds to a bounding planar surface. The plot plane should be moved so it is not coincident with a problem surface. Dashed lines can indicate a cookie cutter cell or a DXTRAN sphere. These are not errors. The reason for the presence of dashed lines on an MCNP plot should be understood before running a problem.

When checking a geometry model, errors may not appear on the two-dimensional slice chosen, but one or more particles will get lost in tracking. To find the modeling error, use the coordinates and trajectory of the particle when it got lost. Entering the particle coordinates as the ORIGIN and the particle trajectory as the first basis vector will result in a plot displaying the problem space.

The ORIGIN, EXTENT, and BASIS vectors all define a space called the plot *window* (in particular, the window that appears on the terminal screen). The window is a rectangular plane twice the length and width of EXTENT, centered about the point defined by ORIGIN. The first BASIS vector B1 is along the horizontal axis of the plot window and points toward the right side of the window. The second BASIS vector B2 is along the vertical axis of the plot window and points toward the top of the window.

The signs are determined by the direction of the vectors; in particular, do the vector components point in the $\pm x$, $\pm y$, or $\pm z$ direction? After signs have been fixed, determine the magnitudes of the vector components. Assume the vector is parallel to the x-axis. It has no y-component and no z-component so the vector would be 1 0 0. If there is no x-component but both y and z, and y and z have equal magnitudes, the vector would be 0 1 1. The vector does not have to be normalized. If the angle between the vector and the axes is known, the user can use the sine and cosine of the angle to determine the magnitude of the components. A rough approximation will probably be sufficient.

APPENDIX B MC PLOT

III. THE MC PLOT TALLY AND CROSS SECTION PLOTTER

MC PLOT plots tally results produced by MCNP and cross-section data used by MCNP. It can draw ordinary two-dimensional x-y plots, contour tally plots, and three-dimensional surface tally plots, and supports a wide variety of plot options. More than one curve can be plotted on a single x-y plot.

MC PLOT plots cross-section data specified in an INP file: either individual nuclides or the complete material composed of constituent nuclei properly weighted by atomic fraction. The data plotted reflect adjustments to the cross sections made by MCNP such as energy cutoffs, neutron cross-section temperatures, $S(\alpha, \beta)$ treatment, summation of photon reactions to provide a total photon cross section, simple physics treatment for photon data, generation of electron stopping powers and other electron data, and more. Cross-section plots can not be made from a RUNTPE file.

This section covers these general topics in the following order: execute line options, plot conventions and command syntax, plot commands grouped by function, and MCTAL files. MC PLOT options and keywords are shown in upper case but are usually typed by the user in lower case.

Final tally results can be plotted after particle transport has finished. The temporary status of one or more tallies can be displayed during the run as transport is ongoing. After transport is finished, MC PLOT is invoked by typing a `z` on the MCNP execute line, either as a separate procedure using existing RUNTPE or MCTAL files or as part of a regular uninterrupted MCNP run. There are two ways to request that a plot be produced periodically during the run: use a MPLOT card in the INP file or use the TTY interrupt feature. See Chapter 3 for an explanation of the MPLOT card. A TTY interrupt `<ctrl-c>m` causes MCNP to pause at the end of the history that is running when the interrupt occurs and allows plots to be made by calling MC PLOT, which takes plot requests from the terminal. No output is sent to the COMOUT file. The following commands can not be used: RMC-TAL, RUNTPE, DUMP and END. Cross-section data cannot be displayed after a TTY interrupt or by use of the MPLOT card.

MC PLOT can make tally plots on a machine different from the one on which the problem was run by using the MCTAL file. When the INP file has a PRDMP card with a nonzero third entry, a MCTAL file is created at the end of the run. The MCTAL file contains all the tally data in the last RUNTPE dump and it is a coded ASCII file that can be converted and moved from one kind of machine to another. When the MCTAL file is created, its name can be specified by: `mcnp i=inpfile mctal= filename` in the execute line. The default name is a unique name based on MCTAL.

A. Input for MC PLOT and Execution Line Options

To run only MC PLOT and plot tallies after termination of MCNP, enter the following command:

```
mcnp z options
```

APPENDIX B MC PLOT

where ‘z’ invokes MC PLOT. “*Options*” is explained in the next paragraph. Cross-section data cannot be plotted by this method.

The execute line command

```
mcnp inp=filename ixrz options
```

causes MCNP to run the problem specified in *filename* and then the prompt *mcplot*> appears for MC PLOT commands. Both cross-section data and tallies can be plotted. Cross-section data cannot be plotted after a TTY interrupt or by use of the MPLOT card.

The execute line command

```
mcnp inp=filename ixz options
```

is the most common way to plot cross-section data. The problem cross sections are read in but no transport occurs. The following commands cannot be used: 3D, BAR, CONTOUR, DUMP, FREQ, HIST, PLOT, RETURN, RMCTAL, RUNTPE, SPLINE, VIEW, and WMCTAL.

The following options can be entered on the execution line:

NOTEK	Suppress plotting at the terminal and send all plots to the graphics metafile, PLOTM. NOTEK is for production and batch situations and for when the user’s terminal has no graphics capability.
COM=aaaa	Use file aaaa as the source of plot requests. When an EOF is read, control is transferred to the terminal. In a production or batch situation, end the file with an END command to prevent transfer of control. Never end the COM file with a blank line. If COM is absent, the terminal is used as the source of plot requests.
RUNTPE=aaaa	Read file aaaa as the source of MCNP tally data. The default is RUNTPE, if it exists. If the default RUNTPE file does not exist, the user will be prompted for an RMCTAL or RUNTPE command.
PLOTM=aaaa	Name the graphics metafile aaaa. The default name is PLOTM. For some systems (see Table B-1) this metafile is a standard postscript file and is named PLOTM.PS. When CGS is being used, there can be no more than six characters in aaaa.
COMOUT=aaaa	Write all plot requests to file aaaa. The default name is COMOUT. MC PLOT writes the COMOUT file in order to give the user the opportunity to do the same plotting at some later time, using all or part of the old COMOUT file as the COM file in the second run.

Unique names for the output files, PLOTM and COMOUT, will be chosen by MCNP to avoid overwriting existing files.

Plot requests are normally entered from the keyboard of a terminal but alternatively can be entered from a file. A plot is requested by entering a sequence of plot commands following a prompt character. The request is

APPENDIX B MCPLOT

terminated by a carriage return not immediately preceded by an `&` or by a `COPLOT` command. Commands consist of keywords, usually followed by some parameters, entered space or comma delimited.

Defaults are available for nearly everything. If MCNP is run with `Z` as the execute line message, and if file `RUNTPE` is present with more than one energy bin in the first tally, and if a carriage return is entered in response to the MCPLOT prompt, a lin-log histogram plot of tally/MeV vs. energy, with error bars and suitable labels, will appear on the screen.

B. Plot Conventions and Command Syntax

1. 2D plot

The origin of coordinates is at the lower left corner of the picture. The horizontal axis is called the x axis. It is the axis of the independent variable such as user bin or cell number or energy. The vertical axis is called the y axis. It is the axis of the dependent variable such as flux or current or dose. Each axis can be either linear or logarithmic.

2. Contour plot

The origin of coordinates is at the lower left corner of the picture. The horizontal axis is called the x axis. It is the axis of the first of the two independent variables. The vertical axis is called the y axis. It is the axis of the second independent variable. The contours represent the values of the dependent variable. Only linear axes are available.

3. 3D plot

In a 3D plot in its default viewpoint position, the origin of coordinates is near the center of the bottom of the picture. The x axis angles up to the right from the origin. As in a contour plot, the x axis is the axis of the first of the two independent variables. The y axis angles up to the left from the origin. It is the axis of the second independent variable. The z axis goes straight up from the origin. It is the axis of the dependent variable. Only linear axes are available. 3D plots available only with `DISSPLA` graphics.

4. Command syntax

Each command consists of a command keyword, in most cases followed by some parameters. Keywords and parameters are entered blank delimited, no more than 80 characters per line. Commas and equal signs are interpreted as blanks. A plot request can be continued onto another line by typing an `&` before the carriage return, but each command (the keyword and its parameters) must be complete on one line. Command keywords, but not parameters, can be abbreviated to any degree not resulting in ambiguity but must be correctly spelled. The term “current plot” means the plot that is being defined by the commands currently being typed in, which might not be the plot that is showing on the screen. Only those commands marked with an `*` in the list in section C can be used after the first `COPLOT` command in a plot request because the others all affect the framework of the plot or are for contour or 3D plots only.

C. Plot Commands Grouped by Function

1. Device-control Commands

Normally MCPLLOT draws plots on the user's terminal and nowhere else. By means of the following commands the user can specify that plots not be drawn on his terminal and/or that they be sent to a graphics metafile or postscript file for processing later by a graphics utility program that will send the plots to other graphics devices.

TERM n m The first parameter of this command sets the output device type. Values for this parameter are not consistent from one graphics vendor to another. The n parameter is not used with any graphics systems other than those shown below. The following values are allowed for n:

- 0 for a terminal with no graphics capability. No plots will be drawn on the terminal, and all plots will be sent to the graphics metafile. TERM 0 is equivalent to putting NOTEK on MCNP's execute line.
- 1 Tektronix 4010 using CGS.
- 2 Tektronix 4014 using CGS.
- 3 Tektronix 4014E using CGS. This is the default.
- 4115 Tektronix using GKS and UNICOS. This is the default.
- 1 Tektronix using the AIX PHIGS GKS library. This is the default.

Check with your vendor for the proper terminal type if you are using a GKS library.

The optional parameter m is the baud rate of the terminal. The default value is 9600.

FILE aa Send or don't send plots to the graphics metafile PLOTM or postscript file PLOTM.PS according to the value of the parameter aa. The graphics metafile is not created until the first FILE command is entered. FILE has no effect in the NOTEK or TERM 0 cases. The allowed values of aa are:

- blank only the current plot is sent to the graphics metafile.
- ALL the current plot and all subsequent plots are sent to the metafile until another FILE command is entered.
- NONE the current plot is not sent to the metafile nor are any subsequent plots until another FILE command is entered.

2. General Commands

* & Continue reading commands for the current plot from the next input line. The & must be the last thing on the line.

* COPLOT Plot a curve according to the commands entered so far and keep the plot open for coplotting one or more additional curves. COPLOT is effective for 2D plots only. If COPLOT

APPENDIX B MCPLOT

- is the last command on a line, it functions as if it were followed by an &.
- FREQ n Specifies the interval between calls to MCPLOT to be every n histories. In KCODE calculation, interval is every n cycles. If n is negative, the interval is in CPU minutes. If n=0, MCPLOT is not called while MCNP is running histories. The default is n=0.
- RETURN If MCPLOT was called by MCNP while running histories or by PLOT while doing geometry plotting, control returns to the calling subroutine. Otherwise RETURN has no effect.
- PLOT Call or return to the PLOT geometry plotter.
- * END Terminate execution of MCPLOT.
- * = available with COPLOT

3. Inquiry Commands

When one of these commands is encountered, the requested display is made and then MCPLOT waits for the user to enter another line, which can be just a carriage return, before resuming. The same thing will happen if MCPLOT sends any kind of warning or comment to the user as it prepares the data for a plot.

- * OPTIONS Display a list of the MCPLOT command keywords.
* or ? or HELP
- * STATUS Display the current values of the plotting parameters.
- * PRINTAL Display the numbers of the tallies in the current RUNTPE or MCTAL file.
- * IPTAL Display the IPTAL array for the current tally. This array (see Appendix E) tells how many elements are in each dimension of the current 8-dimensional tally.
- PRINTPTS Display the x-y coordinates of the points in the current plot. PRINTPTS is not available for coplots or contour or 3D plots.
- * = available with COPLOT

4. File Manipulation Commands

- * RUNTPE aa n Read dump n from RUNTPE file aa. If the parameter n is omitted, the last dump in the file is read.
- * DUMP n Read dump n of the current RUNTPE file.
- * WMCTAL aa Write the tally data in the current RUNTPE dump to MCTAL file aa.
- * RMCTAL aa Read MCTAL file aa.
- * = available with COPLOT

5. Parameter-setting Commands

Parameters entered for one curve or plot remain in effect for subsequent curves and plots until they are either reset to their default values with the

RESET command or are overridden, either by the same command with new values, by a conflicting command, or by the FREE command that resets many parameters. There are two exceptions: FACTOR and LABEL are effective for the current curve only. An example of a conflicting command is BAR, which turns off HIST, PLINEAR, and SPLINE.

a. General

- * TALLY n Define tally n as the current tally. n is the n on the Fn card in the INP file of the problem represented by the current RUNTPE or MCTAL file. The default is the first tally in the problem, which is the lowest numbered neutron tally or, if none, then the lowest numbered photon tally or, if none, then the lowest numbered electron tally.
- * PERT n Plot a perturbation associated with a tally, where n is a number on a PERTn card. PERT 0 will reset PERT n.
- NONORM Suppress bin normalization. The default in a 2D plot is to divide the tallies by the bin widths if the independent variable is cosine, energy, or time. However, also see the description of the MCTAL file in section B.II.D. Bin normalization is not done in 3D or contour plots.
- * FACTOR a f s Multiply the data for axis a by the factor f and then add the term s. a is x, y, or z. s is optional. If s is omitted, it is set to zero. For the initial curve of a 2D plot, reset the axis limits (XLIMS or YLIMS) to the default values. FACTOR affects *only* the current curve or plot.
- * RESET aa Reset the parameters of command aa to their default values. aa can be a parameter-setting command, COPLOT, or ALL. If aa is ALL, the parameters of all parameter-setting commands are reset to their default values. After a COPLOT command, only COPLOT, ALL, or any of the parameter-setting commands that are marked with an * in this list may be reset. Resetting COPLOT or ALL while COPLOT is in effect causes the next plot to be an initial plot.

* = available with COPLOT

b. Titling commands. The double quotes are required.

- TITLE n "aa" Use aa as line n of the main title at the top of the plot. The allowed values of n are 1 and 2. The maximum length of aa is 40 characters. The default is the comment on the FC card for the current tally, if any. Otherwise it is the name of the current RUNTPE or MCTAL file plus the name of the tally. KCODE plots have their own special default title.
- BELOW Put the title below the plot instead of above it. BELOW has no effect on 3D plots.
- SUBTITLE x y "aa"

APPENDIX B MCPLOT

Write subtitle aa at location x,y, which can be anywhere on the plot including in the margins between the axes and the limits of the screen.

XTITLE “aa” Use aa as the title for the x axis. The default is the name of the variable represented by the x axis.

YTITLE “aa” Use aa as the title for the y axis. The default is the name of the variable represented by the y axis.

ZTITLE “aa” Use aa as the title for the z axis in 3D plots. The default is the name of the variable represented by the z axis.

* LABEL “aa” Use aa as the label for the current curve. It is printed in the legend beside a short piece of the kind of line used to plot the curve. The value of LABEL reverts to its default value, blank, after the current curve is plotted. If LABEL is blank, the name of the RUNTPE or MCTAL file being plotted is printed as the label for the curve.

* = available with COPLOT

c. Commands that specify what is to be plotted.

Tallies in MCNP are binned according to the values of eight different independent variables. Because only one or two of those variables can be used as independent variables in any one plot, one or two of the eight independent variables have to be designated as free variables, and the rest become fixed variables. Fixed values (bin numbers) have to be defined, explicitly or by default, for all of the fixed variables. The default value for each fixed variable is the first bin unless a total bin exists in which case it is used instead.

FREE xy Use variable x (y blank) or variables x and y as the independent variable or variables in the plot. If only x is specified, 2D plots are made. If both x and y are specified, either contour or 3D plots are made, depending on whether 3D is in effect. See keyword FIXED for the list of the symbols that can be used for x and y. The default value of xy is E, and gives a 2D plot in which the independent variable is energy. The FREE command resets XTITLE, YTITLE, ZTITLE, XLIMS, YLIMS, HIST, BAR, PLINEAR, and SPLINE to their defaults.

* FIXED q n Set n as the bin number for fixed variable q. The symbols that can be used for q, and the kinds of bins they represent are:

F	cell, surface, or detector
D	total vs. direct or flagged vs. unflagged
U	user-defined
S	segment
M	multiplier
C	cosine
E	energy
T	time

- SET f d u s m c e t
 Define which variables are free and define the bin numbers of the fixed variables. SET does the job of the FREE and several FIXED commands in one compact command. The value of each parameter can be a bin number (the corresponding variable is then a fixed variable) or an * (the corresponding variable is then a free variable). If there is only one *, 2D plots are made. If there are two, contour or 3D plots are made. SET does the same resetting of parameters that FREE does.
- TFC x
 Plot the tally fluctuation chart of the current tally. The independent variable is NPS. Allowed values of x are:
- M mean
 - E relative error
 - F figure of merit
 - L 201 largest tallies vs x
 (NONORM for frequency vs x)
 - N cumulative number fraction of $f(x)$ vs x
 - P probability $f(x)$ vs x
 (NONORM for number frequency vs x)
 - S SLOPE of the high tallies as a function of NPS
 - T cumulative tally fraction of $f(x)$ vs x
 - V VOV as a function of NPS
 - 1-8 1 to 8 moments of $f(x) * x^{1to8}$ vs x
 (NONORM for $f(x) * \Delta x * x^{1to8}$ vs x)
 - 1c-8c 1 to 8 cumulative moments of $f(x) * x^{1to8}$ vs x
- * KCODE i
 The independent variable is the KCODE cycle. The individual estimator plots start with cycle one. The average col/abs/trk-len plots start with the fourth active cycle. Plot k_{eff} or removal lifetime according to the value of i:
- 1 k (collision)
 - 2 k (absorption)
 - 3 k (track)
 - 4 prompt removal lifetime (collision)
 - 5 prompt removal lifetime (absorption)
 - 11-15 the quantity corresponding to i-10, averaged over the cycles so far in the problem.
 - 16 average col/abs/trk-len k_{eff} and one estimated standard deviation
 - 17 average col/abs/trk-len k_{eff} and one estimated standard deviation by cycle skipped. Can not plot fewer than 10 active cycles.
 - 18 average col/abs/trk-len k_{eff} figure of merit
 - 19 average col/abs/trk-len k_{eff} relative error

* = available with COPLOT

APPENDIX B
MCPLLOT

d. Commands for cross section plotting.

- * XS m Plot a cross section according to the value of m:
 Mn a material card in the INP file. Example: XS M15. The
 available materials will be listed if a material is requested
 that does not exist in the INP file.
 z a nuclide ZAID. Example: XS 92235.50C. The full ZAID
 must be provided. The available nuclides will be listed if a
 nuclide is requested that does not exist in the INP file.
 ? Print out a cross section plotting primer.
- * MT n Plot reaction n of material XS m. The default is the to-
 tal cross section. The available reaction numbers are listed
 in Appendix G Section I page G-1. If an invalid reaction
 number is requested, the available reactions in the data file
 will be listed.
- * PAR p Plot the data for particle type p, where p can be n, p, or e
 of material Mn. The default is the source particle type for
 XS=Mn. For XS=z, the particle type is determined from the
 data library type. For example, 92000.01g defines PAR=p.
 Must be first entry on line.
- * = available with COPLOT

e. Commands that specify the form of 2D plots.

- LINLIN Use linear x axis and linear y axis.
LINLOG Use linear x axis and logarithmic y axis. This is the default.
LOGLIN Use logarithmic x axis and linear y axis.
LOGLOG Use logarithmic x axis and logarithmic y axis.
XLIMS min max nsteps
YLIMS min max nsteps
 Define the lower limit, upper limit, and number of subdivi-
 sions on the x or y axis. nsteps is optional for a linear axis
 and is ineffective for a logarithmic axis. In the absence of
 any specification by the user, the values of min, max, and
 nsteps are defined by an algorithm in MCNP.
- SCALES n Put scales on the plots according to the value of n:
 0 no scales on the edges and no grid.
 1 scales on the edges (the default).
 2 scales on the edges and a grid on the plot.
- * HIST Make histogram plots. This is the default if the independent
 variable is cosine, energy, or time.
- * PLINEAR Make piecewise-linear plots. This is the default if the inde-
 pendent variable is not cosine, energy, or time.
- * SPLINE x Use spline curves in the plots. If the parameter x is included,
 rational splines of tension x are plotted. Otherwise Stineman
 cubic splines are plotted. Rational splines are available only
 with the DISSPLA graphics system.

- * BAR Make bar plots.
- * NOERRBAR Suppress error bars. The default is to include error bars.
- * THICK x Set the thickness of the plot curves to the value x. The legal values lie in the range from 0.01 to 0.10. The default value of THICK is 0.02.
- * THIN Set the thickness of the plot curves to the legal minimum of 0.01.
- LEGEND x y Include or omit the legend according to the values of optional parameters x and y.
 no x and no y: put the legend in its normal place. (the default).
 x=0 and no y: omit the legend.
 x and y defined: for 2D plots only, put most of the legend in its usual place but put the part that labels the plot lines at location x,y.
- * = available with COPLOT

f. Commands that specify the form of contour and 3D plots.

- CONTOUR cmin cmax cstep %
 Define cmin, cmax, and cstep as the minimum, maximum, and step values for contours. If the optional % symbol is included, the first three parameters are interpreted as percentages of the minimum and maximum values of the dependent variable. The default values are 5 95 10 %
- 3D Make 3-dimensional rather than contour plots whenever two independent variables are specified by the FREE command. 3D plots are available only with the DISSPLA graphics system.
- VIEW p t Use p and t for the view angles in 3D plots. p is the angle from the x axis toward the y axis in the xy plane and t is the angle up from the xy plane toward the z axis. The angles are in degrees. See the writeup of subroutine VUANGL in the DISSPLA documentation. The default values are $p = 225^\circ$ and $t = 35^\circ$.

D. MCTAL Files

A MCTAL file contains the tally data of one dump of a RUNTPE file. It can be written by the MCRUN module of MCNP or by the MCPLOT module, by other codes, or even by hand in order to send data to MCPLOT for coplotting with MCNP tally data.

As written by MCNP, a MCTAL file has the form shown below, but only as much of it as is essential to contain the information of real substance is necessary. Furthermore the numerical items do not need to be in the columns implied by the formats as long as they are in the right order, are blank delimited, and have no imbedded blanks. For example, to give MCPLOT a table of something versus energy, the user might write a file as simple as:

APPENDIX B
 MCPLOT

```

E 7 1
  .2 .4 .7 1 3 8 12
VALS
  4.00E-5 .022 5.78E-4 .054 3.70E-5 .079 1.22E-5 .122
  7.60E-6 .187 2.20E-6 .245 9.10E-7 .307
  
```

If more than one independent variable is wanted, other lines such as a T line followed by a list of time values would be needed and the table of tally/error values would need to be expanded. If more than one table of tally/error values is wanted, the file would have to include an NTAL line followed by a list of arbitrarily chosen tally numbers, a TALLY line, and lines to describe all of the pertinent independent variables would have to be added for each table.

Form of the MCTAL file as written by MCNP.

kod, ver, probid, knod, nps, rnr (2A8,A19,I5,I11,I15)

kod is the name of the code, MCNP.

ver is the version, 4A.

probid is the date and time when the problem was run and, if it is available, the designator of the machine that was used.

knod is the dump number.

nps is the number of histories that were run.

rnr is the number of pseudorandom numbers that were used.

One blank followed by columns 1–79 of the problem identification line, which is the first line in the problem’s INP file. (1x,A79)

NTAL n NPERT m (A4,I6,1X,A5,I6)

n is the number of tallies in the problem.

m is the number of perturbations in the problem.

List of the tally numbers, on as many lines as necessary. (16I5)

The following information is written for each tally in the problem.

TALLY m i (A5,2I5)

m is the problem name of the tally, one of the numbers in the list after the NTAL line. i is the particle type: 1=N, 2=P, 3=N+P, 4=E, 5=N+E, 6=P+E, 7=N+P+E, where N=neutron, P=photon, E=electron.

The FC card lines, if any, each starting with 5 blanks (5x,A75)

F n (A2,I8)

n is the number of cell, surface, or detector bins.

List of the cell or surface numbers, on as many lines as necessary. (11I7)

If a cell or surface bin is made up of several cells or surfaces, a zero is written. This list is omitted if the tally is a detector tally.

APPENDIX B
MCPLOT

- D n (A2,I8)
n is the number of total vs. direct or flagged vs. unflagged bins. For detectors, n=2 unless there is an ND on the F5 card; for cell and surface tallies, n=1 unless there is an SF or CF card.
- U n or UT n (A2,I8)
n is the number of user bins, including the total bin if there is one. But if there is only one unbounded bin, n=0 instead of 1. If there is a total bin, the character U at the beginning of the line is followed by the character T. These conventions concerning a single unbounded bin and the total bin also apply to the S, M, C, E, and T lines below.
- S n or ST n (A2,I8)
n is the number of segment bins.
- M n or MT n (A2,I8)
n is the number of multiplier bins.
- C n f or CT n f (A2,I8,I4)
n is the number of cosine bins. f is an integer flag: if f=0 or is absent, the cosine values in the list next below are bin boundaries. Otherwise they are the points where the tally values ought to be plotted, and the tally values are not under any circumstances to be divided by the widths of cosine bins. The E and T lines below have similar flags.
- List of cosine values, on as many lines as necessary. 1P6E13.5
- E n f or ET n f (A2,I8,I4)
n is the number of energy bins.
- List of energy values, on as many lines as necessary. (1P6E13.5)
- T n f or TT n f (A2,I8,I4)
n is the number of time bins.
- List of time values, on as many lines as necessary. (1P6E13.5)
- VALS (A4)
List of tally/error data pairs, on as many lines as necessary. (4(1PE13.5,0PF7.4))
The order is what a 9-dimensional FORTRAN array would have if it were dimensioned (2,NT,NE,...,NF), where NT is the # of time bins, NE is the # of energy bins, ..., and NF is the # of cell, surface, or detector bins. The values here are exactly the same as are printed for each tally in the OUTP file.
- TFC n jtf (A3,I5,8I8)
n is the number of sets of tally fluctuation data. jtf is a list of 8 numbers, the bin indexes of the tally fluctuation chart bin.
- List of four numbers for each set of tally fluctuation chart data, NPS, tally, error, figure of merit. (I11,1P3E13.5)

APPENDIX B MCPLOT

This is the end of the information written for each tally.

KCODE nc ikz mk (A5,I5)

nc is the number of recorded KCODE cycles. ikz is the number of settle cycles. mk is the number of variables provided for each cycle.

List of 3 k_{eff} and 2 removal lifetime values for each recorded KCODE cycle if mk=0 or 5; if mk=19, the whole RKPL(19,MRKP) array is given (see page E-40). (5F12.6)

E. Example of Use of COPLOT

```
runtp e a coplot runtp e b
```

Assume all parameter-setting commands have been previously defined. The input above will put two curves on one plot. The first curve will display tally data from RUNTPE a and the second curve will display tally data from RUNTPE b for the same tally number. Unless reset somehow, MCPLOT will continue to read from RUNTPE b. Next we might type

```
xlims min max tally 11 coplot rmctal aux tally 41 &  
coplot runtp e a tally 1
```

changing the upper and lower limit of the x-axis, defining tally 11 as the current tally, plotting the first curve from RUNTPE b, the second curve from tally 41 data on MCTAL file aux, and the third curve from tally 1 data on RUNTPE a. Future plots will display data from RUNTPE a unless reset.

```
tally 24 nonorm file coplot tally 44
```

will send a frame with two curves to the graphics metafile.

Appendix C

INSTALLING MCNP ON VARIOUS SYSTEMS

The following topics are addressed in this appendix: MCNP installation, modifying MCNP, MCNP verification, and converting cross-section files.

I. INSTALLING MCNP

The following files are provided with the MCNP 4A distribution:

FILE	DESCRIPTION
Readme	Installation instructions.
INSTALL	Installation controller. Named INSTALL.SYS for non-UNIX systems (e.g., VMS and DOS).
INSTALL.FIX	Installation fix file.
MCSETUP.FOR	Setup FORTRAN code.
PRPR.ID	FORTRAN preprocessor code.
MAKXS.ID	Cross-section processor source code.
MCNPC.ID	MCNP C source code (used on UNIX systems only).
MCNPF.ID	MCNP FORTRAN source code.
RUNPROB	Script file for MCNP verification. Named RUNPROB.SYS for non-UNIX systems.
TESTINP.TAR	Compressed input files for MCNP verification. Named TESTINP.SYS for non-UNIX systems.
TESTMCTL.SYS	Compressed tally output files for MCNP verification.
TESTOUTP.SYS	Compressed MCNP output files for MCNP verification.
TESTDIR	Cross-section directory for MCNP verification.
TESTLIB1	Cross-section data for MCNP verification.

Substitute the appropriate system identifier from Table C.1 for the “SYS” suffix.

Table C.1

<u>SYSTEM</u>	<u>IDENTIFIER</u>	<u>SYSTEM</u>	<u>IDENTIFIER</u>
Cray UNICOS	ucos	DEC ULTIRX	dec
Sun SunOS	sun	PC DOS	dos
IBM RS/6000 AIX	aix	Sun Solaris	sun
HP-9000 HPUX	hp	SGI IRIX	sun
VAX VMS	vms		

The INSTALL.FIX file is used to implement corrections to either the MCNP source or the MAKEMCNP script. The latter is important for future changes and/or bugs in compilers and/or operating systems. The format of this file is

APPENDIX C

provided within INSTALL.FIX and additional details can be found on page C-10. The MCSETUP utility is a user-friendly interface for creating system dependent files. The remaining files in the first group are MCNP related source code, and the second group of files are used for MCNP verification (i.e., running the 29 MCNP test problems).

For DOS systems, two additional utilities are included: the file compare utility FC.EXE and the archive utility PKXARC.COM.

The following software/hardware requirements exist:

- (1) A FORTRAN 77 compiler. The supported compiler for each system is listed in the 1.1 MCSETUP menu (see below).
- (2) On Unix systems, a C compiler with an ANSI C library is required for certain options (e.g., X-Window graphics, dynamic memory allocation, etc.). A Bourne-shell command interpreter is needed to execute the installation script.
- (3) A minimum of 2 Mbytes of RAM (16 Mbytes recommended) and 50 Mbytes of disk space (100 Mbytes recommended).

A. On Supported Systems

The supported systems are those included in Table C.1. Installation on other systems should follow the procedure described in Section I.B on page C-4.

1. Getting Started

On VMS systems, enter the following line in your LOGIN.COM file to enable argument passing on the MCNP execution line:

```
MCNP ::= $MCNP_DISK:[MCNP_PATH]MCNP.EXE
```

where MCNP_DISK and MCNP_PATH are the disk and directory path to be used for the MCNP installation. To update this change, log back in or type @LOGIN.

To initiate the installation controller, enter the appropriate commands from Table C.2.

Table C.2

<u>COMMANDS</u>	<u>COMMENT</u>
chmod a+x install ./install SYS	UNIX systems - SYS keyword given in the table C.1
COPY INSTALL.VMS INSTALL.COM @INSTALL	VMS systems
COPY INSTALL.DOS INSTALL.BAT INSTALL	DOS systems

The MCSETUP utility is initiated first. Simply alter the main menu according to the MCNP options you desire. Note the following:

- (1) Default responses are included within brackets, [], (i.e., a <CR> will produce the default response) and additional options are included within parentheses.
- (2) Section 1.1 of the main menu should be altered first, because this sets the appropriate computer system with suitable option defaults.
- (3) If the dynamic memory option is turned “off”, an appropriate value for the MDAS parameter should be set (default is `mdas=4000000`). In general, MDAS should be greater than 100000 and less than $(R-2)/4 * 1000000$, where R is your available RAM in Mbytes.
- (4) If you are uncertain as to the availability or location of graphics libraries on your system, contact your system administrator. Default library names and directory paths are supplied by the MCSETUP utility; however these may not be applicable to your system. A FATAL error message is displayed if needed libraries can not be located. Included in this message is the expected library name and path.

When done altering the main menu, use the PROCESS command to continue the installation. The MCSETUP utility creates three system dependent files: the PRPR C patch file (PATCHC, for UNIX systems only), the PRPR FORTRAN patch file (PATCHF), and the MAKEMCNP script. MCSETUP also creates an ANSWER file which contains the MCSETUP input for future installations. This file reflects all options chosen during the initial installation and can be used in future installations by entering the appropriate command(s) from Table C.3.

Table C.3

<u>COMMANDS</u>	<u>COMMENT</u>
<code>./install SYS < answer</code>	UNIX systems
<code>ASSIGN ANSWER.DAT SYS\$COMMAND @INSTALL</code>	VMS systems
<code>INSTALL ANSWER</code>	DOS systems

Next, the installation controller initiates the MAKEMCNP script which creates the MCNP executable. System differences can result in compilation errors (e.g., unsatisfied externals). If this occurs, contact MCNP@LANL.GOV regarding a fix. In most cases a two line fix can be added to your INSTALL.FIX file to rectify the situation.

The last section of the installation controller performs MCNP verification by running the 29 MCNP test problems. If this step is to be omitted, rename the RUNPROB file with some other name (e.g., RUNPROB.ORG).

APPENDIX C

On most dedicated systems, compilation time is roughly 15-30 minutes and verification an additional 20-40 minutes.

2. Upon Completion

A successful compilation generates an MCNP executable, called `mcnp` on UNIX systems and `MCNP.EXE` on VMS and DOS systems. The MCNP FORTRAN source will be placed in the `plib` directory on UNIX systems or called `MCNP.FOR` on VMS and DOS systems. Likewise for the object code. A normal completion results in the following message:

Installation complete - see Readme file.

A log of the installation process is written to the `INSTALL.LOG` file. An abnormal completion results in one of the following messages:

SETUP ERROR OR USER ABORT.
COMPILATION ERROR - see `INSTALL.LOG` file.
VERIFICATION ERROR - see `INSTALL.LOG` file.

The cause of the error can be found in the `INSTALL.LOG` file.

Upon completion of MCNP verification, 29 `difm??` files (`??=01,02,etc.`) will exist containing the MCNP tally differences between your runs and the standard. Similarly, the 29 `difo??` files will contain the MCNP output file differences between your runs and the standard. Exact tracking is required for MCNP verification, thus significant differences (i.e., other than round-off in the last digit) may prove to be serious (e.g., compiler bugs, etc.). In such cases the `INSTALL.LOG` file should be reviewed to ensure that the 29 test problems ran successfully. See Section III on page C-11 for further details.

B. On Other Systems

For systems not included in Table C.1, the installation process is somewhat more complex, involving three general steps: (1) create a PRPR patch file for MCNP; (2) create PRPR, MAKXSF, and MCNP executables; and (3) execute the 29 MCNP test problems. Discussion for the first two steps follows, while step (3) is discussed in Section III on page C-11.

1. Creating a PRPR Patch File for MCNP

The MCNP source file must be preprocessed before it can be compiled. The preprocessor inserts comdecks and deletes the sections of system dependent code that are not appropriate for your particular computer system. Also the preprocessor can modify MCNP to set a search path for data, to set the maximum size of variably dimensioned storage for machines without dynamic memory allocation, or to make any other modification desired. The MCNP preprocessor is called PRPR. PRPR is short, is written in pure FORTRAN 77, and contains no system dependent features. It should compile easily on all systems.

All changes to MCNP, both for the initial compilation and any subsequent modifications, should be done with the preprocessor. The MCNP

source file, MCNPF.ID, should not be altered; **LANL XTM will not support any modifications once the MCNP source file is altered.** You no longer have MCNP, but your own code, which we do not support. Only changes implemented by a patch file and PRPR will be supported.

PRPR requires the FORTRAN source file and usually a correction or modification file known as a patch file. These files must be named CODEF and PATCH, respectively. As a minimum, this patch file must have a *DEFINE directive so that the preprocessor can tell which system-dependent sections of code are to be retained and which are to be deleted. The preprocessor retains or deletes sections of code according to *DEFINE, *IF DEF, and *ENDIF directives in the MCNP source file. The *DEFINE directive must be the first line(s) of the patch file. If no other changes are specified in the patch file, then the *DEFINE directive can be the first line in the CODEF file and the patch file can be omitted. In either case, *DEFINE must start in column 1.

The *DEFINE directive has the form *DEFINE name1,name2,... The names are chosen from the list below.

Names for hardware

CHEAP	32-bit floats and 32-bit integers
T3D	Cray T3D. Requires UNICOS.

Names for operating systems

UNIX	Unix operating system.
UNICOS	Cray Unix time-sharing system. Don't use with UNIX.
SUN	SunOs and Sun Solaris. Requires UNIX.
HPUX	HP operating system. Requires UNIX.
DEC	DEC Unix and SGI IRIX operating systems. Requires UNIX.
AIX	IBM RS/6000. Requires UNIX.
VMS	Digital Equipment VMS operating system.
PCDOS	IBM PC compatible.

Names for optional features

POINTER	Dynamic memory allocation.
MULTT	Shared memory multitasking. (UNICOS, VMS)
MULTP, PVM	Distributed memory multiprocessing with PVM software.
XS64	Use 64-bit cross sections on CHEAP computers.
LP64	Long pointers (64-bit) on workstations.

Names for plotting features

PLOT	Geometry plotting.
MC PLOT	Plotting tally results. Requires PLOT.
GKSSIM	Simulation of GKS by subroutines provided in MCNP. Requires a graphics library.

Names for graphics libraries

XLIB	X-Window graphics.
LAHEY	Lahey F77L-EW32 PC graphics.

The upper-case file names are for clarity. Use the case appropriate for your operating system. On some systems the FORTRAN file suffix is .FOR rather than .F, and the object file suffix .OBJ rather than .O. The following example is MAKEMCNP for the Sun SunOS system:

```
#!/bin/sh
# Script file to make MCNP 4A on the Sun SunOS.
# Files needed: prpr.id,makxs.id,patchf,mcnpc.id,mcnpf.id.
set -ex
cp prpr.id prpr.f
f77 -o prpr prpr.f
rm -f prpr.f newid compile
grep *define patchf > patch
cp makxs.id codef
prpr
mv compile makxsf.f
f77 -o makxsf makxsf.f
rm -f makxsf.f codef newid
cp mcnpc.id codef
prpr
mv compile mcnpc.c
cc -dalign -c -I/usr/openwin3.0/include mcnpc.c
rm -f codef newid
cp patchf patch
cp mcnpf.id codef
prpr
fsplit compile > clog
rm -f compile codef patch newid clog
f77 -O3 -Nn6000 -Nq6000 -Ns6000 -Nx2000 -dalign -c *.f
f77 -o mcnp -Bstatic *.o -L/usr/openwin3.0/lib -lX11
```

Note the MCNP FORTRAN routines are split into separate files for compilation (your compiler may or may not support this). This script links MCNP with the X-Window graphics library (libX11.a in /usr/openwin3.0/lib).

II. MODIFYING MCNP

After the initial compilation of MCNP you may want to make minor modifications to the code. You should avoid the temptation to text edit the MCNP source file or routines that have already been compiled. Instead you should modify the code with PRPR and a patch file, using the *edit command to modify only the affected subroutines if you don't want to recompile the entire code. LANL XTM will not support any version of MCNP that has been modified in any other way.

A. *Creating a PRPR Patch File*

The preprocessor PRPR provided with MCNP makes it possible to maintain codes with the convenience of update patches on workstations where

APPENDIX C

vendor supplied products are unavailable. Unlike other update emulators PRPR uses no binary files and is written in portable standard Fortran 77. PRPR reads a standard Fortran 77 source code that must be named CODEF, spreads common (*comdeck and *call commands) and keeps or deletes conditional code (*define, *if def, *endif commands), and then writes a compile file that will be called COMPILE. If an optional PATCH file is present with more than *define directives, a new CODEF file called NEWID is written according to *insert, *delete, *before, *ident, *addfile, *deck, and *define directives in the PATCH file. The COMPILE file is written when *define directives are present in either the PATCH or CODEF files. The *edit command can be used to recompile single subroutines for minor modifications of MCNP.

PRPR is used to maintain both MCNP and MAKXSF. Patches, in the form of PATCH files, can be developed, maintained, and tested with interim codes obtained from the NEWID and COMPILE files. Temporary fixes, such as compiler bug errors, are particularly attractive to correct with PATCH files rather than embedding lines into the source file where they are hard to remove later. Various PATCH files can be combined to form a new version of the source code by letting a NEWID file become the new CODEF source file.

The principal advantage of PRPR is that it can be used wherever Fortran 77 is supported. Other advantages of PRPR are that it is machine-portable, simple (only 175 lines of Fortran plus 75 lines of comments), and operates directly on source code, not on an earlier program library.

The disadvantages and restrictions are shown below.

1. Available commands are limited to those listed in Table C.4.
2. All commands in PATCH must be in the same order as the corresponding code in CODEF. For example, changes to deck IM must come before changes to deck HS in PATCH because IM comes before HS in CODEF.
3. There are very few error traps. If your PATCH or CODEF files are wrong, PRPR will fail without warning. The few error messages provided are printed at the end of the NEWID file.
4. The FORTRAN source file must be named CODEF and the patch file must be named PATCH.
5. Files named NEWID and COMPILE must not be present when PRPR is executed.
6. The number of lines in a COMDECK and other dimensions are fixed by parameter statements and must be increased if exceeded.
7. *define directives must be the first line(s) of either the PATCH or CODEF file.
8. *addfile should be immediately followed by *deck on the next line;
9. Either an *ident or an *addfile/*deck must precede *insert, *delete, *before, *edit commands.
10. Nothing can be added after the last line of CODEF.

PRPR recognizes the directives shown in Table C.4.

Table C.4

<u>Long Directive</u>	<u>Short Directive</u>	<u>Function</u>
*/	*/	comment
*define,c	*df,c	set condition
*ident,a	*id,a	change patch identifier to a
*edit,a	*e,a	process only deck a
*addfile ,b	*af ,b	add subroutine after deck b
*deck,a	*dk,a	change deck identifier to a
*insert,a,n	*i,a,n	insert lines after a.n
*delete,a.m,a.n	*d,a.m,a.n	delete or replace lines a.m through a.n
*before,a.n	*b,a.n	insert lines before a.n
*comdeck,a	*cd,a	define common deck a
*call,a	*ca,a	insert comdeck a
*if def,c,n		keep following n lines if condition c met
*endif	*ei	end conditional if

All commas above are optional except on the *addfile directive, where the blank before the comma also is required. After each command a comment can be entered as shown in Example 1.

Rules of operation:

1. If the PATCH file does not exist, COMPILE is produced from CODEF.
2. If the PATCH file exists and contains more than *define directives, both NEWID and COMPILE files will be generated.
3. If no *define directives are present, only NEWID is produced from CODEF.
4. The new PRPR is fully backward compatible with older versions of PRPR.

For systems that do not have virtual memory or dynamic memory allocation, it is necessary to set the size of variable common in MCNP, namely the variable MDAS. MCNP will issue a warning message when a problem is so large that MDAS is too small. Also, one of the ways MCNP finds its cross-section data is by searching the path HDPATH that is set in a data statement at compilation time. Finally, many workstations have faulty FORTRAN compilers that do not adhere to the full ANSI standard FORTRAN. Changes in the code may be necessary in the situations mentioned. All changes should be made with a patch file when MCNP is preprocessed. A sample patch file for setting *DEFINE, changing MDAS to 2,500,000 words, and setting the default Unix datapath to /HOME/YOURPATH on a Sun Unix system is shown in Example 1.

APPENDIX C

Example 1

```
*define unix,cheap,suncgs,plot,cgs,mcplot,gkssim
*ident sunfix
*/ ----- comdeck zc
*delete,zc4a.5 line 30
    parameter (mdas=2500000)
*/ ----- block data
*delete,cor4-2.24 line 576
    3 hdpath/'/home/yourpath'/,
```

Much of this example is comments. Without comments it looks like:

```
*define unix,cheap,suncgs,plot,cgs,mcplot,gkssim
*id sunfix
*d,zc4a.5
    parameter (mdas=2500000)
*d,cor4-2.24
    3 hdpath/'/home/yourpath'/,
```

B. Creating a New MCNP Executable

Once the PRPR patch file is prepared, a new MCNP executable must be created. This can be done one of two ways. If your system is one of those supported by the installation package, see section 1 below; otherwise, see section 2.

1. Using the INSTALL.FIX File

The INSTALL.FIX file can be used to incorporate your patch into the MCNP source. Simply add the following to your INSTALL.FIX file:

```
0 1 10 2
.
. ***** Enter your patch here, followed by a blank line *****
.
```

Omit the *define line from your patch (the installer adds this for you). A blank line signifies the end of your patch. The meaning of the first line of numbers is explained in the INSTALL.FIX file supplied with the MCNP distribution. Having modified the fix file, rerun the install script as explained in section I.A.1 (see Table C.3).

There is one caveat to this approach. If your patch makes changes to any of the MCNP common blocks (i.e., ZC, VV, CM, GS, MB, or BD decks), then the MAKEMCNP and RUNPROB scripts must be run manually, as described in sections II.B.2 below and III.

2. Using the MAKEMCNP Script

Assuming a MAKEMCNP script is available or has been developed (see section I.B.2), this script can be executed using the PRPR patch file containing your modifications. While this may not be the most efficient means

of recreating an executable (i.e., all subroutines will be recompiled), it is the most straightforward. Once completed, the test problems should be executed to help ensure the accuracy of your modifications (see section III).

III. MCNP VERIFICATION

MCNP comes with 29 test problems (TESTINP.TAR) and the other files shown below.

<u>FILE</u>	<u>DESCRIPTION</u>
RUNPROB	Script file for MCNP verification. Named RUNPROB.SYS for non-UNIX systems.
TESTINP.TAR	Compressed input files for MCNP verification. Named TESTINP.SYS for non-UNIX systems.
TESTMCTL.SYS	Compressed tally output files for MCNP verification.
TESTOUTP.SYS	Compressed MCNP output files for MCNP verification.
TESTDIR	Cross-section directory for MCNP verification.
TESTLIB1	Cross-section data for MCNP verification.

Substitute the appropriate system identifier from Table C.1 for the “SYS” suffix. The following commands will uncompress the input/output files and execute the test problem script:

<u>COMMANDS</u>	<u>COMMENT</u>
tar -xf testinp.tar tar -xf testmctl.SYS tar -xf testoutp.SYS chmod a+x runprob runprob	UNIX systems - SYS keyword given in the table C.1
BACKUP TESTINP.VMS/SAVE * BACKUP TESTMCTL.VMS/SAVE * BACKUP TESTOUTP.VMS/SAVE * COPY RUNPROB.VMS RUNPROB.COM @RUNPROB	VMS systems
PKXARC TESTINP.DOS PKXARC TESTMCTL.DOS PKXARC TESTOUTP.DOS COPY RUNPROB.DOS RUNPROB.BAT RUNPROB	DOS systems

For other systems, a request must be made for the ASCII format of these files and a RUNPROB script file must be developed. This script performs the following steps for each of the 29 test problems:

APPENDIX C

- (1) Execute MCNP for the 1st test problem
- (2) Compare the tally output file (inp01m) with the standard (mctl01)
- (3) Compare the output file (inp01o) with the standard (outp01)
- (4) Remove the RUNTPE file (inp01r)

The following is a partial listing of the UNIX RUNPROB file:

```
#!/bin/sh
# script for MCNP verification
set -x
./mcnp name=inp01
diff inp01m mctl01 > difm01
diff inp01o outp01 > difo01
rm -f inp01r
./mcnp name=inp02
diff inp02m mctl02 > difm02
diff inp02o outp02 > difo02
rm -f inp02r
.
.
.
```

Upon completion, there should be 29 inp??m and inp??o files (?? = 01, 02, etc.). If any of these are missing, test?? failed. Differences between these runs and the standard show up in the DIF?? files. Exact tracking is required for MCNP verification, thus significant differences (i.e., other than round-off in the last digit) may prove to be serious (e.g., compiler bugs, etc.). In such cases, the cause of the difference should be fully understood.

The test problems are neither good nor typical examples of MCNP problems. Rather, they are bizarre test configurations designed to exercise as many features as possible. The test set is constantly changed as new capabilities are added to MCNP and as bugs are corrected. The INPnn files are the same for all systems, but the answers, MCTL??, differ slightly from system to system because of differences in arithmetic processors. The test set works on the basis of “particle tracking” in which the random walks must be identical. The test problem data library TESTLIB1 is also only for testing purposes because it contains bad data used to test the code. The TESTLIB1 data should not be used for real transport problems.

IV. CONVERTING CROSS-SECTION FILES WITH MAKXSF

The auxiliary code MAKXSF can be used to convert cross-section libraries from one format to another and to construct custom-designed cross-section libraries.

MCNP can read cross-section data from two types of files. Type 1 files are formatted and have sequential access. Type 2 files are unformatted and have direct access. The cross-section files distributed by RSIC are all Type 1 files because Type 1 files are portable. But reading large formatted files is

slow and formatted files are more bulky than unformatted files. The portable auxiliary program MAKXS F has been provided for translating big, slow, portable, Type 1 files into compact, fast, unportable (but still in compliance with Fortran 77), Type 2 files. You may also use MAKXS F to delete cross-section tables that you do not need and to reorganize the cross-section tables into custom-designed cross-section libraries.

MAKXS F must be preprocessed and compiled in a manner similar to that described for MCNP. Examples of compiling MAKXS F are given in Section I.B.2. The PATCH file consists only of the same *DEFINE directive used for MCNP.

The input files to MAKXS F are one or more existing cross-section libraries, a directory file that describes the input cross-section libraries, and a file called SPECS that tells MAKXS F what it is supposed to do. The output files are one or more new cross-section libraries, a new directory file that describes the new cross-section libraries, and a file called TPRINT that contains any error messages generated during the run. The input and output cross-section libraries may be any combination of Type 1 and Type 2 files. The various types of cross-section libraries and the form and contents of the cross-section directory file are described in detail in Appendix F. The directory file XSDIR in the MCNP code package contains complete descriptions of all of the cross-section files in that package. You might print XSDIR and keep the listing as a reference that will tell you what cross-section tables you actually have on hand. The sample SPECS file in the MCNP code package is provided not only as an example of the correct form for a SPECS file but also as one that will be immediately useful to many users. With SPECS and MAKXS F you can create a complete set of Type 2 files from the Type 1 files in the MCNP code package.

The SPECS file is a formatted sequential file with records not exceeding 80 characters in length. The data items in each record may start in any column and are delimited by blanks. The contents of the file follow.

<u>Record</u>	<u>Contents</u>
1	name of old dir file name of new dir file
2	name of old xs lib* name of new xs lib Type Recl* Epr*
3	access route* entered into new directory file (or blank line)
4 +	nuclide list, if old xs lib is absent
Blank record	

where * = optional

Recl = record length

Epr = entries per record

Records 2 through 4+ can be repeated any number of times with data for additional new cross-section libraries. The SPECS file ends with a blank

APPENDIX C

record. If “name of old cross-section library” exists on record 2, all nuclides from that library will be converted. The default for “record length” is 4096, 2048 or 512 depending on your system. The default for “entries per record” is 512.

Example 2

<u>Record</u>	<u>Contents</u>
1	xmdir1 xmdir2
2	el1 el2 2 4096 512
3	/home/scratch/el2
4	rmccsab2 2
5	/datalib/rmccsab2
6	7015.55c
7	1001.50c
8	blank record

In Example 2, the SPECS file starts with Type 1 directory XSDIR1, electron library EL1, and neutron libraries RMCCSA1 and RMCCS1. All nuclides on the electron data file EL1 are to be converted to a Type 2 file called EL2. For electron files only, all data is double precision, so for 512 entries per record (Epr) the record length (Recl) will be 4096 on both Cray and Unix systems. Records 4–7 tell MAKXSF to search all libraries listed in XSDIR1 until it finds nuclides 7015.55c and 1001.50c (which happen to be on RMCCSA1 and RMCCS1, respectively) and construct a new Type 2 library RMCCSAB2 consisting only of these nuclides. The entries per record (Epr) and record length (Recl) will be defaulted. The new directory file XSDIR2 will tell MCNP to look for the the electron cross sections in /home/scratch/el2 and for the neutron cross sections in /datalib/rmccsab2.

If the Type of the new cross-section file is specified to be 1 in record 2, only the name of the new cross-section file and the 1 for the Type are read in that record. If the Type in record 2 is 2, the record length and the number of entries per record can be specified in case the defaults in MAKXSF are wrong for your system. The record length is in 8-bit bytes on the CRAY, and in words on VMS. If the record length is in words, it must be set equal to the number of entries per record ($Recl = Epr$). If the record length is in bytes, $Recl = 4 * Epr$ for CHEAP systems with 32-bit numeric storage units (except for electrons) and $Recl = 8 * Epr$ for electron data and systems with 64-bit numeric storage units. The best value to use for the number of entries per record depends on the characteristics of the secondary storage, usually disks, on your computer system. If the number of entries is too large, there will be a lot of wasted space in the file because of the partial record at the end of each cross-section table. If the number of entries is too small, reading may be slow because of the large number of accesses. For many systems the default value, $Epr = 512$, is a good value. If you intend to use the SPECS file

from the MCNP code package, be sure that the values of the record length and number of entries per record are suitable for your system. The default is $Epr = 512$ and $Recl = 4096, 2048$ or 512 depending upon the kind of system as determined in the *DEFINE command when MAKXSf is preprocessed by PRPR.

The access route on record 3 of the SPECS file is a concatenation of either a Los Alamos Common File System path or a Unix data path with the library name and becomes the fourth entry for each nuclide in the library in the XSDIR file.

It is not necessary to generate all the cross-section files that you will ever need in one MAKXSf run. You can combine and edit directory files at any time with a text editor or with another MAKXSf run. The only requirement is that you must give MCNP a directory file that points to all the cross-section tables that are needed by the current problem. If you plan to run a long series of MCNP problems that all use the same small set of cross-section tables, it might be convenient to generate with MAKXSf a small special-purpose cross-section file and directory file just for your project.

There is another good use for MAKXSf that has nothing to do with cross-section tables, which is to use it as a test code to see whether your computer system fully supports Fortran 77. You might compile MAKXSf and convert the Type 1 cross-section files to Type 2 before tackling MCNP. The small size of MAKXSf makes it more convenient than MCNP for this testing purpose.

APPENDIX C

Appendix D

MODIFYING MCNP

Users sometimes have to modify MCNP for particular applications. In the past, most user modifications were for special sources or special tallies. The need for tally modifications has been greatly reduced by the generalization of the standard tallies in MCNP Versions 2 and 2B. The generalization of the standard sources in Version 3A has done the same for source modifications. However, users continue to find new applications for MCNP and will find new reasons to modify it.

This appendix contains information that users will need when they write modifications to MCNP. Other sections of this manual are also applicable, especially Chapter 2 for theory, Appendix E for variables and arrays in common, and Appendix F for the details of the cross-section tables.

This appendix is written with the assumption that the reader has a listing of MCNP, such as the files MCNPF.ID and MCNPC.ID, open in front of him so he can look at the sections of code referred to in the text.

CONTENTS OF APPENDIX D

I.	Preprocessors	page D-1
II.	Programming Language	page D-1
III.	Symbolic Names	page D-2
IV.	System Dependence	page D-2
V.	Common Blocks	page D-4
VI.	Dynamically Allocated Storage	page D-5
VII.	The RUNTPE File	page D-6
VIII.	C Functions	page D-7

I. PREPROCESSORS

Before MCNP is compiled, it must be preprocessed to distribute the comdecks and to delete inappropriate system-dependent sections of code. The MCNP preprocessor is PRPR, a FORTRAN77¹ program that comes with the MCNP installation package. See Appendix C for information on the *DEFINE directive required for selecting the appropriate system-dependent code and on how to load MCNP on the various systems.

II. PROGRAMMING LANGUAGE

MCNP is written mostly in standard FORTRAN77. Deviations from the standard are avoided because they make it more difficult to maintain portability. MCNP programming currently deviates from the standard in the following areas: system-dependent features, system peculiarities, timing routines, X-window graphics, and dynamically allocated storage. The last three are implemented using C routines found in the distribution file MCNPC.ID.

APPENDIX D

Every dynamically allocated storage array in MCNP has an offset that is added to the first subscript expression in every reference to the array. This causes the value of the subscript expression to exceed the corresponding upper dimension bound for the array, which violates a FORTRAN rule. So far this has not caused trouble because the systems that MCNP currently runs on do not enforce the rule dynamically. The rule can not be enforced at compile time because the offset is a variable.

Common block PBLCOM, containing both floating-point and integer quantities, is equivalenced to an integer array that is used in some DO-loops that copy it to similar arrays. This is illegal in FORTRAN but works because the equivalenced arrays and variables are actually stored in the same places in memory.

Some special features of MCNP cannot be provided within the FORTRAN language. The special features are implemented by calling subroutines in the local libraries in the various computing facilities where MCNP is used. Some of the subroutine calls or preparations for the calls require nonstandard language. For example, the statement that fetches the execute-line message in the DEC VMS system is `CALL LIB$GET_FOREIGN(HM,,)`. There are too many characters in the name of this subroutine, it contains some illegal characters, and two of the arguments are void.

While the FORTRAN standard is not specific as to the case of the source characters, MCNP source files are distributed primarily in lower case. The few exceptions to this are predicated by the following comment : “CCCC ... must be upper case.” Changing the case of the source files should be avoided, even on VAX VMS systems where it was previously necessary. Input to MCNP (via input files or the terminal) is now case insensitive. Case conversion is provided in subroutine NXTSYM.

III. SYMBOLIC NAMES

In MCNP, the name of every entity in COMMON and the name of every function subprogram is at least three characters long. The name of every local entity, including statement functions, is less than three characters long. Thus, the local or global status of a symbolic name can be determined at a glance.

The default implicit typing of FORTRAN is used for all integer and real entities in MCNP. When MCNP is compiled on any 32-bit computer, the statement `IMPLICIT DOUBLE PRECISION (A-H,O-Z)` is included in all program units. There are no complex entities in MCNP nor are there any double-precision entities other than when double precision is used instead of real on 32-bit machines. Logical entities are rare and are always local. The names of most, not all, character entities begin with the letter H.

IV. SYSTEM DEPENDENCE

The use of standard FORTRAN goes a long way by itself toward making MCNP run on many different computer systems. However, differences between the systems still have to be allowed for to some extent.

The most important difference between hardware systems is that some have 60-bit or 64-bit words, whereas others, such as IBM and DEC machines, have 32-bit words. MCNP assumes that no more than 32 bits are available for integer quantities. MCNP assumes that at least 48 bits of precision are available for floating-point quantities. This requires double precision on 32-bit machines. Geometry tracking in MCNP uses floating-point quantities without any special allowance for the fact that they are only approximations to the mathematical real numbers that they represent. This turns out to be a safe practice if the floating-point numbers have 48 bits of precision but not with much less than 48. The accuracy of cross-section data is so low that they could be represented adequately by 32-bit floating-point values, and because most of the memory used by a typical MCNP problem is filled with cross-section tables, it is desirable to use 32-bit words for them. When 32-bit words are used for cross sections, problems fail to track 64-bit-data problems.

The magnitude of a floating-point number cannot exceed about 10^{38} in most 32-bit machines; therefore, intermediate values do not exceed that limit. There are probably still sections of MCNP that can fail by trying to generate numbers greater than 10^{38} .

The vector capability of Cray computers is a major hardware peculiarity which might speed up MCNP if we could find a way to exploit it. The attempts made so far to vectorize MCNP have not been successful and, in fact, have made it run more slowly. Part of the trouble is that Monte Carlo itself resists vectorization, especially with continuous-energy cross-section tables. Part of the trouble is that MCNP is a general-purpose program with a great many options that are implemented in hordes of IF statements. The one place in MCNP where there is some system-dependent code to facilitate vectorization is in subroutine TALSHF. The list-scoring parameter FTLS is affected by this bit of vectorization and has a special value in the Cray case. Only in rare problems does any of this make any significant difference.

The FORTRAN standard allows I/O units to be preconnected, which means that MCNP must avoid using certain unit numbers. Fortunately the preconnected unit numbers in all systems that MCNP currently runs on are numbers less than 10 or greater than 99. To avoid them, MCNP uses unit numbers in the thirties, forties, and fifties. VMS uses SYS\$INPUT and SYS\$OUTPUT to represent the user's terminal.

The FORTRAN standard does not specify the units for the length of the records of a direct-access file. Some systems define the length in bytes, some in words. This inconsistency does not affect the portability of MCNP. Direct access is used only for Type 2 cross-section files. The record length is read from the cross-section directory file and is entered explicitly in the input file to the auxiliary program MAKXSF, which writes the Type 2 files and the cross-section directory file. The question of the units occurs at the same time that the user chooses the size of the records, all in the context of the local system.

Some features of MCNP cannot be provided within the FORTRAN lan-

APPENDIX D

guage. They are implemented by calling subroutines in local system libraries. Not all system-dependent features are available in all systems. The geometry-plotting feature is a special case. Its availability depends more on the local availability of GKS or of one of the other plotting packages – CGS, X-window, Lahey, or DISSPLA – than on the nature of the computer system. DISSPLA has the added complication of not having a regular initialization procedure. The local installation has to insert its particular DISSPLA initialization call in MCNP subroutine GOPWK.

We have encountered bugs in compilers. Some of the comments in MCNP have CA in columns 1 and 2. These comments identify places where unusual programming has been done to get around compiler bugs.

System-dependent sections of code are set off by the preprocessor directives

```
*IF DEF,name ... *ENDIF      or      *IF DEF,name,n
```

See Appendix C for the names that are used and for how to use the preprocessors. As much as possible, we have tried to gather the system-dependent code in MCNP into only a few places, away from heavily mathematical parts of the program. One technique, exemplified by subroutine SETIDT, is to write a subroutine to do just one or several closely related system-dependent tasks. A subroutine of this sort consists of several alternative sections of code, one for each of the different systems. When that technique is impractical, we have tried to concentrate system-dependent code into the main program and into the top subroutines of the main sections. However, some system-dependent code is to be found almost anywhere. Finally, coding practices forced on us by the limitations of certain systems, such as keeping all integer values within 32 bits, affect the entire program.

V. COMMON BLOCKS

Most of the common storage is in comdeck CM, which is used by all MCNP program units except some short mathematical or system-oriented subprograms. This common storage is divided into nine separate common blocks. Dynamically allocated storage is in common block /DAC/, separate from statically allocated storage. Fixed, variable, and ephemeral data are separated to simplify maintenance of subroutine TPEFIL, which writes and reads the RUNTPE file. Fixed data are defined in setting up the problem, are written to RUNTPE only once, and are not changed during transport. Variable data are changed during transport and have to be written to RUNTPE for each restart dump. Ephemeral data, in common blocks /EPHCOM/ and /TSKCOM/, are needed only during problem setup or only during the current history and are not written to RUNTPE. The particle description variables that have to be saved when a detector tally is made, when a DX-TRAN particle is generated, and when a particle is banked are in common block /PBLCOM/, which is separate from the rest of the ephemeral data. Character data are in a common block, /CHARCM/, separate from the numerical data in accordance with the rules of FORTRAN. Tables of hard-wired data are in a separate block called /TABLES/.

If any of the following common blocks is changed, the marker variables at the ends of the floating point and integer portions of the block must remain in those places. The length parameters associated with the block may need to be changed. The values of the length parameters are the numbers of numeric storage units in the floating point and integer portions of the common block.

common block	marker variables	length parameters
/FIXCOM/	ZFIXCM, MFIXCM	NFIXCM, LFIXCM
/VARCOM/	ZVZRCM, MVARCM	NVARCM, LVARCM
/EPHCOM/	ZEPHCM, MEPHCM	NEPHCM, LEPHCM
/PBLCOM/	ZPBLCM, MPBLCM	NPBLCM, LPBLCM
	ZPB9CM, MPB9CM	
/TSKCOM/	ZTSKCM, MTSKCM	NTSKCM, LTSKCM

The expressions for some of the length parameters include the parameter NDP2, which is the number of numeric storage units needed for a floating-point quantity. It has the value 1 on 60-bit and 64-bit machines and 2 on 32-bit machines. If any changes are made to /PBLCOM/ before the real variable ZPBLCM or between the integer variables NPA and MPBLCM, those changes must be echoed in the section of duplicate variables ending in "9" (XXX9, YYY9, etc.). The last two small common blocks, /GKSSIM/ and /MSGCOM/, are used in graphics routines and message passing routines, respectively.

VI. DYNAMICALLY ALLOCATED STORAGE

MCNP uses a limited form of dynamically allocated storage. The lengths and locations of all dynamically allocated arrays are defined during problem setup and are not changed during transport and output. All dynamically allocated storage, for both real (double-precision on 32-bit machines) and integer arrays, is in common block /DAC/. /DAC/ contains only one declared array, DAS. All of the dynamically allocated arrays are equivalenced to DAS. When any dynamically allocated array is referenced, an offset is included in the first subscript expression. The offset for each array is equal to the offset of the previous array plus the length of the previous array. Most of the arrays are included in three sets of arrays, one each for fixed, variable, and ephemeral data. The arrays used for statistics (SHSD, STT, NHSD), tallying (TAL), and for nuclear data tables (XSS, EXS) follow at the end. The space these arrays occupy is also used for some temporary arrays during problem setup and geometry plotting. The lengths of most of the arrays are determined during the course of a preliminary reading of the INP file by subroutine PASS1. The offsets of those arrays are calculated in subroutine SETDAS. The INP file is then rewound and is read again by subroutine RDPROB. This time the data from INP are actually stored. The length of TAL is calculated in subroutine ITALLY. The length of XSS is calculated in subroutines under XACT.

The parameter NDP2 is used to make the appropriate adjustments to the offsets where an integer array follows a floating-point array or vice versa.

APPENDIX D

On systems that provide dynamic memory size adjustment, DAS is dimensioned relatively small, and /DAC/ is loaded as the last thing in memory. At several points during the problem setup, the memory size is adjusted to make /DAC/ big enough to hold the arrays whose lengths have been defined. This is done on most systems using the FORTRAN POINTER statement and the C routines MALLOC and REALLOC (see page D-7 and the MCNPC.ID file). On systems without dynamic memory size adjustment, mostly virtual-memory systems, the parameter MDAS, which is the length of DAS, has to be set before compilation to be large enough for the biggest problem planned to be run but not so large as to violate whatever technical or administrative constraints may exist at the site.

VII. THE RUNTPE FILE

The RUNTPE file contains all the information needed to restart a problem in the continue-run mode. It can be used either to run more histories or to postprocess and plot tallies (see Appendix B.)

The RUNTPE file is sequential and unformatted. It is written and read by subroutine TPEFIL in conjunction with subroutines RUNTPR and RUNTPW. The first part of RUNTPE is a sequence of records containing fixed data for the problem. The rest of RUNTPE is a sequence of restart dumps, each consisting of a sequence of records containing variable data. The first dump is written immediately after the records of fixed data are written, before any transport calculations are done. Subsequent dumps are written from time to time during the initial run and during any continue-runs. If a continue-run is done with execute message item C, its dumps are written after the dump from which it started. If a continue-run is done with execute message item CN, its dumps are written after the fixed-data records. In either case, the number of dumps on the RUNTPE file can be limited by the fourth entry on the PRDMP card, see page 3-113.

Records in the Fixed-Data Part of the RUNTPE File

Identification Record

KOD*8	name of the code
VER*5	version identification
LODDAT*8	load date of the code
IDTM*19	machine designator, date and time
CHCD*10	charge code
PROBID*19	problem identification
PROBS*19	problem identification of surface source
AID*80	problem title
UFIL(3,6)*11	characteristics of user files
MXE	number of cross-section tables in the problem

Cross-section tables, MXE of them, one per record.

The contents of /FIXCOM/.

The part of /DAC/ that contains fixed data.

Records in a Restart Dump

Dump Identification Record

Current values of KOD, VER, LODDAT, IDTM, CHCD, and PROBID.
PROBID is always the same as in the initial identification record.

The contents of /VARCOM/.

The part of /DAC/ that contains variable data.

The part of /DAC/ that contains tally information, if any.

Endfile record, which is overwritten by the next dump.

VIII. C FUNCTIONS

The MCNP source includes a file (MCNPC.ID) of C functions that are implemented on most UNIX systems. These functions can be grouped into three features: system timing, X-window graphics, and dynamic memory allocation. Use of these features requires an ANSI C compiler. At the top of the MCNPC.ID file are the standard include files followed by the bitmap description of the MCNP graphics X-window icon and the related XLIB variable structures and global variable definitions. The first function (ETIME) provides a standard UNIX timing routine. The last two functions (MALLOF and REALLF) provide dynamic memory allocation. The remaining routines comprise MCNP/X-window interface functions. The terseness of these C routines is not typical of code written by C experts; however, it is consistent with the MCNP FORTRAN programming style. Note also the use of 6 characters or less in those C function names referenced from the FORTRAN. Other function names and variables reflect standard C programming.

REFERENCES

1. American National Standards Institute, Inc., American National Standard Programming Language FORTRAN, ANSI X3.9-1978., (New York, 1978).

APPENDIX D

Appendix E

GLOBAL CONSTANTS, VARIABLES, AND ARRAYS

This appendix contains information for users who need to modify MCNP. The first section is a dictionary of the symbolic names of the global entities in MCNP. The second section contains descriptions of some complicated arrays.

I. DICTIONARY OF SYMBOLIC NAMES

The global variables and arrays in MCNP are declared in COMMON statements that are in comdecks to reduce the bulk of the code and to simplify maintenance. The comdecks are copied into the MCNP program units in a preprocessor run before compilation. Some comdecks also contain PARAMETER statements that declare global named constants. Associated with each comdeck that has any common blocks is a BLOCK DATA subprogram that provides initial definitions for some of the entities in the common blocks. The arrangement of the common blocks and named constants in the comdecks and their related BLOCK DATA subprograms is as follows.

COMDECK LX Copyright notice

COMDECK ZC Double precision declaration and named constants

COMDECK VV Tables and character common

/TABLES/ Tables of constant data

/CHARCM/ Character variables and arrays

COMDECK CM with BLKDAT Common blocks for all program units

Includes comdeck ZC and VV

/FIXCOM/ Fixed common; unchanged after problem initiation.

/VARCOM/ Variable common; changes throughout random walk and is needed for continue run.

/EPHCOM/ Ephemeral common; not used in continue run.

/PBLCOM/ Particle description required for banking particles.

/TSKCOM/ Variable common repeated on each multitasking processor.

/ITSKPT/ Pointers to dynamically allocated variable and ephemeral common on each processor.

/DAC/ Dynamically allocated common; variably dimensioned arrays.

COMDECK GS Common block /GKSSIM/ for GKS simulation subroutines

COMDECK MB Common block /MSGCOM/ for multiprocessing message passing subroutines

COMDECK LKON Turn on multitasking lock

COMDECK LKOFF Turn off multitasking lock

COMDECK JC with IBLDAT Common blocks for the IMCN program unit

APPENDIX E COMMON

Named constants

/IMCCOM/ Constants and ephemeral data

/JMCCOM/ Character variables and arrays

COMDECK PC with PBLDAT Common blocks for the PLOT geometry plotting section

Named constants

/PLTCOM/ Constants and ephemeral data

/QLTCOM/ Character variables and arrays

COMDECK LT with LANDCT Common block for XACT electron data

/LANCUT/ Ephemeral data

COMDECK LM with LANDAU Common block for MCRUN electron Landau treatment

/LANCOM/ Ephemeral data

COMDECK MP with ZBLDAT Common blocks for the MCPLOT tally and cross section plotting section

/MPLCOM/ Constants and ephemeral data

/ZCHAR/ Character variables and arrays

The symbolic names of the global constants, variables, and arrays are listed alphabetically below. The dimension bounds (for arrays), the location, and a brief description is given for each entry. The adjustable dimension bound of each dynamically allocated array is indicated by a *. The location of each variable or array is the name of its common block with the slashes omitted. The location of each global named constant is given as the comdeck designator followed by -par.

The names of the entities in /PBLCOM/ that end in 9 are not included in the dictionary. They are used only for saving temporarily the other entities in /PBLCOM/. The names of variables ending in TC are not included in the dictionary. They are the /TSKCOM/ equivalents of some variables in /VARCOM/.

AAAFD(*)	DAC	Array name for real fixed /DAC/
AAAVD(*)	DAC	Array name for real variable /DAC/
AB1(*)	DAC	X-coordinates of points to be plotted
AB2(*)	DAC	Y-coordinates of points to be plotted
ABHI(2)	MPLCOM	Upper x-axis limit of plot data
ABLO(2)	MPLCOM	Lower x-axis limit of plot data
AID*80	CHARCM	Title card of the initial run
AID1*80	CHARCM	Title card of the current run
AIDS*80	CHARCM	Title card of the surface source write run
AJSH	IMCCOM	Coefficient for surface area of a torus
ALS	GKSSIM	Current distance along a polyline
AMFP	TSKCOM	Mean free paths to detector or DXTRAN sphere
AMX(4,4,*)	DAC	Matrices of surface coefficients from SCF
ANEUT	ZC-par	Neutron mass in a.m.u.
ANG(5)	TSKCOM	Surface normal and cosine of track direction
ARA(*)	DAC	Areas of the surfaces in the problem
ARAS(*)	DAC	Calculated areas of the surfaces

APPENDIX E
COMMON

ASP(*)	DAC	Ionization loss straggling coefficients
ATSA(*)	DAC	Calculated areas or volumes of tally segments
AVGDN	ZC-par	1.e-24*Avogadro's number/neutron mass
AVLM(MLANC)	LANCUT	Average electron Landau scattering lambda cutoff
AVOGAD	ZC-par	Avogadro's number
AWC(*)	DAC	Atomic weights for density conversions
AWN(*)	DAC	Atomic weights for neutron kinematics
AWT(*)	DAC	Atomic weights from AWTAB card
BASIS(9)	PLTCOM	Basis vectors for plotting
BBB(4,4)	IMCCOM	Transformation matrix in volume calculator
BBREM(MTOP)	FIXCOM	Bremsstrahlung energy bias factors
BBV(*)	DAC	Equiprobable bins of a source function
BCW(2,4)	FIXCOM	Coefficients of surface source biasing cylinder
BNUM	FIXCOM	Bremsstrahlung bias number
CALPH(MAXI)	FIXCOM	Cosines of electron scattering group boundaries
CBWF	TSKCOM	Weight multiplier for source direction bias
CHCD*10	CHARCM	Charge code
CHITE	GKSSIM	Character height parameters
CHUP	GKSSIM	Character up vector
CLEV(MCLEVS)	MPLCOM	Contour levels
CMG(*)	DAC	Energy-dependent importances
CMULT	TSKCOM	Collision multiplicity
CNM(NKCD)*5	JMCCOM	List of all legal input-card names
COE(6,2,*)	DAC	Parametric coefficients of plot curves
COINCD	FIXCOM	Distance of coincidence. See DBCN(9)
COLL(MIPT)	VARCOM	Number of collisions in problem
COLOUT(2,11)	TSKCOM	Energy and cosine of particles from collision
COM*8	CHARCM	Name of plot command input file
COMOUT*8	CHARCM	Name of plot command output file
CONTUR(3)	MPLCOM	Contour level limits and interval
CP0	EPHCOM	Computer time used to start of MCRUN
CP1	EPHCOM	Computer time used after beginning MCRUN
CP2	EPHCOM	Computer time used so far
CP3	EPHCOM	Computer time of multiprocessing subtasks
CPA	EPHCOM	Computer time used up to start of MCNP
CPK	VARCOM	Computer time for settling in a KCODE problem
CPV	TSKCOM	Current time for time interrupt in VMS
CRS(*)	DAC	Intersections of plot curves
CTHICK	MPLCOM	Thickness of plot line
CTME	EPHCOM	Computer time cutoff from CTME card
CTS	VARCOM	Computer time used for transport in current problem including previous runs, if any
DAS(MDAS/NDP2)	DAC	Dynamically allocated storage
DBCN(30)	VARCOM	Debug controls from DBCN card
DDET	TSKCOM	Distance from collision point to detector
DDG(MIPT,MXDT)	FIXCOM	Controls for detector diagnostics
DDM(2,*)	DAC	Size and history of largest score of each tally
DDN(24,*)	DAC	Detector diagnostics
DDX(MIPT,2,MXDX)	FIXCOM	Controls for DXTRAN diagnostics
DEB	TSKCOM	Distance to energy-group boundary
DEC(3,*)	DAC	Detector contributions by cell
DEN(*)	DAC	Mass densities of the cells
DFDMP	ZC-par	Default dump interval
DFTINT	ZC-par	Default interval between time interrupts

APPENDIX E
COMMON

DISSF(3)	MPLCOM	Scaling factors due to DISSPLA limitation
DLS	PBLCOM	Distance to next boundary
DMP	VARCOM	Dump control from PRDMP card
DPTB(3,*)	DAC	PERT card density change
DRC(16,*)	DAC	Data saved for coincident detectors
DRS(*)	DAC	Electron energy substep range
DTC	PBLCOM	Distance to time cutoff
DTI(MLGC)	TSKCOM	Positive distances to surfaces
DUMN1*8	CHARCM	Dummy name for user-specified file
DUMN2*8	CHARCM	Dummy name for user-specified file
DXC(3,*)	DAC	DXTRAN contributions by cell
DXCP(0:MXDX,MIPT,*)	DAC	DXTRAN cell probabilities
DXD(MIPT,24,MXDX)	DAC	DXTRAN diagnostics
DXL	PBLCOM	Distance to nearest DXTRAN sphere
DXW(MIPT,3)	FIXCOM	DXTRAN weight cutoffs
DXX(MIPT,5,MXDX)	FIXCOM	DXTRAN sphere parameters
EAA(*)	DAC	Average values of source distributions
EACC(4)	VARCOM	Weight and energy of electrons above EMAX
EAR(*)	DAC	Ionization loss straggling coefficients
EBA(mtop,*)	DAC	Unbiased cumulative prob. for photon/elec bremsstrahlung energy loss fractions.
EBD(MTOP,*)	DAC	Bremsstrahlung energy distributions
EBL(*)	DAC	Energy group bounds for photon production
EBT(MTOP,*)	DAC	Thick-target bremsstrahlung distributions
ECF(MIPT)	FIXCOM	Particle energy cutoffs
ECH(MPNG,MWNG,*)	DAC	Bremsstrahlung angular distributions
EDG(*)	DAC	K-edge energies
EEE(*)	DAC	Energy grid for electron cross-section tables
E EK(*)	DAC	K x-ray energies
EFAC	FIXCOM	Ratio of adjacent energies in array EEE
EG0	TSKCOM	Energy of the particle before last collision
EGG(MAXI,*)	DAC	Electron scattering angle distribution
ELC(MIPT)	PBLCOM	Energy cutoffs in the current cell
ELP(MIPT,*)	DAC	Cell-dependent energy cutoffs
EMCF(MIPT)	FIXCOM	Cutin energy for analog capture (n,p) and for detailed photon physics (p)
EMI(*)	DAC	Flags for M-card GA option
EMX	FIXCOM	Maximum energy in problem for particle type
ENUM	FIXCOM	Secondary electron production bias number
EQLM(MLAM)	LANCOM	Landau electron scattering equiprobable bins
ERB(*)	DAC	Error bars for plot points
ERG	PBLCOM	Particle energy
ERGACE	TSKCOM	Raw energy extracted from cross-section table
ESA(*)	DAC	Cut-in energies for thermal S(A,B) tables
ESPL(MIPT,10)	FIXCOM	Controls for energy splitting
EULER	ZC-par	Euler constant used in electron transport
EWVG(*)	DAC	Energy bins for weight-window generator
EXMS*80	CHARCM	Execute message
EXS(*)	DAC	Electron cross sections
EXSAV(2)	PLTCOM	Saved extents
EXTENT(2)	PLTCOM	Extents for plotting
FDD(2,*)	DAC	Inhibitors of source frequency duplication
FEBL(2,*)	DAC	Number, weight of photons produced in each energy group
FES(33)	IMCCOM	Fission energy spectrum for KCODE source

APPENDIX E
COMMON

FIM(MIPT,*)	DAC	Particle cell importances
FIML(MIPT)	PBLCOM	Importance of the current cell
FISMG	PBLCOM	Multigroup importance
FLAM(MLANC)	LANCUT	Landau electron scatter cutoff
FLC(*)	DAC	Electron landau scattering energy cutoff
FLX(*)	DAC	Tally of multigroup cell fluxes
FME(*)	DAC	Atom fractions from M cards
FMG(*)	DAC	Table for biased adjoint sampling
FNW	FIXCOM	Normalization of generated weight windows
FOR(MIPT,*)	DAC	Controls for forced collisions
FPI	EPHCOM	Reciprocal of number of histories
FRC(*)	DAC	Fraction of source cut off by energy limits
FREQ	EPHCOM	Interval between MCRUN calls of MCPLLOT
FSCON	ZC-par	Inverse fine-structure constant
FSO(*)	DAC	Fission source for KCODE
FST(*)	DAC	Bremsstrahlung bias correction factors
FTT(*)	DAC	TTB bremsstrahlung bias correction factors
GBNK(*)	DAC	The floating-point part of the bank
GENR(*)	DAC	Up to 6 records of particles entering each cell
GEPHCOM(NEPHCOM)	EPHCOM	Array name of floating-point part of /EPHCOM/
GFIXCM(NFIXCM)	FIXCOM	Array name of floating-point part of /FIXCOM/
GMG(*)	DAC	Other-way fluxes for biased adjoint sampling
GPB9CM(MPB,NPBLCM+1)	PBLCOM	Floating-point stack in /PBLCOM/
GPBLCM(NPBLCM+1)	PBLCOM	Array name of floating-point part of /PBLCOM/
GPT(MIPT)	TABLES	Masses of particles
GTSKCM(NTSKCM)	TSKCOM	Array name of floating-point part of /TSKCOM/
GVARCM(NVARCM)	VARCOM	Array name of floating-point part of /VARCOM/
GVBUN(NVARCM)	EPHCOM	Backup array for real variable common
GVL(*)	DAC	Group-center velocities
GWT(*)	DAC	Minimum gamma production weights
GWW(2,9,*)	DAC	Terminated and tallied weights
HBLN(MAXV,2)*3	CHARCM	Names of SDEF and SSR source variables
HBLW(MAXW)*3	CHARCM	Names of SSW source variables
HCOLOR(NCOLOR)*12	QLTCOM	Color keywords of geometry plot
HCS(2)*7	CHARCM	"cell" and "surface"
HDPATH*80	CHARCM	Block data UNIX path to XSDIR and/or libraries
HDPATH*80	CHARCM	UNIX path set other ways
HFT(MKFT)*8	CHARCM	Names of FT-card special treatments
HFU(2)*11	CHARCM	Legal values of file attribute FORM
HIP*(MIPT)	CHARCM	Initials of particle names
HITM*67	JMCCOM	Current item from input card
HLBL(43)*40	MPLCOM	Cross section plot reaction labels
HLIN*80	JMCCOM	Initial storage for newly read input line
HMES*69	CHARCM	Expire (bad trouble) message
HMOPT(MOPTS)*5	JMCCOM	M card options (gas, estep, plib, etc.)
HNP(MIPT)*8	CHARCM	Names of particles
HOVR*8	CHARCM	Name of the current code section
HPBL(24)*7	JMCCOM	PTRAC keyword filters (x, y, z, etc.)
HPTB(NPKEY)	JMCCOM	PERT card key words
HPTR(NPTR)*7	JMCCOM	PTRAC keywords (buffer, cell, event, etc.)
HSB(NSP)	FIXCOM	Statistical analysis history score grid
HSD(2)*10	CHARCM	Legal values of file attribute ACCESS
HSLL	ZC-PAR	History score lower bin bound
HSUB*6	CHARCM	Subroutine where expire (bad trouble) occurred

APPENDIX E
COMMON

HUGE	ZC-par	A very large number
HXSPU(15)*40	MPLCOM	Cross section plot ordinate labels
IAP	PBLCOM	Program number of the next cell
IAX	TSKCOM	Flag for presence of AXS vector
IBAD	FIXCOM	Flag for simple bremsstrahlung distribution
IBC	TSKCOM	Index of the tally cosine bin
IBE	TSKCOM	Index of the tally energy bin
IBIN*8	CHARCM	Tally-bin type symbols
IBL(8,2)	MPLCOM	Bin range for plotting each tally bin type
IBNK(*)	DAC	The integer part of the bank
IBS	TSKCOM	Index of the tally segment bin
IBT	TSKCOM	Index of the tally time bin
IBU	TSKCOM	Index of the tally user bin
ICA	IMCCOM	Index of the type of the current input card
ICH*5	JMCCOM	Name in columns 1-5 of the current input card
ICHAN	EPHCOM	Terminal channel for TTY interrupt on VMS
ICL	PBLCOM	Program number of the current cell
ICLP(4,0:MXLV)	TSKCOM	Multilevel source cell and lattice indices
ICN	IMCCOM	Number in columns 1-5 of current input card
ICOL	GKSSIM	GKS graphics color
ICOLOR(MPLM)	PLTCOM	Shading index for materials in plot
ICRN(3,*)	DAC	Surfaces and label of each cell corner
ICS	EPHCOM	Flag for error on current input card
ICURS	PLTCOM	Cursor flag
ICURS1	PLTCOM	Flag for saving initial conditions for cursor
ICUT(2)	MPLCOM	Index of lower x-axis limit of plot data
ICW	FIXCOM	Reference cell for generated weight windows
ICX	IMCCOM	Flag for asterisk on current input card
IDEFV(MAXV)	FIXCOM	Flags for presence of variable names on SDEF
IDES	FIXCOM	Flag to inhibit electron production by photons
IDET	TSKCOM	Index of the current detector
IDMP	EPHCOM	Number of the dump to start a continue run from
IDRC(MXDT)	FIXCOM	Links between master and slave detectors
IDTM*19	CHARCM	Machine designator and current date and time
IDTMS*19	CHARCM	IDTM of the surface source write run
IDUM(50)	VARCOM	Data from IDUM input card
IDX	PBLCOM	Number of the current DXTRAN sphere
IET	TSKCOM	Index of the current $S(\alpha, \beta)$ table
IEX	PBLCOM	Index of the current cross section table
IEXP	PBLCOM	IEX from previous collision
IFFT	FIXCOM	Flag for FT-card treatments SCX or SCD
IFILE	EPHCOM	I/O unit of current plot input file
IFIP(MIPT)	IMCCOM	Flag for presence of IP card
IFL(*)	DAC	Nodes at cell leavings, for tally flagging
IFREE(2)	MPLCOM	Indices of current free variables
IGM	FIXCOM	Total number of energy groups
IGWW	FIXCOM	Pointer to weight window generator tally bin
III	PBLCOM	First lattice index of particle location
IIIFD(*)	DAC	Array name for integer fixed /DAC/
IIIVD(*)	DAC	Array name for integer variable /DAC/
IINT(*)	DAC	Surfaces crossed at the intersections
IITM	IMCCOM	Integer form of current item from input card
IKZ	FIXCOM	Number of KCODE cycles to skip before tallying
ILBL(8)*8	CHARCM	Names of the 8 kinds of tally bins

APPENDIX E
COMMON

ILN	EPHCOM	Count of lines of input data
ILN1	EPHCOM	Saved count of lines of input data
IMD	TSKCOM	Indicator of monodirectional plane source
IMG	FIXCOM	Flag for electron-photon multigroup problem
IMT	FIXCOM	Number of times the surface source will occur
INAME*8	CHARCM	Name from name option on execution line
INDT	FIXCOM	Count of entries on MT cards
INFORM	EPHCOM	Flag for output to plot user
INIF	EPHCOM	Flag to advance starting random number
INK(MINK)	FIXCOM	Output controls from PRINT card
INP*8	CHARCM	Name of problem input file
INPD	EPHCOM	TFC rendezvous frequency (5th PRDMP entry)
IOID	IMCCOM	Flag for VOID card
IOVR	EPHCOM	Index of the current code section
IPAC2(*)	DAC	Flags used to distinguish between population and tracks entering cell
IPAN(*)	DAC	Pointers into PAN for all the cells
IPCT	MPLCOM	Flag for percent contours
IPER	TSKCOM	Current perturbation index
IPERT	FIXCOM	Perturbation flag
IPHOT	FIXCOM	PHYS:E flag for electrons to produce photons
IPL	IMCCOM	Pointer into RTP for current tally card
IPLT	FIXCOM	Indicator how weight windows are to be used
IPNT(2,MKTC,0:*)	DAC	Pointers into RTP See page E-35
IPRPTS	MPLCOM	Flag for printing instead of plotting points
IPSC	TSKCOM	Type of PSC calculation to make
IPT	PBLCOM	Type of particle
IPTAL(8,5,*)	DAC	Guide to tally bins See page E-31
IPTB(2+2*NPKEY,*)	DAC	Pointers to RPTB array for perturbation keywords
IPTR	FIXCOM	PTRAC option flag
IPTRA(NPTR)	EPHCOM	Pointer to PTR() for each PTRAC keyword
IPTY	FIXCOM	Particle types to be written to surface source
IQC	PLTCOM	Index of current curve of current surface
IRC	IMCCOM	First column of data field of input line
IRS	IMCCOM	Index of the current source distribution
IRT	TSKCOM	Counter for renormalizing direction cosines
IRUP	EPHCOM	Flag set by user with ctrl-c interrupt
ISB	FIXCOM	Control parameter for adjoint biasing
ISBM	MP-par	X-dimension of contour or 3D sub-block
ISEF(2,*)	DAC	Source position tries and rejections
ISIC(MAXF)	TSKCOM	Distribution used for each source variable
ISS(*)	DAC	Surfaces where input surface source is to start
ISSW	FIXCOM	Flag to cause surface source file to be written
IST	VARCOM	Where in FSO to store next KCODE source neutron
IST0	VARCOM	Saved IST value to rerun lost history
ISTRG	FIXCOM	Flag to inhibit electron energy straggling
ISUB(NDEF)*8	CHARCM	Names of I/O files
ITAL	TSKCOM	Index of the current tally
ITASK	EPHCOM	Number of active tasks
ITDS(*)	DAC	Tally specifications See page E-32
ITERM	EPHCOM	Type of computer terminal
ITFC	MPLCOM	Type of TFC or KCODE plot
ITFXS	EPHCOM	Flag to indicate need for total-fission tables
ITI(MLGC)	TSKCOM	Surface numbers associated with DTI values

APPENDIX E
COMMON

ITIK(2)	MPLCOM	Number of divisions in each axis
ITITLE(7)	MPLCOM	Flags for existence of titles
ITOTNU	EPHCOM	Flag for total vs prompt nubar
ITTY	TABLES	I/O unit for terminal keyboard
IU1	ZC-par	I/O unit for a scratch file
IU2	ZC-par	I/O unit for another scratch file
IU3	ZC-par	I/O unit for another scratch file
IU4	ZC-par	I/O unit for another scratch file
IUB	ZC-par	I/O unit for bank backup file
IUC	ZC-par	I/O unit for output plot command file
IUD	ZC-par	I/O unit for directory of cross section tables
IUI	ZC-par	I/O unit for problem input file
IUK	ZC-par	I/O unit for input plot command file
IUO	ZC-par	I/O unit for problem output file
IUOU	EPHCOM	Indicator that OUTP has been opened
IUP	ZC-par	I/O unit for intermediate file of plots
IUPC	ZC-par	PTRAC scratch file
IUPW	ZC-par	PTRAC output file
IUR	ZC-par	I/O unit for file of restart dumps
IUS	ZC-par	I/O unit for KCODE source file
IUSC	ZC-par	I/O unit for surface source scratch file
IUSR	ZC-par	I/O unit for surface source input file
IUSW	ZC-par	I/O unit for surface source output file
IUT	ZC-par	I/O unit for output MCTAL file
IUX	ZC-par	I/O unit for files of cross section tables
IUZ	ZC-par	I/O unit for tally input file
IVDD(MAXF)	FIXCOM	For each dependent source variable, the number of the source variable depended upon
IVDIS(MAXV)	FIXCOM	Distribution number for each source variable
IVORD(MAXF)	FIXCOM	Source variable numbers in sampling order
IXAK	VARCOM	Where in FSO to get next KCODE source neutron
IXAK0	VARCOM	Saved IXAK value to rerun lost history
IXC(61,*)	DAC	Encoded cross-section directory entries
IXCOS	TSKCOM	Pointer to cosine table for PSC calculation
IXL(3,*)	DAC	Encoded ZAIDs
IXRE	TSKCOM	Index of the collision reaction
IZA(*)	DAC	ZAs from M cards
J3D	MPLCOM	Flag: if 2 free variables, plot is 3D not 2D
JAP	RUNCOM	Program number of the next surface
JASR(*)	DAC	Input surface source surfaces to be used
JASW(*)	DAC	Surfaces from surface source input file
JBD	TSKCOM	Indicator for scoring flagged (or direct) bin
JBNK	TSKCOM	Number of particles in the bank in memory
JCHAR	EPHCOM	Current character position in input line
JEPHCOM(LEPHCM)	EPHCOM	Array name for integer part of /EPHCOM/
JEV	TSKCOM	Count of event-log lines printed
JFCN	EPHCOM	Flag indicating CN is in the execute message
JFIXCM(LFIXCM)	FIXCOM	Array name for integer part of /FIXCOM/
JFL(*)	DAC	Nodes of surface crossings, for tally flagging
JFQ(8,0:*)	DAC	Order for printing tally results
JFT(*)	DAC	User bin indexes for special tally treatments
JGF	EPHCOM	Indicator that plot goes to graphics metafile
JGM(MIPT)	FIXCOM	Number of energy groups for each particle
JGP	PBLCOM	Neutron: particle energy group number

APPENDIX E
COMMON

		Photon: flag for photon generated electron progeny
		Electron: flag for positron
JGXA(2)	EPHCOM	Flag for active workstations
JG XO(2)	EPHCOM	Flag for open workstations
JJJ	PBLCOM	Second lattice index of particle location
JLBL(2,8)	MPLCOM	Key to cross section plot labels
JLIM(2)	MPLCOM	Flag that user-supplied limits are in effect
JLOC	PLTCOM	Flag for LOCATE command
JMD(*)	DAC	Material mixture number pointer
JMT(*)	DAC	$S(\alpha, \beta)$ material number pointer
JOVR(NOVR)	EPHCOM	Flags for cross sections to be executed
JPB9CM(MPB,LPBLCM+1)	PB9COM	Stored values of JPBLCM
JPBLCM(LPBLCM+1)	PBLCOM	Array name for the common block See page E-28
JPTAL(8,*)	DAC	Basic tally information See page E-31
JRAD	VARCOM	Latch for warning of unusual radius sampling
JRWB(16,MIPT)	TABLES	PWB columns corresponding to values of NTER
JSBM	MP-par	Y-dimension of contour or 3D sub-block
JSCAL	PLTCOM	Indicator of type of scales wanted on plot
JSCN(*)	DAC	Source comments
JSD(4,33)	IMCCOM	Flags for distributions that need space in SSO
JSF(MJSF)	TABLES	Numerical names of built-in source functions
JSS(*)	DAC	Surfaces for surface source output file
JST(2,*)	DAC	Stack of points in the current piece of cell
JSU	PBLCOM	Program number of the current surface
JTA(2)	GKSSIM	Flag for active workstations
JTASKS	EPHCOM	Number of multitasking processors requested
JTF(8,*)	DAC	Indices for fluctuation charts See page E-35
JTFC	EPHCOM	Flag to indicate TFC update is due
JTLS	TSKCOM	Count of the scores in the current history
JTLX	FIXCOM	Latch for the TALLYX warning message
JTR(*)	DAC	Transformation numbers from surface cards
JTSKCM(LTSKCM)	TSKCOM	Array name of integer part of /TSKCOM/
JTTY	TABLES	I/O unit for terminal printer or CRT
JUI	IMCCOM	Unit number of the current input file
JUN(*)	DAC	Universe number of each cell
JUNF	FIXCOM	Flag for repeated structures
JVARCM(LVARCM)	VARCOM	Array name for integer part of /VARCOM/
JVBU(LVARCM)	EPHCOM	Backup array for integer variable common
JVC(*)	DAC	Vector numbers from the VECT card
JVP	EPHCOM	Flag for square viewport
JXS(32,*)	DAC	Blocks of pointers into cross section tables
KAW(*)	DAC	Values of $Z*1000+A$ from the AWTAB card
KBIN(8,2)	MPLCOM	Bin range for plotting each tally bin type
KBNK	ITSKPT	Task offset for IBNK array
KBP	EPHCOM	Interrupt flag for multitasking mode
KC8	VARCOM	-1/0/1 KCODE cycle: settle/not KCODE/active
KCL(102,*)	DAC	Cell numbers of grid points in the plot window
KCOLOR(NCOLOR+6)	EPHCOM	Color indices for geometry plot
KCP(*)	DAC	Descriptions of multi-level source cells
KCSF	VARCOM	Flag for KCODE source overlap
KCT	VARCOM	Number of KCODE cycles to run
KCY	VARCOM	Current KCODE cycle
KCZ	VARCOM	The last KCODE cycle completed
KDB	TSKCOM	Flag for lost particle or long history

APPENDIX E
COMMON

KDBNPS	EPHCOM	NPS of bad trouble history in multitasking
KDDM	ITSKPT	Task offset for DDM array
KDDN	ITSKPT	Task offset for DDN array
KDEC	ITSKPT	Task offset for DEC array
KDR(*)	DAC	ZAs from DRXS card
KDRC	ITSKPT	Task offset for DRC array
KDUP(*)	DAC	List of input cards for detecting duplicates
KDXC	ITSKPT	Task offset for DXC array
KDXD	ITSKPT	Task offset for DXD array
KDY	DAC	Pointer for dynamic arrays under FORTLIB
KEBL	ITSKPT	Task offset for ebl array
KEYP(NKEYP)*8	QLTCOM	Command keywords of PLOT
KEYS(NKEYS)*8	ZCHAR	Command keywords of MCPLLOT
KF8	FIXCOM	Indicator of presence of F8 tallies
KFDD	ITSKPT	Task offset for FDD array
KFEB	ITSKPT	Pointer to FEBL array
KFL	FIXCOM	Flag for cell or surface tally flagging
KFLX	ITSKPT	Task offset for FLX array
KFM(*)	DAC	Type of curve each surface makes in plot plane
KGBN	ITSKPT	Task offset for GBNK array
KGNR	ITSKPT	Task offset for GENR array
KGWW	ITSKPT	Task offset for GWW array
KIFL	ITSKPT	Task offset for IFL array
KISE	ITSKPT	Task offset for ISEF array
KITM	IMCCOM	Type of current item from input card
KJFL	ITSKPT	Task offset for JFL array
KJFT	ITSKPT	Task offset for JFT array
KKK	PBLCOM	Third lattice index of particle location
KKTC	ITSKPT	Task offset for KTC array
KLAJ	ITSKPT	Task offset for LAJ array
KLBL(43)	MPLCOM	Key to cross section plot reaction labels
KLCJ	ITSKPT	Task offset for LCAJ array
KLIN*80	CHARCM	Input line currently being processed
KLS	GKSSIM	Phase of interrupted-line pattern
KLSE	ITSKPT	Task offset for LSE array
KMAZ	ITSKPT	Task offset for maze array
KMM(*)	DAC	Encoded IDs from M cards
KMPLOT	EPHCOM	Indicator of < ctrl-e > IMCPLOT interrupt
KMT(3,*)	DAC	Encoded ZAIDs from MT cards
KMZU	ITSKPT	Task offset for mazu array
KNDP	ITSKPT	Task offset for NDPF array
KNDR	ITSKPT	Task offset for NDR array
KNHS	ITSKPT	Task offset for NHSD array
KNOD	VARCOM	Dump number
KNODS	FIXCOM	Last dump in the surface source write run
KNRM	FIXCOM	Type of normalization of KCODE tallies
KOD*8	ZC-par	Name of the code (MCNP)
KODS*8	CHARCM	Name of the code that wrote surface source file
KOMOUT	EPHCOM	Indicator that COMOUT has been created
KONRUN	EPHCOM	Continue-run flag
KOPLOT	MPLCOM	Flag for coplot
KOV	EPHCOM	Flag to print lost-particle information
KPAC	ITSKPT	Task offset for PAC array
KPAN	ITSKPT	Task offset for PAN array

APPENDIX E
COMMON

KPC2	ITSKPT	Task offset for IPAC2 array
KPCC	ITSKPT	Task offset for PCC array
KPIK	ITSKPT	Task offset for PIK array
KPROD	EPHCOM	Flag for production status
KPT(MIPT)	FIXCOM	Indicators of particle types in problem
KPTB	ITSKPT	Task offset for PTB array
KPWB	ITSKPT	Task offset for PWB array
KQSS	TSKCOM	Latch for incrementing NQSW
KRFLG	EPHCOM	Flag to do event printing
KRQ(7,NKCD)	IMCCOM	Attributes of all types of input data cards
KRTC	ITSKPT	Task offset for RTC array
KRTM	EPHCOM	Flag for run-time monitor
KSC(*)	DAC	0=nonplanar, 2=PX, 3=PY, 4=PZ, N=P plane with orientation N. Parallel planes have same value.
KSD(21,*)	DAC	Source distribution information See page E-27
KSDEF	VARCOM	Flag for KCODE SDEF source
KSF(29)*3	CHARCM	List of all legal surface-type symbols
KSHS	ITSKPT	Pointer to SHSD array
KSR	EPHCOM	Number of seconds left before job time limit
KST(*)	DAC	Surface-type numbers of all the surfaces
KSTT	ITSKPT	Task offset for STT array
KSU(*)	DAC	White (-2), reflecting (-1) or periodic (>0) surface boundary
KTAL	ITSKPT	Task offset for TAL array
KTASK	TSKCOM	Index of the current task
KTC(2,*)	DAC	Current indices of energy grids See page E-28
KTFILE	FIXCOM	Tally file open: none, RUNTPE, or MCTAL
KTGP	ITSKPT	Task offset for TGP array
KTL(NTALMX,2)	IMCCOM	Amount of storage needed for segment divisors
KTLS	FIXCOM	Length of list scoring space
KTP(MIPT,*)	DAC	Particle types included in each tally
KTR(*)	DAC	Cell transformation numbers from TRCL card
KTSKPT(LTSKPT)	ITSKPT	Array name of pointers in /ITSKPT/
KUFIL(2,6)	FIXCOM	Unit numbers and record lengths of user files
KURV	MPLCOM	Type of plot: histogram, plinear, etc.
KWNS	ITSKPT	Task offset for WNS array
KXD(*)	DAC	Encoded dates of XSDIR entries
KXS(*)	DAC	Indices of the cross section tables on RUNTPE
KXSMAT	MPLCOM	Cross section plot first material number in mat array
KXSPAR	MPLCOM	Cross section plot source particle type number
KXSPEN(*)	DAC	Cross section plot xss array energy pointer
KXSPIE(*)	DAC	Cross section plot iex material indices
KXSPKM	MPLCOM	Cross section plot pointer to zaid in a material
KXSPLT	MPLCOM	Cross section plot number of nuclides in mat
KXSPMA	MPLCOM	Cross section plot material number from input file
KXSPMT	MPLCOM	Cross section plot reaction number
KXSPNX(*)	DAC	Cross section plot xss array number of energies
KXSPTP	MPLCOM	Cross section plot data type
KXSPU(43)	MPLCOM	Cross section plot reaction label indices
KXSPXS(*)	DAC	Cross section plot xss array cross section pointer
LAB1	MPLCOM	Offset for AB1 array
LAB2	MPLCOM	Offset for AB2 array
LAF(3,*)	DAC	Fill data for lattice elements
LAJ(*)	DAC	Cells on the other sides of the surfaces in LJA

APPENDIX E
COMMON

LAMX	PLTCOM	Offset for AMX array
LARA	FIXCOM	Offset for ARA array
LARS	IMCCOM	Offset for ARAS array
LASP	FIXCOM	Offset for ASP array
LAT(2,*)	DAC	Lattice type and VCL pointer for each cell
LATS	IMCCOM	Offset for ATSA array
LAWC	FIXCOM	Offset for AWC array
LAWN	FIXCOM	Offset for AWN array
LAWT	IMCCOM	Offset for AWT array
LAX	MPLCOM	Indicator of which axes are logarithmic
LBB	DAC	Size of records in bank backup file
LBBV	IMCCOM	Offset for BBV array
LBNK	FIXCOM	Offset for IBNK array
LCA(*)	DAC	For each cell, a pointer into LJA and LCAJ
LCAJ(*)	DAC	For each surface in LJA, a pointer into the list of other-side cells in LAJ
LCL(*)	DAC	List of cells bounded by the current surface
LCMG	FIXCOM	Offset for CMG array
LCOE	PLTCOM	Offset for COE array
LCOLOR	PLTCOM	Resolution of coloring for geometry plots
LCRS	PLTCOM	Offset for CRS array
LDDM	FIXCOM	Offset for DDM array
LDDN	FIXCOM	Offset for DDN array
LDEC	FIXCOM	Offset for DEC array
LDEN	FIXCOM	Offset for DEN array
LDPT	FIXCOM	Offset for DPTB array
LDRC	FIXCOM	Offset for DRC array
LDRS	FIXCOM	Offset for DRS array
LDUP	IMCCOM	Offset for KDUP array
LDXC	FIXCOM	Offset for DXC array
LDXD	FIXCOM	Offset for DXD array
LDXP	FIXCOM	Offset for DXCP array
LEAA	FIXCOM	Offset for EAA array
LEAR	FIXCOM	Offset for EAR array
LEBA	FIXCOM	Offset for EBA array
LEBD	FIXCOM	Offset for EBD array
LEBL	FIXCOM	Offset for EBL array
LEBT	FIXCOM	Offset for EBT array
LECH	FIXCOM	Offset for ECH array
LEDG	FIXCOM	Offset for EDG array
LEEE	FIXCOM	Offset for EEE array
LEEK	FIXCOM	Offset for EEK array
LEGALC(NKEYS)	MPLCOM	Indicators of legal coplot commands
LEGALM(NKEYS)	MPLCOM	Indicators of legal runtime monitor commands
LEGALX(NKEYS)	MPLCOM	Cross section plot tag for legal plot commands
LEGEND	MPLCOM	Indicator of type of legend specified
LEGG	FIXCOM	Offset for EGG array
LELP	FIXCOM	Offset for ELP array
LEMI	FIXCOM	Offset for EMI array
LEPHCM	CM-par	Size of integer part of /EPHCOM/
LERB	MPLCOM	Offset for ERB array
LESA	FIXCOM	Offset for ESA array
LEV	PBLCOM	Level of the current particle
LEVVP	RUNCOM	Level of the next boundary

APPENDIX E
COMMON

LEWG	FIXCOM	Offsets for EWWG array
LEXS	FIXCOM	Length of electron cross section tables
LFATL	EPHCOM	Flag to run in spite of fatal errors
LFCDG	FIXCOM	End of floating-point fixed /DAC/
LFCDJ	FIXCOM	End of integer fixed /DAC/
LFCL(*)	DAC	Cells where fission is treated like capture
LFDD	FIXCOM	Offset for FDD array
LFEB	FIXCOM	Offset for FEBL array
LFIM	FIXCOM	Offset for FIM array
LFIXCM	CM-par	Size of integer part of /FIXCOM/
LFLC	FIXCOM	Offset for FLC array
LFLI	EPHCOM	Current length of /DAC/
LFLX	FIXCOM	Offset for FLX array
LFME	FIXCOM	Offset for FME array
LFMG	FIXCOM	Offset for FMG array
LFOR	FIXCOM	Offset for FOR array
LFRC	FIXCOM	Offset for FRC array
LFSO	FIXCOM	Offset for FSO array
LFST	FIXCOM	Offset for FST array
LFT(MKFT,*)	DAC	Pointers to FT-card data
LFTT	FIXCOM	Offset for FTT array
LGBN	FIXCOM	Offset for GBNK array
LGC(MLGC+1)	TSKCOM	Logical expression for the current point with respect to a particular cell
LGMG	FIXCOM	Offset for GMG array
LGNR	FIXCOM	Offset for GENR array
LGVL	FIXCOM	Offset for GVL array
LGWT	FIXCOM	Offset for GWT array
LGWW	FIXCOM	Offset for GWW array
LICC	IMCCOM	Length of /DAC/ during execution of IMCN
LICR	IMCCOM	Offset for ICRN array
LIFL	FIXCOM	Offset for IFL array
LIIN	IMCCOM	Offset for IINT array
LIKEF	IMCCOM	Flag for "LIKE m BUT" on cell card
LIPA	FIXCOM	Offset for IPAN array
LIPB	FIXCOM	Offset for IPTB array
LIPN	IMCCOM	Offset for IPNT array
LIPT	FIXCOM	Offset for IPTAL array
LISE	FIXCOM	Offset for ISEF array
LISS	FIXCOM	Offset for ISS array
LIT	IMCCOM	Length of ITDS array
LITD	FIXCOM	Offset for ITDS array
LIXC	FIXCOM	Offset for IXC array
LIXL	FIXCOM	Offset for IXL array
LIZA	FIXCOM	Offset for IZA array
LJA(*)	DAC	Logical geometrical definitions of all cells
LJAR	FIXCOM	Offset for JASR array
LJAV(*)	DAC	Logical geometrical definition of current cell
LJAW	IMCCOM	Offset for JASW array
LJFL	FIXCOM	Offset for JFL array
LJFQ	FIXCOM	Offset for JFQ array
LJFT	FIXCOM	Offset for JFT array
LJMD	FIXCOM	Offset for JMD array
LJMT	FIXCOM	Offset for JMT array

APPENDIX E
COMMON

LJPT	FIXCOM	Offset for JPTAL array
LJSC	FIXCOM	Offset for JSCN array
LJSS	FIXCOM	Offset for JSS array
LJST	PLTCOM	Offset for JST array
LJSV(*)	DAC	List of the surfaces of the current cell
LJTF	FIXCOM	Offset for JTF array
LJTR	IMCCOM	Offset for JTR array
LJUN	FIXCOM	Offset for JUN array
LJVC	FIXCOM	Offset for JVC array
LJXS	FIXCOM	Offset for JXS array
LKAW	IMCCOM	Offset for KAW array
LKCL	PLTCOM	Offset for KCL array
LKCP	FIXCOM	Offset for KCP array
LKDR	IMCCOM	Offset for KDR array
LKFM	PLTCOM	Offset for KFM array
LKMM	IMCCOM	Offset for KMM array
LKMT	IMCCOM	Offset for KMT array
LKSC	FIXCOM	Offset for KSC array
LKSD	FIXCOM	Offset for KSD array
LKST	FIXCOM	Offset for KST array
LKSU	FIXCOM	Offset for KSU array
LKTC	FIXCOM	Offset for KTC array
LKTP	FIXCOM	Offset for KTP array
LKTR	IMCCOM	Offset for KTR array
LKXD	FIXCOM	Offset for KXD array
LKXS	FIXCOM	Offset for KXS array
LLAF	FIXCOM	Offset for LAF array
LLAJ	FIXCOM	Offset for LAJ array
LLAT	FIXCOM	Offset for LAT array
LLAV	IMCCOM	Offset for LAV array
LLBB	FIXCOM	Offset for LBB array
LLCA	FIXCOM	Offset for LCA array
LLCJ	FIXCOM	Offset for LCAJ array
LLCL	PLTCOM	Offset for LCL array
LLCT	FIXCOM	Offset for LOCCT array
LLFC	FIXCOM	Offset for LFCL array
LLFT	FIXCOM	Offset for LFT array
LLGTSK	FIXCOM	Offset for floating-point task arrays
LLJA	FIXCOM	Offset for LJA array
LLJTSK	FIXCOM	Offset for integer task arrays
LLME	FIXCOM	Offset for LME array
LLMT	FIXCOM	Offset for LMT array
LLPH	FIXCOM	Offset for LOCPH array
LLSA	IMCCOM	Offset for LSAT array
LLSC	FIXCOM	Offset for LSC array
LLSE	FIXCOM	Offset for LSE array
LLSG	PLTCOM	Offset for LSG array
LLST	FIXCOM	Offset for LOCST array
LLSV	IMCCOM	Offset for LJSV array
LLXD	IMCCOM	Offset for LXD array
LMAT	FIXCOM	Offset for MAT array
LMAZ	FIXCOM	Offset for MAZE array
LMBD	FIXCOM	Offset for MBD array
LMBI	FIXCOM	Offset for MBI array

APPENDIX E
COMMON

LMCC	MPLCOM	Offset for MCC array
LME(MIPT,*)	DAC	For each material, a list of the indices of the cross section tables
LMFL	FIXCOM	Offset for MFL array
LMFM	IMCCOM	Offset for MFM array
LMT(*)	DAC	For each material, a list of the indices of the applicable $S(\alpha, \beta)$ tables
LMZP	FIXCOM	Offset for MAZP array
LMZU	FIXCOM	Offset for MAZU array
LNCL	FIXCOM	Offset for NCL array
LNCS	PLTCOM	Offset for NCS array
LNDP	FIXCOM	Offset for NDPF array
LNDR	FIXCOM	Offset for NDR array
LNGM	FIXCOM	Offset for NGMFL array
LNHS	FIXCOM	Offset for NHSD array
LNHT	FIXCOM	Offset for NHTFL array
LNLV	IMCCOM	Offset for NLV array
LNMT	FIXCOM	Offset for NMT array
LNPQ	FIXCOM	Offset for NPQ array
LNPT	FIXCOM	Offset for NPTB array
LNPW	FIXCOM	Offset for NPSW array
LNSB	FIXCOM	Offset for NSB array
LNSF	FIXCOM	Offset for NSF array
LNSL	FIXCOM	Offset for NSL array
LNSR	FIXCOM	Offset for NSLR array
LNSTYL	MPLCOM	Line type
LNTB	FIXCOM	Offset for NTBB array
LNTY	FIXCOM	Offset for NTY array
LNXS	FIXCOM	Offset for NXS Array
LOCCT(MIPT,*)	DAC	Cell-tally locators See page E-33
LOC DT(2,MXDT)	FIXCOM	Detector-tally locators See page E-32
LOCKI	EPHCOM	Integer lock variable
LOCKL	EPHCOM	Logical lock variable
LOCPH(*)	DAC	Pulse-height-tally locators
LOCST(MIPT,*)	DAC	Surface-tally locators See page E-33
LODDAT*8	CHARCM	Date when the code was loaded
LODS*8	CHARCM	LODDAT of code that wrote surface source file
LORD	MPLCOM	Offset for ORD array
LOST(2)	VARCOM	Controls for handling lost particles
LPAC	FIXCOM	Offset for PAC array
LPAN	FIXCOM	Offset for PAN array
LPBLCM	CM-par	Length of /PBLCOM/
LPBR	FIXCOM	Offset for PBR array
LPBT	FIXCOM	Offset for PBT array
LPC2	FIXCOM	Offset for IPAC2 array
LPCC	FIXCOM	Offset for PCC array
LPERT	MPLCOM	Perturbation number for MC PLOT
LPIK	FIXCOM	Offset for PIK array
LPKN	FIXCOM	Offset for PKN array
LPLB	PLTCOM	Offset for PLB array
LPMG	FIXCOM	Offsets for PMG array
LPRB	IMCCOM	Offset for PRB array
LPRU	FIXCOM	Offset for PRU array
LPTB	FIXCOM	Offset for PTB array

APPENDIX E
COMMON

LPTR	FIXCOM	Offset for PTR array
LPTS	FIXCOM	Offset for PTS array
LPUT	MPLCOM	Flag for title below plot
LPWB	FIXCOM	Offset for PWB array
LPXR	FIXCOM	Offset for PXR array
LQAV	FIXCOM	Offset for QAV array
LQAX	FIXCOM	Offset for QAX array
LQCN	FIXCOM	Offset for QCN array
LQMX	PLTCOM	Offset for QMX array
LRHO	FIXCOM	Offset for RHO array
LRKP	FIXCOM	Offset for RKPL array
LRNG	FIXCOM	Offset for RNG array
LRPT	FIXCOM	Offset for RPTB array
LRSC	IMCCOM	Offset for RSCRN array
LRSN	IMCCOM	Offset for RSINT array
LRT	IMCCOM	Length of RTP array
LRTC	FIXCOM	Offset for RTC array
L RTP	IMCCOM	Offset for RTP array
LSAT(*)	DAC	For each segmented tally, a pointer into ATSA
LSB	TSKCOM	Latch for the count of bank overflows
LSC(*)	DAC	For each surface, a pointer into SCF
LSCF	FIXCOM	Offset for SCF array
LSCQ	IMCCOM	Offset for SCFQ array
LSCR	FIXCOM	Offset for SCR array
LSE(*)	DAC	Cells where source particles have appeared
LSFB	IMCCOM	Offset for SFB array
LSG(*)	DAC	Kind of line to plot for each segment of curve
LSHS	FIXCOM	Offset for SHSD array
LSMG	FIXCOM	Offset for SMG array
LSPEED	EPHCOM	Baud rate of the plotting terminal display
LSPF	FIXCOM	Offset for SPF array
LSQQ	FIXCOM	Offset for SQQ array
LSSO	FIXCOM	Offset for SSO array
LSTT	FIXCOM	Offset for STT array
LTAL	FIXCOM	Offset for TAL array
LTBT	FIXCOM	Offset for TBT array
LTD	EMCCOM	Length of TDS array
LTDS	FIXCOM	Offset for TDS array
LTFC	FIXCOM	Offset for TFC array
LTGP	FIXCOM	Offset for TGP array
LTMP	FIXCOM	Offset for TMP array
LTRF	FIXCOM	Offset for TRF array
LTSKCM	CM-par	Size of integer part of /TSKCOM/
LTSKPT	CM-par	Number of pointers in /ITSKPT/
LTTH	FIXCOM	Offset for TTH array
LTYPE	GKSSIM	Line type
LVARCM	CM-par	Size of integer part of /VARCOM/
LVCDG	FIXCOM	End of floating-point variable /DAC/
LVCDJ	FIXCOM	End of integer variable /DAC/
LVCL	FIXCOM	Offset for VCL array
LVD	GKSSIM	DISSPLA level
LVEC	FIXCOM	Offset for VEC array
LVLS	IMCCOM	Offset for VOLS array
LVOL	FIXCOM	Offset for VOL array

APPENDIX E
COMMON

LWGM	FIXCOM	Offset for WGM array
LWNS	FIXCOM	Offset for WNS array
LWWE	FIXCOM	Offset for WWE array
LWWF	FIXCOM	Offset for WWF array
LWWK	FIXCOM	Offset for WWK array
LXCC	MPLCOM	Offset for XCC array
LXD(MIPT,*)	DAC	Encoded ZAID extension from M cards
LXEN	MPLCOM	Offset for KXSPEN array
LXIE	MPLCOM	Offset for KXSPIE array
LXNM	FIXCOM	Offset for XNM array
LXNX	MPLCOM	Offset for KXSPNX array
LXRR	MPLCOM	Offset for XRR array
LXS	FIXCOM	Length of XSS array
LXSS	FIXCOM	Offset for XSS array
LXXS	MPLCOM	Offset for KXSPXS array
LX85	MPLCOM	Offset for XSE85 array
LYCC	MPLCOM	Offset for YCC array
LYRR	MPLCOM	Offset for YRR array
LZST	PLTCOM	Offset for ZST array
M1C	IMCCOM	General purpose variable for PASS1 and RDPROB
M2C	IMCCOM	General purpose variable for PASS1 and RDPROB
M3C	IMCCOM	General purpose variable for PASS1 and RDPROB
M4C	IMCCOM	General purpose variable for PASS1 and RDPROB
M5C	IMCCOM	General purpose variable for PASS1 and RDPROB
M6C	IMCCOM	General purpose variable for PASS1 and RDPROB
M7C	IMCCOM	General purpose variable for PASS1 and RDPROB
M8C	IMCCOM	General purpose variable for PASS1 and RDPROB
M9C	IMCCOM	General purpose variable for PASS1 and RDPROB
M10C	IMCCOM	General purpose variable for PASS1 and RDPROB
MAT(*)	DAC	Material numbers of the cells
MAXF	ZC-par	Number of sampleable source variables
MAXI	ZC-par	Number of electron scattering angle groups
MAXV	ZC-par	Number of SDEF source variables
MAXW	ZC-par	Number of SSW source variables
MAZE(*)	DAC	Universe/lattice map values See page E-41
MAZF(3)	EPHCOM	Total source, entering, collisions in maze
MAZP(3,*)	DAC	Universe/lattice map addresses See page E-41
MBB	TSKCOM	Size of the part of bank currently in memory
MBD(*)	DAC	Flags for cells for which DBMIN is inappropriate
MBI(*)	DAC	Which materials have bremsstrahlung biasing
MBNK	FIXCOM	Size of the bank
MCAL	FIXCOM	Type of multigroup problem
MCC(*)	DAC	Scratch array for MCPLOT
MCLB	PC-par	Number of LABEL command keywords
MCLEVS	MP-par	Maximum number of contour levels allowed for
MCOH	ZC-par	Number of WCO coherent form factors
MCOLOR	EPHCOM	Number of colors available for geometry plots
MCPU	ZC-par	Maximum number of tasks allowed for
MCT	FIXCOM	Flag to write MCTAL file at end of the run
MCTAL*8	CHARCM	Name of output MCTAL file
MDAS	ZC-par	Initial length of /DAC/
MDC	EPHCOM	Flag indicating a dump is due to be written
MEPHCM	EPHCOM	Marker variable at end of /EPHCOM/
MFISS(22)	TABLES	Fission ZAIDS for BLKDAT fission Q-values

APPENDIX E
COMMON

MFIXCM	FIXCOM	Marker variable at end of /FIXCOM/
MFL(3,*)	DAC	Fill data for each cell
MFM(*)	DAC	FM-card material numbers
MGEGBT(MIPT)	FIXCOM	Index of a multigroup table for each particle
MGM(MIPT+1)	FIXCOM	Cumulative number of multigroup groups
MGWW(MIPT+1)	FIXCOM	Cumulative sum of NGWW
MINC	ZC-par	Number of VIC incoherent form factors
MINK	ZC-par	Length of INK array
MIPT	ZC-par	Number of kinds of particles the code can run
MIPTS	IMCCOM	Source particle type
MIX	EPHCOM	Number of entries in KMM and FME
MJSF	ZC-par	Length of JSF array
MJSS	FIXCOM	Space needed for surfaces and cells from SSW
MKC	TSKCOM	Index of the current material
MKCP	IMCCOM	Size of array KCP
MKFT	ZC-par	Number of kinds of FT-card special treatments
MKTC	ZC-par	Number of kinds of tally cards
MLAF	IMCCOM	Space required for LAF
MLAJ	FIXCOM	Length of LAJ array
MLAM	LM-par	Landau electron scattering eqm bins
MLANC	LT-par	Electron Landau lambda cutoff values
MLGC	ZC-par	Size of logical arrays for complicated cells
MLJA	FIXCOM	Length of LJA array
MLOLD	LM-par	MCNP4A electron scattering told array size
MMKDB	EPHCOM	Print history info flag for EXPIRE
MNK	EPHCOM	Flag to indicate maximum printing is wanted
MNNM	FIXCOM	Maximum number of nuclides on M card
MOPTS	IMCCOM	Number of M card options (gas, estep, etc.)
MPAN	TSKCOM	Index in PAN of collision material/nuclide
MPB	ZC-par	Depth of the /PBLCOM/
MPB9CM	PB9COM	Marker variable in /PBLCOM/
MPBLCM	PBLCOM	Marker variable at end of /PBLCOM/
MPC	EPHCOM	Flag indicating that printing is due to be done
MPLM	PLTCOM	Number of material color shadings in plot
MPNG	ZC-par	Number of angle groups in ECH
MRKP	FIXCOM	Number of KCODE cycles kept for plotting
MRL	FIXCOM	Number of source points in FSO
MRM	EPHCOM	Flag indicating that plotting is due to be done
MSCAL	MPLCOM	Indicator of type of scales wanted on plot
MSD	FIXCOM	Number of source distributions
MSEB	ZC-par	Maximum number of equiprobable source bins
MSPARE	ZC-par	Number of spare entries in / PBLCOM/
MSRK	FIXCOM	Maximum number of source points in FSO
MSSC	IMCCOM	Length of source comments array JSCN
MSUB(NDEF)*8	CHARCM	Default names of files
MTAL	MPLCOM	Index of the current tally
MTASKS	FIXCOM	Number of tasks in the initial run
MTOP	ZC-par	Number of bremsstrahlung energy groups + 1
MTP	PBLCOM	Reaction MT from previous collision
MTSKCM	TSKCOM	Marker after integer part of /TSKCOM/
MTSKPT	ITSKPT	Marker after /ITSKPT/
MUNIT	GKSSIM	Postscript file unit number
MVARCM	VARCOM	Marker variable at end of /VARCOM/
MWNG	ZC-par	Number of photon energy groups in ECH

APPENDIX E
COMMON

MWW(MIPT+1)	FIXCOM	Cumulative sum of NWW
MXA	FIXCOM	Number of cells in the problem
MXAFS	FIXCOM	Number of cells plus pseudocells for FS cards
MXDT	ZC-par	Maximum number of detectors
MXDX	ZC-par	Maximum number of DXTRAN spheres
MXE	FIXCOM	Number of cross section tables in the problem
MXE1	FIXCOM	First estimate (usually too big) of MXE
MXF	FIXCOM	Total number of tally bins
MXFP	FIXCOM	Number of tally bins without perturbations
MXIT	IMCCOM	Longest input geometry definition for any cell
MXJ	FIXCOM	Number of surfaces in the problem
MXLV	ZC-par	Maximum number of levels allowed for
MXT	FIXCOM	Number of cell-temperature time bins
MXTR	FIXCOM	Number of surface transformations
MXXS	FIXCOM	Length of SPF and WNS
MYNUM	EPHCOM	Number of multiprocessors in workstation box
NAW	IMCCOM	Number of atomic weights from AWTAB card
NBAL(16)	VARCOM	Number of histories processed by each task
NBHWM	VARCOM	Largest number of particles ever in the bank
NBMX	ZC-par	Number of particles IBNK has room for
NBNK	TSKCOM	Number of particles in the bank
NBOV	VARCOM	Count of bank overflows
NBT(MIPT)	VARCOM	Total numbers particles banked
NCEL	PLTCOM	Number of cells bounded by the current surface
NCH(MIPT)	TSKCOM	Counts of neutron and photon collisions or electron substeps
NCL(*)	DAC	Problem numbers of the cells
NCLEV	MPLCOM	Number of contour levels
NCOLOR	ZC-par	Basic colors for plotting
NCOMP	IMCCOM	Count of # characters on cell cards
NCP	PBLCOM	Count of collisions per track
NCPAR(MIPT,NKCD)	IMCCOM	Largest cell parameter n, -1 if none
NCPARF	IMCCOM	Number of cell parameter cards on cell cards
NCRN	IMCCOM	Number of corners in the current cell
NCRS	PLTCOM	Length of LSG and CRS arrays
NCS(*)	DAC	Number of curves where surface meets plot plane
NCTEXT	GKSSIM	GKS graphics color index
NDE	EPHCOM	Value of execute-message item DBUG n
NDEF	ZC-par	Number of file names
NDET(MIPT)	FIXCOM	Numbers of neutron and photon detectors
NDMP	VARCOM	Maximum number of dumps on RUNTPE
NDND	FIXCOM	Number of detectors in the problem
NDP(NTALMX)	IMCCOM	Tally numbers appearing with PD on cell cards
NDP2	ZC-par	Number of numeric storage units needed to store a floating-point value
NDPF(6,*)	DAC	Accounts of detector scores that failed
NDR	DAC	List of discrete-reaction rejections
NDTT	FIXCOM	Total number of detectors in the problem
NDUP(3)	IMCCOM	Number of cards in each input data block
NDX(MIPT)	FIXCOM	Numbers of neutron and photon DXTRAN spheres
NEE	FIXCOM	Number of energies in EEE (0 if no electrons)
NEPHCM	CM-par	Size of floating-point part of /EPHCOM/
NERR	VARCOM	Count of lost particles
NETB(2)	VARCOM	Counts of numbers of times energy > EMX

APPENDIX E
COMMON

NFER	VARCOM	Count of fatal errors found by IMCN or XACT
NFIXCM	CM-par	Size of floating-point part of /FIXCOM/
NFREE	MPLCOM	Number of free variables in current plot
NGMFL(*)	DAC	Gamma production flag for material iex for xs plot
NGP	TSKCOM	Electron energy group
NGWW(MIPT)	FIXCOM	Number of weight-window-generator energy bins
NHB	FIXCOM	Number of history bin computed from DBCN(16)
NHSD(NSP12,*)	DAC	Number in history score distribution which counts nonzero scores for statistical analysis
NHTFL(*)	DAC	Heating number flag for material iex for xs plot
NII	IMCCOM	Number of interpolated values to make; -1 for J
NILR	FIXCOM	Number of cells on SSR card
NILW	FIXCOM	Number of cells on SSW card
NIPS	FIXCOM	Source particle type
NISS	FIXCOM	Number of histories in input surface source
NITM	IMCCOM	Length of current item from input card
NIWR	IMCCOM	Number of cells in RSSA file
NJSR	FIXCOM	Number of surfaces in JASR
NJSS	FIXCOM	Number of surfaces in JSS
NJSW	IMCCOM	Number of surfaces in JASW
NJSX	IMCCOM	Number of surfaces in ISS
NKCD	JC-par	Number of different types of input cards
NKEYP	PC-par	Number of PLOT commands
NKEYS	MP-par	Number of MCPLOT commands
NKRP	EPHCOM	Latch for warning in CALCPS
NKXS	FIXCOM	Count of cross section tables written on RUNTPE
NLAJ	TSKCOM	Number of other-side cells in LAJ
NLAT	IMCCOM	Number of lattice universes in the problem
NLB	PLTCOM	Number of surface labels on the plot
NLEV	FIXCOM	Number of levels in the problem
NLJA	FIXCOM	Number of entries in LJA
NLSE	TSKCOM	Number of cells in the LSE list
NLT	TSKCOM	Number of entries in DTI
NLTEXT	GKSSIM	GKS graphics color index
NLV(*)	DAC	Number of levels in each cell
NMAT	FIXCOM	Number of materials in the problem
NMAT1	IMCCOM	First estimate (usually too big) of NMAT
NMAZ	FIXCOM	Length of maze array. (0 in 1st pass)
NMFM	IMCCOM	2*number of materials on FM cards
NMIP	FIXCOM	Number of particle types for lattice/universe maze
NMT(*)	DAC	Names of the materials
NMXF	FIXCOM	Number of tally blocks =3 or =5 if DBCN(15) set to give VOV in all bins
NMZU	FIXCOM	Length of MAZU array
NNPOS	FIXCOM	Index of first position variable to be sampled
NOCOH	FIXCOM	Flag to inhibit coherent photon scattering
NODE	PBLCOM	Number of nodes in track from source to here
NOERBR	MPLCOM	Flag for no error bars
NOMORE	EPHCOM	Flag for exhausted surface-source file
NONORM	MPLCOM	Flag for no normalization
NORD	FIXCOM	Number of source variables to be sampled
NOVOL	IMCCOM	Flag to inhibit volume calculation
NOVR	ZC-par	Number of main code sections
NP1	FIXCOM	Number of histories in surface source write run

APPENDIX E
COMMON

NPA	PBLCOM	Number of tracks in the same bank location
NPAGES	GKSSIM	Number of postscript file pages
NPB	TSKCOM	Number of saved particles in GPB9CM
NPBLCM	CM-par	Size of floating-point part of /PBLCOM/
NPC(20)	VARCOM	NPS for tally fluctuation charts See page E-35
NPD	VARCOM	NPS step in tally fluctuation chart
NPERT	FIXCOM	Number of perturbations
NPIKMT	FIXCOM	Number of PIKMT entries
NPKEY	ZC-par	Number of PERT keywords
NPLB	PLTCOM	Length of PLB array
NPN	FIXCOM	Length of adjustable dimension of PAN
NPNM	VARCOM	Count of times neutron-reaction MT not found
NPP	VARCOM	Number of histories to run, from NPS card
NPPM	VARCOM	Count of times photon-production MT not found
NPQ(*)	DAC	Number of components in each material
NPS	VARCOM	Count of source particles started
NPSOUT	EPHCOM	NPS when output was last done
NPSR	VARCOM	History number last read from surface source
NPSW(*)	DAC	For each surface source surface, the last history in which a track crossed it
NPT(2)	MPLCOM	Number of points to plot in each direction
NPTB(*)	DAC	Cumulative number of perturbed cross sections
NPTR	ZC-par	Number of PTRAC keywords (HPTR)
NQP(MIPT)	IMCCOM	Flags for particle-type indicators on card
NQSS	VARCOM	Number of histories read from surface source
NQSW	VARCOM	Number of histories written to surface source
NQW	IMCCOM	Particle type of input card. See JPTAL array page E-31
NRC	EPHCOM	Count of restarts in the run
NRCD	FIXCOM	Number of values in a surface-source record
NRNH(3)	VARCOM	Information about number of random numbers used
NRRS	VARCOM	Number of tracks read from surface source
NRSS	FIXCOM	Number of tracks on input surface source file
NRSW	VARCOM	Number of tracks written to surface source
NSA	VARCOM	Source particles yet to be done in this cycle
NSA0	VARCOM	Saved NSA value to rerun lost history
NSB(*)	DAC	Substeps per step for each material
NSC	IMCCOM	Number of surface coefficients in SCF
NSF(*)	DAC	Problem numbers of the surfaces
NSJV	IMCCOM	Length of cell definition in LJAV
NSKK	VARCOM	Number of histories in first IKZ KCODE cycles
NSL(2+4*MIPT,*)	DAC	Summary information for surface source file
NSLR(2+4*MIPT,*)	DAC	Summary information from surface source file
NSP	ZC-par	Number of points in history score distribution grid
NSP12	ZC-par	NSP+12
NSPH	FIXCOM	Flag for spherical output surface source
NSPT	ZC-par	NSP+NTP+7
NSR	FIXCOM	Source type
NSRC	IMCCOM	Number of entries on SRC card
NSRCK	FIXCOM	Nominal size of the KCODE source
NSS	VARCOM	Count of source points stored for the next cycle
NSS0	VARCOM	Saved NSS value to rerun lost history
NSSI(8)	VARCOM	Numbers of rejected surface source tracks
NST	EPHCOM	Reasons why the run is terminating
NSTRID	FIXCOM	Random number stride, 152917 or DBCN(13)

APPENDIX E
COMMON

NSV	IMCCOM	Number of surfaces in LJSV
NTAL	FIXCOM	Number of tallies in the problem
NTALMX	JC-par	Maximum number of tallies
NTASKS	EPHCOM	Number of tasks in current run or processes, if MULTP
NTBB(4,*)	DAC	Counts of scores beyond the last bin
NTC	VARCOM	Control variable for time check
NTC1	VARCOM	Second control variable for time check
NTER	TSKCOM	Type of termination of the track
NTHI	TSKCOM	Indicator of multiple time interrupts
NTL(0:NTALMX)	IMCCOM	Tally numbers from tally input cards
NTP	ZC-par	Number of tail points in history score distribution statistical analysis table
NTSKCM	CM-par	Size of floating-point part of /TSKCOM/
NTSS	VARCOM	Number of surface source tracks accepted
NTX	TSKCOM	Number of calls of TALLYX in user bins loop
NTY(*)	DAC	Type of each cross section table
NTYN	TSKCOM	Type of reaction in current collision
NVARCM	CM-par	Size of floating-point part of /VARCOM/
NVEC	FIXCOM	Number of vectors on VECT card
NVS(MAXV)	TABLES	Number of values for each source variable
NWANG	FIXCOM	Weight window mesh Rfile type and adjoint current flag
NWC	IMCCOM	Count of items on current input card
NWER	VARCOM	Count of warning messages printed
NWGEOM	FIXCOM	1/2=rectangular/cylindrical weight window mesh grid
NWGM	FIXCOM	Weight window mesh coarse meshes + 9 0th index entries
NWWW	FIXCOM	Number of weight window mesh fine mesh cells
NWSB	VARCOM	Count of source weights below cutoff
NWSE	VARCOM	Count of source energies below cutoff
NWSG	VARCOM	Count of source weights above weight window
NWST	VARCOM	Count of source times greater than cutoff
NWW(MIPT)	FIXCOM	Number of weight-window energy bins
NWWS(2,99)	VARCOM	Like NWSG and NWSL but binned
NXNORM	GKSSIM	Postscript file plot normalization
NXNX	FIXCOM	Number of DXTRAN spheres in the problem
NXP	PLTCOM	Number of intersections in CRS
NXS(16,*)	DAC	Blocks of descriptors of cross section tables
NXSC	IMCCOM	Number of XS _n cards
NYNORM	GKSSIM	Postscript file plot normalization
NZIY(8,MXDX,MIPT)	VARCOM	DXTRANs lost to zero importance
ONE	ZC-par	Floating-point constant 1. for arguments
ORD(*)	DAC	Ordinates of points to be plotted
ORIGIN(3)	PLTCOM	Origin for plotting
ORSAV(3)	PLTCOM	Saved origin
OSUM(3)	VARCOM	k_{eff} , cumulative See page E-40
OSUM2(3,3)	VARCOM	k_{eff} covariances, cumulative See page E-40
OUTP*8	CHARCM	Name of problem output file
PAC(MIPT,10,*)	DAC	Activity in each cell See page E-37
PAN(2,6,*)	DAC	Activity of each nuclide See page E-38
PAX(6,16,MIPT)	VARCOM	Ledger of creation and loss See page E-36
PBR(*)	DAC	Bremsstrahlung production cross sections
PBT(*)	DAC	Thick-target bremsstrahlung probabilities
PCC(3,*)	DAC	Neutron-induced photons, by cell See page E-39
PFP	TSKCOM	Probability of electron scatter
PHT(2)	MPLCOM	View angles for 3D plot

APPENDIX E
COMMON

PIE	ZC-par	π
PIK(*)	DAC	Entries from PIKMT card
PIM(10:100)	LANCUT	Landau electron mean ionization potentials
PIMPH(9,4)	LANCUT	Landau electron mean ionization potentials
PIMPV(12)	LANCUT	MCNP4A electron mean ionization potentials
PKN(*)	DAC	Knock-on production cross sections
PLANCK	ZC-par	Planck constant
PLB(*)	DAC	Locations and widths of surface labels
PLE	TSKCOM	Macroscopic cross section of current cell
PLIM(4)	MPLCOM	Limits of the plot
PLMX(4,4)	PLTCOM	Plot matrix
PLOTM*8	CHARCM	Name of the graphics metafile
PMF	TSKCOM	Distance to next collision
PMG(*)	DAC	Table for biased adjoint sampling
PRB(*)	DAC	Probabilities for equiprobable-bin iteration
PRN	VARCOM	Print control from PRDMP card
PROBID*19	CHARCM	Problem identification
PROBS*19	CHARCM	PROBID of the surface source write run
PRU(*)	DAC	Part of the knock-on angular distribution
PSC	TSKCOM	Probability density for scattering toward a detector or DXTRAN sphere
PSIZE(4)	GKSSIM	Postscript file scale factor
PTB(4,*)	DAC	Perturbation coefficients for each perturbed xs
PTR(*)	DAC	PTRAC input parameters
PTRAC*8	CHARCM	Name of the PTRAC file
PTS(*)	DAC	PTRAC track descriptions
PWB(MIPT,19,*)	DAC	Weight-balance tables See page E-37
PXR(*)	DAC	X-ray production cross sections
PXX(4,4)	PLTCOM	Plot matrix transformed for all levels
QAV(*)	DAC	Ionization loss straggling coefficients
QAX(MIPT,*)	DAC	Exponential transform parameters for each cell
QCN(*)	DAC	Ionization loss straggling coefficients
QFISS(23)	TABLES	Fission Q-values
QMX(3,3,2,*)	DAC	Curves where surfaces intersect the plot plane
QPL	TSKCOM	Adjusted macroscopic cross section
RANB	TSKCOM	Upper part of pseudorandom number
RANI	VARCOM	Upper part of RIJK
RANJ	VARCOM	Lower part of RIJK
RANS	TSKCOM	Lower part of pseudorandom number
RDUM(50)	VARCOM	Data from RDUM input card
RES	PC-par	Plot resolution
RFQ(11)*57	CHARCM	Partial formats for termination messages
RGB(100)	GKSSIM	Triplets for colors in postscript files
RHO(*)	DAC	Atom densities of the cells
RIJK	VARCOM	Starting random number for the current history
RIM	FIXCOM	Compression limit for weight windows
RITM	IMCCOM	Real form of current item from input card
RKK	VARCOM	Collision estimate of k_{eff}
RKPL(19,*)	DAC	KCODE quantities for plotting See page E-40
RKT(MTOP)	TABLES	Bremsstrahlung photon/electron energy ratios
RLT(4,2)	VARCOM	Removal lifetimes, current cycle See page E-40
RNFB	FIXCOM	Upper (big) 24 bits of RNMULT*NSTRID
RNFS	FIXCOM	Lower (small) 24 bits of RNMULT*NSTRID
RNG(*)	DAC	Electron ranges

APPENDIX E
COMMON

RNGB	FIXCOM	Upper (big) 24 bits of RNMULT
RNGS	FIXCOM	Lower (small) 24 bits of RNMULT
RNK	PBLCOM	RNR at point where new track was created
RNMULT	FIXCOM	Random number multiplier = 5^{19} or DBCN(14)
RNOK	FIXCOM	Knock-on electron production bias
RNR	VARCOM	Count of pseudorandom numbers generated
RNRTC0	TSKCOM	Initial random number of a history
RPTB(*)	DAC	Storage for PERT keyword entries
RSCRN(2,*)	DAC	R and S coordinates of cell corners
RSINT(2,*)	DAC	R and S coordinates of surface intersections
RSSA*8	CHARCM	Name of surface source input file
RSSP	FIXCOM	Radius of spherical surface source
RSUM(3)	VARCOM	Removal lifetimes, cumulative See page E-40
RSUM2(3,3)	VARCOM	Removal lifetime covariances, cumulative See page E-40
RTC(10,*)	DAC	Current interpolated cross sections See page E-28
RTP(*)	DAC	Tally-card data See page E-35
RUNTPE*8	CHARCM	Name of file of restart dumps
SCALF(3)	MPLCOM	Scale factors for plot data
SCF(*)	DAC	Surface coefficients for all surfaces
SCFQ(5,*)	DAC	Q-form of surface coefficients
SCH	PLTCOM	Scale factor for geometry plots
SCLABL(4)	PLTCOM	LABEL parameters
SCR(*)	DAC	Scratch storage for GMGWW
SFB(*)	DAC	Probabilities of the source input groups
SFF(3,MAXF)	TSKCOM	Current values of source variables
SHSD(NSPT,*)	DAC	Score in the history score distribution for statistical analysis.
SIGA	TSKCOM	Capture cross section
SLITE	ZC-par	Speed of light
SMG(*)	DAC	Table for biased adjoint sampling
SMUL(3)	VARCOM	Tally of neutron multiplication
SNIT	FIXCOM	Surface source splitting or RR factor
SPARE(MSPARE)	PBLCOM	Spare banked array for user modifications
SPF(4,*)	DAC	Source probability distributions See page E-27
SQQ(12,*)	DAC	Coefficients of the built-in source functions
SRCTP*8	CHARCM	Name of KCODE source file
SRV(3,MAXV)	FIXCOM	Explicit or default values of source variables
SSB(10)	EPHCOM	Surface source input buffer
SSO(*)	DAC	Equiprobable bins for source distributions
SSR	TSKCOM	Neutron speed relative to target nucleus
STP	TSKCOM	Electron stopping power
STT	DAC	Big and small tally scores for statistical analysis
SUMK(3)	VARCOM	Sums of KCODE fission weight See page E-40
SWTM	IMCCOM	Minimum weight of source particles
SWTX	IMCCOM	Minimum source weight for obsolete sources
TAL(*)	DAC	Tally scores accumulation See page E-30
TALB(8,2)	TABLES	Bins for detector and DXTRAN diagnostics
TBT(*)	DAC	Temperatures of the cross section tables
TCO(MIPT)	FIXCOM	Particle time cutoffs
TDC	EPHCOM	Time of writing latest dump to RUNTPE
TDS(*)	DAC	Tally specifications See page E-33
TENSN	MPLCOM	Tension of a rational spline
TFC(6,20,*)	DAC	Tally fluctuation charts See page E-35

APPENDIX E
COMMON

TGP(*)	DAC	PIKMT biased photon production probability; or temporary KCODE fission production
THGF(0:50)	FIXCOM	Table of the thermal cross section function
THIRD	ZC-par	Floating-point constant 1/3
TITLES(7)*40	ZCHAR	Titles, legends, and labels
TLC	EPHCOM	Time of writing latest problem summary to OUTP
TMAV(MIPT,3)	VARCOM	Tallies of time to termination
TME	PBLCOM	Time at the particle position
TMP(*)	DAC	Temperatures of the cells
TOLD(MLOLD)	LANCOM	MCNP4A electron scattering lambda data
TOTGP1	TSKCOM	Total biased gamma-production cross section
TOTM	TSKCOM	Total microscopic cross section
TOTMP	PBLCOM	Total cross section for previous track
TPD(7)	TSKCOM	Stored collision data for PSC calculation
TPP(20)	TSKCOM	General-purpose scratch storage
TRF(17,*)	DAC	Geometry transformations
TRM	EPHCOM	Time of latest update of MCPLLOT display
TSC	EPHCOM	Time of writing latest source to SRCTP
TTH(*)	DAC	Time bins for cell temperatures
TTN	TSKCOM	Temperature of the current cell
TWAC	VARCOM	Total weight accepted from surface source file
TWSS	VARCOM	Total weight read from surface source file
UDT(10,0:MXLV)	TSKCOM	Particle location, direction at higher levels
UDT1(10*MXLV+10)	TSKCOM	Synonym for UDT, for fast copying
UDTR(10*MXLV+10)	TSKCOM	Saves UDT for electron generation
UDTS(10*MXLV+10)	TSKCOM	Saves UDT for detectors and DXTRAN
UDTT(10*MXLV+10)	TSKCOM	Another array for saving UDT in
UFIL(3,6)*11	CHARCM	Name, access, and form of each user file
UOLD(3)	TSKCOM	Old direction cosines of track prior to collision
UUU	PBLCOM	Particle direction cosine with X-axis
VCL(3,7,*)	DAC	Lattice vectors and search constants
VCO(MCOH)	TABLES	Form factors for photon scattering
VEC(3,*)	DAC	Vectors from the VECT card
VEL	PBLCOM	Speed of the particle
VER*5	ZC-par	Code version identification
VERS*5	CHARCM	Version of code that wrote surface source file
VIC(MINC)	TABLES	Form factors for photon scattering
VOL(*)	DAC	Volumes of the cells in the problem
VOLS(2,*)	DAC	Calculated volumes of the cells
VTR(3)	TSKCOM	Velocity of the target nucleus
VVV	PBLCOM	Particle direction cosine with Y-axis
WC1(MIPT)	FIXCOM	First weight cutoff
WC2(MIPT)	FIXCOM	Second weight cutoff
WCO(MCOH)	TABLES	Form factors for photon scattering
WCS1(MIPT)	FIXCOM	First weight cutoff modified by SWTM
WCS2(MIPT)	FIXCOM	Second weight cutoff modified by SWTM
WGM(*)	DAC	Weight window mesh weight windows See page E-41
WGT	PBLCOM	Particle weight
WGTS(2)	VARCOM	Range of actual source weights
WNS(2,*)	DAC	Actual frequencies of source sampling
WNVP(4)	EPHCOM	Window and viewport limits
WSF	GKSSIM	Linewidth scale factor
WSSA*8	CHARCM	Name of surface source output file
WSSI(7)	VARCOM	Weights of rejected surface source tracks

APPENDIX E
COMMON

WT0	VARCOM	Weight of each KCODE source point
WTFASV	PBLCOM	Accumulated weight of adjoint particle
WWE(*)	DAC	Weight-window energy bins
WWF(*)	DAC	Lower weight bounds for weight window
WWG(7)	FIXCOM	Controls for the weight window generator
WWINP*8	CHARCM	Weight window mesh input file name
WWK(*)	DAC	Auger electron generation probability
WWM(26)	FIXCOM	Weight window mesh parameters See page E-41
WWP(MIPT,5)	FIXCOM	Weight-window controls
WWW	PBLCOM	Particle direction cosine with Z-axis
XCC(*)	DAC	Scratch array for MCPLOT
XHOM	EPHCOM	Horizontal coordinate of home position
XLF	GKSSIM	Postscript plotting left x-axis tick
XLG	MPLCOM	Horizontal coordinate of legend
XNM(*)	DAC	X-ray production bias factors
XNUM	EPHCOM	X-ray bias number
XRR(*)	DAC	Real scratch array
XRT	GKSSIM	Postscript plotting right x-axis tick
XSDIR*8	CHARCM	Name of directory of cross section tables
XSE85(10,*)	DAC	Electron data by cell: 10 columns of print table 85
XSP TTL*10	MPLCOM	Cross section plot title
XSS(*)	DAC	Cross section tables
XST	MPLCOM	Horizontal coordinate of subtitle
XXX	PBLCOM	X-coordinate of the particle position
XYZMN(3)	MPLCOM	Lower ends of plot axes
XYZMX(3)	MPLCOM	Upper ends of plot axes
YBT	GKSSIM	Postscript plotting top y-axis tick
YCC(*)	DAC	Scratch array for MCPLOT
YCN	TSKCOM	Temperature-normalized neutron velocity
YHOM	EPHCOM	Vertical coordinate of home position
YLG	MPLCOM	Vertical coordinate of legend
YRR(*)	DAC	Real scratch array
YST	MPLCOM	Vertical coordinate of subtitle
YTP	GKSSIM	Postscript plotting bottom y-axis tick
YVAL	MPLCOM	Current location in plot legend area
YYY	PBLCOM	Y-coordinate of the particle position
ZEPHCM	EPHCOM	Marker after floating-point part of /EPHCOM/
ZERO	ZC-par	Floating-point constant 0. for arguments
ZFIXCM	FIXCOM	Marker after floating-point part of /FIXCOM/
ZPB9CM(MPB)	PBLCOM	Marker after floating-point part of /PBLCOM/
ZPBLCM	PBLCOM	Marker after floating-point part of /PBLCOM/
ZST(*)	DAC	Data buffer for PIX file
ZTSKCM	TSKCOM	Marker after floating-point part of /TSKCOM/
ZVARCM	VARCOM	Marker after floating-point part of /VARCOM/
ZZZ	PBLCOM	Z-coordinate of the particle position

II. SOME IMPORTANT COMPLICATED ARRAYS

A. Source Arrays

KSD(21,MSD) Array Information About Each Source Distribution

KSD(LKSD+J,K) contains information of type J about source probability distribution K, as listed below.

- J
- 1 problem name of the distribution
 - 2 index of built-in function, if any
 - 3 length of comment in JSCN
 - 4 number of value sets from SI or DS card
 - 5 flag for discrete distribution: L, S, F, Q, or T option
 - 6 flag for distribution of distributions: S or Q option
 - 7 flag for dependent distribution: DS rather than SI
 - 8 flag for DS Q
 - 9 flag for DS T
 - 10 flag for SP V
 - 11 flag for SI F
 - 12 index of the variable of the distribution
 - 13 offset into SPF
 - 14 offset into SSO
 - 15 offset into JSCN
 - 16 offset into WNS
 - 17 number of equiprobable bins in each group, if any
 - 18 flag for biased distribution: SB card present
 - 19 flag for interpolated distribution: A option
 - 20 number of values on SP and/or SB card
 - 21 number of values per bin, including tag from Q or T option

SPF(4,MXXS) Array Source Probability Distributions

Each source distribution that is not just an unbiased function has a section of SPF. For a histogram distribution, the four rows of SPF contain

- row
- 1 values of the variable (triples for POS, AXS, or VEC)
 - 2 cumulative probability of each bin, possibly biased
 - 3 weight factor to compensate for the bias
 - 4 not used

If the distribution is linearly interpolated, the four rows contain

- row
- 1 values of the variable (never triple)
 - 2 unbiased probability density
 - 3 biased probability density, if any
 - 4 cumulative probability for sampling which bin

APPENDIX E

Arrays

The above definitions are for the final SPF table as used in MCRUN. In IMCN the cumulative probabilities start out as probability per bin and the distributions may not yet be normalized.

B. Transport Arrays

GPBLCM(NPBLCM+1) and JPBLCM(LPBLCM+1) Arrays Particle and Collision Descriptors

GPBLCM and JPBLCM are the floating point and integer variables describing the state of a particle at any given time. GPBLCM is equivalenced to XXX, YYY, ZZZ, UUU, VVV, WWW, ERG, WGT, TME, etc., that describe a particle's x, y, and z-coordinates, u, v, and w-direction cosines, energy, weight, and time. JPBLCM is equivalenced to NPA, ICL, JSU, IPT, IEX, etc., that describe a particle's multiplicity, cell number, surface number, particle type, collision material index, etc. Having all the attributes of a particle in an array form is convenient for storing them temporarily in the GPB9CM and JPB9CM arrays at the start of a history, when generating secondary particles such as neutrons or photons, when generating "pseudo particles" for detectors and DXTRAN, and for banking particles. Banking a particle consists of copying the GPBLCM and JPBLCM arrays to the next block of space in IBNK, and getting a particle from the bank is the reverse. (Banking also consists of copying the UDT1 array if there are repeated structures and the GENR array if there is a weight window generator.)

KTC(2,MXE) and RTC(10,MXE) Arrays Interpolated Cross Sections

When interpolated values of cross sections are calculated at the current particle energy, they are stored in KTC and RTC for possible use later in the calculation of the details of the collision. The values stored in KTC(I,J) and RTC(I,J) are as follows:

For neutron cross sections, class C, D, or Y

EGO = neutron energy in laboratory frame

ERG = neutron energy in target-at-rest frame

KTC

1 index in cross-section table for EGO

2 index in cross-section table for ERG

RTC

1 table interpolation factor for EGO

2 table interpolation factor for ERG

3 absorption (n,0n) cross section for EGO

4 total cross section for EGO at temperature of table

5 total cross section for EGO at cell temperature

6 EGO

7 cell temperature

8 fission cross section

9

10 number of neutrons emitted by fission

For neutron $S(\alpha, \beta)$ cross sections, class T

KTC

- 1 index in inelastic cross-section table
- 2 index in elastic cross-section table

RTC

- 1 inelastic interpolation factor
- 2
- 3
- 4 elastic interpolation factor
- 5
- 6 neutron energy
- 7 inelastic cross section plus elastic cross section
- 8 inelastic cross section
- 9
- 10

For photon cross sections, class P

RTC

- 1 incoherent scattering cross section
- 2 incoherent plus coherent scattering cross section
- 3 incoherent plus coherent plus photoelectric cross section
- 4 total cross section
- 5 photon heating number
- 6 photon energy
- 7
- 8
- 9
- 10

For multigroup neutron cross sections, class M

RTC

- 3 absorption (n,0n) cross section for EGO
- 5 total cross section for EGO at cell temperature
- 8 fission cross section
- 10 number of neutrons emitted by fission

For multigroup photon cross sections, class G

RTC

- 4 total cross section

C. Tally Arrays

The tallying facilities in MCNP are very flexible. The places in the code where tally scoring is done are very heavily used. The arrays required for flexible and efficient tallying are numerous and complicated. The main tally arrays, grouped by function, are listed below. Arrays in parentheses are not discussed separately but are mentioned in the discussion of the preceding array.

APPENDIX E

Arrays

Accumulation of scores: TAL
Controls: JPTAL, IPTAL, LOC DT, ITDS (LOCCT, LOCST), TDS
Fluctuation charts: TFC (JTF, NPC)
Initiation: RTP (IPNT)

TAL(*) Array Tally Scores Accumulation

TAL is in dynamically allocated storage with offset LTAL. LTAL is usually not explicit in the subscript of TAL because the values of the various pointers into TAL include LTAL. TAL is usually divided into three blocks, each of length MXF. If the 15th DBCN card entry is nonzero, then all tallies have the variance of the variance computed and TAL is divided into five blocks. Unless list scoring is in effect (see below), tally scores made during the course of a history are added into tally bins in the first block. At the end of each history the scores in the first block are added into corresponding places in the second block, their squares are added into the third block, and the first block is zeroed. The fourth and fifth blocks carry the cumulative cubes and fourth-powers of the tally to compute the variance of the variance when applicable. Whenever printed output is called for, the sums in the second block and the sums of squares in the third block are used to calculate and print the tally estimates and their estimated errors.

Each of the blocks in TAL is divided into sections of various lengths, one for each tally in the problem. Each section is an eight-dimensional array of tally bins. The storage sequence is as if the section of TAL were an eight-dimensional FORTRAN array. The order of the eight dimensions, corresponding to a right-to-left reading of the dimensions of a FORTRAN array, the kind of bins each dimension represents, and the input cards that define them are as follows.

1	cell, surface, or detector bins	F
2	all vs flagged or all vs direct	CF, SF or F
3	user bins	FU
4	segment bins	FS
5	multiplier bins	FM
6	cosine bins	C
7	energy bins	E
8	time bins	T

The number of bins in each dimension is determined by rules set forth in the descriptions of the input cards in Chapter 3.

An alternative way of entering scores into the first block is automatically used if the number of scores per history is sufficiently small compared to the size of the block. Only the first of the three (or five) blocks in TAL is affected. The procedure is as follows. Index JTLS is incremented by 2, the score is entered at $TAL(LTAL+JTLS-1)$, and the location where the score would otherwise have gone is entered at $TAL(LTAL+JTLS)$. At the end of the history, scores with the same location are consolidated, the scores and their squares are added into the second and third blocks, and JTLS is set to

zero. This technique is called list scoring. The scoring described previously is called table scoring. The reason for using list scoring is speed. It is used in only a small minority of problems but can in some cases make a big difference in running time.

JPTAL(8,NTAL) Array Basic Tally Information

JPTAL(LJPT+J,K) contains integer information of type J about tally K. Each pointer in JPTAL includes the offset of the array pointed into.

- J
- 1 problem number of the tally
 - 2 tally type: 1, 2, 4, 5, 6, 7, or 8
 - 3 NQW particle type: 1=N, 2=P, 3=P,N, 4=E, 6=E,P, 7=E,P,N
 - 4 0 if nothing, 1 if asterisk, 2 if plus, on F card
 - 5 offset in the first block in TAL of the section for tally K
 - 6 location of the tally comment in ITDS
 - 7 location in TAL of the tally fluctuation chart bin
 - 8 1 for a point detector, 2 for a ring detector,
0 if not a detector tally

IP TAL(8,5,NTAL) Array Guide to Tally Bins

IP TAL(LIPT+I,J,K) contains information of type J about the bins of type I of tally K. The eight bin types I are defined above under TAL. The information types J are listed below, subject to the exceptions noted. Each pointer in IP TAL includes the offset of the array pointed into.

- J
- 1 offset in TDS or ITDS of specifications for the bins. If there is just one unbounded bin, the value is zero.
Exceptions
I=2: for cell or surface tally, location in ITDS of flagging cells for detector tally, the number of direct bins (0 or 1)
I=4: program number of pseudocell for segmenting surfaces
 - 2 offset in TDS of bin multipliers
Exceptions
I=1: no meaning
I=2: cell or surface tally: location in ITDS of flagging surfaces
detector tally: offset in TDS of cell contributions
I=3: location in TDS of the dose function
I=4: offset in TDS of the table of segment divisors
 - 3 number of bins, which is never less than one
 - 4 number of bins including a total bin whether there actually is a total bin or not
Exceptions
I=1 and I=2 have no meaning.
 - 5 coefficients for calculating the location of a bin, given the eight bin indices

APPENDIX E

Arrays

LOC DT(2,MXDT) Array Detector-Tally Locators

LOC DT(1,J) is the program number of the tally of which detector J is a part. LOC DT(2,J) is the offset in the first block of TAL of the seven-dimensional array where scores for detector J are made.

ITDS(LIT) Array Tally Specifications

ITDS contains blocks, in no particular order and accessed only through pointers, that contain some of the specifications of the tallies of the problem. ITDS is in dynamically allocated storage with offset LITD. LITD is usually not explicit in the subscript of ITDS because the values of the various pointers into ITDS include LITD.

Tally Comment


The value of JPTAL(LJPT+6,K) is the location in ITDS of the comment for tally K. The first element of the comment is the number of additional elements in the comment. Each line of 67 characters is contained in 23 elements of ITDS, packed 3 characters per element. The packing uses the ICHAR function and a shift factor of 256. The characters are unpacked and processed by the CHAR function before being printed.

Flagging Cells and Surfaces

The values of IPTAL(LIPT+2,1,K) and the values of IPTAL(LIPT+2,2,K) are the locations in ITDS of lists of the program numbers of flagging cells and flagging surfaces, respectively, for tally K. The first item of each list is the number of cells or surfaces in the list.

Cell and Surface Bins

The value of IPTAL(LIPT+1,1,K) is the offset in ITDS of the description of the cell or surface bins of cell or surface tally K. The structure of the description is

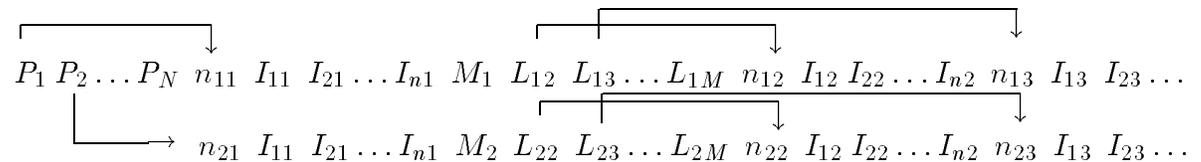

where

- N = number of cell or surface bins in tally K
- P_i = pointer to specifications for bin i
- n_{ij} = number of cells or surfaces in level j of bin i
- I_{ij} = program number of a cell or surface in level j . If negative, it is a lattice cell and the following three entries are element indices (I,J,K). element indices (I,J,K).
- M_i = number of levels in bin i minus one. If zero, no remaining data follows for this bin.
- L_{ij} = pointer to specifications for level j of bin i

Cell and Surface Tally Pointers

The value of LOCCT(I,J) if J is a cell—or LOCST(I,J) if J is a surface—is the location in ITDS of a table which locates the sections of TAL where tally scoring is done when a particle of type I passes through cell or surface J. The table is organized this way:

where
$$N \quad T_1 \quad m_1 \quad L_{11} \quad L_{21} \dots L_{m1} \dots T_N \quad m_N \quad L_{1N} \quad L_{2N} \dots L_{mN}$$

- N = number of tallies for particle type I which include cell or surface J
- T_i = program number of a tally
- m_i = number of bins that involve cell or surface J
- L_{ji} = cell or surface bin number

TDS(LTD) Array Tally Specifications

TDS contains blocks, in no particular order and accessed only through pointers, that contain some of the specifications of the tallies of the problem. TDS is in dynamically allocated storage with offset LTDS. LTDS is usually not explicit in the subscript of TDS because the values of the various pointers into TDS include LTDS.

Detector Bins

For detector tally K, the value of IPTAL(LIPT+1,1,K) is the offset in TDS of the description of the detector bins. The description contains the information from the F card, modified for faster use in TALLYD. Five elements of TDS are used for each detector:

	<u>Point detector</u>	<u>Ring detector</u>
1	X	a
2	Y	r
3	Z	1, 2, or 3 for x, y, or z
4	R	R
5	$ 2\pi R^3/3 $	$ 2\pi R^3/3 $

Cell Contributions

For detector tally K, the value of IPTAL(LIPT+2,2,K) is the offset in TDS of the table of cell contributions. The information in the table is exactly as it is on the PD card.

Simple Bins and Multipliers

The value of IPTAL(LIPT+I,1,K) for I = 3, 6, 7, or 8 is the offset in TDS of a table of bins for tally K. The information in the table is as it came from the corresponding input card except that any T or NT on the card does not appear in the table. The value of IPTAL(LIPT+I,2,K) for I = 6, 7, or 8 is the offset in TDS of a table of bin multipliers for tally K. The information in the table is exactly as it is on the input card.

Segment Bin Divisors

For cell or surface tally K, the value of IPTAL(LIPT+4,2,K) is the offset in TDS of the table of segment bin divisors. Except for a type 1 tally without any SD card, the table exists even if there is no FS card. The table is a two-dimensional array. One dimension is for cell or surface bins and the other is

APPENDIX E


Arrays

for the segment bins. The segment bin index changes faster. If segment bin divisors are not provided on an SD card, they are calculated or derived from VOL or AREA data, if possible, by MCNP according to the tally type:

tally type	2	4	6	7
divisor	area	volume	mass	mass

Multiplier Bins

The value of IPTAL(LIPT+5,2,K) is the offset in TDS of a table of the constant multipliers for the multiplier bins from the FM card of tally K. If there is anything more on the FM card than just a constant multiplier for each bin, the value of IPTAL(LIPT+5,1,K) is the offset in TDS of a table of bin descriptions:



where

- N = number of P's.
- P_i = pointer to the description of a bin or attenuator. If the FM card has only a constant for some bin, then $P_i = 0$ for that bin. If the FM card has C m but nothing more for a bin, (which makes it a track-count bin), then $P_i = -1$. If P_i points to an attenuator which appears inside parentheses on the FM card, it is negative.
- I_i = for a regular bin, the program number of the material m specified on the FM card. For an attenuator, $I_i = -1$.
- n_i = for a regular bin, the number of entries, including both reaction numbers and operators, in the bin description. If the list of reaction numbers in the bin includes the elastic or the total cross section, n_i is negative. For an attenuator, n_i is the number of entries, including material numbers and superficial-density values. If a regular bin appears on the FM card within parentheses that also contain an attenuator, n_i has 10000000 added to it for an attenuator to the right of the bin and 20000000 for an attenuator to the left.
- R_{ji} = for a regular bin, a reaction number or operator. The sum operator, indicated by a colon on the FM card, is stored here as the value 100003. For an attenuator, the R_{ji} are alternating cell numbers and superficial-density values.

Dose Function

The value of IPTAL(LIPT+3,2,K) is the location in TDS of the dose function table for tally K. The first element in the table is the length N. It is followed by the N values of the energy and then the N values of the function. N is preceded by an indicator of the type of interpolation: 0 for log-log, 1 for lin-log, 2 for log-lin, and 3 for lin-lin.

TFC(6,20,NTAL) Array Tally Fluctuation Charts

The value of TFC(LTFC+I,J,K) is the tally value (I=1), the error (I=2), the figure of merit (I=3), the variance of the variance (I=4), the Pareto slope (I=5), and a locator for the Pareto tail plot (I=6) for line J of the tally fluctuation chart for tally K. The tally bin involved is designated by the eight indices in JTF(LJTF+I,K) for I = 1 to 8. The number of histories run at the point where the entries for a line were calculated is stored in NPC(J). Initially a line is calculated every 1000 histories. When the 20th line is generated, the history increment is doubled. When the time comes to generate the 21st line, the odd-numbered lines are eliminated, the data in line J are moved to line J/2 for J = 2 to 20 by 2, and the new data are put in line 11.

RTP(LRT) Array Information from Tally Input Cards

The information from most tally input cards is stored without much modification in temporary array RTP. Numbers are stored as is. Special characters are encoded. After all the input cards have been read, subroutine ITALLY sets up the permanent tally control arrays from the information in RTP. The main reason for this two-step process is that some of the control arrays depend in a complicated way on information from more than one input card. It is simpler to generate the control arrays with all the input data available at the same time than to do it as the cards are read.

Pointer array IPNT(2,21,0:NTAL) is defined as the tally cards are read. The information from tally card type J of tally K begins at RTP(LRTP+IPNT(LIPN+1,J,K)) and occupies IPNT(LIPN+2,J,K) elements of RTP. The tally card type numbers J are given in KRQ(3,N) for each type N of input card. KRQ(3,N) is defined by DATA statements in block data subprogram IBLDAT. KRQ(3,N) is zero for nontally input cards. There is no tally card type 1. IPNT(LIPN+1,1,K) is used for bits that reflect T or NT on certain cards and indicate whether a total bin needs to be included. The value of IPNT(LIPN+1,2,K) is 1, 2, 3, 4, or 5, depending on whether the F card for the tally has blank, X, Y, Z, or W with the F, and it is negative if there is an asterisk on that card.

D. Accounting Arrays

MCNP regularly collects and prints data on the behavior of the particles transported through the problem geometry. This is accounting information which shows what MCNP actually did, in contrast to the tallies which are estimates of physically measurable quantities. The accounting information is essential to a user who is trying to make his problem run faster. The arrays where the accounting data are collected and the titles of the tables where they are printed are as follows.

- PAX Problem Summary
- PAC Problem Activity in Each Cell (Print Table 126)
- PWB Weight Balance in Each Cell (Print Table 130)

APPENDIX E

Arrays

PAN Activity of Each Nuclide in Each Cell (Print Table 140)
 PCC } Summary of Photons Produced in Neutron Collisions
 FEBL }

PAX(6,16,MIPT) Array Problem Summary

The value of PAX(J,K,I) is the total of type I data for mechanism J and particle type K.

<u>I</u>			
1	number of tracks created		
2	weight created		
3	energy created		
4	number of tracks terminated		
5	weight terminated		
6	energy terminated		
<u>J</u>	<u>Particle</u>	<u>Creation Mechanism</u>	<u>Loss Mechanism</u>
1	NPE	source	escape
2	NPE		energy cutoff
3	NPE		time cutoff
4	NPE	weight window	weight window
5	NPE	cell importance	cell importance
6	NPE	weight cutoff	weight cutoff
7	NPE	energy importance	energy importance
8	NP	DXTRAN	DXTRAN
9	NP	forced collisions	forced collisions
10	NP	exponential transform	exponential transform
For neutrons only			
11	N	upscattering	downscattering
12	N		capture
13	N	(n,xn)	loss to (n,xn)
14	N	fission	loss to fission
For photons only			
11	P	from neutrons	Compton scatter
12	P	bremstrahlung	capture
13	P	p-annihilation	pair production
14	P	electron x-rays	
15	P	1st fluorescence	
16	P	2nd fluorescence	
For electrons only			
11	E	pair production	scattering
12	E	Compton recoil	bremstrahlung
13	E	photo-electric	
14	E	photon auger	
15	E	electron auger	
16	E	knock-on	

APPENDIX E

Arrays

For the printed table, the weight totals are divided by the number of histories and the energy totals are divided by the total weight of source particles.

PAC(MIPT,10,MXA) Array Problem Activity in Each Cell

The value of PAC(LPAC+I,J,K) is the total of type J data for particle type I in cell K. If a particle becomes lost, a small amount of erroneous information gets added into PAC.

- | <u>J</u> | |
|----------|--|
| 1 | number of tracks entering cell K |
| 2 | population of cell K: the number of tracks, including source tracks, entering for the first time |
| 3 | number of collisions in cell K |
| 4 | weight entering collisions |
| 5 | energy * time interval in cell K * weight |
| 6 | energy * path length * weight |
| 7 | path length in cell K |
| 8 | mean free path * path length * weight |
| 9 | time interval * weight |
| 10 | path length * weight |

The quantities printed are

$$\text{Tracks Entering} = \text{PAC}(\text{LPAC}+I,1,K)$$

$$\text{Population} = \text{PAC}(\text{LPAC}+I,2,K)$$

$$\text{Collisions} = \text{PAC}(\text{LPAC}+I,3,K)$$

$$\text{Collisions * weight (per history)} = \text{PAC}(\text{LPAC}+I,4,K) / \text{number of histories}$$

$$\text{Number Weighted Energy} = \text{PAC}(\text{LPAC}+I,5,K) / \text{PAC}(\text{LPAC}+I,9,K)$$

$$\text{Flux Weighted Energy} = \text{PAC}(\text{LPAC}+I,6,K) / \text{PAC}(\text{LPAC}+I,10,K)$$

$$\text{Average Track Weight (Relative)} = \text{PAC}(\text{LPAC}+I,10,K) * \text{importance of cell K} / [\text{PAC}(\text{LPAC}+I,7,K) * \text{importance of source cell}]$$

$$\text{Average Track MFP} = \text{PAC}(\text{LPAC}+I,8,K) / \text{PAC}(\text{LPAC}+I,10,K)$$

PWB(MIPT,15,MXA) Array Weight Balance in Each Cell

The value of PWB(LPWB+I,J,K) is the net weight change of type J for particle type I in cell K. If a particle becomes lost, a small amount of erroneous information gets added into PWB. Table values are divided by the number of histories before being printed.

<u>J</u>	<u>Table Heading</u>	
	<u>External</u>	
1	Entering	weight of particles entering cell K
2	Source	weight of created source particles
3	Time Cutoff	weight of particles killed by time cutoff
4	Energy Cutoff	weight of particles killed by energy cutoff
5	Exiting	weight of particles exiting cell K

APPENDIX E

Arrays

	<u>Variance Reduction</u>	
6	Weight Window	net weight change due to weight-window Russian roulette
7	Cell Importance	net weight change due to splitting and Russian roulette in importance sampling
8	Weight Cutoff	net weight change due to weight cutoff
9	Energy Importance	net weight change due to energy splitting and Russian roulette
10	DXTRAN	net weight change due to DXTRAN
11	Forced Collision	net weight change due to forced collision
12	Exponential Transform	net weight change due to exponential transform
	<u>Physical (neutrons)</u>	
13	(n,xn)	weight of new tracks produced by other nonfission processes
14	Fission	weight of fission neutrons produced
15	Capture	weight lost to capture
16	Loss to (n,xn)	weight of neutrons lost to (n,xn)
17	Loss to Fission	weight of neutrons lost to fission
	<u>Physical (photons)</u>	
13	From Neutrons	weight of neutron-induced photons
14	Bremsstrahlung	net weight created by bremsstrahlung
15	P-annihilation	net weight created by p-annihilation
16	Electron x-rays	net weight created by electron x-rays
17	Fluorescence	net weight created by double fluorescence
18	Capture	weight lost to capture
19	Pair Production	net weight created by pair production
	<u>Physical (electrons)</u>	
13	Pair production	net weight created by pair production
14	Compton recoil	net weight created by Compton scatter
15	Photo-electron	net weight created by photo-electrons
16	Photon Auger	net weight created by photon auger
17	Electron Auger	net weight created by electron auger
18	Knock-on	net weight created by knock-ons

PAN(2,6,NPN) Array Activity of Each Nuclide in Each Cell

The value of $PAN(LPAN+I,J,IPAN(LIPA+K)+N-1)$ is the total of type J data for particle type I for the Nth nuclide in cell K. $IPAN(LIPA+M+1) = IPAN(LIPA+M) + \text{number of nuclides in the material of cell M}$. $IPAN(LIPA+1) = 1$ and $NPN = IPAN(LIPA+MXA+1) - 1$. If a particle becomes lost, a small amount of erroneous information gets added into PAN.

J (for neutrons)

- 1 number of collisions with Nth nuclide of cell K
- 2 weight entering collisions
- 3 weight lost to capture
- 4 weight gain by fission
- 5 weight gain by other inelastic processes
- 6 unused

J (for photons)

- 1 number of collisions with Nth nuclide of cell K
- 2 weight entering collisions
- 3 weight lost to capture
- 4 number of neutron-induced photons
- 5 weight of neutron-induced photons
- 6 energy * weight of neutron-induced photons

The quantities printed are

- Total Collisions = PAN(LPAN+I,1,L)
 Collisions * Weight = PAN(LPAN+I,2,L) / number of histories
 Weight Lost to Capture = PAN(LPAN+I,3,L) / number of histories
 Weight Gain by Fission = PAN(LPAN+1,4,L) / number of histories
 Weight Gain by (n,xn) = PAN(LPAN+1,5,L) / number of histories
 Total From Neutrons = PAN(LPAN+2,4,L)
 Weight from Neutrons = PAN(LPAN+2,5,L) / number of histories
 Avg Photon Energy = PAN(LPAN+2,6,L) / PAN(LPAN+2,5,L)

PCC(3,MXA) Array Summary of Photons Produced in Neutron Collisions

The value of PCC(LPCC+J,K) is the total of type J data for cell K. If a particle becomes lost, a small amount of erroneous information may be added into PCC.

J

- 1 number of neutron-induced photons
- 2 weight of neutron-induced photons
- 3 weight * energy of neutron-induced photons

The quantities printed are

- Number of Photons = PCC(LPCC+1,K)
 Weight Per Source Neutron = PCC(LPCC+2,K) / number of histories
 Energy Per Source Neutron = PCC(LPCC+3,K) / number of histories
 Avg Photon Energies = PCC(LPCC+3,K) / PCC(LPCC+2,K)
 Energy/Gram Per Source Neutron = PCC(LPCC+3,K) /
 [cell mass * number of histories]
 Weight/Neutron Collision = PCC(LPCC+2,K) / PAC(LPAC+1,4,K)
 Energy/Neutron Collision = PCC(LPCC+3,K) / PAC(LPAC+1,4,K)

APPENDIX E

Arrays

FEBL(2,K) Array Summary of Photons Produced in Neutron Collisions

The value of FEBL(J,K) is the total of type J data for photon energy bin K, where K=16 for continuous energy problems and K=IGM=number of multigroup energy groups. The energy bin bounds are in array EBL(K) in common block /TABLES/.

- J
1 number of neutron-induced photons
2 weight of neutron-induced photons

The quantities printed are

- Number of Photons = FEBL(1,K)
Number Frequency = FEBL(1,K) / PAX(2,1,3)
Weight of Photons = FEBL(2,K) / number of histories
Weight Frequency = FEBL(2,K) / PAX(2,2,3)

E. KCODE Arrays

OSUM(I) Array Cumulative k_{eff} over active cycles

$$\text{OSUM(I)} = \text{OSUM(I)} + \text{SUMK(I)}/\text{NSRCK}, \text{ I}=1,3.$$

OSUM2(I,J) Array Cumulative k_{eff} covariance quantities

$$\text{OSUM2(I,J)} = \text{OSUM2(I,J)} + \text{ZZ(I)} * \text{ZZ(J)}$$

where $\text{ZZ(K)} = \text{SUMK(K)}/\text{NSRCK}$.

RLT(I,J) Array Prompt removal lifetimes for current active cycle

- RLT(I,J) Prompt removal lifetimes for current active cycle.
I = 1/2/3/4 = collision/absorption/track length/fission
J = 1 sum of WGT*TME over cycle
J = 2 sum of WGT over cycle
Note: RLT(4,1) is summed over all histories and used only for the fission lifespan. RLT(4,2) unused.

RKPL(19,MRKP) Array KCODE Quantities for Plotting

The value of RKPL(LRKP+I,J) for the Jth cycle of a KCODE problem:

- J
1 k_{eff} (collision)
2 k_{eff} (absorption)
3 k_{eff} (track length)
4 prompt removal life (collision)
5 prompt removal life (absorption)
6 average collision k_{eff}
7 average collision k_{eff} standard deviation
8 average absorption k_{eff}
9 average absorption k_{eff} standard deviation
10 average track length k_{eff}
11 average track length k_{eff} standard deviation
12 average col/abs/trk-len k_{eff}

- 13 average col/abs/trk-len k_{eff} standard deviation
- 14 average col/abs/trk-len k_{eff} by cycles skipped
- 15 average col/abs/trk-len k_{eff} by cycles skipped standard deviation
- 16 prompt removal lifetime (col/abs/trk-len)
- 17 prompt removal lifetime (col/abs/trk-len) standard deviation
- 18 number of histories used in each cycle
- 19 col/abs/trk-len k_{eff} figure of merit

RSUM(I) Array Cumulative prompt removal lifetimes over active cycles
 $RSUM(I) = RSUM(I) + RLT(I,1)/RLT(I,2), I=1,3.$

RSUM2(I,J) Array Cumulative prompt removal lifetime covariance quantities
 $RSUM2(I,J) = RSUM2(I,J) + RL(I) * RL(J)$
 where $RL(K) = RLT(K,1)/RLT(K,2).$

SUMK(I) Array $SUMK(I)/NSRCK$ is k_{eff} for current cycle
 $I = 1/2/3 = \text{collision/absorption/track length}$

F. Universe Map/ Lattice Activity Arrays for Table 128

MAZP(3,MXA) Array Used in RSLMAZ to point inside MAZE array.

- MAZP(1,IC) = I, index of cell IC in MAZU(j) list.
- MAZP(2,IC) = universe address J of cell IC.
- MAZP(3,IC) = address J of universe filling cell IC.

MAZU(NMZU) Array Used in RSLMAZ to point inside MAZE array. The MAZE(NMAZ) array contains the number of sources, tracks entering and collisions in each repeated structures/lattice element for each particle type.

- MAZU(J-3) = I = universe name.
- MAZU(J-2) = finite lattice cell filling universe I.
- MAZU(J-1) = total number of lowest level elements below U=I.
- MAZU(J) = NE = number of cells/elements in universe I.
- MAZU(J+K) = number of elements below Kth cell/universe.
- MAZU(J+NE+K) = Kth cell in universe I (repeated structures).
- MAZU(J+NE+K) = first cell of universe filling Kth lattice element.

G. Weight Window Mesh Parameters

- WWM(1-3) total number of fine meshes in x,y,z or r,z,theta directions
- WWM(4-6) origin (corner of box for rectangular geometry, bottom center point for cylindrical geometry)
- WWM(7-9) number of coarse meshes in each direction
- WWM(10-12) cylindrical geometry top center point
- WWM(13-15) cylindrical geometry point on radius and bottom plane
- WWM(16-18) cylindrical geometry direction cosines from bottom center point to point on radius
- WWM(19) cylindrical geometry radius
- WWM(20-22) cylindrical geometry cosines of axis

APPENDIX E

Arrays

WWM(23) cylindrical geometry axis length

WWM(24-26) cylindrical geometry direction cosines of the cross product of the radial direction and axial direction; necessary for full revolution theta determination

WGM(NWGM) weight window mesh geometric data with the inclusion of 0th index entries for each dimension. The data are stored as cumulative values.

Appendix F

DATA TABLE FORMATS

MCNP has two *types* and eight *classes* of data. These data are kept in individual *tables* that are often organized into *libraries*. These tables are located with the XSDIR data directory file. These terms, tables, and the basic data table formats are described in this appendix in the following sections:

	<u>Page</u>
I. Data Types and Classes	F-1
II. XSDIR - Data Directory File	F-2
III. Data Tables	F-4
IV. Data Blocks for Neutron Continuous-Energy and Discrete Transport Tables	F-13
V. Data Blocks for Dosimetry Tables	F-31
VI. Data Blocks for Thermal $S(\alpha, \beta)$ Tables	F-32
VII. Data Blocks for Photon Transport Tables	F-33
VIII. Format for Multigroup Transport Tables	F-36
IX. Data Blocks for Electron Transport Tables	F-49

I. Data Types and Classes

MCNP reads eight *classes* of data from two *types* of data tables. The two types of data tables are:

1. Type 1—standard formatted tables (sequential, 80 characters per record). These portable libraries are used to transmit data from one installation to another. They are bulky and slow to read. Few installations use Type 1 tables in MCNP directly. Most generate Type 2 tables from Type 1 tables using the MAKXSF code (see Appendix C).
2. Type 2—standard unformatted tables (direct-access, binary) locally generated from Type 1 tables. They are not portable except between similar systems such as various UNIX platforms. Type 2 tables are used most because they are more compact and faster to read than Type 1 tables.

Data tables exist for eight *classes* of data: continuous-energy neutron, discrete-reaction neutron, continuous-energy photon interaction, continuous-energy electron interaction, neutron dosimetry, $S(\alpha, \beta)$ thermal, neutron multigroup, and photon multigroup. A user should think of a data table as an entity that contains evaluation-dependent information about one of the eight *classes* of data for a specific target isotope, element, or material. For how the data are used in MCNP, a user does not need to know whether a particular table is in Type 1 or Type 2. For any ZAID, the data contained on Type 1 and Type 2 tables are identical. Problems run with one data type will track problems run with the same data in another format type.

APPENDIX F

When we refer to data libraries, we are talking about a series of data tables concatenated into one file. All tables on a single library must be of the same *type* but not necessarily of the same *class*. For example, the Type 1 library for the MCNP test set contains six *classes* of data. There is no reason, other than convenience, for having data libraries; MCNP could read exclusively from individual data tables not in libraries.

II. XSDIR— Data Directory File

MCNP determines where to find data tables for each ZAID in a problem based on information contained in a system-dependent directory file XSDIR. The directory file is a sequential formatted ASCII file with 80-character records (lines) containing free-field entries delimited by blanks.

The XSDIR file has three sections. In the first section, the first line is an optional entry of the form:

DATAPATH = *datapath*

where the word DATAPATH (optionally capitalized) must start in column 1. The = sign is optional. The directory where the data libraries are stored is *datapath*. The search hierarchy to find the data libraries is:

- (1) `xmdir=datapath` on the MCNP execution line;
- (2) `DATAPATH = datapath` in the INP file message block;
- (3) the current directory;
- (4) the DATAPATH entry on the first line of the XSDIR file;
- (5) the unix environmental variable `setenv DATAPATH datapath`;
- (6) the individual data table line in the XSDIR file (see below under Access route); or
- (7) the directory specified at MCNP compile time in the BLOCK DATA subroutine.

The second section of the XSDIR file is the atomic weight ratios. This section starts with the words “ATOMIC WEIGHT RATIOS” (capitalization optional) beginning in column 1. The following lines are free-format pairs of ZAID AWR, where ZAID is an integer of the form ZZAAA and AWR is the atomic weight ratio. These atomic weight ratios are used for converting from weight fractions to atom fractions and for getting the average Z in computing electron stopping powers. If the atomic weight ratio is missing for any nuclide requested on an Mn card, it must be provided on the AWTAB card.

The third section of the XSDIR file is the listing of available data tables. This section starts with the word “DIRECTORY” (capitalization optional) beginning in column 1. The lines following consist of the seven- to ten-entry description of each table. The ZAID of each table must be the first entry. If a table requires more than one line, the continuation is indicated by a + at the end of the line. A zero indicates the entry is inapplicable. Unneeded entries at the end of the line can be omitted.

The directory file has seven to ten entries for each table. They are:

- | | |
|------------------------|----------------|
| 1. Name of the table | character * 10 |
| 2. Atomic weight ratio | real |
| 3. File name | character |

- | | |
|---------------------------------|----------------|
| 4. Access route | character * 70 |
| 5. File type | integer |
| 6. Address | integer |
| 7. Table length | integer |
| 8. Record length | integer |
| 9. Number of entries per record | integer |
| 10. Temperature | real |
1. Name of the Table. This is usually the ZAID: 3 characters for Z, 3 characters for A, a decimal point, 2 characters for evaluation identification, and a tenth character used to identify continuous energy tables by the letter C, discrete-reaction tables by D, dosimetry tables by Y, $S(\alpha,\beta)$ thermal tables by T, continuous-energy photon tables by P, continuous-energy electron tables by E, multigroup neutron tables by M, and multigroup photon tables by G. For the $S(\alpha,\beta)$ tables, the first 6 characters contain a mnemonic character string, such as LWTR.01T.
 2. Atomic Weight Ratio. This is the atomic mass divided by the mass of a neutron. The atomic weight ratio here is used only for neutron kinematics and should be the same as it appears in the cross-section table so that threshold reactions are correct. It is the quantity A used in all the neutron interaction equations of Chapter 2. This entry is used only for neutron tables.
 3. File Name. The file name is the name of the library that contains the table and is a string of eight characters in a form allowed by the local installation.
 4. Access Route. The access route is a string of up to 70 characters that tells how to get ahold of the file if it is not already accessible. At Los Alamos on UNICOS, it is a CFS path name. On other systems it might be a UNIX directory path. If there is no access route, this entry is zero.
 5. File Type. 1 or 2.
 6. Address. For Type 1 files the address is the line number in the file where the table starts. For Type 2 files, it is the record number of the first record of the table.
 7. Table Length. A data table consists of two blocks of information. The first block is a collection of pointers, counters, and character information. The second block is a solid sequence of numbers. For Type 1 and Type 2 tables, the table length is the length (total number of words) of the second block.
 8. Record Length. This entry is unused for Type 1 files and therefore is zero. For Type 2 direct access files it is the processor-dependent attribute called the record length. The record length is a multiple of the number of entries per record where the multiple is 1 for VMS and the multiple is the number of 8-bit bytes in the record for most other systems. Thus for 512 entries per record, the record length is 4096 for UNICOS, 4096 for double-precision data on unix workstations (electron data are always double precision on single-precision platforms), 2048 for single-precision data on unix workstations, etc.

APPENDIX F

9. Number of Entries per Record. This is unused for Type 1 files and therefore is zero. For Type 2 files it is the number of items per record in the second block of the table. Usually this entry is set to 512.
10. Temperature. The temperature in MeV at which a neutron table was processed. This entry is used only for neutron data.

III. Data Tables

The remainder of this Appendix is designed for the user who wishes to know a great deal about how data are stored in data tables and in MCNP. First we describe how to find a specific table on a Type 1 or Type 2 library. Then we document the detailed format of the various blocks of information for each *class* of data.

Three arrays are associated with each data table. The NXS array contains various counters and flags. The JXS array contains pointers. The XSS array contains all of the data. These arrays are the same regardless of the *type* of a specific table. The arrays are manipulated internally by MCNP. Within a data table, the counter and pointer arrays are dimensioned to NXS(16) and JXS(32). In MCNP the same arrays are dimensioned to NXS(16,IEX) and JXS(32,IEX), where IEX is the index of the particular table in the problem. There is no limit to the number of tables or their size other than available space on a particular computing platform.

To locate data for a specific table (external to MCNP) it is necessary to extract several parameters associated with that table from the directory file XSDIR. The file name obviously indicates the name of the library that the table is stored on. Other important parameters from the viewpoint of this Appendix are file type (NTY), address (IRN), table length (ITL), and number of entries per record (NER).

A. Locating Data on a Type 1 Table

Because Type 1 tables are 80-character card-image files, the XSDIR address IRN is the line number of the first record, or the beginning, of the table. The first 12 records (lines) contain miscellaneous information as well as the NXS and JXS arrays. The format follows.

Address		Contents	Format
Relative	Absolute		
1	IRN	HZ,AW(0),TZ,HD	A10,2E12.0,1X,A10
2	IRN+1	HK,HM	A70,A10
3-6	IRN+2	(IZ(I),AW(I),I=1,16)	4(I7,F11.0)
7-8	IRN+6	(NXS(I),I=1,16)	8I9
9-12	IRN+8	(JXS(I),I=1,32)	8I9

The variables are defined in Tables F.1–F.3 for neutron, photon, dosimetry and $S(\alpha, \beta)$ thermal libraries. These variables are defined in Table F.31 and F.32 for multigroup data.

The XSS array immediately follows the JXS array. All data from the XSS array are read into MCNP with a 4E20.0 format. (When Type 1 tables are

created, floating-point numbers are written in 1PE20.12 format and integers are written in I20 format.) The length of the XSS array is given by the table length, ITL, in the directory (also by NXS(1) in the table itself). The number of records required for the XSS array is $(ITL+3)/4$. A Type 1 library is shown in Figure F.1.

Layout of a Type 1 Library

Starting Address (Line Number)	Number of Records	Contents
$IRN_1=1$	12	misc. including NXS_1, JXS_1
IRN_1+12	$(ITL_1+3)/4$	XSS_1
IRN_2	12	misc. including NXS_2, JXS_2
IRN_2+12	$(ITL_2+3)/4$	XSS_2
.	.	.
.	.	.
.	.	.
IRN_n	12	misc. including NXS_n, JXS_n
IRN_n+12	$(ITL_n+3)/4$	XSS_n

n =number of tables contained on library

IRN_i, ITL_i are the addresses and table lengths from XSDIR

APPENDIX F

Table F.1
Definition of the NXS Array

NTY	1 or 2 Continuous energy or Discrete reaction Neutron	3 Dosimetry	4 Thermal	5 Continuous energy Photon
NXS(1)	Length of second block of data	Length of second block of data	Length of second block of data	Length of second block of data
NXS(2)	ZA=1000*Z+A	ZA=1000*Z+A	IDPNI=inelastic scattering mode	Z
NXS(3)	NES=number of energies		NIL=inelastic dimensioning parameter	NES=number of energies
NXS(4)	NTR=number of reactions excluding elastic	NTR=number of reactions	NIEB=number of inelastic exiting energies	NFLO=length of the fluorescence data divided by 4
NXS(5)	NR=number of reactions having secondary neutrons excluding elastic		IDPNC=elastic scattering mode	
NXS(6)	NTRP=number of photon production reactions		NCL=elastic dimensioning parameter	
NXS(7)			IFENG=secondary energy mode	
NXS(8)				
.....				
.....				
.....				
NXS(15)	NT=number of PIKMT reactions			
NXS(16)	0=normal photon production -1=do not produce photons			

Note that many variables are not used, allowing for easy expansion in the future.

Table F.2
Definition of the JXS Array

NTY	1 or 2 Continuous energy or Discrete reaction Neutron	3 Dosimetry	4 Thermal	5 Continuous energy Photon
JXS(1)	ESZ=location of energy table	LONE=location of first word of table	ITIE=location of inelastic energy table	ESZG=location of energy table
JXS(2)	NU=location of fission nu data		ITIX=location of inelastic cross sections	JINC=location of incoherent form factors
JXS(3)	MTR=location of MT array	MTR=location of MT array	ITXE=location of inelastic energy/angle distributions	JCOH=location of coherent form factors
JXS(4)	LQR=location of Q-value array		ITCE=location of elastic energy table	JFLO=location of fluorescence data table
JXS(5)	TYR=location of reaction type array		ITCX=location of elastic cross sections	LHNM=location of heating numbers
JXS(6)	LSIG=location of table of cross- section locators	LSIG=location of table of cross- section locators	ITCA=location of elastic angular distributions	
JXS(7)	SIG=location of cross sections	SIGD=location of cross sections		
JXS(8)	LAND=location of table of angular distribution locators			
JXS(9)	AND=location of angular distributions			

APPENDIX F

Table F.2 (cont)

NTY	1 or 2 Continuous energy or Discrete reaction Neutron	3 Dosimetry	4 Thermal	5 Continuous energy Photon
JXS(10)	LDLW=location of table of energy distribution locators			
JXS(11)	DLW=location of energy distributions			
JXS(12)	GPD=location of photon production data			
JXS(13)	MTRP=location of photon production MT array			
JXS(14)	LSIGP=location of table of photon production cross section locators			
JXS(15)	SIGP=location of photon production cross sections			
JXS(16)	LANDP=location of table of photon production angular distribution locators			
JXS(17)	ANDP=location of photon production angular distributions			

Table F.2 (cont)

NTY	1 or 2	3	4	5
	Continuous energy or Discrete reaction Neutron	Dosimetry	Thermal	Continuous energy Photon
JXS(18)	LDLWP=location of table of photon production energy dist tribution locators			
JXS(19)	DLWP=location of photon production energy distributions			
JXS(20)	YP=location of table of yield multipliers			
JXS(21)	FIS=location of total fission cross section			
JXS(22)	END=location of last word of this table	END=location of last word of this table		
JXS(23)				
.....				
.....				
.....				
JXS(32)				

Note that many variables are not used, allowing for easy expansion in the future.

All pointers in the JXS array refer to locations in the XSS array.

JXS(1) always points to the first entry in the second block of data.

APPENDIX F

Table F.3

Definition of Miscellaneous Variables on Data Tables

HZ—10 character name (ZAID) of table. The form of HZ is

ZZZAAA.nnC	continuous-energy neutron
ZZZAAA.nnD	discrete-reaction neutron
ZZZAAA.nnY	dosimetry
XXXXXX.nnT	thermal $S(\alpha,\beta)$
ZZZ000.nnP	continuous-energy photon
ZZZ000.nnM	neutron multigroup
ZZZ000.nnG	photon multigroup
ZZZ000.nnE	continuous-energy electron

where ZZZ is the atomic number

AAA is the mass number

XXXXXX for thermal data is a Hollerith name
or abbreviation of the material

nn is the evaluation identifier

AW(0)—atomic weight ratio; the atomic weight divided by the mass of a neutron

TZ—temperature at which the data were processed (in MeV)

HD—10-character date when data were processed

HK—70-character comment

HM—10-character MAT identifier

(IZ(I),AW(I),I=1,16)—16 pairs of ZZZAAAs and atomic weight ratios. In the past these were needed for photon tables but are now ignored. The IZ entries are still needed for thermal tables to indicate for which isotope(s) the scattering data are appropriate.

B. Locating Data on a Type 2 Table

A standard unformatted file consists of many records, each with NER entries, where NER is the number of entries per record defined on XSDIR. A Type 2 data table consists of one record that contains pointers, counters, and character information, followed by one or more records containing the XSS array.

The information contained in the first record for each table is the same as that contained in the first twelve lines of a Type 1 table described above. The variables, in order, are HZ, AW(0), TZ, HD, HK, HM, (IZ(I),AW(I),I=1,16), (NXS(I),I=1,16), (JXS(I),I=1,32). The variables are defined in Tables F.1–F.3. HZ, HD, and HM are 10-character variables and HK is a 70-character variable. Floating-point variables may be double precision in some cases. The number of words contained in this “package” of information is therefore different for different computing systems. The remainder of the first record is empty.

The next NREC records ($NREC \geq 1$) contain the XSS data array, with $NREC = (ITL + NER - 1) / NER$, where ITL is the table length.

APPENDIX F

A Type 2 library is shown in Figure F.2.

Layout of a Type 2 Library

Address	Contents
$IRN_1 = 1$	misc. including NXS_1, JXS_1
2	XSS_1 $NER < ITL_1 \leq 2 * NER$
3	XSS_1 (cont)
$IRN_2 = 4$	misc. including NXS_2, JXS_2
5	XSS_2 $ITL_2 \leq NER$
·	·
·	·
$IRN_n = MAX-3$	misc. including NXS_n, JXS_n
MAX-2	XSS_n
MAX-1	XSS_n (cont) $2 * NER < ITL_n \leq 3 * NER$
MAX	XSS_n (cont)

(Records per table are examples only)

n=number of tables contained on library

MAX=number of records contained on library

IRN_i, ITL_i, NER are the addresses, table lengths, and entries per record from XSDIR

Figure F.2

APPENDIX F

C. Locating Data Tables in MCNP

The NXS and JXS arrays exist in MCNP for each data table. The information contained in the (2-dimensional) arrays in MCNP mirrors the information contained in NXS and JXS (1-dimensional) on the individual tables. The current dimensions are NXS(16) and JXS(32) on the data tables and NXS(16, ∞) and JXS(32, ∞) in MCNP, where ∞ indicates variable dimensioning. In the code, the arrays are usually referenced as NXS(I,IEX) and JXS(I,IEX), where IEX is the index to a particular table.

The data from all cross-section tables used in an MCNP problem are in the XSS array, a part of dynamically allocated common. The data from the first table appear first, followed by the data from the second table, etc., as shown in Figure F.4. The pointers in the JXS array indicate absolute locations in the XSS array.

Diagram of Data Storage in MCNP

common shared with other information	Data Table 1	Data Table 2	...	Data Table n
--	--------------------	--------------------	-----	--------------------

XSS

Figure F.4

The definitions of the variables in the NXS and JXS arrays (Tables F.1 and F.2) are the same in MCNP as on a data table with one exception. For discrete-reaction neutron tables, NXS(16,IEX) is used in MCNP as an indicator of whether discrete tables in a problem have cross sections tabulated on identical energy grids. Although the definitions of the variables are the same, the contents are generally not. Pointers in the JXS array are pointing to locations in the MCNP internal XSS array that are different from the locations in the data table XSS array. Flags in the NXS array will generally retain the same value in MCNP. Counters in the NXS array may retain the same value, primarily depending on the degree to which MCNP is able to expunge data for a particular problem.

D. Individual Data Blocks

Several blocks of data exist for every cross-section table. The format of an individual block is essentially the same in MCNP as on a data table. In either case, the absolute location of a data block in the XSS array is determined by pointers in the JXS array. The specific data blocks available for a particular table are a function of the *class* of data. We next describe the detailed format of individual data blocks for each *class* of data.

IV. Data Blocks for Continuous-Energy and Discrete Neutron Transport Tables

The format of individual data blocks found on neutron transport tables is identical for continuous-energy (NTY=1) and discrete-reaction (NTY=2) tables. Therefore, the format for both are described in this section. All data blocks are now listed with a brief description of their contents and the table numbers in which their formats are detailed.

**Note: In the tables that follow these descriptions, it is understood that NXS(I) or JXS(I) really means NXS(I,IEX) or JXS(I,IEX) when locating data blocks in MCNP.

1. ESZ Block—contains the main energy grid for the table and the total, absorption, and elastic cross sections as well as the average heating numbers. The ESZ Block always exists. See Table F.4.
2. NU Block—contains prompt and/or total $\bar{\nu}$ as a function of incident neutron energy. The NU Block exists only for fissionable isotopes (that is, if JXS(2) \neq 0). See Table F.5.
3. MTR Block—contains list of ENDF/B MT numbers for all neutron reactions other than elastic scattering. The MTR Block exists for all isotopes that have reactions other than elastic scattering (that is, all isotopes with NXS(4) \neq 0). See Table F.6.
4. LQR Block—contains list of kinematic Q-values for all neutron reactions other than elastic scattering. The LQR Block exists if NXS(4) \neq 0. See Table F.7.
5. TYR Block—contains information about the type of reaction for all neutron reactions other than elastic scattering. Information for each reaction includes the number of secondary neutrons and whether secondary neutron angular distributions are in the laboratory or center-of-mass system. The TYR Block exists if NXS(4) \neq 0. See Table F.8.
6. LSIG Block—contains list of cross-section locators for all neutron reactions other than elastic scattering. The LSIG Block exists if NXS(4) \neq 0. See Table F.9.
7. SIG Block—contains cross sections for all reactions other than elastic scattering. The SIG Block exists if NXS(4) \neq 0. See Table F.10.
8. LAND Block—contains list of angular-distribution locators for all reactions producing secondary neutrons. The LAND Block always exists. See Table F.11.
9. AND Block—contains angular distributions for all reactions producing secondary neutrons. The AND Block always exists. See Table F.12.
10. LDLW Block—contains list of energy distribution locators for all reactions producing secondary neutrons except for elastic scattering. The LDLW Block exists if NXS(5) \neq 0. See Table F.13.
11. DLW Block—contains energy distributions for all reactions producing secondary neutrons except for elastic scattering. The DLW Block exists if NXS(5) \neq 0. See Table F.14.
12. GPD—contains the total photon production cross section tabulated on

APPENDIX F

the ESZ energy grid and a 30X20 matrix of secondary photon energies. The GPD Block exists only for those older evaluations that provide coupled neutron/photon information (that is, if $JXS(12) \neq 0$). See Table F.15.

13. MTRP Block—contains list of MT numbers for all photon production reactions. (We will use the term “photon production reaction” for any information describing a specific neutron-in photon-out reaction.) The MTRP Block exists if $NXS(6) \neq 0$. See Table F.6.
14. LSIGP Block—contains list of cross-section locators for all photon production reactions. The LSIGP Block exists if $NXS(6) \neq 0$. See Table F.9.
15. SIGP Block—contains cross sections for all photon production reactions. The SIGP Block exists if $NXS(6) \neq 0$. See Table F.16.
16. LANDP Block—contains list of angular-distribution locators for all photon production reactions. The LANDP Block exists if $NXS(6) \neq 0$. See Table F.17.
17. ANDP Block—contains photon angular distributions for all photon- production reactions. The ANDP Block exists if $NXS(6) \neq 0$. See Table F.18.
18. LDLWP Block—contains list of energy-distribution locators for all photon production reactions. The LDLWP Block exists if $NXS(6) \neq 0$. See Table F.13.
19. DLWP Block—contains photon energy distributions for all photon production reactions. The DLWP Block exists if $NXS(6) \neq 0$. See Table F.14.
20. YP Block—contains list of MT identifiers of neutron reaction cross sections required as photon production yield multipliers. The YP Block exists if $NXS(6) \neq 0$. See Table F.19.
21. FIS Block—contains the total fission cross section tabulated on the ESZ energy grid. The FIS Block exists if $JXS(21) \neq 0$. See Table F.20.

Table F.4
ESZ Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(1)	$E(I), I=1, NXS(3)$	Energies
JXS(1)+NXS(3)	$\sigma_t(I), I=1, NXS(3)$	Total cross sections
JXS(1)+2*NXS(3)	$\sigma_a(I), I=1, NXS(3)$	Total absorption cross sections
JXS(1)+3*NXS(3)	$\sigma_{el}(I), I=1, NXS(3)$	Elastic cross sections
JXS(1)+4*NXS(3)	$H_{ave}(I), I=1, NXS(3)$	Average heating numbers

Table F.5
NU Block

There are three possibilities for the NU Block:

1. $JXS(2)=0$ no NU Block
2. $XSS(JXS(2))>0$ either prompt $\bar{\nu}$ or total $\bar{\nu}$ is given. The NU array begins at location $XSS(KNU)$ where $KNU=JXS(2)$.
3. $XSS(JXS(2))<0$ both prompt $\bar{\nu}$ and total $\bar{\nu}$ are given. The prompt NU Array begins at $XSS(KNU)$ where $KNU=JXS(2)+1$; the total NU array begins at $XSS(KNU)$, where $KNU=JXS(2)+ABS(XSS(JXS(2)))+1$.

The NU Array has two forms if it exists:

a) Polynomial function form of NU Array:

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
KNU	$LNU=1$	Polynomial function flag
$KNU+1$	NC	Number of coefficients
$KNU+2$	$C(I),I=1,NC$	Coefficients

$$\bar{\nu}(E) = \sum_{I=1}^{NC} C(I) * E^{I-1} \quad E \text{ in MeV}$$

b) Tabular data form of NU array:

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
KNU	$LNU=2$	Tabular data flag
$KNU+1$	NR	Number of interpolation regions
$KNU+2$	$NBT(I),I=1,NR$	ENDF interpolation parameters
$KNU+2+NR$	$INT(I),I=1,NR$	If $NR=0$, NBT and INT are omitted and linear-linear interpolation is used.
$KNU+2+2*NR$	NE	Number of energies
$KNU+3+2*NR$	$E(I),I=1,NE$	Tabular energy points
$KNU+3+2*NR+NE$	$\bar{\nu}(I),I=1,NE$	Corresponding values of $\bar{\nu}$

Table F.6
MTR, MTRP Blocks

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
LMT	MT_1	First ENDF reaction available
$LMT+1$	MT_2	Second ENDF reaction available
.	.	.
.	.	.
.	.	.
$LMT+NMT-1$	MT_{NMT}	Last ENDF reaction available

where $LMT=JXS(3)$ for MTR Block

$LMT=JXS(13)$ for MTRP Block

$NMT=NXS(4)$ for MTR Block

$NMT=NXS(6)$ for MTRP Block

APPENDIX F

Note: For MTR Block: MT_1, MT_2, \dots are standard ENDF MT numbers, that is, $MT=16=(n,2n)$; $MT=17=(n,3n)$; etc.

For MTRP Block: the MT values are somewhat arbitrary. To understand the scheme used for numbering the photon production MTs, it is necessary to realize that in ENDF/B format, more than one photon can be produced by a particular neutron reaction that is itself specified by a single MT. Each of these photons is produced with an individual energy-dependent cross section. For example, MT 102 (radiative capture) might be responsible for 40 photons, each with its own cross section, angular distribution, and energy distribution. We need 40 photon MTs to represent the data; the MTs are numbered 102001, 102002, ... , 102040. Therefore, if ENDF/B MT “N” is responsible for “M” photons, we shall number the photon MTs $1000*N+1, 1000*N+2, \dots, 1000*N+M$.

Table F.7
LQR Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(4)	Q_1	Q-value of reaction MT_1
JXS(4)+1	Q_2	Q-value of reaction MT_2
⋮	⋮	⋮
⋮	⋮	⋮
⋮	⋮	⋮
JXS(4)+NXS(4)-1	$Q_{NXS(4)}$	Q-value of reaction $MT_{NXS(4)}$

Note: The MT_i 's are given in the MTR Block.

Table F.8
TYR Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(5)	TY_1	Neutron release for reaction MT_1
JXS(5)+1	TY_2	Neutron release for reaction MT_2
⋮	⋮	⋮
⋮	⋮	⋮
⋮	⋮	⋮
JXS(5)+NXS(4)-1	$TY_{NXS(4)}$	Neutron release for reaction $MT_{NXS(4)}$

Note: the possible values of TY_i are $\pm 1, \pm 2, \pm 3, \pm 4, 19, 0$ and integers greater than 100 in absolute value. The sign indicates the system for scattering: negative = CM system; positive = LAB system. Thus if $TY_i = +3$, three neutrons are released for reaction MT_i , and the data on the cross-section tables used to determine the exiting neutrons' angles are given in the LAB system.

$TY_i=19$ indicates fission. The number of secondary neutrons released is determined from the fission $\bar{\nu}$ data found in the NU Block.

$TY_i=0$ indicates absorption (ENDF reactions $MT > 100$); no neutrons

are released.

$|TY_i| > 100$ signifies reactions other than fission that have energy-dependent neutron multiplicities. The number of secondary neutrons released is determined from the yield data found in the DLW Block.

The MT_i 's are given in the MTR Block.

Table F.9
LSIG, LSIGP Blocks

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
LXS	$\overline{LOCA}_1=1$	Loc.of cross sections for reaction MT_1
LXS+1	$LOCA_2$	Loc.of cross sections for reaction MT_2
.	.	.
.	.	.
.	.	.
LXS+NMT-1	$LOCA_{NMT}$	Loc.of cross sections for reaction MT_{NMT}

where LXS=JXS(6) for LSIG Block

LXS=JXS(14) for LSIGP Block

NMT=NXS(4) for LSIG Block

NMT=NXS(6) for LSIGP Block

Note: All locators are relative to JXS(7) for LSIG or JXS(15) for LSIGP.

The MT_i 's are given in the MTR Block for LSIG or the MTRP Block for LSIGP. $LOCA-i$ values must be monotonically increasing or data will be overwritten in subroutine EXPUNG.

Table F.10
SIG Block

<u>Location in XSS</u>	<u>Description</u>
$\overline{JXS(7)+LOCA}_1 - 1$	Cross-section array* for reaction MT_1
$\overline{JXS(7)+LOCA}_2 - 1$	Cross-section array* for reaction MT_2
.	.
.	.
.	.
$\overline{JXS(7)+LOCA}_{NXS(4)} - 1$	Cross-section array* for reaction $MT_{NXS(4)}$

*The i^{th} array has the form:

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
$\overline{JXS(7)+LOCA}_i - 1$	IE_i	Energy grid index for reaction MT_i
$\overline{JXS(7)+LOCA}_i$	NE_i	Number of consecutive entries for MT_i
$\overline{JXS(7)+LOCA}_i + 1$	$\sigma_i[E(K)], K=IE_i,$ $IE_i+NE_i - 1$	Cross sections for reaction MT_i

APPENDIX F

Note: The values of $LOCA_i$ are given in the LSIG Block. The energy grid $E(K)$ is given in the ESZ Block. The energy grid index IE_i corresponds to the first energy in the grid at which a cross section is given. The MT_i 's are defined in the MTR Block.

Table F.11
LAND Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(8)	$LOCB_1=1$	Loc.of angular dist. data for: elastic scattering
JXS(8)+1	$LOCB_2$	reaction MT_1
.	.	.
.	.	.
.	.	.
JXS(8)+NXS(5)	$LOCB_{NXS(5)+1}$	reaction $MT_{NXS(5)}$

Note: All locators ($LOCB_i$) are relative to JXS(9). If $LOCB_i=0$, no angular distribution data are given for this reaction, and isotropic scattering is assumed in either the LAB or CM system. Choice of LAB or CM system depends upon value for this reaction in the TYR Block. The MT_i 's are given in the MTR Block.

If $LOCB_i=-1$, no angular distribution data are given for this reaction in the AND Block. Angular distribution data are specified through $LAW_i=44$ in the DLW Block.

The $LOCB_i$ locators must be monotonically increasing or data will be overwritten in subroutine EXPUNG.

Table F.12
AND Block

<u>Location in XSS</u>	<u>Description</u>
$JXS(9)+LOCB_1 - 1$	Angular distribution array* for elastic scattering
$JXS(9)+LOCB_2 - 1$	Angular distribution array* for reaction MT_1
.	.
.	.
$JXS(9)+LOCB_{NXS(5)+1} - 1$	Angular distribution array* for reaction $MT_{NXS(5)}$

Note: The values of $LOCB_i$ are given in the LAND Block. If $LOCB_i=0$, no angular distribution array is given and scattering is isotropic in either the LAB or CM system. Choice of LAB or CM system depends on value in the TYR Block. The MT_i 's are given in the MTR Block.

*The i^{th} array has the form:

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
------------------------	------------------	--------------------

APPENDIX F

JXS(9)+LOCB _i - 1	NE	Number of energies at which angular distributions are tabulated.
JXS(9)+LOCB _i	E(J),J=1,NE	Energy grid
JXS(9)+LOCB _i +NE	LC(J),J=1,NE	Location of tables associated with energies E(J)
JXS(9)+LC(1)-1	P(1,K),K=1,33	32 equiprobable cosine bins for scattering at energy E(1)
JXS(9)+LC(2)-1	P(2,K),K=1,33	32 equiprobable cosine bins for scattering at energy E(2)
.	.	.
JXS(9)+LC(NE)-1	P(NE,K),K=1,33	32 equiprobable cosine bins for scattering at energy E(NE)

Note: All values of LC(J) are relative to JXS(9). If LC(J)=0, no table is given for energy E(J) and scattering is isotropic in the coordinate system indicated by entry in the TYR Block.

Table F.13
LDLW, LDLWP Blocks

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
LED	LOCC ₁	Loc.of energy dist. data for reaction MT ₁
LED+1	LOCC ₂	Loc.of energy dist. data for reaction MT ₂
.	.	.
LED+NMT-1	LOCC _{NMT}	Loc.of energy dist. data for reaction MT _{NMT}

where LED=JXS(10) for LDLW Block
LED=JXS(18) for LDLWP Block
NMT=NXS(5) for LDLW Block
NMT=NXS(6) for LDLWP Block

Note: All locators are relative to JXS(11) for LDLW or JXS(19) for LDLWP. The MT_i's are given in the MTR Block for LDLW or MTRP Block for LDLWP. The LOCC_i locators must be monotonically increasing or data will be overwritten in subroutine EXPUNG.

Table F.14
DLW,DLWP Blocks

<u>Location in XSS</u>	<u>Description</u>
JED+LOCC ₁ - 1	Energy distribution array* for reaction MT ₁
JED+LOCC ₂ - 1	Energy distribution array* for reaction MT ₂
.	.
.	.
.	.

APPENDIX F

JED+LOCC_{NMT} - 1 Energy distribution array* for reaction MT_{NMT}

where JED=JXS(11) for DLW
 JED=JXS(19) for DLWP
 NMT=NXS(5) for DLW
 NMT=NXS(6) for DLWP

Note: Values of LOCC_i are given in the LDLW and LDLWP Blocks. Values of MT_i are given in the MTR and MTRP Blocks.

*The *i*th array has the form:

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
LDIS+LOCC _i - 1	LNW ₁	Location of next law. If LNW _i =0, then law LAW ₁ is used regardless of other circumstances.
LDIS+LOCC _i	LAW ₁	Name of this law
LDIS+LOCC _i +1	IDAT ₁	Location of data for this law relative to LDIS
LDIS+LOCC _i +2	NR	Number of interpolation regions to define law applicability regime
LDIS+LOCC _i +3	NBT(I),I=1,NR	ENDF interpolation parameters.
LDIS+LOCC _i +3+NR	INT(I),I=1,NR	If NR=0, NBT and INT are omitted and linear-linear interpolation is used.
LDIS+LOCC _i +3+2*NR	NE	Number of energies
LDIS+LOCC _i +4+2*NR	E(I),I=NE	Tabular energy points
LDIS+LOCC _i +4 +2*NR+NE	P(I),I=1,NE	Probability of law validity. If the particle energy, E, is E<E(1) then P(E)=P(1) If E>E(NE) then P(E)=P(NE). If more than 1 law is given, then LAW ₁ is used only if ξ < P(E) where ξ is a random number between 0 and 1.
LDIS+IDAT ₁ - 1	LDAT(I),I=1,L**	Law data array for LAW ₁ . The length, L, of the law data array, LDAT, is determined from parameters within LDAT. The various law data arrays, LDAT, for each law, LAW _i , are given in the following tables.
LDIS+LNW ₁ - 1	LNW ₂	Location of next law
LDIS+LNW ₁	LAW ₂	Name of this law
LDIS+LNW ₁ +1	IDAT ₂	Location of data for this law
.	.	.
.	.	.
.	.	.

etc.

where LDIS=JXS(11) for DLW
 LDIS=JXS(19) for DLWP

Note: The locators LOCC_{*i*} are defined in the LDLW Block or the LDLWP Block. All locators (LNW_{*i*}, IDAT_{*i*}) are relative to LDIS.

**We now define the format of the LDAT array for each law. Laws 2 and 4 are used to describe the spectra of secondary photons from neutron collisions. All laws except for Law 2 are used to describe the spectra of scattered neutrons. In the following tables we provide relative locations of data in the LDAT array rather than absolute locations in the XSS array. The preceding table defines the starting location of the LDAT array within the XSS array.

a. LAW_{*i*}=1 Tabular Equiprobable Energy Bins (From ENDF Law 1)

<u>Location</u>	<u>Parameter</u>	<u>Description</u>
LDAT(1)	NR	Interpolation scheme between
LDAT(2)	NBT(I),I=1,NR	tables of E _{out} . If NR=0
LDAT(2+NR)	INT(I),I=1,NR	or if INT(I) ±1 (histogram), linear-linear interpolation is used
LDAT(2+2*NR)	NE	Number of incident energies tabulated
LDAT(3+2*NR)	E _{in} (I),I=1,NE	List of incident energies for which E _{out} is tabulated
LDAT(3+2*NR+NE)	NET	Number of outgoing energies in each E _{out} table
LDAT(4+2*NR+NE)	E _{out1} (I),I=1,NET E _{out2} (I),I=1,NET . . E _{out_{NE}} (I),I=1,NET	E _{out} tables are NET boundaries of NET-1 equally likely energy intervals. Linear-linear interpolation is used between intervals.

b. LAW_{*i*}=2 Discrete Photon Energy

<u>Location</u>	<u>Parameter</u>	<u>Description</u>
LDAT(1)	LP	Indicator of whether the photon is a primary or nonprimary photon
LDAT(2)	EG	Photon energy (if LP=0 or LP=1), or Binding energy (if LP=2)

If LP=0 or LP=1, the photon energy is EG

If LP=2, the photon energy is EG+(AWR)/(AWR+1)*EN
 where AWR is the atomic weight ratio
 and EN is the neutron energy

c. LAW_{*i*}=3 Level Scattering (From ENDF Law 3)

$$\text{LDAT}(1) = \left(\frac{A+1}{A} \right) |Q| \quad \text{LDAT}(2) = \left(\frac{A}{A+1} \right)^2$$

$$E_{\text{out}}^{\text{CM}} = \text{LDAT}(2) * (E - \text{LDAT}(1))$$

APPENDIX F

LDAT(1)	NR	}	Interpolation scheme between T's
LDAT(2)	NBT(I),I=1,NR		
LDAT(2+NR)	INT(I),I=1,NR		
LDAT(2+2*NR)	NE		Number of incident energies tabulated
LDAT(3+2*NR)	E(I),I=1,NE		Incident energy table
LDAT(3+2*NR+NE)	T(I),I=1,NE		Tabulated function of incident energies
LDAT(3+2*NR+2*NE)	NET		Number of X's tabulated
LDAT(4+2*NR+2*NE)	X(I),I=1,NET		Tabulated probabilistic function

$E_{out} = X(\xi)*T(E)$, where $X(\xi)$ is a randomly sampled table of X's, and E is the incident energy.

f. LAW_i=7 Simple Maxwell Fission Spectrum (From ENDF Law 7)

<u>Location</u>	<u>Parameter</u>	<u>Description</u>	
LDAT(1)	NR	}	
LDAT(2)	NBT(I),I=1,NR		
LDAT(2+NR)	INT(I),I=1,NR		
LDAT(2+2*NR)	NE		Number of incident energies tabulated
LDAT(3+2*NR)	E(I),I=1,NE		Incident energy table
LDAT(3+2*NR+NE)	T(I),I=1,NE		Tabulated T's
LDAT(3+2*NR+2*NE)U			Restriction energy

$$f(E \rightarrow E_{out}) = C \sqrt{E_{out}} e^{-E_{out}/T(E)}$$

with restriction $0 \leq E_{out} \leq E - U$

$$C = T^{-3/2} \left[\frac{\sqrt{\pi}}{2} \operatorname{erf} \left(\sqrt{(E-U)/T} \right) - \sqrt{(E-U)/T} e^{-(E-U)/T} \right]^{-1}$$

g. LAW_i=9 Evaporation Spectrum (From ENDF Law 9)

<u>Location</u>	<u>Parameter</u>	<u>Description</u>	
LDAT(1)	NR	}	
LDAT(2)	NBT(I),I=1,NR		
LDAT(2+NR)	INT(I),I=1,NR		
LDAT(2+2*NR)	NE		Number of incident energies tabulated
LDAT(3+2*NR)	E(I),I=1,NE		Incident energy table
LDAT(3+2*NR+NE)	T(I),I=1,NE		Tabulated T's
LDAT(3+2*NR+2*NE)U			Restriction energy

$$f(E \rightarrow E_{out}) = C E_{out} e^{-E_{out}/T(E)}$$

with restriction $0 \leq E_{out} \leq E - U$

$$C = T^{-2} \left[1 - e^{(E-U)/T} (1 + (E-U)/T) \right]^{-1}$$

h. LAW_i=11 Energy Dependent Watt Spectrum (From ENDF Law 11)

APPENDIX F

<u>Location</u>	<u>Parameter</u>	<u>Description</u>
LDAT(1)	NR _a	} Interpolation scheme between a's
LDAT(2)	NBT _a (I),I=1,NR _a	
LDAT(2+NR _a)	INT _a (I),I=1,NR _a	
LDAT(2+2*NR _a)	NE _a	
LDAT(3+2*NR _a)	E _a (I),I=1,NE _a	Incident energy table
LDAT(3+2*NR _a +NE _a)	a(I),I=1,NE _a	Tabulated a's
<i>let L=3+2*(NR_a+NE_a)</i>		
LDAT(L)	NR _b	} Interpolation scheme between b's
LDAT(L+1)	NBT _b (I),I=1,NR _b	
LDAT(L+1+NR _b)	INT _b (I),I=1,NR _b	
LDAT(L+1+2*NR _b)	NE _b	
LDAT(L+2+2*NR _b)	E _b (I),I=1,NE _b	Incident energy table
LDAT(L+2+2*NR _b +NE _b)	b(I),I=1,NE _b	Tabulated b's
LDAT(L+2+2*NR _b +2*NE _b)	U	Rejection energy

$$f(E \rightarrow E_{out}) = C_o \exp[-E_{out}/a(E)] \sinh [b(E)E_{out}]^{1/2}$$

with restriction $0 \leq E_{out} < E - U$

This law is sampled by the rejection scheme in LA-5061-MS (R11, pg. 45).

i. LAW_i=22 Tabular Linear Functions (from UK Law 2)

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>	
LDAT(1)	NR	} Interpolation parameters which are not used by MCNP (histogram interpolation is assumed)	
LDAT(2)	NBT(I),I=1,NR		
LDAT(2+NR)	INT(I),I=1,NR		
LDAT(2+2*NR)	NE		
LDAT(3+2*NR)	E _{in} (I),I=1,NE	} Number of incident energies tabulated List of incident energies for E _{out} tables Locators of E _{out} tables (relative to JXS(11))	
LDAT(3+2*NR+NE)	LOCE(I),I=1,NE		
Data for E _{in} (1) (Let L=3+2*NR+2*NE):			
LDAT(L)	NF ₁		if E _{in} (I) _i E < E _{in} (I+1)
LDAT(L+1)	P ₁ (K),K=1,NF ₁		and ξ is a random
LDAT(L+1+NF ₁)	T ₁ (K),K=1,NF ₁		number [0,1] then if
LDAT(L+1+2*NF ₁)	C ₁ (K),K=1,NF ₁		
Data for E _{in} (2):		$\sum_{k=1}^{k=K} P_I(K) < \xi \leq \sum_{k=1}^{k=K} P_I(K)$	
.	.	} E _{out} = C _I (K)*(E-T _I (K))	
.	.		
.	.		

j. LAW_i=24 (From UK Law 6)

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
LDAT(1)	NR	} Interpolation parameters which are not used by MCNP (histogram interpolation is assumed)
LDAT(2)	NBT(I),I=1,NR	
LDAT(2+NR)	INT(I),I=1,NR	

APPENDIX F

LDAT(2+2*NR)	NE	Number of incident energies
LDAT(3+2*NR)	$E_{in}(I), I=1, NE$	List of incident energies for which T is tabulated
LDAT(3+2*NR+NE)	NET	Number of outgoing values in each table
LDAT(4+2*NR+NE)	$T_1(I), I=1, NET$ $T_2(I), I=1, NET$. . $T_{NE}(I), I=1, NET$	Tables are NET boundaries of NET-1 equally likely intervals. Linear-linear interpolation is used between intervals.

$E_{out} = T_K(I)*E$
 where $T_K(I)$ is sampled from the above tables
 E is the incident neutron energy

k. LAW_i=44 Kalbach-87 Formalism (From ENDF File 6 Law 1, LANG=2)

<u>Location</u>	<u>Parameter</u>	<u>Description</u>
LDAT(1)	NR	Number of interpolation regions
LDAT(2)	NBT(I), I=1, NR	ENDF interpolation parameters. If NR=0, NBT and INT are omitted and linear-linear interpolation is used.
LDAT(2+NR)	INT(I), I=1, NR	
LDAT(2+2*NR)	NE	Number of energies at which distributions are tabulated
LDAT(3+2*NR)	E(I), I=1, NE	Incident neutron energies
LDAT(3+2*NR+NE)	L(I), I=1, NE	Locations of distributions (relative to JXS(11) or JXS(19))

Data for E(1) (let $K=3+2*NR+2*NE$):

LDAT(K)	INTT'	Interpolation scheme for subsequent data INTT=1 histogram distribution INTT=2 linear-linear distribution
LDAT(K+1)	NP	Number of points in the distribution
LDAT(K+2)	EOUT(I), I=1, NP	Outgoing energy grid
LDAT(K+2+NP)	PDF(I), I=1, NP	Probability density function
LDAT(K+2+2*NP)	CDF(I), I=1, NP	Cumulative density function
LDAT(K+2+3*NP)	R(I), I=1, NP	Precompound fraction r
LDAT(K+2+4*NP)	A(I), I=1, NP	Angular distribution slope value a

Data for E(2):

.
.
.

If the value of LDAT(K) is $INTT' > 10$, then

$$INTT' = 10 * ND + INTT$$

where $INTT$ is the interpolation scheme and the first ND values of NP describe discrete photon lines. The remaining $NP - ND$ values describe a

APPENDIX F

continuous distribution. In this way the distribution may be discrete, continuous, or a discrete distribution superimposed upon a continuous background.

The angular distributions for neutrons are then sampled from

$$p(\mu, E_{in}, E_{out}) = \frac{1}{2} \frac{A}{\sinh(A)} [\cosh(A\mu) + R \sinh(A\mu)]$$

as described in Chapter 2.

1. LAW_{i=66} N-body phase space distribution (From ENDF File 6 Law 6)

<u>Location</u>	<u>Parameter</u>	<u>Description</u>
LDAT(1)	NPSX	Number of bodies in the phase space
LDAT(2)	A _p	Total mass ratio for the NPSX particles

$$E_{out} = T(\xi) * E_i^{max}$$

where

$$E_i^{max} = \frac{A_p - 1}{A_p} \left(\frac{A}{A + 1} E_{in} + Q \right)$$

and $T(\xi)$ is sampled from

$$P_i(\mu, E_{in}, T) = C_n \sqrt{T} (E_i^{max} - T)^{3n/2-4}$$

where the sampling scheme is from R28 of LA-9721-MS and is described in Chapter 2, page 2–45.

- m. LAW_{i=67} Laboratory Angle–Energy Law (From ENDF File 6 Law 7)

<u>Location</u>	<u>Parameter</u>	<u>Description</u>
LDAT(1)	NR	Number of interpolation regions
LDAT(2)	NBT(I), I=1, NR	ENDF interpolation parameters. If NR=0, NBT and INT are omitted and linear-linear interpolation is used.
LDAT(2+NR)	INT(I), I=1, NR	
LDAT(2+2*NR)	NE	Number of energies at which distributions are tabulated
LDAT(3+2*NR)	E(I), I=1, NE	Incident neutron energies
LDAT(3+2*NR+NE)	L(I), I=1, NE	Locations of distributions (relative to JXS(11) or JXS(19))
Data for E(1) (let K=3+2*NR+2*NE):		
LDAT(K)	INTMU	Interpolation scheme for secondary cosines INTMU=1 histogram distribution INTMU=2 linear-linear distribution
LDAT(K+1)	NMU	Number of secondary cosines
LDAT(K+2)	XMU(I), I=1, NMU	Secondary cosines
LDAT(K+2+NMU)	LMU(I), I=1, NMU	Location of data for each secondary cosine (relative to JXS(11) or JXS(19))

APPENDIX F

Data for XMU(1) (let $J=K+2+2*NMU$):

LDAT(J)	INTEP	Interpolation parameter between secondary energies (INTEP=1 is histogram, INTEP=2 is linear-linear)
LDAT(J+1)	NPEP	Number of secondary energies
LDAT(J+2)	EP(I),I=1,NPEP	Secondary energy grid
LDAT(J+2+NPEP)	PDF(I),I=1,NPEP	Probability density function
LDAT(J+2+2*NPEP)	CDF(I),I=1,NPEP	Cumulative density function

Data for XMU(2)

.

Data for XMU(NMU)

.

Data for E(2)

.

Data for E(NE)

.

n. Energy-Dependent Neutron Yields

There are additional numbers to be found for neutrons in the DLW array. For those reactions with entries in the TYR block which are greater than 100 in absolute value, there must be neutron yields $Y(E)$ provided as a function of neutron energy. The neutron yields are handled similar to the average number of neutrons per fission $\bar{\nu}(E)$ which is given for the fission reactions. These yields are a part of the coupled energy-angle distributions given in File 6 of ENDF-6 data.

Location in XSS

JED+|TY_{*i*}|-101 Neutron yield data for reaction MT_{*i*}

where JED=JXS(11)=DLW

$i \leq$ number of reactions with negative angular distributions locators

The *i*th array has the form

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
KY	NR	Number of interpolation regions
KY+1	NBT(I),I=1,NR	ENDF interpolation parameters. If NR=0
KY+1+NR	INT(I),I=1,NR	NBT and INT are omitted and linear-linear interpolation is used.
KY+1+2*NR	NE	Number of energies
KY+2+2*NR	E(I),I=1,NE	Tabular energy points
KY+2+2*NR+NE	Y(I),I=1,NE	Corresponding Y(E) values
where KY=JED+ TY _{<i>i</i>} -101		

APPENDIX F

Table F.15
GPD Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(12)	$\sigma_\gamma(I), I=1, NXS(3)$	Total photon production cross section
JXS(12)+NXS(3)	EG(1,K), K=1,20	20 equally likely outgoing photon energies for incident neutron energy $E < EN(2)$
JXS(12)+NXS(3)+20	EG(2,K), K=1,20	20 equiprobable outgoing photon energies for incident neutron energy $EN(2) \leq E < EN(3)$
.	.	.
.	.	.
.	.	.
JXS(12)+NXS(3)+580	EG(30,K), K=1,20	20 equiprobable outgoing photon energies for incident neutron energy $E \geq EN(30)$

Notes: (1) The discrete incident neutron energy array in MeV is EN(J), J=1,30: 1.39E-10, 1.52E-7, 4.14E-7, 1.13E-6, 3.06E-6, 8.32E-6, 2.26E-5, 6.14E-5, 1.67E-4, 4.54E-4, 1.235E-3, 3.35E-3, 9.23E-3, 2.48E-2, 6.76E-2, .184, .303, .500, .823, 1.353, 1.738, 2.232, 2.865, 3.68, 6.07, 7.79, 10., 12., 13.5, 15.
(2) The equiprobable photon energy matrix is used only for those older tables that do not provide expanded photon production data, and no currently-supported libraries use this data.

Table F.16
SIGP Block

<u>Location in XSS</u>	<u>Description</u>
JXS(15)+LOCA ₁ -1	Cross-section array* for reaction MT ₁
JXS(15)+LOCA ₂ -1	Cross-section array* for reaction MT ₂
.	.
.	.
JXS(15)+LOCA _{NXS(6)} -1	Cross-section array* for reaction MT _{NXS(6)}

*The i^{th} array has three possible forms, depending on the first word in the array:

- (a) If MFTYPE=12 (Yield Data taken from ENDF File 12) or
If MFTYPE=16 (Yield Data taken from ENDF File 6)

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(15)+LOCA _i -1	MFTYPE	12 or 16
JXS(15)+LOCA _i	MTMULT	Neutron MT whose cross section should multiply the yield
JXS(15)+LOCA _i +1	NR	Number of interpolation regions
JXS(15)+LOCA _i +2	NBT(I), I=1, NR	ENDF interpolation parameters. If NR=0,

APPENDIX F

JXS(15)+LOCA _i +2+NR	INT(I),I=1,NR	NBT and INT are omitted and linear-linear interpolation is used.
JXS(15)+LOCA _i +2 +2*NR	NE	Number of energies at which the yield is tabulated
JXS(15)+LOCA _i +3 +2*NR	E(I),I=1,NE	Energies
JXS(15)+LOCA _i +3 +2*NR+NE	Y(I),I=1,NE	Yields

$$\sigma_{\gamma,i} = Y(E) * \sigma_{MTMULT}(E)$$

(b) If MFTYPE=13 (Cross-Section Data from ENDF File 13)

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(15)+LOCA _i -1	MFTYPE	13
JXS(15)+LOCA _i	IE	Energy grid index
JXS(15)+LOCA _i +1	NE	Number of consecutive entries
JXS(15)+LOCA _i +2	$\sigma_{\gamma,i}[E(K)], K=IE, IE+NE-1$	Cross sections for reaction MT _i

Note: The values of LOCA_i are given in the LSIGP Block. The energy grid E(K) is given in the ESZ Block. The MT_i's are defined in the MTRP Block.

Table F.17
LANDP Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(16)	LOCB ₁ =1	Loc.of angular dist. data for reaction MT ₁
JXS(16)+1	LOCB ₂	Loc.of angular dist. data for reaction MT ₂
.	.	.
.	.	.
.	.	.
JXS(16)+NXS(6)-LOCB _{NXS(6)}		Loc.of angular dist. data for reaction MT _{NXS(6)}

Note: All locators (LOCB_i) are relative to JXS(17). If LOCB_i=0, there are no angular distribution data given for this reaction and isotropic scattering is assumed in the LAB system. MT_i's are defined in the MTRP Block.

Table F.18
ANDP Block

<u>Location in XSS</u>	<u>Description</u>
JXS(17)+LOCB ₁ - 1	Angular distribution array* for reaction MT ₁
JXS(17)+LOCB ₂ - 1	Angular distribution array* for reaction MT ₂

APPENDIX F

. . .

JXS(17)+LOCB_{NXS(6)} - 1 Angular distribution array* for reaction MT_{NXS(6)}

Note: The values of LOCB_i are given in the LANDP Block. If LOCB_i=0, then no angular distribution array is given and scattering is isotropic in the LAB system. The MT_i's are given in the MTRP Block.

*The *i*th array has the form:

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(17)+LOCB _i - 1	NE	Number of energies at which angular distributions are tabulated.
JXS(17)+LOCB _i	E(J),J=1,NE	Energy grid
JXS(17)+LOCB _i +NE	LC(J),J=1,NE	Location of tables associated with energies E(J)
JXS(17)+LC(1)-1	P(1,K),K=1,33	32 equiprobable cosine bins for scattering at energy E(1)
JXS(17)+LC(2)-1	P(2,K),K=1,33	32 equiprobable cosine bins for scattering at energy E(2)
.	.	.
.	.	.
JXS(17)+LC(NE)-1	P(NE,K),K=1,33	32 equiprobable cosine bins for scattering at energy E(NE)

Note: All values of LC(J) are relative to JXS(17). If LC(J)=0, no table is given for energy E(J) and scattering is isotropic in the LAB system.

Table F.19
YP Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(20)	NYP	Number of neutron MTs to follow
JXS(20)+1	MTY(I),I=1,NYP	Neutron MTs

Note: The MTY array contains all neutron MTs that are required as photon-production yield multipliers (See Table F.16). MCNP needs this information when expunging data.

Table F.20
FIS Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(21)	IE	Energy grid index
JXS(21)+1	NE	Number of consecutive entries
JXS(21)+2	$\sigma_f[E(K)],K=IE,IE+NE-1$	Total fission cross sections

Note: The FIS Block generally is not provided on individual data tables because the total fission cross section is a redundant quantity [that is,

$\sigma_{f,tot}(E) = \sigma_{n,f}(E) + \sigma_{n,n'f}(E) + \sigma_{n,2nf}(E) + \sigma_{n,3nf}(E)$. MCNP forms the FIS Block if conditions warrant (for example, for KCODE calculations, coupled neutron/photon calculations, etc.). The energy grid $E(K)$ is given in the ESZ Block.

V. Data Blocks for Dosimetry Tables

Dosimetry tables (NTY=3) provide cross sections that are useful as response functions with the FM feature in MCNP. They can never be used for actual neutron transport. Therefore, there is a more limited set of information available on dosimetry tables than on neutron transport tables (NTY=1 or 2). Only three blocks of data exist on dosimetry tables. The three blocks follow, with the table numbers in which their formats are detailed.

1. MTR Block—contains a list of the MT numbers for all reactions provided on the table. The MTR Block always exists on dosimetry tables. The format of the block is identical to that of the MTR Block previously described for neutron transport tables. See Table F.6.

2. LSIG Block—contains a list of cross-section locators for all reactions provided on the table. The LSIG Block always exists on dosimetry tables. The format of the block is identical to that of the LSIG Block previously described for neutron transport tables. See Table F.9.

3. SIGD Block—contains (energy, cross-section) pairs for all reactions provided on the table. The SIGD Block always exists on dosimetry tables. See Table F.21.

Table F.21
SIGD Block

<u>Location in XSS</u>	<u>Description</u>
JXS(7)+LOCA ₁ - 1	Cross-section array* for reaction MT ₁
JXS(7)+LOCA ₂ - 1	Cross-section array* for reaction MT ₂
⋮	⋮
JXS(7)+LOCA _{NXS(4)} - 1	Cross-section array* for reaction MT _{NXS(4)}

*the i^{th} array is of the form:

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(7)+LOCA _{i} - 1	NR	Number of interpolation regions
JXS(7)+LOCA _{i}	NBT(I),I=1,NR	ENDF interpolation parameters. If NR=0,
JXS(7)+LOCA _{i} +NR	INT(I),I=1,NR	NBT and INT are omitted and linear-linear interpolation is assumed.
JXS(7)+LOCA _{i} +2*NR	NE	Number of (energy,cross section) pairs
JXS(7)+LOCA _{i} +1 +2*NR	E(I),I=1,NE	Energies
JXS(7)+LOCA _{i} +1 +2*NR+NE	$\sigma(I)$,I=1,NE	Cross sections

Note: The locators (LOCA _{i}) are provided in the LSIG Block. The MT _{i} 's are given in the MTR Block.

APPENDIX F

VI. Data Blocks for Thermal $S(\alpha, \beta)$ Tables

Data from thermal $S(\alpha, \beta)$ tables (NTY=4) provide a complete representation of thermal neutron scattering by molecules and crystalline solids. Cross sections for elastic and inelastic scattering are found on the tables (typically for neutron energies below 4 eV). A coupled energy/angle representation is used to describe the spectra of inelastically scattered neutrons. Angular distributions for elastic scattering are also provided.

Four unique blocks of data are associated with $S(\alpha, \beta)$ tables. We now briefly describe each of the four data blocks and give the table numbers in which their formats are detailed.

1. ITIE Block—contains the energy-dependent inelastic scattering cross sections. The ITIE Block always exists. See Table F.22.
2. ITCE Block—contains the energy-dependent elastic scattering cross sections. The ITCE Block exists if $JXS(4) \neq 0$. See Table F.23.
3. ITXE Block—contains coupled energy/angle distributions for inelastic scattering. The ITXE Block always exists. See Table F.24.
4. ITCA Block—contains angular distributions for elastic scattering. The ITCA Block exists if $JXS(4) \neq 0$ and $NXS(6) \neq -1$. See Table F.25.

Table F.22
ITIE Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(1)	NE_{in}	Number of inelastic energies
JXS(1)+1	$E_{in}(I), I=1, NE_{in}$	Energies
JXS(1)+1+ NE_{in}	$\sigma_{in}(I), I=1, NE_{in}$	Inelastic cross sections

Note: $JXS(2)=JXS(1)+1+NE_{in}$

Linear-linear interpolation is assumed between adjacent energies.

Table F.23
ITCE Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(4)	NE_{el}	Number of elastic energies
JXS(4)+1	$E_{el}(I), I=1, NE_{el}$	Energies
JXS(4)+1+ NE_{el}	$P(I), I=1, NE_{el}$	(See Below)

If $NXS(5) \neq 4$:

$\sigma_{el}(I)=P(I)$, with linear-linear interpolation between points

If $NXS(5)=4$:

$\sigma_{el}(E)=P(I)/E$, for $E_{el}(I)_i < E < E_{el}(I+1)$

Note: $JXS(5)=JXS(3)+1+NE_{el}$

Table F.24
ITXE Block

APPENDIX F

For NXS(2)=3 (equally-likely cosines; currently the only scattering mode allowed for inelastic angular distributions)

Location in XSS	Parameter	Description
JXS(3)	$E_1^{OUT}[E_{in}(1)]$	First of NXS(4) equally-likely outgoing energies for inelastic scattering at $E_{in}(1)$
JXS(3)+1	$\mu_I(1 \rightarrow 1),$ I=1,NXS(3)+1	Equally-likely discrete cosines for scattering from $E_{in}(1)$ to $E_1^{OUT}[E_{in}(1)]$
JXS(3)+2+NXS(3)	$E_2^{OUT}[E_{in}(1)]$	Second of NXS(4) equally-likely outgoing energies for inelastic scattering at $E_{in}(1)$
JXS(3)+3+NXS(3)	$\mu_I(1 \rightarrow 2),$ I=1,NXS(3)+1	Equally-likely discrete cosines for scattering from $E_{in}(1)$ to $E_2^{OUT}[E_{in}(1)]$
.	.	.
.	.	.
.	.	.
JXS(3)+(NXS(4)-1)* (NXS(3)+2)	$E_{NXS(4)}^{OUT}[E_{in}(1)]$	Last of NXS(4) equally-likely outgoing energies for inelastic scattering at $E_{in}(1)$
JXS(3)+(NXS(4)-1)* (NXS(3)+2)+1	$\mu_I(1 \rightarrow \text{NXS}(4)),$ I=1,NXS(3)+1	Equally-likely discrete cosines for scattering from $E_{in}(1)$ to $E_{NXS(4)}^{OUT}[E_{in}(1)]$
.	.	.
(Repeat for all remaining values of E_{in})	.	.
.	.	.

Note: Incident inelastic energy grid $E_{in}(I)$ is given in ITIE Block. Linear-linear interpolation is assumed between adjacent values of E_{in} .

Table F.25
ITCA Block

Location in XSS	Parameter	Description
JXS(6)	$\mu_I[E_{el}(1)],$ I=1,NXS(6)+1	Equally-likely discrete cosines for elastic scattering at $E_{el}(1)$
JXS(6)+NXS(6)+1	$\mu_I[E_{el}(2)],$ I=1,NXS(6)+1	Equally-likely discrete cosines for elastic scattering at $E_{el}(2)$
.	.	.
.	.	.
.	.	.
JXS(6)+(NE _{el} - 1)* (NXS(6)+1)	$\mu_I[E_{el}(\text{NE}_{el})],$ I=1,NXS(6)+1	Equally-likely discrete cosines for elastic scattering at $E_{el}(\text{NE}_{el})$

Note: Incident elastic energy grid $E_{el}(I)$ and number of energies NE_{el} are given in ITCE Block. Linear-linear interpolation is assumed between adjacent values of E_{el} .

VII. Data Blocks for Photon Transport Tables

Only five data blocks are found on photon transport tables (NTY=5). Information contained on the blocks includes: cross sections for coherent and

APPENDIX F

incoherent scattering, pair production, and the photoelectric effect; scattering functions and form factors that modify the differential Klein-Nishina and Thomson cross sections; energy deposition data; and fluorescence data. The five data blocks are now listed, along with brief descriptions and table numbers where detailed formats may be found.

1. ESZG Block—contains the coherent, incoherent, photoelectric, and pair production cross sections, all tabulated on a common energy grid. The ESZG Block always exists. See Table F.26.

2. JINC Block—contains the incoherent scattering functions that are used to modify the differential Klein-Nishina cross section. The JINC Block always exists. See Table F.27.

3. JCOH Block—contains the coherent form factors that are used to modify the differential Thomson cross section. The JCOH Block always exists. See Table F.28.

4. JFLO Block—contains fluorescence data. The JFLO Block exists if $NXS(4) \neq 0$. See Table F.29.

5. LHNM Block—contains average heating numbers. The LHNM Block always exists. See Table F.30.

Table F.26
ESZG Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(1)	$\ln[E(I), I=1, NXS(3)]$	Logarithms of energies
JXS(1)+NXS(3)	$\ln[\sigma_{IN}(I), I=1, NXS(3)]$	Logarithms of incoherent cross sections
JXS(1)+2*NXS(3)	$\ln[\sigma_{CO}(I), I=1, NXS(3)]$	Logarithms of coherent cross sections
JXS(1)+3*NXS(3)	$\ln[\sigma_{PE}(I), I=1, NXS(3)]$	Logarithms of photoelectric cross sections
JXS(1)+4*NXS(3)	$\ln[\sigma_{PP}(I), I=1, NXS(3)]$	Logarithms of pair production cross sections

Note: Linear-linear interpolation is performed on the logarithms as stored, resulting in effective log-log interpolation for the cross sections. If a cross section is zero, a value of 0.0 is stored on the data table.

Table F.27
JINC Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(2)	$FF_{INC}(I), I=1, 21$	Incoherent scattering functions

Note: The scattering functions for all elements are tabulated on a fixed set of $v(I)$, where v is the momentum of the recoil electron (in inverse angstroms). The grid is: $v(I), I=1, 21 / 0. , .005 , .01 , .05 , .1 , .15 , .2 , .3 , .4 , .5 , .6 , .7 , .8 , .9 , 1. , 1.5 , 2. , 3. , 4. , 5. , 8. /$

Linear-linear interpolation is assumed between adjacent $v(I)$.

The constants $v(I)$ are stored in the VIC array in common block RBL-DAT.

Table F.28
JCOH Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(3)	FFINT _{COH} (I),I=1,55	Integrated coherent form factors
JXS(3)+55	FF _{COH} (I),I=1,55	Coherent form factors

Note: The form factors for all elements are tabulated on a fixed set of $v(I)$, where v is the momentum transfer of the recoil electron (in inverse angstroms). The grid is: $v(I), I=1,55 / 0. , .01 , .02 , .03 , .04 , .05 , .06 , .08 , .10 , .12 , .15 , .18 , .20 , .25 , .30 , .35 , .40 , .45 , .50 , .55 , .60 , .70 , .80 , .90 , 1.0 , 1.1 , 1.2 , 1.3 , 1.4 , 1.5 , 1.6 , 1.7 , 1.8 , 1.9 , 2.0 , 2.2 , 2.4 , 2.6 , 2.8 , 3.0 , 3.2 , 3.4 , 3.6 , 3.8 , 4.0 , 4.2 , 4.4 , 4.6 , 4.8 , 5.0 , 5.2 , 5.4 , 5.6 , 5.8 , 6.0 /$
 The integrated form factors are tabulated on a fixed set of $v(I)^2$, where the $v(I)$ are those defined above. See LA-5157-MS for a description of the integrated form factors and the sampling technique used in MCNP. The constants $v(I)$ are stored in the VCO array. The constants $v(I)^2$ are stored in the WCO array. Both arrays are in common block RBLDAT.

Table F.29
JFLO Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(4)	e(1),...,e(NXS(4))	(See Below)
JXS(4) + NXS(4)	$\Phi(1), \dots, \Phi(NXS(4))$	(See Below)
JXS(4) + 2*NXS(4)	Y(1),...,Y(NXS(4))	(See Below)
JXS(4) + 3*NXS(4)	F(1),...,F(NXS(4))	(See Below)
.	.	.
.	.	.
.	.	.

A complete description of the parameters given in this block may be found in LA-5240-MS. Briefly:

e(I) are the edge energies
 $\Phi(I)$ are relative probabilities of ejection from various shells
 Y(I) are yields
 and F(I) are fluorescent energies.

Table F.30
LHNM Block

<u>Location in XSS</u>	<u>Parameter</u>	<u>Description</u>
JXS(5)	H _{ave} (I),I=1,NXS(3)	Average heating numbers

Note: Log-log interpolation is performed between adjacent heating numbers. The units of H_{ave} are MeV per collision. Heating numbers are tabulated on the energy grid given in the ESZG Block.

APPENDIX F

VIII. Format for Multigroup Transport Tables

Table F.31
NXS Array

Parameter	Description
NXS(1)	LDB Length of second block of data
NXS(2)	ZA 1000*Z+A for neutrons, 1000*Z for photons
NXS(3)	NLEG Number of angular distribution variables
NXS(4)	NEDIT Number of edit reactions
NXS(5)	NGRP Number of groups
NXS(6)	NUS Number of upscatter groups
NXS(7)	NDS Number of downscatter groups
NXS(8)	NSEC Number of secondary particles
NXS(9)	ISANG Angular distribution type ISANG=0 for equi-probable cosines bins ISANG=1 for discrete cosines
NXS(10)	NNUBAR Number of nubars given
NXS(11)	IBFP Boltzmann-Fokker-Planck indicator IBFP=0 for Boltzmann only IBFP=1 for Boltzmann-Fokker-Planck IBFP=2 for Fokker-Planck only
NXS(12)	IPT Identifier for incident particle IPT=1 for neutrons IPT=2 for photons IPT=0 for other particles (temporary)
NXS(13)–NXS(16) are presently unused	

All data in the NXS Array is appropriate for the incident particle only.

Table F.32
JXS Array

Parameter	Description
JXS(1)	LERG Location of incident particle group structure=1
JXS(2)	LTOT Location of total cross sections
JXS(3)	LFISS Location of fission cross sections
JXS(4)	LNU Location of nubar data
JXS(5)	LCHI Location of fission chi data
JXS(6)	LABS Location of absorption cross sections
JXS(7)	LSTOP Location of stopping powers
JXS(8)	LMOM Location of momentum transfers
JXS(9)	LMTED Location of edit reaction numbers
JXS(10)	LXSED Location of edit cross sections
JXS(11)	LIPT Location of secondary particle types
JXS(12)	LERG2L Location of secondary group structure locators
JXS(13)	LPOL Location of P0 locators
JXS(14)	LSANG2 Location of secondary angular distribution types
JXS(15)	LNLEG2 Location of number of angular distribution variables for secondaries
JXS(16)	LXPNL Location of XP_N locators
JXS(17)	LPNL Location of P_N locators
JXS(18)	LSIGMA Location of SIGMA Block locators
JXS(19)	LSIGSC Location of cumulative P0 scattering cross sections
JXS(20)	LSIGSCS Location of cumulative P0 scattering cross sections to secondary particle

Notes: JXS(18)–JXS(20) are calculated and used internally in MCNP.

These parameters have a value of 0 on the cross section file.

JXS(21)–JXS(32) are presently unused.

APPENDIX F

Table F.33
ERG Block

Location	Parameter	Description
JXS(1)	ECENT(1)	Center energy of group 1
.	.	.
.	.	.
.	.	.
JXS(1)+NXS(5)-1	ECENT(NXS(5))	Center energy of Group NXs(5)
JXS(1)+NXS(5)	EWID(1)	Width of Group 1
.	.	.
.	.	.
.	.	.
JXS(1)+2*NXS(5)-1	EWID(NXS(5))	Width of Group NXs(5)
JXS(1)+2*NXS(5)	GMASS(1)	Mass of Group-1 particle
.	.	.
.	.	.
.	.	.
JXS(1)+3*NXS(5)-1	GMASS(NXS(5))	Mass of Group-NXS(5) particle

Notes: Group masses are given only if NXs(12)=0.

All entries are in MeV.

Group energies are descending, unless NXs(12)=0, in which case there may be discontinuities.

Length: 2*NXS(5) if NXs(12)≠0; 3*NXS(5) if NXs(12)=0

Exists: Always

Table F.34
TOT Block

Location	Parameter	Description
JXS(2)	SIGTOT(1)	Total cross section in Group 1
.	.	.
.	.	.
.	.	.
JXS(2)+NXS(5)-1	SIGTOT(NXS(5))	Total cross section in Group NXs(5)

Length: NXs(5)

Exists: If JXS(2)≠ 0

Table F.35
FISS Block

Location	Parameter	Description
JXS(3)	SIGFIS(1)	Fission cross section in Group 1
.	.	.
.	.	.
.	.	.
JXS(3)+NXS(5)-1	SIGFIS(NXS(5))	Fission cross section in Group NXS(5)

Length: NXS(5)

Exists: If JXS(3) ≠ 0

Table F.36
NU Block

Location	Parameter	Description
JXS(4)	NUBAR(1)	See below
.	.	.
.	.	.
.	.	.
JXS(4)+NXS(10)*NXS(5)-1	NUBAR(NXS(10)*NXS(5))	See below

Note: If NXS(10)=1, then one set of nubar is given (NUBAR(1) → NUBAR(NXS(5))). The nubar may be either prompt or total. If NXS(10)=2, then both prompt and total nubar are given. In this case, NUBAR(1) → NUBAR(NXS(5)) are prompt nubar and NUBAR(NXS(5)+1) → NUBAR (2*NXS(5)) are total nubar.

Length: NXS(5)*NXS(10)

Exists: If JXS(3) ≠ 0

APPENDIX F

Table F.37
CHI Block

Location	Parameter	Description
JXS(5)	FISFR(1)	Group 1 fission fraction
⋮	⋮	⋮
JXS(5)+NXS(5)-1	FISFR(NXS(5))	Group NXS(5) fission fraction

Note: The fission fractions are normalized so that their sum is 1.0.

Length: NXS(5)

Exists: If JXS(3) ≠ 0

Table F.38
ABS Block

Location	Parameter	Description
JXS(6)	SIGABS(1)	Absorption cross section in Group 1
⋮	⋮	⋮
JXS(6)+NXS(5)-1	SIGABS(NXS(5))	Absorption cross section in Group NXS(5)

Length: NXS(5)

Exists: If JXS(6) ≠ 0

Table F.39
STOP Block

Location	Parameter	Description
JXS(7)	SPOW(1)	Stopping power in Group 1
⋮	⋮	⋮
JXS(7)+NXS(5)-1	SPOW(NXS(5))	Stopping power in Group NXS(5)

Length: NXS(5)

Exists: If JXS(7) ≠ 0

Table F.40
MOM Block

Location	Parameter	Description
JXS(8)	MOMTR(1)	Momentum transfer in Group 1
.	.	.
.	.	.
.	.	.
JXS(8)+NXS(5)-1	MOMTR(NXS(5))	Momentum transfer in Group NXS(5)

Length: NXS(5)

Exists: If JXS(8) \neq 0

Table F.41
MTED Block

Location	Parameter	Description
JXS(9)	MT(1)	Identifier for edit reaction 1
.	.	.
.	.	.
.	.	.
JXS(9)+NXS(4)-1	MT(NXS(4))	Identifier for edit reaction NXS(4)

Length: NXS(4)

Exists: If JXS(4) \neq 0

APPENDIX F

Table F.42
XSED Block

Location	Parameter	Description
JXS(10)	XS(1,1)	Edit cross section for reaction 1, Group 1
.	.	.
JXS(10)+NXS(5)-1	XS(1,NXS(5))	Edit cross section for reaction 1, Group NXS(5)
.	.	.
JXS(10)+(NXS(4)-1)*(NXS(5))	XS(NXS(4),1)	Edit cross section for reaction NXS(4), Group 1
.	.	.
JXS(10)+NXS(4)*NXS(5)-1	XS(NXS(4),NXS(5))	Edit cross section for reaction NXS(4), Group NXS(5)

Length: NXS(4)*NXS(5)

Exists: If NXS(4) ≠ 0

Table F.43
IPT Block

Location	Parameter	Description
JXS(11)	IPT(1)	Identifier for secondary particle 1
.	.	.
JXS(11)+NXS(8)-1	IPT(NXS(8))	Identifier for secondary particle NXS(8)

Note: Present values of IPT are:

IPT=1 for neutrons,

IPT=2 for photons

Length: NXS(8)

Exists: If NXS(8) ≠ 0

Table F.44
ERG2L Block

Location	Parameter	Description
JXS(12)	LERG2(1)	Location of ERG2 Block* for secondary particle 1
.	.	.
.	.	.
JXS(12)+NXS(8)-1	LERG2(NXS(8))	Location of ERG2 Block* for secondary particle NXS(8)

Length: NXS(8)

Exists: If NXS(8) ≠ 0

***The ERG2 Block for secondary particle i is of the form:**

Location	Parameter	Description
LERG2(i)	NERG(i)	Number of energy groups for secondary particle i
LERG2(i)+1	ECENT2(1)	Center energy of Group 1 for secondary particle i
.	.	.
.	.	.
LERG2(i)+NERG(i)	ECENT2(NERG(i))	Center energy of Group NERG(i) for secondary particle i
LERG2(i)+NERG(i)+1	EWID2(1)	Width of Group 1 for secondary particle i
.	.	.
.	.	.
LERG2(i)+2*NERG(i)	EWID2(NERG(i))	Width of Group NERG(i) for secondary particle i

Note: Values of LERG2(i) are from ERG2L Block. Group energies are descending.

Length: 2*NERG(i)+1

Exists: If NXS(8) ≠ 0, then ERG2 Block is repeated NXS(8) times.

APPENDIX F

Table F.45
POL Block

<u>Location</u>	<u>Parameter</u>	<u>Description</u>
JXS(13)	LPO(1)	Location of P0 Block* for incident particle
.	.	.
.	.	.
JXS(13)+NXS(8)	LPO(NXS(8)+1)	Location of P0 Block* for secondary particle NXS(8)

Length: NXS(8)+1

Exists: If JXS(13) ≠ 0

***The P0 Block for particle i is of the form:**

<u>Location</u>	<u>Parameter</u>	<u>Description</u>
LPO(i)	SIG(1 → 1)	P0 cross section for scattering from incident particle Group 1 to exiting particle Group 1
.	.	.
.	.	.
LPO(i+L-1)	SIG(NXS(5)→K)	P0 cross section for scattering from incident particle group NXS(5) to exiting particle Group K

Note: See Table F.53 for a complete description of the ordering and length of the P0 block.

Exists: If JXS(13) ≠ 0, then the P0 Block is repeated NXS(8)+1 times.

Table F.46
SANG2 Block

Location	Parameter	Description
JXS(14)	ISANG2(1)	Angular distribution type for secondary particle 1
.	.	.
.	.	.
.	.	.
JXS(14)+NXS(8)-1	ISANG2(NXS(8))	Angular distribution type for secondary particle NXS(8)

Note: ISANG2(i)=0 for equi-probable cosine bins: ISANG2(i)=1 for discrete cosines.

Length: NXS(8)

Exists: If NXS(8) \neq 0

Table F.47
NLEG2 Block

Location	Parameter	Description
JXS(15)	NLEG2(1)	Number of angular distribution variables for secondary particle 1
.	.	.
.	.	.
.	.	.
JXS(15)+NXS(8)-1	NLEG2(NXS(8))	Number of angular distribution variables for secondary particle NXS(8)

Length: NXS(8)

Exists: If NXS(8) \neq 0

APPENDIX F

Table F.48
XPNL Block

Location	Parameter	Description
JXS(16)	LXPN(1)	Location of XPN Block* for incident particle
⋮	⋮	⋮
JXS(16)+NXS(8)	LXPN(NXS(8)+1)	Location of XPN Block* for secondary particle NXS(8)

Note: If LXPN(i)=0, then all possible scattering is isotropic and no XPN block exists.

Length: NXS(8)+1

Exists: If JXS(13) ≠ 0

***The XPN Block for particle i is of the form:**

Location	Parameter	Description
LXPN(i)	LPND(1→1)	Location of PND Block [†] for scattering from incident particle Group 1 to exiting particle Group 1
⋮	⋮	⋮
LXPN(i+L-1)	LPND(NXS(5)→K)	Location of PND Block [†] for scattering from incident particle Group NXS(5) to exiting particle Group K

[†]See Table F.49 for a description of the PND Block

Note: See Table F.53 for a complete description of the ordering and length of the XPN Block. Also see the notes to the PN Block in Table F.49 for more complete description of the meanings of the LPND parameters.

Exists: If JXS(13) ≠ 0, then the XPN Block is repeated NXS(8)+1 times.

Table F.49
PNL Block

Location	Parameter	Description
JXS(17)	LPN(1)	Location of PN Block* for incident particle
.	.	.
JXS(17)+NXS(8)	LPN(NXS(8)+1)	Location of PN Block* for secondary particle NXS(8)

Note: If LPN(i)=0, then all possible scattering is isotropic and no PN Block exists.

Length: NXS(8)+1

Exists: If JXS(13)≠ 0.

***The PN Block for particle i is of the form:**

Location	Parameter	Description
LPN(i)+LPND(1→1)-1	PND(1→1,I) I=1,NLEG(i)	Angular distribution data for scattering from incident particle Group 1 to exiting particle Group 1
.	.	.
LPN(i)+LPND(NXS(5) →K)-1	PND(NXS(5) →K,I), I=1, NLEG(i)	Angular distribution data for scattering from incident particle Group NXS(5) to exiting particle Group K

Note: Values of LPND are from the XPN Block (see Table F.48). Values of LPN(i) are from the PNL Block. If LPND>0, then data exists in the PN Block as described above. If LPND=0, scattering is isotropic in the laboratory system and no data exist in the PN Block. If LPND=-1, then scattering is impossible for the combination of incident and exiting groups; again no data exist in the PN Block. The appropriate value of NLEG is found in Table F.31 or Table F.47. The value of ISANG (from Table F.31 or Table F.46) determines what data are found in the PND array. If ISANG=0, then PND contains NLEG cosines, which are boundaries of NLEG-1 equally-probable cosine bins. If ISANG=1, then PND contains (NLEG-1)/2 cumulative probabilities followed by (NLEG+1)/2 discrete cosines. The cumulative probability corresponding to the final discrete cosine is defined to be 1.0.

Exists: If JXS(13)≠ 0, then the PN Block is repeated NXS(8)+1 times.

APPENDIX F

Table F.50
SIGMA Block*

Location	Parameter	Description
JXS(18)	SCAT _{gg} (1)	Location of the within-group scattering cross section for group 1 within the P0 Block
.	.	.
JXS(18)+NXS(5)-1	SCAT _{gg} (NXS(5))	Location of the within-group scattering cross section for group NXS(5) in the P0 Block

Table F.51
SIGSC Block*

Location	Parameter	Description
JXS(19)	SIGSC(1)	Total P0 scattering cross section for group 1 excluding scattering to secondary particle
.	.	.
JXS(19)+NXS(5)-1	SIGSC(NXS(5))	Total P0 scattering cross section for group NXS(5) excluding scattering to secondary particle

Table F.52
SIGSCS Block*

Location	Parameter	Description
JXS(20)	SIGSCS(1)	Total P0 scattering cross section to a secondary particle for group 1
.	.	.
JXS(20)+NXS(5)-1	SIGSCS(NXS(5))	Total P0 scattering cross section to a secondary particle for group NXS(5)

*The SIGMA, SIGSC and SIGSCS Blocks are calculated and used internally within MCNP and do not actually appear on the cross-section file.

Table F.53
Additional Information for P0 and XPN Blocks

1. Ordering

Entries in these blocks always start with data for scattering from the highest energy group of the incident particle to the highest energy group of the exiting particle. The last entry is always data for scattering from the lowest energy group of the exiting particle. The remaining entries are ordered according to the following prescription:

$$\begin{aligned} &X(1 \rightarrow J), J=I1(1), I2(1), \\ &X(2 \rightarrow J), J=I1(2), I2(2), \\ &\cdot \\ &\cdot \\ &\cdot \\ &X(NXS(5) \rightarrow J), J=I1(NXS(5)), I2(NXS(5)). \end{aligned}$$

If the incident and exiting particles are the same:

$$\begin{aligned} I1(K) &= \text{MAX}(1, K - NXs(6)), \\ I2(K) &= \text{MIN}(NXs(5), K + NXs(7)). \end{aligned}$$

If the incident and exiting particles are different:

$$\begin{aligned} I1(K) &= 1, \\ I2(K) &= \text{NERG}(i) \text{ for the appropriate secondary particle from} \\ &\quad \text{Table F.44.} \end{aligned}$$

2. Length

If the incident and exiting particles are the same:

$$L = NXs(5) * (1 + NXs(7) + NXs(6)) - \frac{(NXs(7) * (NXs(7) + 1)) + (NXs(6) * (NXs(6) + 1))}{2}$$

If the incident and exiting particles are different:

$$L = NXs(5) * \text{NERG}(i), \text{ where } \text{NERG}(i) \text{ is for the appropriate secondary particle from Table F.44.}$$

IX. Format for Electron Transport Tables

This Section not written yet.

APPENDIX F

Appendix G

NEUTRON CROSS-SECTION LIBRARIES

This appendix is divided into five sections. Section I lists some of the more frequently used ENDF/B reaction types that can be used with the FMn input card. Table G.1 in Section II lists the currently available $S(\alpha, \beta)$ data available for use with the MTm card. Section III provides a brief description of the available continuous-energy and discrete neutron data libraries. Table G.2 in Section III is a list of the continuous-energy and discrete neutron data libraries maintained by XTM. Section IV describes the multigroup data library MGXSNP, and Section V describes the dosimetry data libraries.

I. ENDF/B REACTION TYPES

The following partial list includes some of the more useful reactions for use with the FMn input card and with the cross-section plotter (see pages 3–75 and B–10.) The complete ENDF/B list can be found in the ENDF/B manual.¹ The MT column lists the ENDF/B reaction number. The FM column lists special MCNP reaction numbers that can be used with the FM card and cross-section plotter.

Generally only a subset of reactions are available for a particular nuclide. Some reaction data are eliminated by MCNP in cross-section processing if they are not required by the problem. Examples are photon production in a MODE N problem, or certain reaction cross sections not requested on an FM card. FM numbers should be used when available, rather than MT numbers. If an MT number is requested, the equivalent FM number will be displayed on the legend of cross-section plots.

Neutron Continuous-energy and Discrete:

<u>MT</u>	<u>FM</u>	<u>Microscopic Cross-Section Description</u>
1	-1	Total (see note 1 following)
2	-3	Elastic (see note 1 following)
16		(n,2n)
17		(n,3n)
18		Total fission (n,fx) if and only if MT=18 is used to specify fission in the original evaluation.
	-6	Total fission cross section. (equal to MT=18 if MT=18 exists; otherwise equal to the sum of MTs 19, 20, 21, and 38.)
19		(n,f)
20		(n,n'f)
21		(n,2nf)
22		(n,n' α)
28		(n,n'p)
32		(n,n'd)
33		(n,n't)
38		(n,3nf)

APPENDIX G

51		(n,n') to 1 st excited state
52		(n,n') to 2 nd excited state
.	.	.
90		(n,n') to 40 th excited state
91		(n,n') to continuum
101	-2	Absorption: sum of MT=102-117 (neutron disappearance; does not include fission)
102		(n, γ)
103		(n,p)
104		(n,d)
105		(n,t)
106		(n, ³ He)
107		(n, α)

In addition, the following special reactions are available for many nuclides:

202	-5	total photon production
203		total proton production (see note 3 following)
204		total deuterium production (see note 3 following)
205		total tritium production (see note 3 following)
206		total ³ He production (see note 3 following)
207		total alpha production (see note 3 following)
301	-4	average heating numbers (MeV/collision)
	-7	nubar (prompt or total)
	-8	fission Q (in print table 98, but not plots)

S(α, β):

<u>MT</u>	<u>FM</u>	<u>Microscopic Cross-Section Description</u>
1		Total cross section
2		Elastic scattering cross-section
4		Inelastic scattering cross-section

Neutron and Photon Multigroup:

<u>MT</u>	<u>FM</u>	<u>Microscopic Cross-Section Description</u>
1	-1	Total cross section
18	-2	Fission cross section
	-3	Nubar data
	-4	Fission chi data
101	-5	Absorption cross section
	-6	Stopping powers
	-7	Momentum transfers
n		Edit reaction n
202		Photon production
301		Heating number
318		Fission Q
401		Heating number times total cross section

Photons (see note 4 following):

<u>MT</u>	<u>FM</u>	<u>Microscopic Cross-Section Description</u>
501	-5	Total
504	-1	Incoherent (Compton + Form Factor)
502	-2	Coherent (Thomson + Form Factor)
522	-3	Photoelectric with fluorescence
516	-4	Pair production
301	-6	Heating number

Electrons (see note 5 following):

<u>MT</u>	<u>FM</u>	<u>Microscopic Cross-Section Description</u>
	1	de/dx electron collision stopping power
	2	de/dx electron radiative stopping power
	3	de/dx total electron stopping power
	4	electron range
	5	electron radiation yield
	6	relativistic β^2
	7	stopping power density correction
	8	ratio of rad/col stopping powers
	9	drange
	10	dyield
	11	rng array values
	12	qav array values
	13	ear array values

Notes:

- (1) At the time they are loaded, the total and elastic cross sections from the data library are thermally adjusted by MCNP to the temperature of the problem, if that temperature is different from the temperature at which the cross-section set was processed (see page 2-28.) If different cells have different temperatures, the cross sections first are adjusted to zero degrees and adjusted again to the appropriate cell temperatures during transport. The cross-section plot will *never* display the *transport* adjustment. Therefore, for plotting, reactions 1 and -1 are equivalent and reactions 2 and -3 are equivalent. But for the FM card, reactions -1 and -3 will use the zero degree data and reactions 1 and 2 will use the transport-adjusted data. For example, if a library evaluated at 300° is used in a problem with cells at 400° and 500°, the cross-section plotter and MT=-1 and MT=-3 options on the FM card will use 0° data. The MT=1 and MT=2 options on the FM card will use 400° and 500° data.
- (2) The nomenclature between MCNP and ENDF/B is sometimes inconsistent in that MCNP often refers to the number of the reaction type as R whereas ENDF/B uses MT. They are one and the same,

APPENDIX G

however. The problem arises since MCNP has an MT input card used for the $S(\alpha, \beta)$ thermal treatment.

- (3) The user looking for total production of p, d, t, ^3He , and ^4He should be warned that in some evaluations, such processes are represented using reactions with MT (or R) numbers other than the standard ones given in the above list. This is of particular importance with the so-called “pseudolevel” representation of certain reactions which take place in light isotopes. For example, the ENDF/B-V evaluation of carbon includes cross sections for the $(n, n'3\alpha)$ reaction in MT = 52 to 58. The user interested in particle production from light isotopes should check for the existence of pseudolevels and thus possible deviations from the above standard reaction list.
- (4) There are two photon transport libraries maintained by XTM, MCPLIB and MCPLIB02.²⁻³ The photon library MCPLIB provides data for transporting photons with energies from 1 keV to 100 MeV. The default photon library MCPLIB02 provides data up to 100 GeV. Photon transport data are not provided for $Z > 94$, and coupled neutron-photon problems cannot be run for these nuclides.
- (5) XTM maintains one electron transport library, EL. The MT numbers used for xs plotting are taken from Print Table 85 columns and are not from ENDF.

II. $S(\alpha, \beta)$ DATA FOR USE WITH THE MTm CARD

Table G.1
Thermal $S(\alpha, \beta)$ Cross-Section Libraries

<u>ZAID</u>	<u>Date of Processing</u>	<u>Material Description</u>	<u>Nuclides¹</u>	<u>Temp (°K)</u>
THERXS1 (Source: LANL)				
smeth.01t	04/10/88	Solid methane	1001	22
lmeth.01t	04/10/88	Liquid methane	1001	100
hpara.01t	03/03/89	Para H	1001	20
hortho.01t	03/03/89	Ortho H	1001	20
dpara.01t	05/30/89	Para D	1002	20
dortho.01t	05/30/89	Ortho D	1002	20
TMCCS1 (Source: ENDF)				
lwtr.01t	10/22/85	H in light water	1001	300
lwtr.02t	10/22/85	H in light water	1001	400
lwtr.03t	10/22/85	H in light water	1001	500
lwtr.04t	10/22/85	H in light water	1001	600

APPENDIX G

lwtr.05t	10/22/85	H in light water	1001	800
poly.01t	10/22/85	H in polyethylene	1001	300
h/zr.01t	10/22/85	H in Zr-hydride	1001	300
h/zr.02t	10/22/85	H in Zr-hydride	1001	400
h/zr.04t	10/22/85	H in Zr-hydride	1001	600
h/zr.05t	10/22/85	H in Zr-hydride	1001	800
h/zr.06t	10/22/85	H in Zr-hydride	1001	1200
benz.01t	09/08/86	Benzene	1001, 6000, 6012	300
benz.02t	09/08/86	Benzene	1001, 6000, 6012	400
benz.03t	09/08/86	Benzene	1001, 6000, 6012	500
benz.04t	09/08/86	Benzene	1001, 6000, 6012	600
benz.05t	09/08/86	Benzene	1001, 6000, 6012	800
hwtr.01t	10/22/85	D in heavy water	1002	300
hwtr.02t	10/22/85	D in heavy water	1002	400
hwtr.03t	10/22/85	D in heavy water	1002	500
hwtr.04t	10/22/85	D in heavy water	1002	600
hwtr.05t	10/22/85	D in heavy water	1002	800
be.01t	10/24/85	Be metal	4009	300
be.04t	10/24/85	Be metal	4009	600
be.05t	10/24/85	Be metal	4009	800
be.06t	10/24/85	Be metal	4009	1200
beo.01t	09/08/86	Be oxide	4009, 8016	300
beo.04t	09/08/86	Be oxide	4009, 8016	600
beo.05t	09/08/86	Be oxide	4009, 8016	800
beo.06t	09/08/86	Be oxide	4009, 8016	1200
grph.01t	09/08/86	Graphite	6000, 6012	300
grph.04t	09/08/86	Graphite	6000, 6012	600
grph.05t	09/08/86	Graphite	6000, 6012	800
grph.06t	09/08/86	Graphite	6000, 6012	1200
grph.07t	09/08/86	Graphite	6000, 6012	1600
grph.08t	09/08/86	Graphite	6000, 6012	2000
zr/h.01t	09/08/86	Zr in Zr-hydride	40000	300
zr/h.02t	09/08/86	Zr in Zr-hydride	40000	400
zr/h.04t	09/08/86	Zr in Zr-hydride	40000	600
zr/h.05t	09/08/86	Zr in Zr-hydride	40000	800
zr/h.06t	09/08/86	Zr in Zr-hydride	40000	1200

*Nuclides for which the $S(\alpha, \beta)$ data are valid. For example, lwtr.01t provides scattering data only for ^1H ; ^{16}O would still be represented by the default free-gas treatment.

APPENDIX G

III. MCNP NEUTRON CROSS-SECTION LIBRARIES

Table G.2 lists all the continuous-energy and discrete neutron data libraries maintained by XTM. The entries in each of the columns of Table G.2 are described as follows:

ZAID – The nuclide identification number with the form $ZZZAAA.nnX$ where ZZZ is the atomic number,

AAA is the mass number (000 for naturally occurring elements),

nn is the neutron cross-section identifier

$X=C$ for continuous-energy neutron tables

$X=D$ for discrete-reaction tables

ATOMIC WEIGHT RATIO – The atomic weight ratio (AWR) is the ratio of the atomic mass of the nuclide to a neutron. This is the AWR that is contained in the original evaluation and that was used in the NJOY processing of the evaluation.

LIBRARY – Name of the library that contains the data file for that **ZAID**. The number in brackets following a file name refers to one of the special notes at the end of Table G.2.

SOURCE – Indicates the originating evaluation for that data file.

ENDF/B-V.# or ENDF/B-VI.# (such as B-V.0 and B-VI.1) are the Evaluated Nuclear Data Files, a US effort coordinated by the National Nuclear Data Center at Brookhaven National Laboratory. The evaluations are updated periodically by evaluators from all over the country, and the release number of the evaluation is given. This is not necessarily the same as the ENDF revision number for that evaluation. For example, Pu-242 is noted as ENDF/B-VI.2 as it is from release 2 of ENDF/B-VI, but it is revision 1 of that evaluation.

LLNL – evaluated nuclear data libraries compiled by the Nuclear Data Group at Lawrence Livermore National Laboratory. The number in the library name indicates the year the library was produced or received.

T-2 – evaluations from the Nuclear Theory and Applications group T-2 at Los Alamos National Laboratory.

—:T-2 or —:XTM – indicates the original evaluation has been modified by the Los Alamos National Laboratory groups T-2 or XTM.

DATE of EVALUATION – Denotes the year that the evaluation was completed or accepted. In cases where this information is not known, the date that data library was produced is given. If minor corrections were made to an evaluation, the original evaluation date was kept. The notation “< 1985” means “before” 1985.

TEMP – Indicates the temperature ($^{\circ}\text{K}$) at which the data were processed. The temperature enters into the processing of the evaluation into a data file only through the Doppler broadening of cross sections. The user must be aware that without the proper use of the TMP card, MCNP will attempt

to correct the data libraries to the default 300°K by modifying the elastic and total cross sections only.

Doppler broadening refers to a change in cross section resulting from thermal motion of nuclei in a target material. Doppler broadening is done on all cross sections for incident neutrons (nonrelativistic energies) on a target at some temperature (TEMP) in which the free-atom approximation is valid. In general an increase in the temperature of the material containing neutron-absorbing nuclei in a homogeneous system results in Doppler broadening of resonances and an increase in resonance absorption. Furthermore, a constant cross section at zero°K goes to $1/v$ behavior as the temperature increases. You should not only use the best evaluations but also use evaluations that are at temperatures approximating the temperatures in your application.

- LENGTH – The total length of a particular cross-section file in words. It is understood that the actual storage requirement in an MCNP problem will often be less because certain data that are not needed for a problem may be expunged.
- NUMBER of – The number of energy points on the grid used for the neutron
ENERGIES cross sections for that data file. In general, a finer energy grid (or greater number of points) indicates a more accurate representation of the cross sections, particularly through the resonance region.
- E_{max} – The maximum incident neutron energy for that data file. For all incident neutron energies greater than E_{max} , MCNP assumes the last cross section value given.
- GPD – “yes” means that photon–production data are included; “no” means that such data are not included.
- $\bar{\nu}$ – for fissionable material, $\bar{\nu}$ indicates the type of fission nu data available. “**p**” means that only prompt nu data are given; “**t**” means that only total nu data are given; “**b**” means that prompt and total nu are given.

Table G.2 contains no indication of a “recommended” library for each isotope. Because of the wide variety of applications, no one set is “best.” The default cross–section set for each isotope is determined by the XSDIR file being used (see page 2–20.)

Finally, you may introduce a cross-section library of your own by using the XS input card.

APPENDIX G

Table G.2

Continuous-Energy and Discrete Neutron Data Libraries Maintained by XTM

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 1 ***** Hydrogen *****										
** H-1 **										
1001.35c	0.9992	endl85	LLNL	<1985	0	3,506	330	20	yes	no
1001.42c	0.9992	endl92	LLNL	<1992	300	1,968	121	30	yes	no
1001.50c	0.9992	rmccs	B-V.0	1977	294	2,766	244	20	yes	no
1001.50d	0.9992	drmccs	B-V.0	1977	294	3,175	263	20	yes	no
1001.53c	0.9992	endf5mt[1]	B-V.0	1977	587	4,001	394	20	yes	no
1001.60c	0.9992	endf60	B-VI.1	1989	294	3,484	357	100	yes	no
** H-2 **										
1002.35c	1.9968	endl85	LLNL	<1985	0	2,507	135	20	yes	no
1002.50c	1.9968	endf5p	B-V.0	1967	294	3,987	214	20	yes	no
1002.50d	1.9968	dre5	B-V.0	1967	294	4,686	263	20	yes	no
1002.55c	1.9968	rmccs	T-2	1982	294	5,981	285	20	yes	no
1002.55d	1.9968	drmccs	T-2	1982	294	5,343	263	20	yes	no
1002.60c	1.9968	endf60	B-VI.0	1967[2]	294	2,704	178	20	yes	no
** H-3 **										
1003.35c	2.9901	endl85	LLNL	<1985	0	1,269	76	20	no	no
1003.42c	2.9901	endl92	LLNL	<1992	300	2,308	52	30	no	no
1003.50c	2.9901	rmccs	B-V.0	1965	294	2,428	184	20	no	no
1003.50d	2.9901	drmccs	B-V.0	1965	294	2,807	263	20	no	no
1003.60c	2.9901	endf60	B-VI.0	1965	294	3,338	180	20	no	no
Z = 2 ***** Helium *****										
** He-3 **										
2003.35c	2.9901	endl85	LLNL	<1985	0	2,481	182	20	yes	no
2003.42c	2.9901	endl92	LLNL	<1992	300	1,477	151	30	yes	no
2003.50c	2.9901	rmccs	B-V.0	1971	294	2,320	229	20	no	no
2003.50d	2.9901	drmccs	B-V.0	1971	294	2,612	263	20	no	no
2003.60c	2.9890	endf60	B-VI.1	1990	294	2,834	342	20	no	no
** He-4 **										
2004.35c	3.9682	endl85	LLNL	<1985	0	1,442	78	20	no	no
2004.42c	3.9682	endl92	LLNL	<1992	300	1,332	49	30	no	no
2004.50c	4.0015	rmccs	B-V.0	1973	294	3,061	345	20	no	no
2004.50d	4.0015	drmccs	B-V.0	1973	294	2,651	263	20	no	no
2004.60c	4.0015	endf60	B-VI.0	1973	294	2,971	327	20	no	no
Z = 3 ***** Lithium *****										
** Li-6 **										
3006.42c	5.9635	endl92	LLNL	<1992	300	7,805	294	30	yes	no
3006.50c	5.9634	rmccs	B-V.0	1977	294	9,932	373	20	yes	no
3006.50d	5.9634	drmccs	B-V.0	1977	294	8,716	263	20	yes	no
3006.60c	5.9634	endf60	B-VI.1	1989	294	12,385	498	20	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
** Li-7 **										
3007.42c	6.9557	endl92	LLNL	<1992	300	5,834	141	30	yes	no
3007.50c	6.9557	endf5p	B-V.0	1972	294	4,864	343	20	yes	no
3007.50d	6.9557	dre5	B-V.0	1972	294	4,935	263	20	yes	no
3007.55c	6.9557	rmccs	B-V.2	1979	294	13,171	328	20	yes	no
3007.55d	6.9557	drmccs	B-V.2	1979	294	12,647	263	20	yes	no
3007.60c	6.9557	endf60	B-VI.0	1988	294	14,567	387	20	yes	no
Z = 4 ***** Beryllium *****										
** Be-7 **										
4007.35c	6.9567	endl85	LLNL	<1985	0	1,834	180	20	no	no
4007.42c	6.9567	endl92	LLNL	<1992	300	1,544	127	30	yes	no
** Be-9 **										
4009.21c	8.9348	100xs[3]	T-2:XTM	1989	300	28,964	316	100	yes	no
4009.50c	8.9348	rmccs	B-V.0	1976	294	8,886	329	20	yes	no
4009.50d	8.9348	drmccs	B-V.0	1976	294	8,756	263	20	yes	no
4009.60c	8.9348	endf60	B-VI.0	1986	294	64,410	276	20	yes	no
Z = 5 ***** Boron *****										
** B-10 **										
5010.42c	9.9269	endl92	LLNL	<1992	300	4,733	175	30	yes	no
5010.50c	9.9269	rmccs	B-V.0	1977	294	20,200	514	20	yes	no
5010.50d	9.9269	drmccs	B-V.0	1977	294	12,322	263	20	yes	no
5010.53c	9.9269	endf5mt[1]	B-V.0	1977	587	23,676	700	20	yes	no
5010.60c	9.9269	endf60	B-VI.1	1989	294	27,957	673	20	yes	no
** B-11 **										
5011.35c	10.9147	endl85	LLNL	<1985	0	4,289	247	20	yes	no
5011.42c	10.9147	endl92	LLNL	<1992	300	4,285	244	30	yes	no
5011.50c	10.9150	endf5p	B-V.0	1974	294	4,344	487	20	no	no
5011.50d	10.9150	dre5	B-V.0	1974	294	2,812	263	20	no	no
5011.55c	10.9150	rmccsa	B-V.0:T-2	1971[4]	294	12,254	860	20	yes	no
5011.55d	10.9150	drmccs	B-V.0:T-2	1971[4]	294	7,106	263	20	yes	no
5011.56c	10.9147	newxs	T-2	1986	294	56,929	1,762	20	yes	no
5011.56d	10.9147	newxsd	T-2	1986	294	17,348	263	20	yes	no
5011.60c	10.9147	endf60	B-VI.0	1989	294	108,351	2,969	20	yes	no
Z = 6 ***** Carbon *****										
** C-nat **										
6000.50c	11.8969	rmccs	B-V.0	1977	294	23,326	875	20	yes	no
6000.50d	11.8969	drmccs	B-V.0	1977	294	16,844	263	20	yes	no
6000.60c	11.8980	endf60	B-VI.1	1989	294	22,422	978	32	yes	no
** C-12 **										
6012.21c	11.8969	100xs[3]	T-2:XTM	1989	300	28,809	919	100	yes	no
6012.35c	11.8969	endl85	LLNL	<1985	0	5,154	225	20	yes	no
6012.42c	11.8969	endl92	LLNL	<1992	300	6,229	191	30	yes	no
6012.50c	11.8969	rmccs[5]	B-V.0	1977	294	23,326	875	20	yes	no
6012.50d	11.8969	drmccs[5]	B-V.0	1977	294	16,844	263	20	yes	no
** C-13 **										
6013.35c	12.8916	endl85	LLNL	<1985	0	4,886	395	20	yes	no
6013.42c	12.8916	endl92	LLNL	<1992	300	5,993	429	30	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 7 ***** Nitrogen *****										
** N-14 **										
7014.42c	13.8828	endl92	LLNL	<1992	300	20,528	770	30	yes	no
7014.50c	13.8830	rmccs	B-V.0	1973	294	45,457	1,196	20	yes	no
7014.50d	13.8830	drmccs	B-V.0	1973	294	26,793	263	20	yes	no
7014.60c	13.8828	endf60	T-2	1992	294	60,397	1,379	20	yes	no
** N-15 **										
7015.42c	14.8713	endl92	LLNL	<1992	300	22,590	352	30	yes	no
7015.55c	14.8710	rmccsa	T-2	1983	294	20,920	744	20	yes	no
7015.55d	14.8710	drmccs	T-2	1983	294	15,273	263	20	yes	no
7015.60c	14.8710	endf60	B-VI.0	1993	294	24,410	653	20	yes	no
Z = 8 ***** Oxygen *****										
** O-16 **										
8016.21c	15.8575	100xs[3]	T-2:XTM	1989	300	45,016	1,427	100	yes	no
8016.35c	15.8575	endl85	LLNL	<1985	0	10,357	465	20	yes	no
8016.42c	15.8575	endl92	LLNL	<1992	300	9,551	337	30	yes	no
8016.50c	15.8580	rmccs	B-V.0	1972	294	37,942	1,391	20	yes	no
8016.50d	15.8580	drmccs	B-V.0	1972	294	20,455	263	20	yes	no
8016.53c	15.8580	endf5mt[1]	B-V.0	1972	587	37,989	1,398	20	yes	no
8016.54c	15.8580	endf5mt[1]	B-V.0	1972	881	38,017	1,402	20	yes	no
8016.60c	15.8532	endf60	B-VI.0	1990	294	58,253	1,609	20	yes	no
** O-17 **										
8017.60c	16.8531	endf60	B-VI.0	1978	294	4,200	335	20	no	no
Z = 9 ***** Fluorine *****										
** F-19 **										
9019.35c	18.8352	endl85	LLNL	<1985	0	31,547	1,452	20	yes	no
9019.42c	18.8352	endl92	LLNL	<1992	300	37,814	1,118	30	yes	no
9019.50c	18.8350	endf5p	B-V.0	1976	294	44,130	1,569	20	yes	no
9019.50d	18.8350	dre5	B-V.0	1976	294	23,156	263	20	yes	no
9019.51c	18.8350	rmccs	B-V.0	1976	294	41,442	1,541	20	yes	no
9019.51d	18.8350	drmccs	B-V.0	1976	294	23,156	263	20	yes	no
9019.60c	18.8350	endf60	B-VI.0	1990	300	93,826	1,433	20	yes	no
Z = 10 ***** Neon *****										
** Ne-20 **										
10020.42c	19.8207	endl92	LLNL	<1992	300	14,286	1,011	30	yes	no
Z = 11 ***** Sodium *****										
** Na-23 **										
11023.35c	22.7923	endl85	LLNL	<1985	0	22,777	1,559	20	yes	no
11023.42c	22.7923	endl92	LLNL	<1992	300	19,309	1,163	30	yes	no
11023.50c	22.7920	endf5p	B-V.0	1977	294	52,252	2,703	20	yes	no
11023.50d	22.7920	dre5	B-V.0	1977	294	41,665	263	20	yes	no
11023.51c	22.7920	rmccs	B-V.0	1977	294	48,863	2,228	20	yes	no
11023.51d	22.7920	drmccs	B-V.0	1977	294	41,665	263	20	yes	no
11023.60c	22.7920	endf60	B-VI.1	1977	294	50,294	2,543	20	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 12	*****		Magnesium	*****						
** Mg-nat **										
12000.35c	24.0962	endl85	LLNL	<1985	0	9,686	675	20	yes	no
12000.42c	24.0962	endl92	LLNL	<1992	300	9,288	468	30	yes	no
12000.50c	24.0963	endf5u	B-V.0	1978	294	56,334	2,430	20	yes	no
12000.50d	24.0963	dre5	B-V.0	1978	294	14,070	263	20	yes	no
12000.51c	24.0963	rmccs	B-V.0	1978	294	48,917	1,928	20	yes	no
12000.51d	24.0963	drmccs	B-V.0	1978	294	14,070	263	20	yes	no
12000.60c	24.0963	endf60	B-VI.0	1978	294	55,776	2,525	20	yes	no
Z = 13	*****		Aluminum	*****						
** Al-27 **										
13027.21c	26.7498	100xs[3]	T-2:XTM	1989	300	35,022	1,473	100	yes	no
13027.35c	26.7498	endl85	LLNL	<1985	0	36,895	2,038	20	yes	no
13027.42c	26.7498	endl92	LLNL	<1992	300	32,388	1,645	30	yes	no
13027.50c	26.7500	rmccs	B-V.0	1973	294	54,162	2,028	20	yes	no
13027.50d	26.7500	drmccs	B-V.0	1973	294	41,947	263	20	yes	no
13027.60c	26.7500	endf60	B-VI.0	1973	294	55,427	2,241	20	yes	no
Z = 14	*****		Silicon	*****						
** Si-nat **										
14000.21c	27.8440	100xs[3]	T-2:XTM	1989	300	76,399	2,883	100	yes	no
14000.35c	27.8442	endl85	LLNL	<1985	0	19,016	1,012	20	yes	no
14000.42c	27.8442	endl92	LLNL	<1992	300	16,696	855	30	yes	no
14000.50c	27.8440	endf5p	B-V.0	1976	294	98,609	2,440	20	yes	no
14000.50d	27.8440	dre5	B-V.0	1976	294	69,498	263	20	yes	no
14000.51c	27.8440	rmccs	B-V.0	1976	294	88,129	1,887	20	yes	no
14000.51d	27.8440	drmccs	B-V.0	1976	294	69,498	263	20	yes	no
14000.60c	27.8440	endf60	B-VI.0	1976	294	104,198	2,824	20	yes	no
Z = 15	*****		Phosphorus	*****						
** P-31 **										
15031.35c	30.7077	endl85	LLNL	<1985	0	5,875	303	20	yes	no
15031.42c	30.7077	endl92	LLNL	<1992	300	6,805	224	30	yes	no
15031.50c	30.7080	endf5u	B-V.0	1977	294	5,733	326	20	yes	no
15031.50d	30.7080	dre5	B-V.0	1977	294	5,761	263	20	yes	no
15031.51c	30.7080	rmccs	B-V.0	1977	294	5,732	326	20	yes	no
15031.51d	30.7080	drmccs	B-V.0	1977	294	5,761	263	20	yes	no
15031.60c	30.7080	endf60	B-VI.0	1977	294	6,715	297	20	yes	no
Z = 16	*****		Sulfur	*****						
** S-nat **										
16000.60c	31.7882	endf60	B-VI.0	1979	294	108,683	8,382	20	yes	no
** S-32 **										
16032.35c	31.6974	endl85	LLNL	<1985	0	7,054	357	20	yes	no
16032.42c	31.6974	endl92	LLNL	<1992	300	6,623	307	30	yes	no
16032.50c	31.6970	endf5u	B-V.0	1977	294	6,789	363	20	yes	no
16032.50d	31.6970	dre5	B-V.0	1977	294	6,302	263	20	yes	no
16032.51c	31.6970	rmccs	B-V.0	1977	294	6,780	362	20	yes	no
16032.51d	31.6970	drmccs	B-V.0	1977	294	6,302	263	20	yes	no
16032.60c	31.6970	endf60	B-VI.0	1977	294	7,025	377	20	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 17	*****		Chlorine	*****						
** Cl-nat **										
17000.35c	35.1484	endl85	LLNL	<1985	0	12,903	1,014	20	yes	no
17000.42c	35.1484	endl92	LLNL	<1992	300	12,012	807	30	yes	no
17000.50c	35.1480	endf5p	B-V.0	1967	294	23,313	1,499	20	yes	no
17000.50d	35.1480	dre5	B-V.0	1967	294	18,209	263	20	yes	no
17000.51c	35.1480	rmccs	B-V.0	1967	294	21,084	1,375	20	yes	no
17000.51d	35.1480	drmccs	B-V.0	1967	294	18,209	263	20	yes	no
17000.60c	35.1480	endf60	B-VI.0	1967	294	24,090	1,816	20	yes	no
Z = 18	*****		Argon	*****						
** Ar-nat **										
18000.35c	39.6048	rmccsa	LLNL	<1985	0	5,585	259	20	yes	no
18000.35d	39.6048	drmccs	LLNL	<1985	0	14,703	263	20	yes	no
18000.42c	39.6048	endl92	LLNL	<1992	300	5,580	152	30	yes	no
18000.59c	39.6048	misc5xs[6,7]	T-2	1982	294	3,473	252	20	yes	no
Z = 19	*****		Potassium	*****						
** K-nat **										
19000.35c	38.7624	endl85	LLNL	<1985	0	11,130	714	20	yes	no
19000.42c	38.7624	endl92	LLNL	<1992	300	11,060	544	30	yes	no
19000.50c	38.7660	endf5u	B-V.0	1974	294	22,051	1,243	20	yes	no
19000.50d	38.7660	dre5	B-V.0	1974	294	23,137	263	20	yes	no
19000.51c	38.7660	rmccs	B-V.0	1974	294	18,798	1,046	20	yes	no
19000.51d	38.7660	drmccs	B-V.0	1974	294	23,137	263	20	yes	no
19000.60c	38.7660	endf60	B-VI.0	1974	294	24,482	1,767	20	yes	no
Z = 20	*****		Calcium	*****						
** Ca-nat **										
20000.35c	39.7357	endl85	LLNL	<1985	0	12,933	974	20	yes	no
20000.42c	39.7357	endl92	LLNL	<1992	300	13,946	1,002	30	yes	no
20000.50c	39.7360	endf5u	B-V.0	1976	294	62,624	2,394	20	yes	no
20000.50d	39.7360	dre5	B-V.0	1976	294	29,033	263	20	yes	no
20000.51c	39.7360	rmccs	B-V.0	1976	294	53,372	1,796	20	yes	no
20000.51d	39.7360	drmccs	B-V.0	1976	294	29,033	263	20	yes	no
20000.60c	39.7360	endf60	B-VI.0	1980	294	76,468	2,704	20	yes	no
** Ca-40 **										
20040.21c	39.6193	100xs[3]	T-2:XTM	1989	300	53,013	2,718	100	yes	no
Z = 21	*****		Scandium	*****						
** Sc-45 **										
21045.60c	44.5679	endf60	B-VI.2	1992	294	105,627	10,639	20	yes	no
Z = 22	*****		Titanium	*****						
** Ti-nat **										
22000.35c	47.4885	endl85	LLNL	<1985	0	13,421	1,337	20	yes	no
22000.42c	47.4885	endl92	LLNL	<1992	300	8,979	608	30	yes	no
22000.50c	47.4676	endf5u	B-V.0	1977	294	54,801	4,434	20	yes	no
22000.50d	47.4676	dre5	B-V.0	1977	294	10,453	263	20	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
22000.51c	47.4676	rmccs	B-V.0	1977	294	31,832	1,934	20	yes	no
22000.51d	47.4676	drmccs	B-V.0	1977	294	10,453	263	20	yes	no
22000.60c	47.4676	endf60	B-VI.0	1977	294	76,454	7,761	20	yes	no
Z = 23 ***** Vanadium *****										
** V-nat **										
23000.50c	50.5040	endf5u	B-V.0	1977	294	38,312	2,265	20	yes	no
23000.50d	50.5040	dre5	B-V.0	1977	294	8,868	263	20	yes	no
23000.51c	50.5040	rmccs	B-V.0	1977	294	34,110	1,899	20	yes	no
23000.51d	50.5040	drmccs	B-V.0	1977	294	8,868	263	20	yes	no
23000.60c	50.5040	endf60	B-VI.0	1988	294	167,334	8,957	20	yes	no
** V-51 **										
23051.42c	50.5063	endl92	LLNL	<1992	300	94,082	5,988	30	yes	no
Z = 24 ***** Chromium *****										
** Cr-nat **										
24000.35c	51.5493	endl85	LLNL	<1985	0	9,218	358	20	yes	no
24000.42c	51.5493	endl92	LLNL	<1992	300	12,573	377	30	yes	no
24000.50c	51.5490	rmccs	B-V.0	1977	294	134,454	11,050	20	yes	no
24000.50d	51.5490	drmccs	B-V.0	1977	294	30,714	263	20	yes	no
** Cr-50 **										
24050.60c	49.5170	endf60	B-VI.1	1989	294	119,178	11,918	20	yes	no
** Cr-52 **										
24052.60c	51.4940	endf60	B-VI.1	1989	294	117,680	10,679	20	yes	no
** Cr-53 **										
24053.60c	52.4860	endf60	B-VI.1	1989	294	114,982	10,073	20	yes	no
** Cr-54 **										
24054.60c	53.4760	endf60	B-VI.1	1989	294	98,510	9,699	20	yes	no
Z = 25 ***** Manganese *****										
** Mn-55 **										
25055.35c	54.4661	endl85	LLNL	<1985	0	7,493	446	20	yes	no
25055.42c	54.4661	endl92	LLNL	<1992	300	10,262	460	30	yes	no
25055.50c	54.4661	endf5u	B-V.0	1977	294	105,093	12,525	20	yes	no
25055.50d	54.4661	dre5	B-V.0	1977	294	9,681	263	20	yes	no
25055.51c	54.4661	rmccs	B-V.0	1977	294	25,727	1,578	20	yes	no
25055.51d	54.4661	drmccs	B-V.0	1977	294	9,681	263	20	yes	no
25055.60c	54.4661	endf60	B-VI.0	1988	294	184,269	8,207	20	yes	no
Z = 26 ***** Iron *****										
** Fe-nat **										
26000.21c	55.3650	100xs[3]	T-2:XTM	1989	300	149,855	15,598	100	yes	no
26000.35c	55.3672	endl85	LLNL	<1985	0	30,983	2,772	20	yes	no
26000.42c	55.3672	endl92	LLNL	<1992	300	38,653	3,385	30	yes	no
26000.50c	55.3650	endf5p	B-V.0	1978	294	115,447	10,957	20	yes	no
26000.50d	55.3650	dre5	B-V.0	1978	294	33,896	263	20	yes	no
26000.55c	55.3650	rmccs	T-2	1986	294	178,392	6,899	20	yes	no
26000.55d	55.3650	drmccs	T-2	1986	294	72,632	263	20	yes	no
** Fe-54 **										
26054.60c	53.4760	endf60	B-VI.1	1989	294	121,631	10,701	20	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
** Fe-56 **										
26056.60c	55.4540	endf60	B-VI.1	1989	294	174,517	11,618	20	yes	no
** Fe-57 **										
26057.60c	56.4460	endf60	B-VI.1	1989	294	133,995	7,606	20	yes	no
** Fe-58 **										
26058.60c	57.4360	endf60	B-VI.1	1989	294	93,450	6,788	20	yes	no
Z = 27	*****		Cobalt	*****						
** Co-59 **										
27059.35c	58.4269	endl85	LLNL	<1985	0	38,958	4,177	20	yes	no
27059.42c	58.4269	endl92	LLNL	<1992	300	119,231	13,098	30	yes	no
27059.50c	58.4269	endf5u	B-V.0	1977	294	117,075	14,502	20	yes	no
27059.50d	58.4269	dre5	B-V.0	1977	294	11,769	263	20	yes	no
27059.51c	58.4269	rmccs	B-V.0	1977	294	28,355	1,928	20	yes	no
27059.51d	58.4269	drmccs	B-V.0	1977	294	11,769	263	20	yes	no
27059.60c	58.4269	endf60	B-VI.2	1992	294	186,618	11,838	20	yes	no
Z = 28	*****		Nickel	*****						
** Ni-nat **										
28000.42c	58.1957	endl92	LLNL	<1992	300	44,833	3,116	30	yes	no
28000.50c	58.1826	rmccs	B-V.0	1977	294	139,913	8,927	20	yes	no
28000.50d	58.1826	drmccs	B-V.0	1977	294	21,998	263	20	yes	no
** Ni-58 **										
28058.35c	57.4376	endl85	LLNL	<1985	0	42,744	4,806	20	yes	no
28058.42c	57.4376	endl92	LLNL	<1992	300	38,930	4,914	30	yes	no
28058.60c	57.4380	endf60	B-VI.1	1989	294	172,069	16,445	20	yes	no
** Ni-60 **										
28060.60c	59.4160	endf60	B-VI.1	1991	294	110,885	10,055	20	yes	no
** Ni-61 **										
28061.60c	60.4080	endf60	B-VI.1	1989	294	93,801	5,882	20	yes	no
** Ni-62 **										
28062.60c	61.3960	endf60	B-VI.1	1989	294	82,085	7,230	20	yes	no
** Ni-64 **										
28064.60c	63.3790	endf60	B-VI.1	1989	294	66,656	6,144	20	yes	no
Z = 29	*****		Copper	*****						
** Cu-nat **										
29000.35c	63.0001	endl85	LLNL	<1985	0	7,039	293	20	yes	no
29000.50c	63.5460	rmccs	B-V.0	1978	294	51,850	3,435	20	yes	no
29000.50d	63.5460	drmccs	B-V.0	1978	294	12,777	263	20	yes	no
** Cu-63 **										
29063.60c	62.3890	endf60	B-VI.2	1989	294	119,097	11,309	20	yes	no
** Cu-65 **										
29065.60c	64.3700	endf60	B-VI.2	1989	294	118,385	11,801	20	yes	no
Z = 30	*****		Zinc	*****						
** Zn-nat **										
30000.40c	64.8183	endl92	LLNL	<1992	300	271,897	33,027	30	yes	no
30000.42c	64.8183	endl92	LLNL:XTM	<1992	300	271,897	33,027	30	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 31	*****	Gallium	*****							
** Ga-nat **										
31000.35c	69.1211	endl85	LLNL	<1985	0	7,509	469	20	yes	no
31000.42c	69.1211	endl92	LLNL	<1992	300	6,311	219	30	yes	no
31000.50c	69.1211	rmccs	B-V.0	1980	294	7,928	511	20	yes	no
31000.50d	69.1211	drmccs	B-V.0	1980	294	6,211	263	20	yes	no
31000.60c	69.1211	endf60	B-VI.0	1980	294	9,228	566	20	yes	no
Z = 33	*****	Arsenic	*****							
** As-74 **										
33074.35c	73.2889	endl85	LLNL	<1985	0	50,881	6,424	20	yes	no
33074.42c	73.2889	endl92	LLNL	<1992	300	55,752	6,851	30	yes	no
** As-75 **										
33075.35c	74.2780	rmccsa	B-V.0	1974	0	50,931	6,421	20	yes	no
33075.35d	74.2780	drmccs	B-V.0	1974	0	8,480	263	20	yes	no
33075.42c	74.2780	endl92	LLNL	<1992	300	56,915	6,840	30	yes	no
Z = 35	*****	Bromine	*****							
** Br-79 **										
35079.55c	78.2404	misc5xs[6,8]	T-2	1982	294	10,431	1,589	20	no	no
** Br-81 **										
35081.55c	80.2212	misc5xs[6,8]	T-2	1982	294	5,342	831	20	no	no
Z = 36	*****	Krypton	*****							
** Kr-78 **										
36078.50c	77.2510	rmccsa	B-V.0	1978	294	9,057	939	20	no	no
36078.50d	77.2510	drmccs	B-V.0	1978	294	4,358	263	20	no	no
** Kr-80 **										
36080.50c	79.2298	rmccsa	B-V.0	1978	294	10,165	1,108	20	no	no
36080.50d	79.2298	drmccs	B-V.0	1978	294	4,276	263	20	no	no
** Kr-82 **										
36082.50c	81.2098	rmccsa	B-V.0	1978	294	7,220	586	20	no	no
36082.50d	81.2098	drmccs	B-V.0	1978	294	4,266	263	20	no	no
36082.59c	81.2098	misc5xs[6,7]	T-2	1982	294	7,010	499	20	yes	no
** Kr-83 **										
36083.50c	82.2018	rmccsa	B-V.0	1978	294	8,078	811	20	no	no
36083.50d	82.2018	drmccs	B-V.0	1978	294	4,359	263	20	no	no
36083.59c	82.2018	misc5xs[6,7]	T-2	1982	294	8,069	704	20	yes	no
** Kr-84 **										
36084.50c	83.1906	rmccsa	B-V.0	1978	294	9,364	944	20	no	no
36084.50d	83.1906	drmccs	B-V.0	1978	294	4,463	263	20	no	no
36084.59c	83.1906	misc5xs[6,7]	T-2	1982	294	10,370	954	20	yes	no
** Kr-86 **										
36086.50c	85.1726	rmccsa	B-V.0	1975	294	10,416	741	20	no	no
36086.50d	85.1726	drmccs	B-V.0	1975	294	4,301	263	20	no	no
36086.59c	85.1726	misc5xs[6,7]	T-2	1982	294	8,740	551	20	yes	no
Z = 37	*****	Rubidium	*****							
** Rb-85 **										
37085.55c	84.1824	misc5xs[6,8]	T-2	1982	294	27,304	4,507	20	no	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
** Rb-87 **										
37087.55c	86.1626	misc5xs[6,8]	T-2	1982	294	8,409	1,373	20	no	no
Z =	39	*****	Yttrium	*****						
** Y-88 **										
39088.35c	87.1543	endl85	LLNL	<1985	0	11,299	272	20	yes	no
39088.42c	87.1543	endl92	LLNL	<1992	300	11,682	181	30	yes	no
** Y-89 **										
39089.35c	88.1421	misc5xs[6]	LLNL		0	49,885	6,154	20	yes	no
39089.42c	88.1421	endl92	LLNL	<1992	300	69,315	8,771	30	yes	no
39089.50c	88.1421	endf5u	B-V.0 [9]	1985	294	18,631	3,029	20	no	no
39089.50d	88.1421	dre5	B-V.0 [9]	1985	294	2,311	263	20	no	no
39089.60c	88.1420	endf60	B-VI.0	1986	294	86,556	9,567	20	yes	no
Z =	40	*****	Zirconium	*****						
** Zr-nat **										
40000.35c	90.4364	endl85	LLNL	<1985	0	14,738	1,292	20	yes	no
40000.42c	90.4364	endl92	LLNL	<1992	300	131,855	17,909	30	yes	no
40000.56c	90.4360	misc5xs[6,10]	B-V:XTM	1976	300	52,064	7944	20	no	no
40000.56d	90.4360	misc5xs[6,10]	B-V:XTM	1976	300	5,400	263	20	no	no
40000.57c	90.4360	misc5xs[6,10]	B-V:XTM	1976	300	16,816	2,116	20	no	no
40000.57d	90.4360	misc5xs[6,10]	B-V:XTM	1976	300	5,400	263	20	no	no
40000.58c	90.4360	misc5xs[6,10]	B-V:XTM	1976	587	57,528	8,777	20	no	no
40000.60c	90.4360	endf60	B-VI.1	1976 [10]	294	66,035	10,298	20	no	no
** Zr-93 **										
40093.50c	92.1083	kidman	B-V.0	1974	294	2,579	236	20	no	no
Z =	41	*****	Niobium	*****						
** Nb-93 **										
41093.35c	92.1083	endl85	LLNL	<1985	0	50,441	6,095	20	yes	no
41093.42c	92.1083	endl92	LLNL	<1992	300	73,324	9,277	30	yes	no
41093.50c	92.1051	endf5p	B-V.0	1974	294	128,960	17,279	20	yes	no
41093.50d	92.1051	dre5	B-V.0	1974	294	10,332	263	20	yes	no
41093.51c	92.1051	rmccs	B-V.0	1974	294	14,675	963	20	yes	no
41093.51d	92.1051	drmccs	B-V.0	1974	294	10,332	263	20	yes	no
41093.60c	92.1051	endf60	B-VI.1	1990	294	110,269	10,678	20	yes	no
Z =	42	*****	Molybdenum	*****						
** Mo-nat **										
42000.35c	95.1158	endl85	LLNL	<1985	0	8,628	573	20	yes	no
42000.42c	95.1158	endl92	LLNL	<1992	300	9,293	442	30	yes	no
42000.50c	95.1160	endf5u	B-V.0	1979	294	35,634	4,260	20	yes	no
42000.50d	95.1160	dre5	B-V.0	1979	294	7,754	263	20	yes	no
42000.51c	95.1160	rmccs	B-V.0	1979	294	10,139	618	20	yes	no
42000.51d	95.1160	drmccs	B-V.0	1979	294	7,754	263	20	yes	no
42000.60c	95.1160	endf60	B-VI.0	1979	294	45,573	5,466	20	yes	no
** Mo-95 **										
42095.50c	94.0906	kidman	B-V.0	1980	294	15,411	2,256	20	no	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 43	*****	Technetium		*****						
** Tc-99 **										
43099.50c	98.1500	kidman	B-V.0	1978	294	12,152	1,640	20	no	no
43099.60c	98.1500	endf60	B-VI.0	1978	294	54,262	8,565	20	no	no
Z = 44	*****	Ruthenium		*****						
** Ru-101 **										
44101.50c	100.0390	kidman	B-V.0	1980	294	5,299	543	20	no	no
** Ru-103 **										
44103.50c	102.0220	kidman	B-V.0	1974	294	3,052	235	20	no	no
Z = 45	*****	Rhodium		*****						
** Rh-103 **										
45103.50c	102.0210	rmccsa	B-V.0	1978	294	18,870	2,608	20	no	no
45103.50d	102.0210	drmccs	B-V.0	1974	294	4,663	263	20	no	no
** Rh-105 **										
45105.50c	104.0050	kidman	B-V.0	1974	294	1,591	213	20	no	no
Z = 45	*****	Average fission product from Uranium-235		*****						
** U-235 fp **										
45117.90c	115.5446	rmccs	T-2	1982	294	10,314	399	20	yes	no
45117.90d	115.5446	drmccs	T-2	1982	294	9,507	263	20	yes	no
Z = 46	*****	Palladium		*****						
** Pd-105 **										
46105.50c	104.0040	kidman	B-V.0	1980	294	4,647	505	20	no	no
** Pd-108 **										
46108.50c	106.9770	kidman	B-V.0	1980	294	4,549	555	20	no	no
Z = 46	*****	Average fission product from Plutonium-239		*****						
** Pu-239 fp **										
46119.90c	117.5255	rmccs	T-2	1982	294	10,444	407	20	yes	no
46119.90d	117.5255	drmccs	T-2	1982	294	9,542	263	20	yes	no
Z = 47	*****	Silver		*****						
** Ag-nat **										
47000.55c	106.9420	rmccsa	T-2	1984	294	29,092	2,350	20	yes	no
47000.55d	106.9420	drmccs	T-2	1984	294	12,409	263	20	yes	no
** Ag-107 **										
47107.35c	105.9867	endl85	LLNL	<1985	0	13,134	994	20	yes	no
47107.42c	105.9867	endl92	LLNL	<1992	300	27,108	2,885	30	yes	no
47107.50c	105.9870	rmccsa	B-V.0	1978	294	12,111	1,669	20	no	no
47107.50d	105.9870	drmccs	B-V.0	1978	294	4,083	263	20	no	no
47107.60c	105.9870	endf60	B-VI.0	1983	294	64,008	10,101	20	no	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
** Ag-109 **										
47109.35c	107.9692	endl85	LLNL	<1985	0	13,452	1,094	20	yes	no
47109.42c	107.9692	endl92	LLNL	<1992	300	33,603	3,796	30	yes	no
47109.50c	107.9690	rmccsa	B-V.0	1978	294	14,585	2,120	20	no	no
47109.50d	107.9690	drmccs	B-V.0	1978	294	3,823	263	20	no	no
47109.60c	107.9690	endf60	B-VI.0	1983	294	76,181	11,903	20	no	no
Z = 48	*****	Cadmium	*****							
** Cd-nat **										
48000.35c	111.4443	endl85	LLNL	<1985	0	12,283	1,115	20	yes	no
48000.42c	111.4443	endl92	LLNL	<1992	300	211,537	29,369	30	yes	no
48000.50c	111.4600	endf5u	B-V.0	1974	294	19,714	2,981	20	no	no
48000.50d	111.4600	dre5	B-V.0	1974	294	3,026	263	20	no	no
48000.51c	111.4600	rmccs	B-V.0	1974	294	6,734	818	20	no	no
48000.51d	111.4600	drmccs	ENDF/B-V.0	1974	294	3,026	263	20	no	no
Z = 49	*****	Indium	*****							
** In-nat **										
49000.42c	113.8336	endl92	LLNL	<1992	300	65,498	7,870	30	yes	no
49000.60c	113.8340	endf60	B-VI.0	1990	294	93,662	10,116	20	yes	no
Z = 49-50	*****	Fission products	*****							
** Ave fp **										
49120.42c	116.4906	endl92[11]	LLNL	<1992	300	12,755	164	30	yes	no
49125.42c	116.4906	endl92[11]	LLNL	<1992	300	9,142	119	30	yes	no
50120.35c	116.4906	rmccs	LLNL	<1985	0	8,366	232	20	yes	no
50120.35d	116.4906	drmccs	LLNL	<1985	0	8,963	263	20	yes	no
Z = 50	*****	Tin	*****							
** Sn-nat **										
50000.35c	117.6704	endl85	LLNL	<1985	0	5,970	205	20	yes	no
50000.40c	117.6704	endl92	LLNL:XTM	<1992	300	248,212	34,612	30	yes	no
50000.42c	117.6704	endl92	LLNL	<1992	300	248,212	34,612	30	yes	no
Z = 51	*****	Antimony	*****							
** Sb-nat **										
51000.42c	120.7041	endl92	LLNL	<1992	300	95,953	10,721	30	yes	no
Z = 53	*****	Iodine	*****							
** I-127 **										
53127.42c	125.8143	endl92	LLNL	<1992	300	76,321	9,854	30	yes	no
53127.55c	125.8140	misc5xs[6,8]	T-2	1982	294	59,725	9,423	20	no	no
53127.60c	125.8143	endf60[12]	T-2	1991	294	399,760	7,888	30	yes	no
** I-129 **										
53129.60c	127.7980	endf60	B-VI.0	1980	294	8,792	1,237	20	no	no
** I-135 **										
53135.50c	133.7510	kidman	B-V.0	1974	294	1,232	194	20	no	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	\bar{v}
Z = 54	*****	Xenon	*****	*****	*****	*****	*****	*****	*****	*****
** Xe-nat **										
54000.35c	130.1721	endl85	LLNL	<1985	0	41,432	5,228	20	yes	no
54000.42c	130.1721	endl92	LLNL	<1992	300	43,411	5,173	30	yes	no
** Xe-131 **										
54131.50c	129.7810	kidman	B-V.0	1978	294	22,572	3,376	20	no	no
** Xe-134 **										
54134.35c	132.7551	endl85	LLNL	<1985	0	7,463	359	20	yes	no
54134.42c	132.7551	endl92	LLNL	<1992	300	8,033	192	30	yes	no
** Xe-135 **										
54135.50c	133.7480	endf5mt[1]	B-V	1975	294	5,529	704	20	no	no
54135.53c	133.7480	endf5mt[1]	B-V	1975	587	5,541	706	20	no	no
54135.54c	133.7480	endf5mt[1]	B-V	1975	881	5,577	712	20	no	no
Z = 55	*****	Cesium	*****	*****	*****	*****	*****	*****	*****	*****
** Cs-133 **										
55133.50c	131.7640	kidman	B-V.0	1978	294	26,713	4,142	20	no	no
55133.55c	131.7640	misc5xs[6,8]	T-2	1982	294	67,893	11,025	20	no	no
55133.60c	131.7640	endf60	B-VI.0	1978	294	54,723	8,788	20	no	no
** Cs-134 **										
55134.60c	132.7570	endf60	B-VI.0	1988	294	10,227	1,602	20	no	no
** Cs-135 **										
55135.50c	133.7470	kidman	B-V.0	1974	294	1,903	199	20	no	no
55135.60c	133.7470	endf60	B-VI.0	1974	294	3,120	388	20	no	no
** Cs-136 **										
55136.60c	134.7400	endf60	B-VI.0	1974	294	10,574	1,748	20	no	no
** Cs-137 **										
55137.60c	135.7310	endf60	B-VI.0	1974	294	2,925	369	20	no	no
Z = 56	*****	Barium	*****	*****	*****	*****	*****	*****	*****	*****
** Ba-138 **										
56138.35c	136.7206	endl85	LLNL	<1985	0	5,985	262	20	yes	no
56138.50c	136.7150	rmccs	B-V.0	1978	294	6,018	292	20	yes	no
56138.50d	136.7150	drmccs	B-V.0	1978	294	6,320	263	20	yes	no
56138.60c	136.7150	endf60	B-VI.0	1978	294	7,347	267	20	yes	no
Z = 59	*****	Praseodymium	*****	*****	*****	*****	*****	*****	*****	*****
** Pr-141 **										
59141.50c	139.6970	kidman	B-V.0	1980	294	15,620	1,354	20	no	no
Z = 60	*****	Neodymium	*****	*****	*****	*****	*****	*****	*****	*****
** Nd-143 **										
60143.50c	141.6820	kidman	B-V.0	1980	294	17,216	1,701	20	no	no
** Nd-145 **										
60145.50c	143.6680	kidman	B-V.0	1980	294	38,473	3,985	20	no	no
** Nd-147 **										
60147.50c	145.6540	kidman	B-V.0	1979	294	1,816	251	20	no	no
** Nd-148 **										
60148.50c	146.6460	kidman	B-V.0	1980	294	10,867	1,054	20	no	no

APPENDIX G

Z	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 61	*****	Promethium								
** Pm-147 **										
61147.50c	145.6530	kidman	B-V.0	1980	294	9,152	825	20	no	no
** Pm-148 **										
61148.50c	146.6470	kidman	B-V.0	1979	294	1,643	257	20	no	no
** Pm-149 **										
61149.50c	147.6390	kidman	B-V.0	1979	294	2,069	238	20	no	no
Z = 62	*****	Samarium								
** Sm-147 **										
62147.50c	145.6530	kidman	B-V.0	1980	294	33,773	2,885	20	no	no
** Sm-149 **										
62149.50c	147.6380	endf5u	B-V.0	1978	294	15,662	2,008	20	no	no
62149.50d	147.6380	dre5	B-V.0	1978	294	4,429	263	20	no	no
** Sm-150 **										
62150.50c	148.6290	kidman	B-V.0	1974	294	9,345	1,329	20	no	no
** Sm-151 **										
62151.50c	149.6230	kidman	B-V.0	1980	294	7,303	605	20	no	no
** Sm-152 **										
62152.50c	150.6150	kidman	B-V.0	1980	294	41,252	4,298	20	no	no
Z = 63	*****	Europium								
** Eu-nat **										
63000.35c	150.6546	rmccsa	LLNL	<1985	0	6,926	364	20	yes	no
63000.35d	150.6546	drmccs	LLNL	<1985	0	6,654	263	20	yes	no
63000.42c	150.6546	end192	LLNL	<1992	300	37,421	4,498	30	yes	no
** Eu-151 **										
63151.50c	149.6230	rmccs	B-V.0	1977	294	68,057	5,465	20	yes	no
63151.50d	149.6230	drmccs	B-V.0	1977	294	10,013	263	20	yes	no
63151.55c	149.6230	newxs	T-2	1986	294	86,575	4,749	20	yes	no
63151.55d	149.6230	newxsd	T-2	1986	294	35,199	263	20	yes	no
63151.60c	149.6230	endf60	B-VI.0	1986	294	96,099	7,394	20	yes	no
** Eu-152 **										
63152.50c	150.6200	endf5u	B-V.0	1975	294	49,313	4,553	20	no	no
63152.50d	150.6200	dre5	B-V.0	1975	294	5,655	263	20	no	no
** Eu-153 **										
63153.50c	151.6070	rmccs	B-V.0	1978	294	55,231	4,636	20	yes	no
63153.50d	151.6070	drmccs	B-V.0	1978	294	11,244	263	20	yes	no
63153.55c	151.6080	newxs	T-2	1986	294	72,971	4,174	20	yes	no
63153.55d	151.6080	newxsd	T-2	1986	294	36,372	263	20	yes	no
63153.60c	151.6080	endf60	B-VI.0	1986	294	86,490	6,198	20	yes	no
** Eu-154 **										
63154.50c	152.6000	endf5u	B-V.0	1975	294	37,008	4,030	20	no	no
63154.50d	152.6000	dre5	B-V.0	1975	294	5,458	263	20	no	no
** Eu-155 **										
63155.50c	153.5920	kidman	B-V.0	1974	294	4,532	273	20	no	no
Z = 64	*****	Gadolinium								
** Gd-nat **										
64000.35c	155.8991	rmccsa	LLNL	<1985	0	7,878	454	20	yes	no
64000.35d	155.8991	drmccs	LLNL	<1985	0	6,833	263	20	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
** Gd-152 **										
64152.50c	150.6150	endf5u	B-V.0	1977	294	26,251	3,285	20	no	no
64152.50d	150.6150	dre5	B-V.0	1977	294	5,899	263	20	no	no
64152.55c	150.6150	misc5xs[6,13]	B-V.0:T-2	1986	294	32,590	3,285	20	yes	no
64152.60c	150.6150	endf60	B-VI.0	1977	294	32,760	4,391	20	no	no
** Gd-154 **										
64154.50c	152.5990	endf5u	B-V.0	1977	294	49,572	7,167	20	no	no
64154.50d	152.5990	dre5	B-V.0	1977	294	5,930	263	20	no	no
64154.55c	152.5990	misc5xs[6,13]	B-V.0:T-2	1986	294	59,814	7,167	20	yes	no
64154.60c	152.5990	endf60	B-VI.0	1977	294	67,662	10,189	20	no	no
** Gd-155 **										
64155.50c	153.5920	endf5u	B-V.0	1977	294	44,965	6,314	20	no	no
64155.50d	153.5920	dre5	B-V.0	1977	294	6,528	263	20	no	no
64155.55c	153.5920	misc5xs[6,13]	B-V.0:T-2	1986	294	54,346	6,314	20	yes	no
64155.60c	153.5920	endf60	B-VI.0	1977	294	61,398	9,052	20	no	no
** Gd-156 **										
64156.50c	154.5830	endf5u	B-V.0	1977	294	37,371	3,964	20	no	no
64156.50d	154.5830	dre5	B-V.0	1977	294	6,175	263	20	no	no
64156.55c	154.5830	misc5xs[6,13]	B-V.0:T-2	1986	294	44,391	3,964	20	yes	no
64156.60c	154.5830	endf60	B-VI.0	1977	294	42,885	5,281	20	no	no
** Gd-157 **										
64157.50c	155.5760	endf5u	B-V.0	1977	294	38,975	5,370	20	no	no
64157.50d	155.5760	dre5	B-V.0	1977	294	6,346	263	20	no	no
64157.55c	155.5760	misc5xs[6,13]	B-V.0:T-2	1986	294	47,271	5,370	20	yes	no
64157.60c	155.5760	endf60	B-VI.0	1977	294	56,957	8,368	20	no	no
** Gd-158 **										
64158.50c	156.5670	endf5u	B-V.0	1977	294	95,876	15,000	20	no	no
64158.50d	156.5670	dre5	B-V.0	1977	294	5,811	263	20	no	no
64158.55c	156.5670	misc5xs[6,13]	B-V.0:T-2	1986	294	113,916	15,000	20	yes	no
64158.60c	156.5670	endf60	B-VI.0	1977	294	59,210	8,909	20	no	no
** Gd-160 **										
64160.50c	158.5530	endf5u	B-V.0	1977	294	53,988	8,229	20	no	no
64160.50d	158.5530	dre5	B-V.0	1977	294	5,030	263	20	no	no
64160.55c	158.5530	misc5xs[6,13]	B-V.0:T-2	1986	294	65,261	8,229	20	yes	no
64160.60c	158.5530	endf60	B-VI.0	1977	294	54,488	8,304	20	no	no
Z	=	67	*****	Holmium	*****					
** Ho-165 **										
67165.35c	163.5135	rmccsa	LLNL	<1985	0	54,279	7,075	20	yes	no
67165.35d	163.5135	drmccs	LLNL	<1985	0	7,019	263	20	yes	no
67165.42c	163.5135	endl92	LLNL	<1992	300	103,467	13,884	30	yes	no
67165.55c	163.5130	newxs	T-2	1986	294	56,605	2,426	30	yes	no
67165.55d	163.5130	newxsd	T-2	1986	294	42,266	263	20	yes	no
67165.60c	163.5130	endf60	B-VI.0	1988	294	75,307	4,688	30	yes	no
Z	=	69	*****	Thulium	*****					
** Tm-169 **										
69169.55c	167.4830	misc5xs[6]1	T-2	1986	300	47,941	4,738	20	no	no
Z	=	72	*****	Hafnium	*****					
** Hf-nat **										
72000.35c	176.9567	endl85	LLNL	<1985	0	75,862	9,636	20	yes	no
72000.42c	176.9567	endl92	LLNL	<1992	300	108,989	14,113	30	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
72000.50c	176.9540	newxs	B-V.0	1976	294	52,231	8,270	20	no	no
72000.50d	176.9540	newxsd	B-V.0	1976	294	4,751	263	20	no	no
72000.60c	176.9540	endf60	B-VI.0	1976	294	84,369	13,634	20	no	no
Z = 73 ***** Tantalum *****										
** Ta-181 **										
73181.35c	179.3936	endl85	LLNL	<1985	0	33,547	2,812	20	yes	no
73181.42c	179.3936	endl92	LLNL	<1992	300	47,852	4,927	30	yes	no
73181.50c	179.4000	endf5u	B-V.0	1972	294	60,740	6,341	20	yes	no
73181.50d	179.4000	dre5	B-V.0	1972	294	16,361	263	20	yes	no
73181.51c	179.4000	rmccs	B-V.0	1972	294	21,527	753	20	yes	no
73181.51d	179.4000	drmccs	B-V.0	1972	294	16,361	263	20	yes	no
73181.60c	179.4000	endf60	B-VI.0	1972	294	91,374	10,352	20	yes	no
** Ta-182 **										
73182.60c	180.3870	endf60	B-VI.0	1971	294	12,085	1,698	20	no	no
Z = 74 ***** Tungsten *****										
** W-nat **										
74000.21c	182.2706	100xs[3]	T-2:XTM	1989	300	194,513	21,386	100	yes	no
74000.55c	182.2770	rmccs	B-V.2	1982	294	50,639	1,816	20	yes	no
74000.55d	182.2770	drmccs	B-V.2	1982	294	34,272	263	20	yes	no
** W-182 **										
74182.50c	180.3900	endf5p	B-V.0	1973	294	94,367	11,128	20	yes	no
74182.50d	180.3900	dre5	B-V.0	1973	294	17,729	263	20	yes	no
74182.55c	180.3900	rmccsa	B-V.2	1980	294	122,290	13,865	20	yes	no
74182.55d	180.3900	drmccs	B-V.2	1980	294	26,387	263	20	yes	no
74182.60c	180.3900	endf60	B-VI.0	1980	294	113,177	12,283	20	yes	no
** W-183 **										
74183.50c	181.3800	endf5p	B-V.0	1973	294	58,799	5,843	20	yes	no
74183.50d	181.3800	dre5	B-V.0	1973	294	19,443	263	20	yes	no
74183.55c	181.3800	rmccsa	B-V.2	1980	294	79,534	8,083	20	yes	no
74183.55d	181.3800	drmccs	B-V.2	1980	294	26,320	263	20	yes	no
74183.60c	181.3800	endf60	B-VI.0	1980	294	89,350	9,131	20	yes	no
** W-184 **										
74184.50c	182.3700	endf5p	B-V.0	1973	294	58,870	6,173	20	yes	no
74184.50d	182.3700	dre5	B-V.0	1973	294	17,032	263	20	yes	no
74184.55c	182.3700	rmccsa	B-V.2	1980	294	80,006	7,835	20	yes	no
74184.55d	182.3700	drmccs	B-V.2	1980	294	26,110	263	20	yes	no
74184.60c	182.3700	endf60	B-VI.0	1980	294	78,809	7,368	20	yes	no
** W-186 **										
74186.50c	184.3600	endf5p	B-V.0	1973	294	63,701	6,866	20	yes	no
74186.50d	184.3600	dre5	B-V.0	1973	294	17,018	263	20	yes	no
74186.55c	184.3600	rmccsa	B-V.2	1980	294	83,618	8,342	20	yes	no
74186.55d	184.3600	drmccs	B-V.2	1980	294	26,281	263	20	yes	no
74186.60c	184.3600	endf60	B-VI.0	1980	294	82,010	7,793	20	yes	no
Z = 75 ***** Rhenium *****										
** Re-185 **										
75185.32c	183.3612	misc5xs[6]	LLNL	<1985	0	13,650	1,488	20	yes	no
75185.35c	183.3641	endl85	LLNL	<1985	0	16,038	1,487	20	yes	no
75185.42c	183.3641	endl92	LLNL	<1992	300	23,715	2,214	30	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
75185.50c	183.3640	rmccsa	B-V.0	1968	294	9,190	1,168	20	no	no
75185.50d	183.3640	drmccs	B-V.0	1968	294	4,252	263	20	no	no
75185.60c	183.3640	endf60	B-VI.0	1990	294	102,775	16,719	20	no	no
** Re-187 **										
75187.32c	185.3539	misc5xs[6]	LLNL	<1985	0	12,318	1,296	20	yes	no
75187.35c	185.3497	endl85	LLNL	<1985	0	14,769	1,295	20	yes	no
75187.42c	185.3497	endl92	LLNL	<1992	300	20,969	1,821	30	yes	no
75187.50c	185.3500	rmccsa	B-V.0	1968	294	8,262	959	20	no	no
75187.50d	185.3500	drmccs	B-V.0	1968	294	4,675	263	20	no	no
75187.60c	185.3500	endf60	B-VI.0	1990	294	96,989	15,624	20	no	no
Z = 77	*****		Iridium	*****						
** Ir-nat **										
77000.55c	190.5630	misc5xs[6]1	T-2	1986	300	43,071	3,704	20	no	no
Z = 78	*****		Platinum	*****						
** pt-nat **										
78000.35c	193.4141	rmccsa	LLNL	<1985	0	15,371	1,497	20	yes	no
78000.35d	193.4141	drmccs	LLNL	<1985	0	6,933	263	20	yes	no
78000.40c	193.4141	endl92	LLNL:XTM	<1992	300	43,559	5,400	30	yes	no
78000.42c	193.4141	endl92	LLNL	<1992	300	43,559	5,400	30	yes	no
Z = 79	*****		Gold	*****						
** Au-197 **										
79197.35c	195.2745	endl85	LLNL	<1985	0	31,871	3,781	20	yes	no
79197.50c	195.2740	endf5p	B-V.0	1977	294	139,425	22,632	20	no	no
79197.50d	195.2740	dre5	B-V.0	1977	294	4,882	263	20	no	no
79197.55c	195.2740	rmccsa	T-2	1983[4]	294	134,325	17,909	20	yes	no
79197.55d	195.2740	drmccs	T-2	1983[4]	294	7,883	263	20	yes	no
79197.56c	195.2740	newxs	T-2	1984	294	122,482	11,823	30	yes	no
79197.56d	195.2740	newxsd	T-2	1984	294	38,801	263	20	yes	no
79197.60c	195.2740	endf60	B-VI.1	1984	294	161,039	17,724	30	yes	no
Z = 80	*****		Mercury	*****						
** Hg-nat **										
80000.40c	198.8668	endl92	LLNL:XTM	<1992	300	29,731	2,507	30	yes	no
80000.42c	198.8668	endl92	LLNL	<1992	300	29,731	2,507	30	yes	no
Z = 82	*****		Lead	*****						
** Pb-nat **										
82000.35c	205.4200	endl85	LLNL	<1985	0	6,639	349	20	yes	no
82000.42c	205.4200	endl92	LLNL	<1992	300	270,244	18,969	30	yes	no
82000.50c	205.4300	rmccs	B-V.0	1976	294	37,633	1,346	20	yes	no
82000.50d	205.4300	drmccs	B-V.0	1976	294	20,649	263	20	yes	no
** Pb-206 **										
82206.60c	204.2000	endf60	B-VI.0	1989	294	148,815	12,872	20	yes	no
** Pb-207 **										
82207.60c	205.2000	endf60	B-VI.1	1991	294	111,750	7,524	20	yes	no
** Pb-208 **										
82208.60c	206.1900	endf60	B-VI.0	1989	294	70,740	5,105	20	yes	no

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 83 ***** Bismuth *****										
** Bi-209 **										
83209.35c	207.1851	endl85	LLNL	<1985	0	18,316	1,303	20	yes	no
83209.42c	207.1851	endl92	LLNL	<1992	300	20,921	1,200	30	yes	no
83209.50c	207.1850	endf5u	B-V.0	1980	294	14,939	1,300	20	yes	no
83209.50d	207.1850	dre5	B-V.0	1980	294	7,516	263	20	yes	no
83209.51c	207.1850	rmccs	B-V.0	1980	294	13,721	1,186	20	yes	no
83209.51d	207.1850	drmccs	B-V.0	1980	294	7,516	263	20	yes	no
83209.60c	207.1850	endf60	B-VI.0	1989	294	100,138	8,427	20	yes	no
Z = 90 ***** Thorium *****										
** Th-230 **										
90230.60c	228.0600	endf60	B-VI.0	1977	294	35,155	5,533	20	no	t
** Th-231 **										
90231.35c	229.0516	endl85	LLNL	<1985	0	9,157	308	20	yes	p
90231.42c	229.0516	endl92	LLNL	<1992	300	15,712	187	30	yes	b
** Th-232 **										
90232.35c	230.0447	endl85	LLNL	<1985	0	56,091	6,169	20	yes	p
90232.42c	230.0447	endl92	LLNL	<1992	300	109,829	13,719	30	yes	b
90232.50c	230.0400	endf5u	B-V.0	1977	294	152,782	17,901	20	yes	b
90232.50d	230.0400	dre5	B-V.0	1977	294	11,937	263	20	yes	b
90232.51c	230.0400	rmccs	B-V.0	1977	294	17,925	1,062	20	yes	b
90232.51d	230.0400	drmccs	B-V.0	1977	294	11,937	263	20	yes	b
90232.60c	230.0400	endf60	B-VI.0	1977	294	127,606	16,381	20	yes	b
** Th-233 **										
90233.35c	231.0396	endl85	LLNL	<1985	0	9,352	348	20	yes	p
90233.42c	231.0396	endl92	LLNL	<1992	300	16,015	206	30	yes	b
Z = 91 ***** Protactinium *****										
** Pa-231 **										
91231.60c	229.0500	endf60	B-VI.0	1977	294	19,835	2,610	20	no	b
** Pa-233 **										
91233.35c	231.0383	endl85	LLNL	<1985	0	19,170	1,910	20	yes	p
91233.42c	231.0383	endl92	LLNL	<1992	300	27,720	1,982	30	yes	b
91233.50c	231.0380	endf5u	B-V.0	1974	294	19,519	2,915	20	no	t
91233.50d	231.0380	dre5	B-V.0	1974	294	3,700	263	20	no	t
91233.51c	231.0380	rmccs	B-V.0	1974	294	5,641	637	20	no	t
91233.51d	231.0380	drmccs	B-V.0	1974	294	3,700	263	20	no	t
Z = 92 ***** Uranium *****										
** U-232 **										
92232.60c	230.0400	endf60	B-VI.0	1977	294	13,839	1,759	20	no	b
** U-233 **										
92233.35c	231.0377	endl85	LLNL	<1985	0	29,674	2,924	20	yes	p
92233.42c	231.0377	endl92	LLNL	<1992	300	29,521	2,163	30	yes	b
92233.50c	231.0430	rmccs	B-V.0	1978	294	18,815	2,293	20	no	b
92233.50d	231.0430	drmccs	B-V.0	1978	294	4,172	263	20	no	b
92233.60c	231.0430	endf60[14]	B-VI.0	1978	294	32,226	3,223	20	yes	b
** U-234 **										
92234.35c	232.0304	endl85	LLNL	<1985	0	8,557	237	20	yes	p
92234.42c	232.0304	endl92	LLNL	<1992	300	13,677	149	30	yes	b

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
92234.50c	232.0300	endf5p	B-V.0	1978	294	89,433	12,430	20	no	t
92234.50d	232.0300	dre5	B-V.0	1978	294	4,833	263	20	no	t
92234.51c	232.0300	rmccs	B-V.0	1978	294	6,426	672	20	no	t
92234.51d	232.0300	drmccs	B-V.0	1978	294	4,833	263	20	no	t
92234.60c	232.0300	endf60	B-VI.0	1978	294	77,059	10,660	17.5	no	b
** U-235 **										
92235.11c	233.0250	endf62mt	B-VI.2	1989	77	696,398	78,912	20	yes	b
92235.12c	233.0250	endf62mt	B-VI.2	1989	400	411,854	43,344	20	yes	b
92235.13c	233.0250	endf62mt	B-VI.2	1989	500	379,726	39,328	20	yes	b
92235.14c	233.0250	endf62mt	B-VI.2	1989	600	353,678	36,072	20	yes	b
92235.15c	233.0250	endf62mt	B-VI.2	1989	800	316,622	31,440	20	yes	b
92235.16c	233.0250	endf62mt	B-VI.2	1989	900	300,278	29,397	20	yes	b
92235.17c	233.0250	endf62mt	B-VI.2	1989	1200	269,062	25,495	20	yes	b
92235.42c	233.0248	endl92	LLNL	<1992	300	72,790	5,734	30	yes	b
92235.50c	233.0250	rmccs	B-V.0	1977	294	60,489	5,725	20	yes	b
92235.50d	233.0250	drmccs	B-V.0	1977	294	11,788	263	20	yes	b
92235.52c	233.0250	endf5mt[1]	B-V.0	1977	587	65,286	6,320	20	yes	b
92235.53c	233.0250	endf5mt[1]	B-V.0	1977	587	36,120	2,685	20	yes	b
92235.54c	233.0250	endf5mt[1]	B-V.0	1977	881	36,008	2,671	20	yes	b
92235.56c	233.0250	endf5ht	B-V.0	1977	1.2e4	28,494	1,729	20	yes	b
92235.57c	233.0250	endf5ht	B-V.0	1977	1.2e5	25,214	1,319	20	yes	b
92235.58c	233.0250	endf5ht	B-V.0	1977	1.2e6	22,966	1,038	20	yes	b
92235.59c	233.0250	endf5ht	B-V.0	1977	1.2e7	22,406	968	20	yes	b
92235.60c	233.0250	endf60	B-VI.2	1989	294	289,975	28,110	20	yes	b
** U-236 **										
92236.35c	234.0178	endl85	LLNL	<1985	0	8,699	224	20	yes	p
92236.42c	234.0178	endl92	LLNL	<1992	300	14,595	311	30	yes	b
92236.50c	234.0180	endf5p	B-V.0	1978	294	138,715	19,473	20	no	t
92236.50d	234.0180	dre5	B-V.0	1978	294	4,838	263	20	no	t
92236.51c	234.0180	rmccs	B-V.0	1978	294	7,302	800	20	no	t
92236.51d	234.0180	drmccs	B-V.0	1978	294	4,838	263	20	no	t
92236.60c	234.0180	endf60	B-VI.0	1989	294	82,819	10,454	20	no	b
** U-237 **										
92237.35c	235.0123	endl85	LLNL	<1985	0	9,364	353	20	yes	p
92237.42c	235.0123	endl92	LLNL	<1992	300	13,465	210	30	yes	b
92237.50c	235.0120	endf5p	B-V.0	1976	294	32,445	3,293	20	yes	t
92237.50d	235.0120	dre5	B-V.0	1976	294	8,851	263	20	yes	t
92237.51c	235.0120	rmccs	B-V.0	1976	294	10,317	527	20	yes	t
92237.51d	235.0120	drmccs	B-V.0	1976	294	8,851	263	20	yes	t
** U-238 **										
92238.11c	236.0060	endf62mt	B-VI.2	1993	77	621,385	74,481	20	yes	b
92238.12c	236.0060	endf62mt	B-VI.2	1993	400	456,593	53,882	20	yes	b
92238.13c	236.0060	endf62mt	B-VI.2	1993	500	433,681	51,018	20	yes	b
92238.14c	236.0060	endf62mt	B-VI.2	1993	600	414,185	48,581	20	yes	b
92238.15c	236.0060	endf62mt	B-VI.2	1993	800	386,305	45,096	20	yes	b
92238.16c	236.0060	endf62mt	B-VI.2	1993	900	372,625	43,386	20	yes	b
92238.17c	236.0060	endf62mt	B-VI.2	1993	1200	348,137	40,325	20	yes	b
92238.21c	236.0060	100xs[3]	T-2:XTM	1989	300	279,245	30,911	100	yes	b
92238.35c	236.0058	endl85	LLNL	<1985	0	27,168	1,845	20	yes	p
92238.42c	236.0058	endl92	LLNL	<1992	300	107,739	7,477	30	yes	b
92238.50c	236.0060	rmccs	B-V.0	1979	294	88,998	9,285	20	yes	b
92238.50d	236.0060	drmccs	B-V.0	1979	294	16,815	263	20	yes	b
92238.52c	236.0060	endf5mt[1]	B-V.0	1979	587	123,199	8,454	20	yes	b
92238.53c	236.0060	endf5mt[1]	B-V.0	1979	587	160,107	17,876	20	yes	b
92238.54c	236.0060	endf5mt[1]	B-V.0	1979	881	160,971	17,984	20	yes	b

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
92238.56c	233.0250	endf5ht	B-V.0	1979	1.2e4	82,470	8,176	20	yes	b
92238.57c	233.0250	endf5ht	B-V.0	1979	1.2e5	47,206	3,768	20	yes	b
92238.58c	233.0250	endf5ht	B-V.0	1979	1.2e6	27,814	1,344	20	yes	b
92238.59c	233.0250	endf5ht	B-V.0	1979	1.2e7	22,078	627	20	yes	b
92238.60c	236.0060	endf60	B-VI.2	1993	294	206,322	22,600	20	yes	b
** U-239 **										
92239.35c	237.0007	rmccsa	LLNL	<1985	0	9,809	394	20	yes	p
92239.35d	237.0007	drmccs	LLNL	<1985	0	9,286	263	20	yes	p
92239.42c	237.0007	endl92	LLNL	<1992	300	14,336	205	30	yes	b
** U-240 **										
92240.35c	237.9944	endl85	LLNL	<1985	0	8,495	218	20	yes	p
92240.42c	237.9944	endl92	LLNL	<1992	300	14,000	128	30	yes	b
Z = 93 ***** Neptunium *****										
** Np-235 **										
93235.35c	233.0249	endl85	LLNL	<1985	0	9,490	364	20	yes	p
93235.42c	233.0249	endl92	LLNL	<1992	300	17,717	660	30	yes	b
** Np-236 **										
93236.35c	234.0188	endl85	LLNL	<1985	0	8,821	284	20	yes	p
93236.42c	234.0188	endl92	LLNL	<1992	300	13,464	179	30	yes	b
** Np-237 **										
93237.35c	235.0118	endl85	LLNL	<1985	0	20,225	1,678	20	yes	p
93237.42c	235.0118	endl92	LLNL	<1992	300	31,966	2,477	30	yes	b
93237.50c	235.0120	endf5p	B-V.0	1978	294	63,223	8,519	20	no	t
93237.50d	235.0120	dre5	B-V.0	1978	294	5,267	263	20	no	t
93237.55c	235.0120	rmccsa	T-2	1984	294	32,558	1,682	20	no	b
93237.55d	235.0120	drmccs	T-2	1984	294	20,484	263	20	no	b
93237.60c	235.0118	endf60	B-VI.1	1990	294	105,150	7,218	20	yes	b
** Np-238 **										
93238.35c	236.0060	endl85	LLNL	<1985	0	8,878	282	20	yes	p
93238.42c	236.0060	endl92	LLNL	<1992	300	13,445	165	30	yes	b
** Np-239 **										
93239.60c	236.9990	endf60	B-VI.0	1988	294	7,406	562	20	no	t
Z = 94 ***** Plutonium *****										
** Pu-236 **										
94236.60c	234.0180	endf60	B-VI.0	1978	294	33,448	4,610	20	no	t
** Pu-237 **										
94237.35c	235.0120	endl85	LLNL	<1985	0	11,300	202	20	yes	p
94237.42c	235.0120	endl92	LLNL	<1992	300	17,284	279	30	yes	b
94237.60c	235.0120	endf60	B-VI.0	1978	294	3,524	257	20	no	t
** Pu-238 **										
94238.35c	236.0046	endl85	LLNL	<1985	0	15,619	958	20	yes	p
94238.42c	236.0046	endl92	LLNL	<1992	300	30,572	2,177	30	yes	b
94238.50c	236.1670	endf5p	B-V.0	1978	294	18,763	2,301	20	no	t
94238.50d	236.1670	dre5	B-V.0	1978	294	5,404	263	20	no	t
94238.51c	236.1670	rmccs	B-V.0	1978	294	6,067	537	20	no	t
94238.51d	236.1670	drmccs	B-V.0	1978	294	5,404	263	20	no	t
94238.60c	236.0045	endf60	B-VI.0	1978	294	29,054	3,753	20	no	b
** Pu-239 **										
94239.11c	236.9986	endf62mt	B-VI.2	1993	77	568,756	62,522	20	yes	b
94239.12c	236.9986	endf62mt	B-VI.2	1993	400	418,556	43,747	20	yes	b

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
94239.13c	236.9986	endf62mt	B-VI.2	1993	500	395,964	40,923	20	yes	b
94239.14c	236.9986	endf62mt	B-VI.2	1993	600	377,116	38,567	20	yes	b
94239.15c	236.9986	endf62mt	B-VI.2	1993	800	350,292	35,214	20	yes	b
94239.16c	236.9986	endf62mt	B-VI.2	1993	900	338,236	33,707	20	yes	b
94239.17c	236.9986	endf62mt	B-VI.2	1993	1200	312,572	30,499	20	yes	b
94239.42c	236.9986	endl92	LLNL	<1992	300	93,878	6,827	30	yes	b
94239.50c	236.9990	endf5p	B-V.0	1976	294	74,049	7,809	20	yes	b
94239.50d	236.9990	dre5	B-V.0	1976	294	12,631	263	20	yes	b
94239.55c	236.9990	rmccs	B-V.2	1983	294	102,099	10,318	20	yes	b
94239.55d	236.9990	drmccs	B-V.2	1983	294	20,727	263	20	yes	b
94239.56c	236.9990	endf5ht	B-V.2	1983	1.2e4	45,529	2,547	20	yes	b
94239.57c	236.9990	endf5ht	B-V.2	1983	1.2e5	36,201	1,381	20	yes	b
94239.58c	236.9990	endf5ht	B-V.2	1983	1.2e6	31,049	737	20	yes	b
94239.59c	236.9990	endf5ht	B-V.2	1983	1.2e7	29,761	576	20	yes	b
94239.60c	236.9986	endf60	B-VI.2	1993	294	283,354	26,847	20	yes	b
** Pu-240 **										
94240.42c	237.9916	endl92	LLNL	<1992	300	198,041	16,626	30	yes	b
94240.50c	237.9920	rmccs	B-V.0	1977	294	58,917	6,549	20	yes	b
94240.50d	237.9920	drmccs	B-V.0	1977	294	9,569	263	20	yes	b
94240.60c	237.9920	endf60	B-VI.2	1986	294	133,071	15,676	20	yes	b
** Pu-241 **										
94241.35c	238.9860	endl85	LLNL	<1985	0	8,844	257	20	yes	p
94241.42c	238.9860	endl92	LLNL	<1992	300	14,108	203	30	yes	b
94241.50c	238.9780	endf5p	B-V.0	1977	294	38,601	3,744	20	yes	b
94241.50d	238.9780	dre5	B-V.0	1977	294	11,575	263	20	yes	b
94241.51c	238.9780	rmccs	B-V.0	1977	294	13,403	623	20	yes	b
94241.51d	238.9780	drmccs	B-V.0	1977	294	11,575	263	20	yes	b
94241.60c	238.9780	endf60	B-VI.1	1988	294	76,453	8,112	20	yes	b
** Pu-242 **										
94242.35c	239.9793	endl85	LLNL	<1985	0	21,159	1,724	20	yes	p
94242.42c	239.9793	endl92	LLNL	<1992	300	48,688	4,287	30	yes	b
94242.50c	239.9790	endf5p	B-V.0	1978	294	71,429	7,636	20	yes	b
94242.50d	239.9790	dre5	B-V.0	1978	294	12,463	263	20	yes	b
94242.51c	239.9790	rmccs	B-V.0	1978	294	15,702	728	20	yes	b
94242.51d	239.9790	drmccs	B-V.0	1978	294	12,463	263	20	yes	b
94242.60c	239.9790	endf60	B-VI.0	1978	294	73,725	7,896	20	yes	b
** Pu-243 **										
94243.35c	240.9740	endl85	LLNL	<1985	0	10,763	485	20	yes	p
94243.42c	240.9740	endl92	LLNL	<1992	300	20,253	745	30	yes	b
94243.60c	240.9740	endf60	B-VI.2	1976	294	45,142	4,452	20	yes	t
** Pu-244 **										
94244.60c	241.9680	endf60	B-VI.0	1978	294	23,654	3,695	20	no	t
Z = 95 ***** Americium *****										
** Am-241 **										
95241.35c	238.9860	endl85	LLNL	<1985	0	25,290	1,982	20	yes	p
95241.42c	238.9860	endl92	LLNL	<1992	300	32,579	2,011	30	yes	b
95241.50c	238.9860	endf5u	B-V.0	1978	294	42,084	4,420	20	yes	t
95241.50d	238.9860	dre5	B-V.0	1978	294	9,971	263	20	yes	t
95241.51c	238.9860	rmccs	B-V.0	1978	294	12,374	713	20	yes	t
95241.51d	238.9860	drmccs	B-V.0	1978	294	9,971	263	20	yes	t
95241.60c	238.9860	endf60	T-2	1994	300	168,924	13,556	30	yes	b

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
** Am-242 ms **										
95242.35c	239.9801	endl85	LLNL	<1985	0	20,908	1,817	20	yes	p
95242.42c	239.9801	endl92	LLNL	<1992	300	21,828	1,368	20	yes	b
95242.50c	239.9800	endf5u	B-V.0	1978	294	8,593	323	20	yes	t
95242.50d	239.9800	dre5	B-V.0	1978	294	9,048	263	20	yes	t
95242.51c	239.9800	rmccs	B-V.0	1978	294	8,502	317	20	yes	t
95242.51d	239.9800	drmccs	B-V.0	1978	294	9,048	263	20	yes	t
** Am-243 **										
95243.35c	240.9733	endl85	LLNL	<1985	0	39,400	4,093	20	yes	p
95243.42c	240.9733	endl92	LLNL	<1992	300	52,074	4,867	30	yes	b
95243.50c	240.9730	endf5u	B-V.0	1978	294	92,015	11,921	20	yes	t
95243.50d	240.9730	dre5	B-V.0	1978	294	11,742	263	20	yes	t
95243.51c	240.9730	rmccs	B-V.0	1978	294	13,684	757	20	yes	t
95243.51d	240.9730	drmccs	B-V.0	1978	294	11,742	263	20	yes	t
95243.60c	240.9730	endf60	B-VI.0	1988	294	104,257	11,984	20	yes	b
Z = 96 ***** Curium *****										
** Cm-241 **										
96241.60c	238.9870	endf60	B-VI.0	1978	294	3,132	278	20	no	t
** Cm-242 **										
96242.35c	239.9794	endl85	LLNL	<1985	0	21,653	1,891	20	yes	p
96242.42c	239.9794	endl92	LLNL	<1992	300	37,766	3,141	30	yes	b
96242.50c	239.9790	endf5u	B-V.0	1978	294	30,897	3,113	20	yes	t
96242.50d	239.9790	dre5	B-V.0	1978	294	8,903	263	20	yes	t
96242.51c	239.9790	rmccs	B-V.0	1978	294	9,767	472	20	yes	t
96242.51d	239.9790	drmccs	B-V.0	1978	294	8,903	263	20	yes	t
96242.60c	239.9790	endf60	B-VI.0	1978	294	34,374	3,544	20	yes	b
** Cm-243 **										
96243.35c	240.9733	endl85	LLNL	<1985	0	21,577	1,880	20	yes	p
96243.42c	240.9733	endl92	LLNL	<1992	300	21,543	1,099	30	yes	b
96243.60c	240.9730	endf60	B-VI.0	1978	294	18,860	1,445	20	yes	t
** Cm-244 **										
96244.35c	241.9661	endl85	LLNL	<1985	0	21,196	1,815	20	yes	p
96244.42c	241.9661	endl92	LLNL	<1992	300	46,590	4,198	30	yes	b
96244.50c	241.9660	endf5u	B-V.0	1978	294	45,991	4,919	20	yes	t
96244.50d	241.9660	dre5	B-V.0	1978	294	9,509	263	20	yes	t
96244.51c	241.9660	rmccs	B-V.0	1978	294	10,847	566	20	yes	t
96244.51d	241.9660	drmccs	B-V.0	1978	294	9,509	263	20	yes	t
96244.60c	241.9660	endf60	B-VI.0	1978	294	73,001	8,294	20	yes	t
** Cm-245 **										
96245.35c	242.9602	endl85	LLNL	<1985	0	24,128	2,230	20	yes	p
96245.42c	242.9602	endl92	LLNL	<1992	300	25,678	1,564	30	yes	b
96245.60c	242.9600	endf60	B-VI.2	1979	294	29,535	2,636	20	yes	b
** Cm-246 **										
96246.35c	243.9534	endl85	LLNL	<1985	0	12,489	711	20	yes	p
96246.42c	243.9534	endl92	LLNL	<1992	300	24,550	1,376	30	yes	b
96246.60c	243.9530	endf60	B-VI.2	1976	294	37,948	3,311	20	yes	t
** Cm-247 **										
96247.35c	244.9479	endl85	LLNL	<1985	0	20,265	1,654	20	yes	p
96247.42c	244.9479	endl92	LLNL	<1992	300	39,971	3,256	30	yes	b
96247.60c	244.9500	endf60	B-VI.2	1976	294	38,800	3,679	20	yes	t
** Cm-248 **										
96248.35c	245.9413	endl85	LLNL	<1985	0	18,178	1,425	20	yes	p
96248.42c	245.9413	endl92	LLNL	<1992	300	40,345	3,355	30	yes	b
96248.60c	245.9410	endf60	B-VI.0	1978	294	83,452	9,706	20	yes	t

APPENDIX G

ZAID	AWR	Library Name	Source	Eval Date	Temp (°K)	Length words	NE	E_{max} MeV	GPD	$\bar{\nu}$
Z = 97	*****	Berkelium	*****							
** Bk-249 **										
97249.35c	246.9353	endl85	LLNL	<1985	0	11,783	633	20	yes	p
97249.42c	246.9353	endl92	LLNL	<1992	300	19,573	809	30	yes	b
97249.60c	246.9400	endf60	B-VI:XTM	1986	294	50,503	5,268	20	no	b
Z = 98	*****	Californium	*****							
** Cf-249 **										
98249.35c	246.9352	endl85	LLNL	<1985	0	28,055	2,659	20	yes	p
98249.42c	246.9352	endl92	LLNL	<1992	300	49,615	4,554	30	yes	b
98249.60c	246.9400	endf60	B-VI:XTM	1989	294	41,271	4,329	20	no	b
** Cf-250 **										
98250.35c	247.9281	endl85	LLNL	<1985	0	10,487	457	20	yes	p
98250.42c	247.9281	endl92	LLNL	<1992	300	17,659	574	30	yes	b
98250.60c	247.9280	endf60	B-VI.2	1976	294	47,758	5,554	20	yes	t
** Cf-251 **										
98251.35c	248.9227	endl85	LLNL	<1985	0	10,969	516	20	yes	p
98251.42c	248.9227	endl92	LLNL	<1992	300	17,673	545	30	yes	b
98251.60c	248.9230	endf60	B-VI.2	1976	294	42,817	4,226	20	yes	b
** Cf-252 **										
98252.35c	249.9161	endl85	LLNL	<1985	0	17,908	1,535	20	yes	p
98252.42c	249.9161	endl92	LLNL	<1992	300	21,027	1,210	30	yes	b
98252.60c	249.9160	endf60	B-VI.2	1976	294	49,204	5,250	20	yes	b

Not all libraries listed in this table are publically available.

SPECIAL NOTES

- note 1. The data libraries previously known as EPRXS and U600K are now a part of the data library ENDF5MT.
- note 2. Data translated to ENDF/B-VI format with some modifications by LANL.
- note 3. The 100XS data library contains data for 9 nuclides up to 100 MeV. Heating numbers on this data library are known to be incorrect, overestimating the energy deposition.⁴
- note 4. The natural carbon data 6000.50c are repeated here with the ZAID of 6012.50c for the user's convenience. Both are based on the natural carbon ENDF/B-V.0 evaluation.
- note 5. The data libraries previously known as ARKRC, GDT2GP, IRNAT, MIS-CXS, TM169, and T2DDC are now a part of the data library MISC5XS.
- note 6. Photon production data were added to the existing ENDF evaluation in 1984. A complete new evaluation was performed in 1986.

APPENDIX G

- note 7. Photon production added to ENDF/B-V.0 neutron files by T-2, with the intent to estimate photon heating roughly.⁵
- note 8. These data were taken from incomplete fission-product evaluations.⁶
- note 9. This is ENDF/B-V.0 after modification by evaluator to get better agreement with ENDL85.^{7,8}
- note 10. The following files for Zr have been replaced by the indicated ZAID, eliminating the rare problem of having a secondary neutron energy greater than the incident neutron energy caused by an ENDF/B-V.0 evaluation problem.⁹ Note that this correction has been made for the ENDF/B-VI evaluation.

40000.50c	rmccs	->	40000.56c	misc5xs
40000.50d	drmcscs	->	40000.56d	misc5xs
40000.51c	endf5p	->	40000.57c	misc5xs
40000.51d	dre5	->	40000.57d	misc5xs
40000.53c	eprixs	->	40000.58c	misc5xs

- note 11. The ZAIDs for ENDL-based average fission product data files have been changed for the latest library, ENDL92, to 49120.42c and 49125.42c. Z is now set to 49 to ensure that the appropriate photon transport library is used in MODE N P problems. You may need to update the atomic weight ratio table in your XSDIR file to include these entries.^{10,11}
- note 12. The LANL/T-2 evaluation for I-127 was accepted for ENDF/B-VI.2 with modifications. These data are processed from the original LANL/T-2 evaluation.
- note 13. Photon production for GDT2GP. Photon production data were added to the ENDF/B-V.0 neutron cross sections by T-2. These data are valid only to 1 MeV.¹²
- note 14. Photon production data added to original evaluation in 1981 by LANL.
- note 15. The multitemperature data library ENDF62MT is still under development and is not publically available.¹³

IV. MULTIGROUP DATA FOR MCNP

Currently, only one coupled neutron-photon multigroup library is supported by XTM, MGXSNP.¹⁴ MGXSNP is comprised of 30-group neutron and 12-group photon data primarily based on ENDF/B-V for 95 nuclides. The MCNP compatible multigroup data library was produced from the original Sn multigroup libraries MENDF5 and MENDF5G using the code CRSRD in April 1987.^{15,16} The original neutron data library, MENDF5, was produced using the “TD-Division Weight Function,” also called “CLAW” by the processing code NJOY.¹⁷⁻¹⁹ This weight function is a combination of a Maxwellian thermal + 1/E + fission + fusion peak at 14.0 MeV. The data library contains no upscatter groups or self-shielding, and is most applicable for fast systems. All cross-sections are for room temperature, 300°K. P0 through P4 scattering matrices from the original library were processed by CRSRD into angular distributions for MCNP using the Carter-Forest equiprobable bin treatment. When available, both total and prompt nubar data

are provided. The edit reactions available for each ZAID are fully described in reference 14.

Table G.3 describes the MGXSNP data library. The ZAIDs used for this library correspond to the source evaluation in the same manner as the ZAID for the continuous-energy and discrete data; as an example the same source evaluation for natural iron was used to produce 26000.55c, 26000.55d and 26000.55m. For coupled neutron-photon problems, specifying a particular isotope on a material card will invoke the neutron set for that isotope and the corresponding photon set for that element. For example, an entry of “1003” on a material card will cause MCNP to use ZAID=1003.50m for neutron data and 1000.01g for photon data.

Table G.3
MGXSNP: A Coupled Neutron-Photon Multigroup Data Library

<u>ZAID</u>	<u>Neutron AWR</u>	<u>Length</u>	<u>ZAID</u>	<u>Photon AWR</u>	<u>Length</u>
1001.50m	0.999172	3249	1000.01g	0.999317	583
1002.55m	1.996810	3542			
1003.50m	2.990154	1927			
2003.50m	2.990134	1843	2000.01g	3.968217	583
2004.50m	3.968238	1629			
3006.50m	5.963479	3566	3000.01g	6.881312	583
3007.55m	6.955768	3555			
4007.35m	6.949815	1598	4000.01g	8.934763	557
4009.50m	8.934807	3014			
5010.50m	9.926970	3557	5000.01g	10.717168	583
5011.56m	10.914679	2795			
6000.50m (1)	11.896972	2933	6000.01g	11.907955	583
6012.50m (1)	11.896972	2933			
7014.50m	13.882849	3501	7000.01g	13.886438	583
7015.55m	14.871314	2743			
8016.50m	15.857588	3346	8000.01g	15.861942	583
9019.50m	18.835289	3261	9000.01g	18.835197	583
11023.50m	22.792388	2982	11000.01g	22.792275	583
12000.50m	24.096375	3802	12000.01g	24.096261	583
13027.50m	26.749887	3853	13000.01g	26.749756	583
14000.50m	27.844378	3266	14000.01g	27.844241	583
15031.50m	30.707833	2123	15000.01g	30.707682	583
16032.50m	31.697571	2185	16000.01g	31.788823	583
17000.50m	35.148355	2737	17000.01g	35.148180	583
18000.35m	39.605021	2022	18000.01g	39.604489	557
19000.50m	38.762616	2833	19000.01g	38.762423	583
20000.50m	39.734053	3450	20000.01g	39.733857	583
22000.50m	47.455981	3015	22000.01g	47.455747	583
23000.50m	50.504104	2775	23000.01g	50.503856	583
24000.50m	51.549511	3924	24000.01g	51.549253	583
25055.50m	54.466367	2890	25000.01g	54.466099	583
26000.55m	55.366734	4304	26000.01g	55.366466	583
27059.50m	58.427218	2889	27000.01g	58.426930	583
28000.50m	58.182926	3373	28000.01g	58.182641	583
29000.50m	62.999465	2803	29000.01g	62.999157	583

APPENDIX G

31000.50m	69.124611	2084	31000.01g	69.124270	583
33075.35m	74.278340	2022	33000.01g	74.277979	557
36078.50m	77.251400	2108	36000.01g	83.080137	583
36080.50m	79.230241	2257			
36082.50m	81.210203	2312			
36083.50m	82.202262	2141			
36084.50m	83.191072	2460			
36086.50m	85.173016	2413			
40000.50m	90.440039	2466	40000.01g	90.439594	583
41093.50m	92.108717	2746	41000.01g	92.108263	583
42000.50m	95.107162	1991	42000.01g	95.106691	583
45103.50m	102.021993	2147	45000.01g	102.021490	583
45117.90m	115.544386	2709			
46119.90m	117.525231	2629	46000.01g	105.513949	557
47000.55m	106.941883	2693	47000.01g	106.941685	583
47107.50m	105.987245	2107			
47109.50m	107.969736	1924			
48000.50m	111.442911	1841	48000.01g	111.442363	583
50120.35m	115.995479	1929	50000.01g	117.667336	557
50998.99m	228.025301	1382			
50999.99m	228.025301	1413			
54000.35m	130.171713	1929	54000.01g	130.165202	557
56138.50m	136.721230	2115	56000.01g	136.146809	583
63000.35m	150.654333	1933	63000.01g	150.657141	557
63151.55m	149.623005	2976			
63153.55m	151.608005	2691			
64000.35m	155.898915	1929	64000.01g	155.900158	557
67165.55m	163.512997	2526	67000.01g	163.513493	583
73181.50m	179.394458	2787	73000.01g	179.393456	583
74000.55m	182.270446	4360	74000.01g	182.269548	583
74182.55m	180.386082	3687			
74183.55m	181.379499	3628			
74184.55m	182.371615	3664			
74186.55m	184.357838	3672			
75185.50m	183.365036	1968	75000.01g	184.607108	583
75187.50m	185.350629	2061			
78000.35m	193.415026	1929	78000.01g	193.404225	557
79197.56m	195.274027	3490	79000.01g	195.274513	583
82000.50m	205.437162	3384	82000.01g	205.436151	583
83209.50m	207.186158	2524	83000.01g	207.185136	583
90232.50m	230.045857	2896	90000.01g	230.044724	583
91233.50m	231.039442	1970	91000.01g	229.051160	479
92233.50m	231.038833	1988	92000.01g	235.984125	583
92234.50m	232.031554	2150			
92235.50m	233.025921	3164			
92236.50m	234.018959	2166			
92237.50m	235.013509	2174			
92238.50m	236.006966	3553			
92239.35m	236.997601	2147			
93237.55m	235.012957	2812	93000.01g	235.011799	479
94238.50m	236.005745	2442	94000.01g (2)	241.967559	583
94239.55m	236.999740	3038			
94240.50m	237.992791	3044			
94241.50m	238.987218	2856			

94242.50m	239.980508	2956
95241.50m	238.987196	2535
95242.50m	239.981303	2284
95243.50m	240.974535	2480
96242.50m	239.980599	1970
96244.50m	241.967311	1950

note 1. The neutron transport data for ZAID's 6012.50m and 6000.50m are the same.

note 2. Photon transport data are not provided for $Z > 94$.

V. DOSIMETRY DATA FOR MCNP

The tally multiplier (FM) feature in MCNP allows users to calculate quantities of the form:

$$C \int \phi(E)R(E)dE$$

where C is a constant, $\phi(E)$ is the fluence (n/cm^2), and R(E) is a response function. If R(E) is a cross section, and with the appropriate choice of units for C [atom/b-cm], the quantity calculated becomes the total number of some type of reaction per unit volume. If the tally is made over a finite time interval, it becomes a reaction rate per unit volume. In addition to using the standard reaction cross-section information available in our neutron transport libraries, dosimetry or activation reaction data may also be used as a response function. Often only dosimetry data is available for rare nuclides.

A full description of the use of dosimetry data can be found in reference 20. This memorandum also gives a listing of all reaction data that is available for each ZAID. Table G.4 lists the available dosimetry data libraries for use with MCNP, the evaluation source and data, and the length of the data. There have been no major revisions of the LLNL/ACTL data since LLLDOS was produced. Users need to remember that dosimetry data libraries are only appropriate when used as a source of R(E) for FM tally multipliers. Dosimetry data libraries may not be used as a source of data for materials through which actual transport is required.

Table G.4
Dosimetry Data Libraries for MCNP Tallies

ZAID	AWR	Library Name	Source	Eval Date	Length Words
Z = 1 ***** Hydrogen *****					
1001.30y	1.00782	lldos	LLNL/ACTL	<1983	209
1002.30y	2.01410	lldos	LLNL/ACTL	<1983	149
1003.30y	3.01605	lldos	LLNL/ACTL	<1983	27
Z = 2 ***** Helium *****					
2003.30y	3.01603	lldos	LLNL/ACTL	<1983	267

APPENDIX G

Z = 3 ***** Lithium *****

3006.24y	5.96340	531dos	ENDF/B-V	1978	735
3006.26y	5.96340	532dos	ENDF/B-V	1977	713
3006.30y	6.01512	lldos	LLNL/ACTL	<1983	931
3007.26y	6.95570	532dos	ENDF/B-V	1972	733
3007.30y	7.01601	lldos	LLNL/ACTL	<1983	201

Z = 4 ***** Beryllium *****

4007.30y	7.01693	lldos	LLNL/ACTL	<1983	253
4009.30y	9.01218	lldos	LLNL/ACTL	<1983	335

Z = 5 ***** Boron *****

5010.24y	9.92690	531dos	ENDF/B-V	1979	769
5010.26y	9.92690	532dos	ENDF/B-V	1976	589
5010.30y	10.01290	lldos	LLNL/ACTL	<1983	381
5011.30y	11.00930	lldos	LLNL/ACTL	<1983	119

Z = 6 ***** Carbon *****

6012.30y	12.00000	lldos	LLNL/ACTL	<1983	97
6013.30y	13.00340	lldos	LLNL/ACTL	<1983	479
6014.30y	14.00320	lldos	LLNL/ACTL	<1983	63

Z = 7 ***** Nitrogen *****

7014.26y	13.88300	532dos	ENDF/B-V	1973	1013
7014.30y	14.00310	lldos	LLNL/ACTL	<1983	915

Z = 8 ***** Oxygen *****

8016.26y	15.85800	532dos	ENDF/B-V	1973	95
8016.30y	15.99490	lldos	LLNL/ACTL	<1983	215
8017.30y	16.99910	lldos	LLNL/ACTL	<1983	239

Z = 9 ***** Fluorine *****

9019.26y	18.83500	532dos	ENDF/B-V	1979	31
9019.30y	18.99840	lldos	LLNL/ACTL	<1983	517

Z = 11 ***** Sodium *****

11023.30y	22.98980	lldos	LLNL/ACTL	<1983	621
-----------	----------	-------	-----------	-------	-----

APPENDIX G

Z = 12 ***** Magnesium *****

12023.30y	22.99410	lldos	LLNL/ACTL	<1983	333
12024.26y	23.98500	532dos	ENDF/B-V	1979	165
12024.30y	23.98500	lldos	LLNL/ACTL	<1983	309
12025.30y	24.98580	lldos	LLNL/ACTL	<1983	309
12026.30y	25.98260	lldos	LLNL/ACTL	<1983	321
12027.30y	26.98430	lldos	LLNL/ACTL	<1983	309

Z = 13 ***** Aluminum *****

13026.30y	25.98690	lldos	LLNL/ACTL	<1983	447
13027.24y	26.75000	531dos	ENDF/B-V	1973	1165
13027.26y	26.75000	532dos	ENDF/B-V	1973	1753
13027.30y	26.98150	lldos	LLNL/ACTL	<1983	491

Z = 14 ***** Silicon *****

14027.30y	26.98670	lldos	LLNL/ACTL	<1983	401
14028.30y	27.97690	lldos	LLNL/ACTL	<1983	377
14029.30y	28.97650	lldos	LLNL/ACTL	<1983	389
14030.30y	29.97380	lldos	LLNL/ACTL	<1983	395
14031.30y	30.97540	lldos	LLNL/ACTL	<1983	337

Z = 15 ***** Phosphorus *****

15031.26y	30.70800	532dos	ENDF/B-V	1977	65
15031.30y	30.97380	lldos	LLNL/ACTL	<1983	263

Z = 16 ***** Sulfur *****

16031.30y	30.97960	lldos	LLNL/ACTL	<1983	393
16032.24y	31.69740	531dos	ENDF/B-V	1979	145
16032.26y	31.69700	532dos	ENDF/B-V	1977	35
16032.30y	31.97210	lldos	LLNL/ACTL	<1983	417
16033.30y	32.97150	lldos	LLNL/ACTL	<1983	435
16034.30y	33.96790	lldos	LLNL/ACTL	<1983	437
16035.30y	34.96900	lldos	LLNL/ACTL	<1983	339
16036.30y	35.96710	lldos	LLNL/ACTL	<1983	293
16037.30y	36.97110	lldos	LLNL/ACTL	<1983	279

Z = 17 ***** Chlorine *****

17034.30y	33.97380	lldos	LLNL/ACTL	<1983	401
17035.30y	34.96890	lldos	LLNL/ACTL	<1983	459
17036.30y	35.96830	lldos	LLNL/ACTL	<1983	563

APPENDIX G

17037.30y	36.96590	lldos	LLNL/ACTL	<1983	407
17038.30y	37.96800	lldos	LLNL/ACTL	<1983	337

Z = 18 ***** Argon *****

18036.30y	35.96750	lldos	LLNL/ACTL	<1983	309
18037.30y	36.96680	lldos	LLNL/ACTL	<1983	311
18038.30y	37.96270	lldos	LLNL/ACTL	<1983	311
18039.30y	38.96430	lldos	LLNL/ACTL	<1983	337
18040.26y	39.61910	532dos	ENDF/B-V	1979	3861
18040.30y	39.96240	lldos	LLNL/ACTL	<1983	347
18041.30y	40.96450	lldos	LLNL/ACTL	<1983	317
18042.30y	41.96300	lldos	LLNL/ACTL	<1983	291
18043.30y	42.96570	lldos	LLNL/ACTL	<1983	295

Z = 19 ***** Potassium *****

19038.30y	37.96910	lldos	LLNL/ACTL	<1983	603
19039.30y	38.96370	lldos	LLNL/ACTL	<1983	405
19040.30y	39.96400	lldos	LLNL/ACTL	<1983	675
19041.26y	40.60990	532dos	ENDF/B-V	1979	33
19041.30y	40.96180	lldos	LLNL/ACTL	<1983	369
19042.30y	41.96240	lldos	LLNL/ACTL	<1983	343
19043.30y	42.96070	lldos	LLNL/ACTL	<1983	277
19044.30y	43.96160	lldos	LLNL/ACTL	<1983	275
19045.30y	44.96070	lldos	LLNL/ACTL	<1983	283
19046.30y	45.96200	lldos	LLNL/ACTL	<1983	283

Z = 20 ***** Calcium *****

20039.30y	38.97070	lldos	LLNL/ACTL	<1983	601
20040.30y	39.96260	lldos	LLNL/ACTL	<1983	309
20041.30y	40.96230	lldos	LLNL/ACTL	<1983	313
20042.30y	41.95860	lldos	LLNL/ACTL	<1983	285
20043.30y	42.95880	lldos	LLNL/ACTL	<1983	295
20044.30y	43.95550	lldos	LLNL/ACTL	<1983	269
20045.30y	44.95620	lldos	LLNL/ACTL	<1983	271
20046.30y	45.95370	lldos	LLNL/ACTL	<1983	255
20047.30y	46.95450	lldos	LLNL/ACTL	<1983	243
20048.30y	47.95250	lldos	LLNL/ACTL	<1983	239
20049.30y	48.95570	lldos	LLNL/ACTL	<1983	229

Z = 21 ***** Scandium *****

21044.30y	43.95940	lldos	LLNL/ACTL	<1983	313
21044.31y	43.95940	lldos	LLNL/ACTL	<1983	311
21045.24y	44.56790	531dos	ENDF/B-V	1979	20179

APPENDIX G

21045.26y	44.56790	532dos	ENDF/B-V	1979	20211
21045.30y	44.95590	lldos	LLNL/ACTL	<1983	547
21046.30y	45.95520	lldos	LLNL/ACTL	<1983	323
21046.31y	45.95520	lldos	LLNL/ACTL	<1983	323
21047.30y	46.95240	lldos	LLNL/ACTL	<1983	331
21048.30y	47.95220	lldos	LLNL/ACTL	<1983	325

Z = 22 ***** Titanium *****

22045.30y	44.95810	lldos	LLNL/ACTL	<1983	449
22046.24y	45.55780	531dos	ENDF/B-V	1977	53
22046.26y	45.55780	532dos	ENDF/B-V	1977	53
22046.30y	45.95260	lldos	LLNL/ACTL	<1983	391
22047.24y	46.54800	531dos	ENDF/B-V	1977	209
22047.26y	46.54800	532dos	ENDF/B-V	1977	209
22047.30y	46.95180	lldos	LLNL/ACTL	<1983	419
22048.24y	47.53600	531dos	ENDF/B-V	1977	145
22048.26y	47.53600	532dos	ENDF/B-V	1977	177
22048.30y	47.94790	lldos	LLNL/ACTL	<1983	415
22049.30y	48.94790	lldos	LLNL/ACTL	<1983	409
22050.26y	49.57000	532dos	ENDF/B-V	1979	33
22050.30y	49.94480	lldos	LLNL/ACTL	<1983	345
22051.30y	50.94660	lldos	LLNL/ACTL	<1983	389

Z = 23 ***** Vanadium *****

23047.30y	46.95490	lldos	LLNL/ACTL	<1983	209
23048.30y	47.95230	lldos	LLNL/ACTL	<1983	399
23049.30y	48.94850	lldos	LLNL/ACTL	<1983	423
23050.30y	49.94720	lldos	LLNL/ACTL	<1983	407
23051.30y	50.94400	lldos	LLNL/ACTL	<1983	357
23052.30y	51.94480	lldos	LLNL/ACTL	<1983	401

Z = 24 ***** Chromium *****

24049.30y	48.95130	lldos	LLNL/ACTL	<1983	377
24050.26y	49.51650	532dos	ENDF/B-V	1979	7405
24050.30y	49.94600	lldos	LLNL/ACTL	<1983	435
24051.30y	50.94480	lldos	LLNL/ACTL	<1983	377
24052.26y	51.49380	532dos	ENDF/B-V	1979	27
24052.30y	51.94050	lldos	LLNL/ACTL	<1983	417
24053.30y	52.94060	lldos	LLNL/ACTL	<1983	425
24054.30y	53.93890	lldos	LLNL/ACTL	<1983	461
24055.30y	54.94080	lldos	LLNL/ACTL	<1983	419
24056.30y	55.94070	lldos	LLNL/ACTL	<1983	297

APPENDIX G

Z = 25 ***** Manganese *****

25051.30y	50.94820	lldos	LLNL/ACTL	<1983	417
25052.30y	51.94560	lldos	LLNL/ACTL	<1983	379
25053.30y	52.94130	lldos	LLNL/ACTL	<1983	425
25054.30y	53.94040	lldos	LLNL/ACTL	<1983	391
25055.24y	54.46610	531dos	ENDF/B-V	1977	119
25055.30y	54.93800	lldos	LLNL/ACTL	<1983	435
25056.30y	55.93890	lldos	LLNL/ACTL	<1983	423
25057.30y	56.93830	lldos	LLNL/ACTL	<1983	419
25058.30y	57.93970	lldos	LLNL/ACTL	<1983	285

Z = 26 ***** Iron *****

26053.30y	52.94530	lldos	LLNL/ACTL	<1983	387
26054.24y	53.47620	531dos	ENDF/B-V	1979	517
26054.26y	53.47600	532dos	ENDF/B-V	1978	21563
26054.30y	53.93960	lldos	LLNL/ACTL	<1983	457
26055.30y	54.93830	lldos	LLNL/ACTL	<1983	373
26056.24y	55.45400	531dos	ENDF/B-V	1978	449
26056.26y	55.45400	532dos	ENDF/B-V	1978	581
26056.30y	55.93490	lldos	LLNL/ACTL	<1983	415
26057.30y	56.93540	lldos	LLNL/ACTL	<1983	447
26058.24y	57.43560	531dos	ENDF/B-V	1979	7077
26058.26y	57.43560	532dos	ENDF/B-V	1979	7097
26058.30y	57.93330	lldos	LLNL/ACTL	<1983	431
26059.30y	58.93490	lldos	LLNL/ACTL	<1983	397
26060.30y	59.93400	lldos	LLNL/ACTL	<1983	285

Z = 27 ***** Cobalt *****

27057.30y	56.93630	lldos	LLNL/ACTL	<1983	629
27058.30y	57.93580	lldos	LLNL/ACTL	<1983	531
27058.31y	57.93580	lldos	LLNL/ACTL	<1983	569
27059.30y	58.93320	lldos	LLNL/ACTL	<1983	657
27060.30y	59.93380	lldos	LLNL/ACTL	<1983	435
27060.31y	59.93380	lldos	LLNL/ACTL	<1983	499
27061.30y	60.93250	lldos	LLNL/ACTL	<1983	613
27062.30y	61.93400	lldos	LLNL/ACTL	<1983	463
27062.31y	61.93400	lldos	LLNL/ACTL	<1983	519
27063.30y	62.93360	lldos	LLNL/ACTL	<1983	339
27064.30y	63.93580	lldos	LLNL/ACTL	<1983	323

Z = 28 ***** Nickel *****

28057.30y	56.93980	lldos	LLNL/ACTL	<1983	441
-----------	----------	-------	-----------	-------	-----

APPENDIX G

28058.24y	57.43760	531dos	ENDF/B-V	1977	411
28058.26y	57.43760	532dos	ENDF/B-V	1978	4079
28058.30y	57.93530	lldos	LLNL/ACTL	<1983	509
28059.30y	58.93430	lldos	LLNL/ACTL	<1983	513
28060.24y	59.41590	531dos	ENDF/B-V	1977	435
28060.26y	59.41590	532dos	ENDF/B-V	1978	479
28060.30y	59.93080	lldos	LLNL/ACTL	<1983	503
28061.30y	60.93110	lldos	LLNL/ACTL	<1983	489
28062.26y	61.39630	532dos	ENDF/B-V	1978	3847
28062.30y	61.92830	lldos	LLNL/ACTL	<1983	459
28063.30y	62.92970	lldos	LLNL/ACTL	<1983	375
28064.30y	63.92800	lldos	LLNL/ACTL	<1983	397
28065.30y	64.93010	lldos	LLNL/ACTL	<1983	345

Z = 29 ***** Copper *****

29062.30y	61.93260	lldos	LLNL/ACTL	<1983	507
29063.24y	62.93000	531dos	ENDF/B-V	1978	3375
29063.26y	62.93000	532dos	ENDF/B-V	1978	3615
29063.30y	62.92960	lldos	LLNL/ACTL	<1983	513
29064.30y	63.92980	lldos	LLNL/ACTL	<1983	437
29065.24y	64.92800	531dos	ENDF/B-V	1978	49
29065.26y	64.92800	532dos	ENDF/B-V	1978	49
29065.30y	64.92780	lldos	LLNL/ACTL	<1983	563
29066.30y	65.92890	lldos	LLNL/ACTL	<1983	397

Z = 30 ***** Zinc *****

30064.30y	63.92910	lldos	LLNL/ACTL	<1983	555
30066.30y	65.92600	lldos	LLNL/ACTL	<1983	561
30067.30y	66.92710	lldos	LLNL/ACTL	<1983	411
30068.30y	67.92480	lldos	LLNL/ACTL	<1983	643
30070.30y	69.92530	lldos	LLNL/ACTL	<1983	619

Z = 31 ***** Gallium *****

31069.30y	68.92560	lldos	LLNL/ACTL	<1983	197
31071.30y	70.92470	lldos	LLNL/ACTL	<1983	419

Z = 32 ***** Germanium *****

32070.30y	69.92420	lldos	LLNL/ACTL	<1983	405
32072.30y	71.92210	lldos	LLNL/ACTL	<1983	423
32073.30y	72.92350	lldos	LLNL/ACTL	<1983	431
32074.30y	73.92120	lldos	LLNL/ACTL	<1983	629
32076.30y	75.92140	lldos	LLNL/ACTL	<1983	623

APPENDIX G

Z = 33 ***** Arsenic *****

33075.30y	74.92160	lldos	LLNL/ACTL	<1983	987
-----------	----------	-------	-----------	-------	-----

Z = 34 ***** Selenium *****

34074.30y	73.92250	lldos	LLNL/ACTL	<1983	159
34076.30y	75.91920	lldos	LLNL/ACTL	<1983	177
34080.30y	79.91650	lldos	LLNL/ACTL	<1983	205
34082.30y	81.91670	lldos	LLNL/ACTL	<1983	223

Z = 35 ***** Bromine *****

35079.30y	78.91830	lldos	LLNL/ACTL	<1983	263
35081.30y	80.91630	lldos	LLNL/ACTL	<1983	695

Z = 37 ***** Rubidium *****

37085.30y	84.91180	lldos	LLNL/ACTL	<1983	193
37087.30y	86.90920	lldos	LLNL/ACTL	<1983	199

Z = 38 ***** Strontium *****

38084.30y	83.91340	lldos	LLNL/ACTL	<1983	163
38086.30y	85.90930	lldos	LLNL/ACTL	<1983	33

Z = 39 ***** Yttrium *****

39089.30y	88.90590	lldos	LLNL/ACTL	<1983	419
-----------	----------	-------	-----------	-------	-----

Z = 40 ***** Zirconium *****

40089.30y	88.90890	lldos	LLNL/ACTL	<1983	321
40090.26y	89.13200	532dos	ENDF/B-V	1976	37
40090.30y	89.90470	lldos	LLNL/ACTL	<1983	385
40091.30y	90.90560	lldos	LLNL/ACTL	<1983	407
40092.26y	91.11200	532dos	ENDF/B-V	1976	3821
40092.30y	91.90500	lldos	LLNL/ACTL	<1983	431
40093.30y	92.90650	lldos	LLNL/ACTL	<1983	371
40094.26y	93.09600	532dos	ENDF/B-V	1976	5255
40094.30y	93.90630	lldos	LLNL/ACTL	<1983	417
40095.30y	94.90800	lldos	LLNL/ACTL	<1983	375
40096.30y	95.90830	lldos	LLNL/ACTL	<1983	57
40097.30y	96.91090	lldos	LLNL/ACTL	<1983	339

APPENDIX G

Z = 41 ***** Niobium *****

41091.30y	90.90700	lldos	LLNL/ACTL	<1983	491
41091.31y	90.90700	lldos	LLNL/ACTL	<1983	491
41092.30y	91.90720	lldos	LLNL/ACTL	<1983	285
41092.31y	91.90720	lldos	LLNL/ACTL	<1983	285
41093.30y	92.90640	lldos	LLNL/ACTL	<1983	493
41094.30y	93.90730	lldos	LLNL/ACTL	<1983	331
41095.30y	94.90680	lldos	LLNL/ACTL	<1983	333
41096.30y	95.90810	lldos	LLNL/ACTL	<1983	335
41097.30y	96.90810	lldos	LLNL/ACTL	<1983	339
41098.30y	97.91030	lldos	LLNL/ACTL	<1983	341
41100.30y	99.91420	lldos	LLNL/ACTL	<1983	349

Z = 42 ***** Molybdenum *****

42090.30y	89.91390	lldos	LLNL/ACTL	<1983	261
42091.30y	90.91180	lldos	LLNL/ACTL	<1983	281
42092.26y	91.21000	532dos	ENDF/B-V	1980	7815
42092.30y	91.90680	lldos	LLNL/ACTL	<1983	537
42093.30y	92.90680	lldos	LLNL/ACTL	<1983	429
42093.31y	92.90680	lldos	LLNL/ACTL	<1983	461
42094.30y	93.90510	lldos	LLNL/ACTL	<1983	443
42095.30y	94.90580	lldos	LLNL/ACTL	<1983	523
42096.30y	95.90470	lldos	LLNL/ACTL	<1983	501
42097.30y	96.90600	lldos	LLNL/ACTL	<1983	427
42098.26y	97.06440	532dos	ENDF/B-V	1980	6489
42098.30y	97.90540	lldos	LLNL/ACTL	<1983	421
42099.30y	98.90770	lldos	LLNL/ACTL	<1983	445
42100.26y	99.04920	532dos	ENDF/B-V	1980	4971
42100.30y	99.90750	lldos	LLNL/ACTL	<1983	427
42101.30y	100.91000	lldos	LLNL/ACTL	<1983	447

Z = 43 ***** Technetium *****

43099.30y	98.90620	lldos	LLNL/ACTL	<1983	469
43099.31y	98.90620	lldos	LLNL/ACTL	<1983	469

Z = 45 ***** Rhodium *****

45103.30y	102.90600	lldos	LLNL/ACTL	<1983	275
-----------	-----------	-------	-----------	-------	-----

Z = 46 ***** Palladium *****

46110.30y	109.90500	lldos	LLNL/ACTL	<1983	417
-----------	-----------	-------	-----------	-------	-----

APPENDIX G

Z = 47 ***** Silver *****

47106.30y	105.90700	lldos	LLNL/ACTL	<1983	263
47106.31y	105.90700	lldos	LLNL/ACTL	<1983	265
47107.30y	106.90500	lldos	LLNL/ACTL	<1983	517
47108.30y	107.90600	lldos	LLNL/ACTL	<1983	275
47108.31y	107.90600	lldos	LLNL/ACTL	<1983	275
47109.30y	108.90500	lldos	LLNL/ACTL	<1983	583
47110.30y	109.90600	lldos	LLNL/ACTL	<1983	277
47110.31y	109.90600	lldos	LLNL/ACTL	<1983	281

Z = 48 ***** Cadmium *****

48106.30y	105.90600	lldos	LLNL/ACTL	<1983	177
48111.30y	110.90400	lldos	LLNL/ACTL	<1983	317
48112.30y	111.90300	lldos	LLNL/ACTL	<1983	221
48116.30y	115.90500	lldos	LLNL/ACTL	<1983	231

Z = 49 ***** Indium *****

49113.30y	112.90400	lldos	LLNL/ACTL	<1983	861
49115.24y	113.92000	531dos	ENDF/B-V	1978	26009
49115.26y	113.92000	532dos	ENDF/B-V	1978	26009
49115.30y	114.90400	lldos	LLNL/ACTL	<1983	1265

Z = 50 ***** Tin *****

50112.30y	111.90500	lldos	LLNL/ACTL	<1983	789
50114.30y	113.90300	lldos	LLNL/ACTL	<1983	435
50115.30y	114.90300	lldos	LLNL/ACTL	<1983	389
50116.30y	115.90200	lldos	LLNL/ACTL	<1983	603
50117.30y	116.90300	lldos	LLNL/ACTL	<1983	313
50118.30y	117.90200	lldos	LLNL/ACTL	<1983	745
50119.30y	118.90300	lldos	LLNL/ACTL	<1983	311
50120.26y	118.87200	532dos	ENDF/B-V	1974	12881
50120.30y	119.90200	lldos	LLNL/ACTL	<1983	309
50122.26y	120.85600	532dos	ENDF/B-V	1974	1891
50122.30y	121.90300	lldos	LLNL/ACTL	<1983	275
50124.26y	122.84100	532dos	ENDF/B-V	1974	1693
50124.30y	123.90500	lldos	LLNL/ACTL	<1983	485

Z = 51 ***** Antimony *****

51121.30y	120.90400	lldos	LLNL/ACTL	<1983	811
51123.30y	122.90400	lldos	LLNL/ACTL	<1983	1013

APPENDIX G

Z = 53 ***** Iodine *****					
53127.24y	125.81400	531dos	ENDF/B-V	1972	115
53127.26y	125.81400	532dos	ENDF/B-V	1980	14145
53127.30y	126.90400	lldos	LLNL/ACTL	<1983	221
Z = 55 ***** Cesium *****					
55133.30y	132.90500	lldos	LLNL/ACTL	<1983	215
Z = 57 ***** Lanthanum *****					
57139.26y	137.71300	532dos	ENDF/B-V	1980	15475
Z = 58 ***** Cerium *****					
58140.30y	139.90500	lldos	LLNL/ACTL	<1983	427
58142.30y	141.90900	lldos	LLNL/ACTL	<1983	265
Z = 59 ***** Praseodymium *****					
59141.30y	140.90800	lldos	LLNL/ACTL	<1983	215
Z = 60 ***** Neodymium *****					
60142.30y	141.90800	lldos	LLNL/ACTL	<1983	207
60148.30y	147.91700	lldos	LLNL/ACTL	<1983	255
60150.30y	149.92100	lldos	LLNL/ACTL	<1983	259
Z = 62 ***** Samarium *****					
62144.30y	143.91200	lldos	LLNL/ACTL	<1983	189
62148.30y	147.91500	lldos	LLNL/ACTL	<1983	245
62152.30y	151.92000	lldos	LLNL/ACTL	<1983	237
62154.30y	153.92200	lldos	LLNL/ACTL	<1983	247
Z = 63 ***** Europium *****					
63151.30y	150.92000	lldos	LLNL/ACTL	<1983	731
63153.30y	152.92100	lldos	LLNL/ACTL	<1983	565
Z = 64 ***** Gadolinium *****					
64150.30y	149.91900	lldos	LLNL/ACTL	<1983	237
64151.30y	150.92000	lldos	LLNL/ACTL	<1983	241

APPENDIX G

Z = 66 ***** Dysprosium *****

66164.26y	162.52000	532dos	ENDF/B-V	1967	581
-----------	-----------	--------	----------	------	-----

Z = 67 ***** Holmium *****

67163.30y	162.92900	lldos	LLNL/ACTL	<1983	533
67164.30y	163.93000	lldos	LLNL/ACTL	<1983	327
67164.31y	163.93000	lldos	LLNL/ACTL	<1983	327
67165.30y	164.93000	lldos	LLNL/ACTL	<1983	589
67166.30y	165.93200	lldos	LLNL/ACTL	<1983	333
67166.31y	165.93200	lldos	LLNL/ACTL	<1983	333

Z = 69 ***** Thulium *****

69169.30y	168.93400	lldos	LLNL/ACTL	<1983	453
-----------	-----------	-------	-----------	-------	-----

Z = 71 ***** Lutetium *****

71173.30y	172.93900	lldos	LLNL/ACTL	<1983	587
71174.30y	173.94000	lldos	LLNL/ACTL	<1983	417
71174.31y	173.94000	lldos	LLNL/ACTL	<1983	465
71175.30y	174.94100	lldos	LLNL/ACTL	<1983	559
71176.30y	175.94300	lldos	LLNL/ACTL	<1983	621
71176.31y	175.94300	lldos	LLNL/ACTL	<1983	637
71177.30y	176.94400	lldos	LLNL/ACTL	<1983	573
71177.31y	176.94400	lldos	LLNL/ACTL	<1983	573

Z = 72 ***** Hafnium *****

72174.30y	173.94000	lldos	LLNL/ACTL	<1983	147
72175.30y	174.94100	lldos	LLNL/ACTL	<1983	121
72176.30y	175.94100	lldos	LLNL/ACTL	<1983	153
72177.30y	176.94300	lldos	LLNL/ACTL	<1983	157
72178.30y	177.94400	lldos	LLNL/ACTL	<1983	153
72179.30y	178.94600	lldos	LLNL/ACTL	<1983	433
72180.30y	179.94700	lldos	LLNL/ACTL	<1983	409
72181.30y	180.94900	lldos	LLNL/ACTL	<1983	365
72183.30y	182.95400	lldos	LLNL/ACTL	<1983	373

Z = 73 ***** Tantalum *****

73179.30y	178.94600	lldos	LLNL/ACTL	<1983	629
73180.30y	179.94700	lldos	LLNL/ACTL	<1983	523
73180.31y	179.94700	lldos	LLNL/ACTL	<1983	435
73181.30y	180.94800	lldos	LLNL/ACTL	<1983	715

APPENDIX G

73182.30y	181.95000	lldos	LLNL/ACTL	<1983	435
73182.31y	181.95000	lldos	LLNL/ACTL	<1983	447
73183.30y	182.95100	lldos	LLNL/ACTL	<1983	425
73184.30y	183.95400	lldos	LLNL/ACTL	<1983	371
73186.30y	185.95900	lldos	LLNL/ACTL	<1983	377

Z = 74 ***** Tungsten *****

74179.30y	178.94700	lldos	LLNL/ACTL	<1983	263
74180.30y	179.94700	lldos	LLNL/ACTL	<1983	397
74181.30y	180.94800	lldos	LLNL/ACTL	<1983	263
74182.30y	181.94800	lldos	LLNL/ACTL	<1983	415
74183.30y	182.95000	lldos	LLNL/ACTL	<1983	499
74184.30y	183.95100	lldos	LLNL/ACTL	<1983	443
74185.30y	184.95300	lldos	LLNL/ACTL	<1983	267
74186.30y	185.95400	lldos	LLNL/ACTL	<1983	413
74187.30y	186.95700	lldos	LLNL/ACTL	<1983	279
74188.30y	187.95800	lldos	LLNL/ACTL	<1983	271

Z = 75 ***** Rhenium *****

75184.30y	183.95300	lldos	LLNL/ACTL	<1983	331
75184.31y	183.95300	lldos	LLNL/ACTL	<1983	335
75185.30y	184.95300	lldos	LLNL/ACTL	<1983	373
75186.30y	185.95500	lldos	LLNL/ACTL	<1983	381
75187.30y	186.95600	lldos	LLNL/ACTL	<1983	547
75188.30y	187.95800	lldos	LLNL/ACTL	<1983	339
75188.31y	187.95800	lldos	LLNL/ACTL	<1983	341

Z = 77 ***** Iridium *****

77191.30y	190.96100	lldos	LLNL/ACTL	<1983	237
77193.30y	192.96300	lldos	LLNL/ACTL	<1983	243
77194.30y	193.96500	lldos	LLNL/ACTL	<1983	421

Z = 78 ***** Platinum *****

78190.30y	189.96000	lldos	LLNL/ACTL	<1983	151
78192.30y	191.96100	lldos	LLNL/ACTL	<1983	153
78193.30y	192.96300	lldos	LLNL/ACTL	<1983	123
78193.31y	192.96300	lldos	LLNL/ACTL	<1983	123
78194.30y	193.96300	lldos	LLNL/ACTL	<1983	211
78195.30y	194.96500	lldos	LLNL/ACTL	<1983	157
78196.30y	195.96500	lldos	LLNL/ACTL	<1983	157
78197.30y	196.96700	lldos	LLNL/ACTL	<1983	427
78197.31y	196.96700	lldos	LLNL/ACTL	<1983	129

APPENDIX G

78198.30y	197.96800	lldos	LLNL/ACTL	<1983	183
78199.30y	198.97100	lldos	LLNL/ACTL	<1983	99
78199.31y	198.97100	lldos	LLNL/ACTL	<1983	99

Z = 79 ***** Gold *****

79193.30y	192.96400	lldos	LLNL/ACTL	<1983	209
79194.30y	193.96500	lldos	LLNL/ACTL	<1983	261
79195.30y	194.96500	lldos	LLNL/ACTL	<1983	261
79196.30y	195.96700	lldos	LLNL/ACTL	<1983	265
79196.31y	195.96700	lldos	LLNL/ACTL	<1983	265
79197.30y	196.96700	lldos	LLNL/ACTL	<1983	307
79198.30y	197.96800	lldos	LLNL/ACTL	<1983	265
79199.30y	198.96900	lldos	LLNL/ACTL	<1983	269
79200.30y	199.97100	lldos	LLNL/ACTL	<1983	39

Z = 80 ***** Mercury *****

80202.30y	201.97100	lldos	LLNL/ACTL	<1983	381
80203.30y	202.97300	lldos	LLNL/ACTL	<1983	379
80204.30y	203.97300	lldos	LLNL/ACTL	<1983	365

Z = 81 ***** Thallium *****

81202.30y	201.97200	lldos	LLNL/ACTL	<1983	377
81203.30y	202.97200	lldos	LLNL/ACTL	<1983	375
81204.30y	203.97400	lldos	LLNL/ACTL	<1983	373
81205.30y	204.97400	lldos	LLNL/ACTL	<1983	369

Z = 82 ***** Lead *****

82203.30y	202.97300	lldos	LLNL/ACTL	<1983	257
82204.30y	203.97300	lldos	LLNL/ACTL	<1983	405
82205.30y	204.97400	lldos	LLNL/ACTL	<1983	257
82206.30y	205.97400	lldos	LLNL/ACTL	<1983	347
82207.30y	206.97600	lldos	LLNL/ACTL	<1983	333
82208.30y	207.97700	lldos	LLNL/ACTL	<1983	263
82209.30y	208.98100	lldos	LLNL/ACTL	<1983	279
82210.30y	209.98400	lldos	LLNL/ACTL	<1983	351

Z = 83 ***** Bismuth *****

83208.30y	207.98000	lldos	LLNL/ACTL	<1983	409
83209.30y	208.98000	lldos	LLNL/ACTL	<1983	551
83210.30y	209.98400	lldos	LLNL/ACTL	<1983	421
83210.31y	209.98400	lldos	LLNL/ACTL	<1983	421

APPENDIX G

Z = 84 ***** Polonium *****

84210.30y	209.98300	lldos	LLNL/ACTL	<1983	441
-----------	-----------	-------	-----------	-------	-----

Z = 90 ***** Thorium *****

90230.30y	230.03300	lldos	LLNL/ACTL	<1983	209
90231.30y	231.03600	lldos	LLNL/ACTL	<1983	599
90232.30y	232.03800	lldos	LLNL/ACTL	<1983	347
90233.30y	233.04200	lldos	LLNL/ACTL	<1983	561
90234.30y	234.04400	lldos	LLNL/ACTL	<1983	37

Z = 91 ***** Protactinium *****

91231.26y	229.05000	532dos	ENDF/B-V	1978	2861
91233.26y	231.03800	532dos	ENDF/B-V	1978	73
91233.30y	233.04000	lldos	LLNL/ACTL	<1983	361

Z = 92 ***** Uranium *****

92233.26y	231.04300	532dos	ENDF/B-V	1978	75
92233.30y	233.04000	lldos	LLNL/ACTL	<1983	461
92234.30y	234.04100	lldos	LLNL/ACTL	<1983	393
92235.30y	235.04400	lldos	LLNL/ACTL	<1983	4629
92236.30y	236.04600	lldos	LLNL/ACTL	<1983	395
92237.30y	237.04900	lldos	LLNL/ACTL	<1983	609
92238.30y	238.05100	lldos	LLNL/ACTL	<1983	3103
92239.30y	239.05400	lldos	LLNL/ACTL	<1983	825
92240.30y	240.05700	lldos	LLNL/ACTL	<1983	389

Z = 93 ***** Neptunium *****

93237.30y	237.04800	lldos	LLNL/ACTL	<1983	629
-----------	-----------	-------	-----------	-------	-----

Z = 94 ***** Plutonium *****

94237.30y	237.04800	lldos	LLNL/ACTL	<1983	487
94238.30y	238.05000	lldos	LLNL/ACTL	<1983	459
94239.30y	239.05200	lldos	LLNL/ACTL	<1983	497
94240.30y	240.05400	lldos	LLNL/ACTL	<1983	479
94241.30y	241.05700	lldos	LLNL/ACTL	<1983	559
94242.30y	242.05900	lldos	LLNL/ACTL	<1983	505
94243.30y	243.06200	lldos	LLNL/ACTL	<1983	511

APPENDIX G

Z = 95 ***** Americium *****

95241.30y	241.05700	lldos	LLNL/ACTL	<1983	673
95242.30y	242.06000	lldos	LLNL/ACTL	<1983	473
95243.30y	243.06100	lldos	LLNL/ACTL	<1983	431

Z = 96 ***** Curium *****

96242.30y	242.05900	lldos	LLNL/ACTL	<1983	467
96243.30y	243.06100	lldos	LLNL/ACTL	<1983	465
96244.30y	244.06300	lldos	LLNL/ACTL	<1983	483
96245.30y	245.06500	lldos	LLNL/ACTL	<1983	465
96246.30y	246.06700	lldos	LLNL/ACTL	<1983	491
96247.30y	247.07000	lldos	LLNL/ACTL	<1983	491
96248.30y	248.07200	lldos	LLNL/ACTL	<1983	495

Z = 97 ***** Berkelium *****

97249.30y	249.07500	lldos	LLNL/ACTL	<1983	545
-----------	-----------	-------	-----------	-------	-----

Z = 98 ***** Californium *****

98249.30y	249.07500	lldos	LLNL/ACTL	<1983	491
98250.30y	250.07600	lldos	LLNL/ACTL	<1983	335
98251.30y	251.08000	lldos	LLNL/ACTL	<1983	485
98252.30y	252.08200	lldos	LLNL/ACTL	<1983	467

REFERENCES

1. V. McLane, C. L. Dunford, and P.F. Rose, ed., "ENDF-102: Data Formats and Procedures for the Evaluated Nuclear Data File ENDF-6," BNL report, BNL-NCS-44945, revised (1995).
2. R. C. Little, "New Photon Library from ENDF Data," LANL internal memorandum to Buck Thompson (February 26, 1982).
3. H. G. Hughes, "Information on the Photon Library MCPLIB02," LANL internal memorandum X-6:HGH-93-77 (revised 1996).
4. R. C. Little, "Summary Documentation for the 100XS Neutron Cross Section Library (Release 1)," LANL internal memorandum XTM:RCL-95-259 and LA-UR-96-24 (1995).
5. R. C. Little, "Argon and Krypton Cross-section Files," LANL internal

- memorandum (June 30, 1982).
6. R. C. Little, "Cross Sections in ACE Format for Various IP Target Materials," LANL internal memorandum (August 19, 1982).
 7. R. C. Little, "Y-89 cross sections for MCNP," LANL internal memorandum X-6:RCL-85-419, (1985).
 8. R. C. Little, "Modified ENDF/B-V.0 Y-89 cross sections for MCNP," LANL internal memorandum X-6:RCL-85-443, (1985).
 9. R. E. Seamon, "Revised ENDF/B-V Zirconium Cross Sections," LANL internal memorandum X-6:RES-92-324 (1992).
 10. S. C. Frankle, "ENDL Fission Products, ENDL85 and ENDL92," LANL internal memorandum, XTM:95-254, (1995).
 11. S. C. Frankle, "Summary Documentation for the ENDL92 Continuous-Energy Neutron Data Library (Release 1)," LANL Unclassified Release, XTM:96-05 and LA-UR-96-327, (1996).
 12. R. Little and R. Seamon, "ENDF/B-V.0 Gd Cross Sections with Photon Production," LANL internal memorandum X-6:RCL-87-132, (1986).
 13. S. C. Frankle, "ENDF62MT: A Multitemperature Neutron Library for MCNP (Rev. 0)," LANL internal memorandum XTM:SCF-96-153 (1996).
 14. R. C. Little, "Neutron and Photon Multigroup Data Tables for MCNP3B," LANL internal memorandum X-6:RCL-87-225 (1987).
 15. R. C. Little and R. E. Seamon, "New MENDF5 and MENDF5G," LANL internal memorandum X-6:RCL-86-412 (1986).
 16. J. C. Wagner et al., "MCNP: Multigroup/Adjoint Capabilities," LANL report LA-12704 (1994).
 17. R. E. Seamon, "Weight Functions for the Isotopes on Permfile THIRTY2," LANL Internal memorandum, TD-6 (July 23, 1976).
 18. R. E. Seamon, "Plots of the TD Weight Function," LANL internal memorandum, X-6:RES-91-80 (1980).
 19. R. E. MacFarlane and D. W. Muir, "The NJOY Nuclear Data Processing System," LANL report LA-12740 (1994).
 20. R. C. Little and R. E. Seamon, "Dosimetry/Activation Cross Sections for MCNP," LANL internal memorandum, March 13, 1984.

APPENDIX G

Appendix H

FISSION SPECTRA CONSTANTS AND FLUX-TO-DOSE FACTORS

This Appendix is divided into two sections: fission spectra constants to be used with the SP input card and ANSI standard flux-to-dose conversion factors to be used with the DE and DF input cards.

I. CONSTANTS FOR FISSION SPECTRA

The following is a list of recommended parameters for use with the MCNP source fission spectra and the SP input card described in Chapter 3. The constants for neutron-induced fission are taken directly from the ENDF/B-V library. For each fissionable isotope, constants are given for either the Maxwell spectrum or the Watt spectrum, but not both. The Watt fission spectrum is preferred to the Maxwell fission spectrum. The constants for spontaneously fissioning isotopes are supplied by Madland of Group T-2. If you desire constants for isotopes other than those listed below, contact XTM. Note that both the Watt and Maxwell fission spectra are approximations. A more accurate representation has been developed by Madland in T-2. If you are interested in this spectrum, contact XTM.

A. Constants for the Maxwell fission spectrum (neutron-induced)

$$f(E) = CE^{1/2} \exp(-E/a)$$

	Incident Neutron	
	<u>Energy (MeV)</u>	<u>a (MeV)</u>
n + ²³³ Pa	Thermal	1.3294
	1	1.3294
	14	1.3294
n + ²³⁴ U	Thermal	1.2955
	1	1.3086
	14	1.4792
n + ²³⁶ U	Thermal	1.2955
	1	1.3086
	14	1.4792
n + ²³⁷ U	Thermal	1.2996
	1	1.3162
	14	1.5063
n + ²³⁷ Np	Thermal	1.315
	1	1.315
	14	1.315
n + ²³⁸ Pu	Thermal	1.330
	1	1.330
	14	1.330

APPENDIX H
Fission Spectra

n + ²⁴⁰ Pu	Thermal	1.346
	1	1.3615
	14	1.547
n + ²⁴¹ Pu	Thermal	1.3597
	1	1.3752
	14	1.5323
n + ²⁴² Pu	Thermal	1.337
	1	1.354
	14	1.552
n + ²⁴¹ Am	Thermal	1.330
	1	1.330
	14	1.330
n + ^{242m} Am	Thermal	1.330
	1	1.330
	14	1.330
n + ²⁴³ Am	Thermal	1.330
	1	1.330
	14	1.330
n + ²⁴² Cm	Thermal	1.330
	1	1.330
	14	1.330
n + ²⁴⁴ Cm	Thermal	1.330
	1	1.330
	14	1.330
n + ²⁴⁵ Cm	Thermal	1.4501
	1	1.4687
	14	1.6844
n + ²⁴⁶ Cm	Thermal	1.3624
	1	1.4075
	14	1.6412

B. Constants for the Watt Fission Spectrum

$$f(E) = C \exp(-E/a) \sinh(bE)^{1/2}$$

1. Neutron-Induced Fission

	Incident Neutron Energy (MeV)	a (MeV)	b (MeV ⁻¹)
n + ²³² Th	Thermal	1.0888	1.6871
	1	1.1096	1.6316
	14	1.1700	1.4610

APPENDIX H
Dose Factors

n + ²³³ U	Thermal	0.977	2.546
	1	0.977	2.546
	14	1.0036	2.6377
n + ²³⁵ U	Thermal	0.988	2.249
	1	0.988	2.249
	14	1.028	2.084
n + ²³⁸ U	Thermal	0.88111	3.4005
	1	0.89506	3.2953
	14	0.96534	2.8330
n + ²³⁹ Pu	Thermal	0.966	2.842
	1	0.966	2.842
	14	1.055	2.383

2. Spontaneous Fission

	<u>a (MeV)</u>	<u>b (MeV⁻¹)</u>
²⁴⁰ Pu	0.799	4.903
²⁴² Pu	0.833668	4.431658
²⁴² Cm	0.891	4.046
²⁴⁴ Cm	0.906	3.848
²⁵² Cf	1.025	2.926

II. Flux-to-Dose Conversion Factors

This section presents several flux-to-dose rate conversion factor sets for use on the DE and DF tally cards to convert from calculated particle flux to human biological dose equivalent rate. These sets of conversion factors are not the only ones in existence, nor are they recommended by this publication. Rather, they are presented for convenience should you decide that one is appropriate for your use. The original publication cited or other sources should be consulted to determine if they are appropriate for your application.

Although the various conversion factor sets differ from one another, it seems to be the consensus of the health physics community that they do not differ significantly from most health physics applications where accuracies of $\pm 20\%$ are generally acceptable. Some of the differences in the various sets are attributable to different assumptions about source directionality, phantom geometry, and depth of penetration. The neutron quality factors, derived primarily from animal experiments, are also somewhat different.

Be aware that conversion factor sets are subject to change based on the actions of various national and international organizations such as the National Council on Radiation Protection and Measurements (NCRP), the International Commission on Radiological Protection (ICRP), the International Commission on Radiation Units and Measurements (ICRU), the American National Standards Institute (ANSI), and the American Nuclear Society

APPENDIX H

Dose Factors

(ANS). Changes may be based on the re-evaluation of existing data and calculations or on the availability of new information. Currently, a revision of the 1977 ANSI/ANS¹ conversion factors is under way and the ICRP and NCRP are considering an increase in the neutron quality factors by a factor of 2 to 2.5.

In addition to biological dose factors, a reference is given for silicon displacement kerma factors for potential use in radiation effects assessment of electronic semiconductor devices. The use of these factors is subject to the same caveats stated above for biological dose rates.

A. Biological Dose Equivalent Rate Factors

In the following discussions, dose rate will be used interchangeably with biological dose equivalent rate. In all cases the conversion factors will contain the quality factors used to convert the absorbed dose in rads to rem. The neutron quality factors implicit in the conversion factors are also tabulated for information. For consistency, all conversion factors are given in units of rem/h per unit flux (particles/cm²-s) rather than in the units given by the original publication. The interpolation mode chosen should correspond to that recommended by the reference. For example, the ANSI/ANS publication recommends log-log interpolation; significant differences at interpolated energies can result if a different interpolation scheme is used.

1. Neutrons

The NCRP-38^(Ref. 2) and ICRP-21^(Ref. 3) neutron flux-to-dose rate conversion factors and quality factors are listed in Table H.1. Note that the 1977 ANSI/ANS factors referred to earlier were taken from NCRP-38 and therefore are not listed separately.

2. Photons

The 1977 ANSI/ANS¹ and the ICRP-21^(Ref. 3) photon flux-to-dose rate conversion factors are given the Table H.2. No tabulated set of photon conversion factors have been provided by the NCRP as far as can be determined. Note that the 1977 ANSI/ANS and the ICRP-21 conversion factor sets differ significantly (>20%) below approximately 0.7 MeV. The maximum disagreement occurs at approximately 0.06 MeV, where the ANSI/ANS value is about 2.3 times larger than the ICRP value.

B. Silicon Displacement Kerma Factors

Radiation damage to or effects on electronic components are often of interest in radiation fields. Of particular interest are the absorbed dose in rads and silicon displacement kerma factors. The absorbed dose may be calculated for a specific material by using the FM tally card discussed in Chapter 3 with an appropriate constant C to convert from the MCNP default units to rads. The silicon displacement kermas, however, are given as a function of energy, similar to the biological conversion factors. Therefore, they may be implemented on the DE and DF cards. One source of these

APPENDIX H
Dose Factors

kerma factors and a discussion of their significance and use can be found in Reference 4.

Table H.1
Neutron Flux-to-Dose Rate Conversion Factors and Quality Factors

Neutron Energy, E (MeV)	NCRP-38, ANSI/ANS-6.1.1-1977*		ICRP-21	
	DF(E) (rem/hr)/(n/cm ² ·s)	Quality Factor	DF(E) (rem/hr)/(n/cm ² ·s)	Quality Factor
2.5E-08	3.67E-06	2.0	3.85E-06	2.3
1.0E-07	3.67E-06	2.0	4.17E-06	2.0
1.0E-06	4.46E-06	2.0	4.55E-06	2.0
1.0E-05	4.54E-06	2.0	4.35E-06	2.0
1.0E-04	4.18E-06	2.0	4.17E-06	2.0
1.0E-03	3.76E-06	2.0	3.70E-06	2.0
1.0E-02	3.56E-06	2.5	3.57E-06	2.0
1.0E-01	2.17E-05	7.5	2.08E-05	7.4
5.0E-01	9.26E-05	11.0	7.14E-05	11.0
1.0	1.32E-04	11.0	1.18E-04	10.6
2.0			1.43E-04	9.3
2.5	1.25E-04	9.0		
5.0	1.56E-04	8.0	1.47E-04	7.8
7.0	1.47E-04	7.0		
10.0	1.47E-04	6.5	1.47E-04	6.8
14.0	2.08E-04	7.5		
20.0	2.27E-04	8.0	1.54E-04	6.0

*Extracted from American National Standard ANSI/ANS-6.1.1-1977 with permission of the publisher, the American Nuclear Society.

APPENDIX H
Dose Factors

Table H.2
Photon Flux-to-Dose Rate Conversion Factors

ANSI/ANS-6.1.1-1977		ICRP-2	
Energy, E (MeV)	DF(E) (rem/hr)/(photons/cm ² ·s)	Energy, E (MeV)	DF(E) (rem/hr)/(photons/cm ² ·s)
0.01	3.96E-06	0.01	2.78E-06
0.03	5.82E-07	0.015	1.11E-06
0.05	2.90E-07	0.02	5.88E-07
0.07	2.58E-07	0.03	2.56E-07
0.1	2.83E-07	0.04	1.56E-07
0.15	3.79E-07	0.05	1.20E-07
0.2	5.01E-07	0.06	1.11E-07
0.25	6.31E-07	0.08	1.20E-07
0.3	7.59E-07	0.1	1.47E-07
0.35	8.78E-07	0.15	2.38E-07
0.4	9.85E-07	0.2	3.45E-07
0.45	1.08E-06	0.3	5.56E-07
0.5	1.17E-06	0.4	7.69E-07
0.55	1.27E-06	0.5	9.09E-07
0.6	1.36E-06	0.6	1.14E-06
0.65	1.44E-06	0.8	1.47E-06
0.7	1.52E-06	1.	1.79E-06
0.8	1.68E-06	1.5	2.44E-06
1.0	1.98E-06	2.	3.03E-06
1.4	2.51E-06	3.	4.00E-06
1.8	2.99E-06	4.	4.76E-06
2.2	3.42E-06	5.	5.56E-06
2.6	3.82E-06	6.	6.25E-06
2.8	4.01E-06	8.	7.69E-06
3.25	4.41E-06	10.	9.09E-06
3.75	4.83E-06		
4.25	5.23E-06		
4.75	5.60E-06		
5.0	5.80E-06		
5.25	6.01E-06		
5.75	6.37E-06		
6.25	6.74E-06		
6.75	7.11E-06		
7.5	7.66E-06		
9.0	8.77E-06		
11.0	1.03E-05		
13.0	1.18E-05		
15.0	1.33E-05		

III. References

1. ANS-6.1.1 Working Group, M. E. Battat (Chairman), "American National Standard Neutron and Gamma-Ray Flux-to-Dose Rate Factors," ANSI/ANS-6.1.1-1977 (N666), American Nuclear Society, LaGrange Park, Illinois (1977).
2. NCRP Scientific Committee 4 on Heavy Particles, H. H. Rossi, chairman, "Protection Against Neutron Radiation," NCRP-38, National Council on Radiation Protection and Measurements (January 1971).
3. ICRP Committee 3 Task Group, P. Grande and M. C. O'Riordan, chairmen, "Data for Protection Against Ionizing Radiation from External Sources: Supplement to ICRP Publication 15," ICRP-21, International Commission on Radiological Protection, Pergamon Press (April 1971).
4. ASTM Committee E-10 on Nuclear Technology and Applications, "Characterizing Neutron Energy Fluence Spectra in Terms of an Equivalent Monoenergetic Neutron Fluence for Radiation-Hardness Testing of Electronics," American Society for Testing and Materials Standard E722-80, Annual Book of ASTM Standards (1980).

APPENDIX H

Appendix I
PTRAC TABLES

Table I.1 presents the format of the PTRAC output file. Tables I.2–I.7 provide a detailed description of each variable in the output file. Note that capitalized variables with three or more characters refer to MCNP FORTRAN variables (except where noted) and are defined in Appendix E.

Table I.1
Format of the PTRAC Output File

Format	Line	ASCII Format	Binary Record
-1	1	(i5)	1
KOD, VER, LODDAT, IDTM	2	(a8,a5,a8,a19)	2
AID	3	(a80)	3
m n ₁ V ₂ ¹ V ₂ ¹ ... V _{n₁} ¹ ...	4	(1x, 10e12.4)	4
.			
· K total lines of PTRAC input data (see Table I.2)			
.			
N ₁ N ₂ ... N ₂₀	4+K	(1x,20i5)	4+K
L ₁ L ₂ ... L _{N₁}	5+K	(1x,30i4)	5+K
L ₁ ¹ L ₂ ¹ ... L _{N₂+N₃} ¹			
.			
· M total lines of variable IDs			
.			
***** End of Header - Start NPS and Event Lines *****			
I ₁ ¹ I ₂ ¹ ... I _{N₁} ¹	5+K+M	(1x,5i10, e13.5)	6+K
J ₁ ¹ J ₂ ¹ ... J _{N₂,4,6,8,10} ¹	6+K+M	(1x, 8i10)	7+K
P ₁ ¹ P ₂ ¹ ... P _{N₃,5,7,9,11} ¹	7+K+M	(1x,9e13.5)	
J ₁ ² J ₂ ² ... J _{N₂,4,6,8,10} ²	8+K+M	(1x,8i10)	8+K
P ₁ ² P ₂ ² ... P _{N₃,5,7,9,11} ²	9+K+M	(1x,9e13.5)	
.			
· Q total lines of event data for this history (see Table I.3)			
.			
I ₁ ² I ₂ ² ... I _{N₁} ²	5+K+M+Q	(1x,5i10,e13.5)	6+K+Q/2
.			
.			

Table I.1 - Continued
Format of the PTRAC Output File

See Table I.3 for all possible values of N_2 - N_{11} :

- N_1 = Number of variables on the NPS line (I_1 I_2 ...).
- N_2 = Number of variables on 1st event line for an “src” event.
 N_3 = Number of variables on 2nd event line for an “src” event.
 N_4 = Number of variables on 1st event line for a “bnk” event.
 N_5 = Number of variables on 2nd event line for a “bnk” event.
 N_6 = Number of variables on 1st event line for a “sur” event.
 N_7 = Number of variables on 2nd event line for a “sur” event.
 N_8 = Number of variables on 1st event line for a “col” event.
 N_9 = Number of variables on 2nd event line for a “col” event.
 N_{10} = Number of variables on 1st event line for a “ter” event.
 N_{11} = Number of variables on 2nd event line for a “ter” event.
- N_{12} = IPT for single particle transport, otherwise 0.
 N_{13} = 4 for real*4 output and 8 for real*8 output.
 N_{14} - N_{20} = not used.

See Table I.4 for definitions of variable IDs:

- L_1 L_2 ... L_{N_1} = List of variable IDs for the NPS line.
 L_1^1 L_2^1 ... $L_{N_2+N_3}^1$ = List of variable IDs for a “src” event.
 L_1^2 L_2^2 ... $L_{N_4+N_5}^2$ = List of variable IDs for a “bnk” event.
 L_1^3 L_2^3 ... $L_{N_6+N_7}^3$ = List of variable IDs for a “sur” event.
 L_1^4 L_2^4 ... $L_{N_8+N_9}^4$ = List of variable IDs for a “col” event.
 L_1^5 L_2^5 ... $L_{N_{10}+N_{11}}^5$ = List of variable IDs for a “ter” event.

See Table I.4 for corresponding variable IDs:

- I_1 = NPS.
 I_2 = Event type of the 1st event for this history (see Table I.5).
 I_3 = Cell number if cell filtered, otherwise omitted.
 I_4 = Surface number if surface filtered, otherwise omitted.
 I_5 = Tally number if tally filtered, otherwise omitted.
 I_6 = TFC bin tally if tally filtered, otherwise omitted.

Table I.2
PTRAC Input Format

$$m \ n_1 \ V_1^1 \ V_2^1 \ \dots \ V_{n_1}^1 \quad n_2 \ V_1^2 \ V_2^2 \ \dots \ V_{n_2}^2 \quad \dots \ n_{13} \ V_1^{13} \ V_2^{13} \ \dots \ V_{n_{13}}^{13}$$

m = Number of PTRAC keywords = 13.

n_i = Number of entries for i^{th} keyword or 0 for no entries.

$V_1 \ V_2 \ \dots \ V_{n_i}$ = 1st entry, 2nd entry, ... for the i^{th} keyword (see below).

Index	Keyword	Index	Keyword	Index	Keyword	Index	Keyword
1	BUFFER	5	FILTER	9	SURFACE	13	WRITE
2	CELL	6	MAX	10	TALLY		
3	EVENT	7	MENP	11	TYPE		
4	FILE	8	NPS	12	VALUE		

Table I.3
Event Line Variable IDs (See Table I.4)*

Index	Type 1 ($N_{12} \neq 0$ WRITE=pos)		Type 2 ($N_{12}=0$ WRITE=pos)		Type 3 ($N_{12} \neq 0$ WRITE=all)		Type 4 ($N_{12}=0$ WRITE=all)	
	$N_2=5$ $N_3=3$	$N_{4,6,8,10}=6$ $N_{5,7,9,11}=3$	$N_2=6$ $N_3=3$	$N_{4,6,8,10}=7$ $N_{5,7,9,11}=3$	$N_2=6$ $N_3=9$	$N_{4,6,8,10}=7$ $N_{5,7,9,11}=9$	$N_2=7$ $N_3=9$	$N_{4,6,8,10}=8$ $N_{5,7,9,11}=9$
J ₁	7	7	7	7	7	7	7	7
J ₂	8	8	8	8	8	8	8	8
J ₃	9	10,12,10,14	9	10,12,10,14	9	10,12,10,14	9	10,12,10,14
J ₄	17	11,13,11,15	16	11,13,11,15	17	11,13,11,15	16	11,13,11,15
J ₅	18	17	17	16	18	17	17	16
J ₆		18	18	17	19	18	18	17
J ₇				18		19	19	18
J ₈								19
P ₁	20	20	20	20	20	20	20	20
P ₂	21	21	21	21	21	21	21	21
P ₃	22	22	22	22	22	22	22	22
P ₄					23	23	23	23
P ₅					24	24	24	24
P ₆					25	25	25	25
P ₇					26	26	26	26
P ₈					27	27	27	27
P ₉					28	28	28	28

*For a “bnk” event (N_4, N_5), interpret $J_1 \dots J_4 = 7,8,10,11$

For a “sur” event (N_6, N_7), interpret $J_1 \dots J_4 = 7,8,12,13$

For a “col” event (N_8, N_9), interpret $J_1 \dots J_4 = 7,8,10,11$

For a “ter” event (N_{10}, N_{11}), interpret $J_1 \dots J_4 = 7,8,14,15$

Table I.4
Description of Variable IDs

Variable ID	MCNP Name	Description
NPS LINE		
1	NPS	See Appendix E
2	—	Event type of 1 st event (see Table I.5)
3	NCL(ICL)	See Appendix E
4	NSF(JSU)	"
5	JPTAL(1,ITAL)	"
6	TAL(JPTAL(7,ITAL))	"
EVENT LINE		
7	—	Event type of next event (see Table I.5)
8	NODE	See Appendix E
9	NSR	"
10	NXS(2,IEX)	"
11	NTYN	Reaction type (see Table I.7)
12	NSF(JSU)	"
13	—	Angle with surface normal (degrees)
14	NTER	Termination type (see Table I.7)
15	—	Branch number for this history
16	IPT	See Appendix E
17	NCL(ICL)	"
18	MAT(ICL)	"
19	NCP	"
20	XXX	"
21	YYY	"
22	ZZZ	"
23	UUU	"
24	VVV	"
25	WWW	"
26	ERG	"
27	WGT	"
28	TME	"

Table I.5
Event Type Description

Location	Variable ID	Event Type					Flag*
		src	bnk**	sur	col	ter	
J ₁	7	1000	±(2000+L)	3000	4000	5000	9000

*When J₁ = 9000, this event is the last event for this history.

**When J₁ < 0, the next event has been rejected and is included for creation information only. The value L is given in Table I.6.

Table I.6
Bank Event Descriptions

L Value	Description	MCNP Subroutine	NXS & NTYN Provided
1	DXTRAN Track	DXTRAN	Y
2	Energy Split	ERGIMP	N
3	Weight Window Surface Split	WTWNDO	N
4	Weight Window Collision Split	WTWNDO	Y
5	Forced Collision-Uncollided Part	FORCOL	N
6	Importance Split	SURFAC	N
7	Neutron From Neutron (n,xn) (n,f)	COLIDN	Y
8	Photon From Neutron	ACEGAM	Y
9	Photon From Double Fluorescence	COLIDP	Y
10	Photon From Annihilation	COLIDP	N
		ELECTR	
11	Electron From Photoelectric	EMAKER	Y
12	Electron From Compton	EMAKER	Y
13	Electron From Pair Production	EMAKER	Y
14	Auger Electron From Photon/X-ray	EMAKER	Y
15	Positron From Pair Production	EMAKER	N
16	Bremsstrahlung From Electron	TTBR	N
		BREMS	
17	Knock on Electron	KNOCK	N
18	X-rays From Electron	KXRAY	N
19	Photon From Neutron - Multigroup	MGCOLN	Y
20	Neutron (n,f) - Multigroup	MGCOLN	Y
21	Neutron (n,xn) k- Multigroup	MGCOLN	Y
22	Photo From Photon - Multigroup	MGCOLP	Y
23	Adjoint Weight Split - Multigroup	MGACOL	N

Table I.7
NTER and NTYN Variable Descriptions

NTER	Description	NTYN	Description
1	Escape	NEUTRON	
2	Energy cutoff	1	Inelastic $S(\alpha, \beta)$
3	Time cutoff	2	Elastic $S(\alpha, \beta)$
4	Weight window	-99	Elastic scatter
5	Cell importance	>5	Inelastic scatter (see UKAEA Nuclear Data File)
6	Weight cutoff	PHOTON	
7	Energy importance	1	Incoherent scatter
8	DXTRAN	2	Coherent scatter
9	Forced collision	3	Fluorescence
10	Exp. transform	4	Double fluorescence
NEUTRON		5	Pair production
11	Downscattering		
12	Capture		
13	Loss to (n,xn)		
14	Loss to fission		
PHOTON			
11	Compton scatter		
12	Capture		
13	Pair production		
ELECTRON			
11	Scattering		
12	Bremsstrahlung		

INDEX

- R_o; 3-66
- ACE format; F-1
- AREA card; 3-20
- AWTAB card; 3-99
- Absorption; Neutron; 2-147
- Absorption; Neutron; 2-33
- Accounting arrays; E-35
- Accuracy; 2-90
- Adjoint option; 2-24
- Adjoint option; 3-102
- Ambiguity surface; 2-12
- Ambiguity surface; 2-13
- Ambiguity surface; 4-8
- Analog capture; 2-33
- Analog capture; 3-111
- Analog detector; 3-65
- Angular bins; 3-74
- Area calculation; 2-163
- Arrays; E-27
- Asterisk; 3-64
- Atomic; Density; 3-9
- Atomic; Mass; 3-96
- Atomic; Number; 3-96
- Atomic; Weight card; 3-99
- BASIS vectors; B-4
- BBREM card; 3-39
- Bank; E-28
- Boltzmann transport equation; 2-147
- C Functions; D-7
- CFn card; 3-81
- CMn card; 3-81
- COMMON dictionary; E-1
- COMMON dictionary; E-2
- CONC problem; 5-50
- CTME card; 3-112
- CTRL-E; 1-32
- CUT card; 3-110
- CUT card; 3-111
- CUT card; 3-111
- Capture lifetime; 2-152
- Capture; Analog; 2-33
- Capture; Analog; 3-111
- Capture; Implicit; 2-130
- Capture; Neutron; 2-147
- Capture; Neutron; 2-33
- Card format; 3-4
- Cards; AREA; 3-20
- Cards; AWTAB; 3-99
- Cards; Atomic weight; 3-99
- Cards; BBREM; 3-39
- Cards; CFn; 3-81
- Cards; CMn; 3-81
- Cards; CTME; 3-112
- Cards; CUT; 3-110
- Cards; CUT; 3-111
- Cards; CUT; 3-111
- Cards; Cell; 1-22
- Cards; Cell; 3-9
- Cards; Cn; 3-74
- Cards; Comment; 3-72
- Cards; DBCN; 3-115
- Cards; DD; 3-89
- Cards; DE/DF; 3-79
- Cards; DE/DF; H-5
- Cards; DRXS; 3-97
- Cards; DS; 3-52
- Cards; DXC; 3-38
- Cards; DXT; 3-91
- Cards; Defaults; 3-132
- Cards; Defaults; 3-7
- Cards; Designator; 3-7
- Cards; Detector; 3-65
- Cards; Dose; 3-79
- Cards; ELPT; 3-111
- Cards; EMn; 3-80
- Cards; ESPLT; 3-29
- Cards; EXT; 3-31
- Cards; En; 3-72
- Cards; FCL; 3-33
- Cards; FCn; 3-72
- Cards; FILES; 3-119
- Cards; FILL; 3-21
- Cards; FILL; 3-25
- Cards; FMn; 3-75
- Cards; FMn; 4-34
- Cards; FQn; 3-75
- Cards; FSn; 3-83
- Cards; FSn; 4-37
- Cards; FTn; 3-93
- Cards; FTn; 4-39
- Cards; FUn; 3-86

INDEX

- Cards; FUn; 4-45
- Cards; Fill; 4-19
- Cards; Fluctuation; 3-88
- Cards; Fna; 3-63
- Cards; IMP; 3-28
- Cards; KCODE; 3-59
- Cards; KSRC; 3-61
- Cards; LAT; 3-21
- Cards; LAT; 3-24
- Cards; LOST; 3-115
- Cards; Lat; 4-19
- Cards; MGOPT; 3-102
- Cards; MODE; 3-19
- Cards; MPLOT; 3-122
- Cards; MTm; 3-109
- Cards; Message block; 3-1
- Cards; Mm; 3-95
- Cards; NONU; 3-98
- Cards; NPS; 3-112
- Cards; PDn; 3-38
- Cards; PERT; 3-128
- Cards; PHYS; 3-103
- Cards; PHYS; 3-104
- Cards; PHYS; 3-105
- Cards; PIKMT; 3-100
- Cards; PRDMP; 3-113
- Cards; PRINT; 3-120
- Cards; PTRAC; 3-123
- Cards; PWT; 3-30
- Cards; Print hierarchy; 3-75
- Cards; RDUM; 3-113
- Cards; Repeated structures;
3-21
- Cards; SB; 2-133
- Cards; SB; 3-48
- Cards; SC; 3-53
- Cards; SDEF; 3-40
- Cards; SDn; 3-84
- Cards; SFn; 3-82
- Cards; SI; 3-48
- Cards; SP; 3-48
- Cards; SSR; 3-56
- Cards; SSW; 3-55
- Cards; Summary; 3-132
- Cards; Surface; 1-18
- Cards; Surface; 3-12
- Cards; TFn; 3-88
- Cards; THTME; 3-108
- Cards; TMP; 3-108
- Cards; TMn; 3-80
- Cards; TOTNU; 3-98
- Cards; TRCL; 3-21
- Cards; TRCL; 3-23
- Cards; TRn; 3-26
- Cards; TRn; 4-14
- Cards; Tally; 3-63
- Cards; Title; 3-2
- Cards; Tn; 3-73
- Cards; U; 3-22
- Cards; VECT; 3-33
- Cards; VOID; 3-100
- Cards; VOL; 3-20
- Cards; Weight window generator;
3-37
- Cards; Weight window; 3-34
- Cards; X; 3-16
- Cards; XSn; 3-99
- Cards; Y; 3-16
- Cards; Z; 3-16
- Cell cards; 1-22
- Cell cards; 3-9
- Cell; Flagging; 3-81
- Cells; Ambiguity; 2-12
- Cells; Colon; 1-16
- Cells; Complements; 2-9
- Cells; Concave corners; 1-15
- Cells; Importance; 2-120
- Cells; Intersections; 1-15
- Cells; Introduction; 1-14
- Cells; Parenthesis; 1-16
- Cells; Sense; 1-14
- Cells; Specification; 1-14
- Cells; Unions; 1-16
- Central Limit Theorem; 2-92
- Cn card; 3-74
- Coding deviations; D-1
- Coefficient table; 3-14
- Collision nuclide; 2-27
- Colon; 1-16
- Column input; 3-6
- Comment card; 3-72
- Common blocks; D-4

INDEX

- Complement operator; 2-9
- Computer time cutoff; 3-112
- Concave corners; 1-15
- Cone biasing; 2-134
- Cones; 2-11
- Continue-run; 3-121
- Continue-run; 3-2
- Continuous biasing; 2-133
- Coordinate pairs; 3-16
- Coordinate system; 1-13
- Coordinate transformation; 3-26
- Coordinate transformation; 4-14
- Correlated sampling; 2-143
- Cosine; Bins; 3-74
- Cosine; Multiplier; 3-81
- Criticality; 2-143
- Criticality; 3-59
- Cross-section; Data format; F-12
- Cross-section; Defaults; 2-20
- Cross-section; Defaults; G-7
- Cross-section; Dosimetry format; F-31
- Cross-section; Electron format; F-49
- Cross-section; Elements; 3-96
- Cross-section; Files; G-6
- Cross-section; Format; F-1
- Cross-section; Identifier; 3-96
- Cross-section; Introduction; 1-4
- Cross-section; Libraries; G-6
- Cross-section; Listings; G-6
- Cross-section; Multigroup format; F-36
- Cross-section; Neutron; 2-17
- Cross-section; Photon format; F-33
- Cross-section; Photon; 3-96
- Cross-section; Plotting; B-10
- Cross-section; Thermal format; F-32
- Cross-section; XSLIST; G-8
- Cross-section; XSn card; 3-99
- Current tally; 2-70
- Current tally; 3-63
- Cutoffs; Computer time; 3-112
- Cutoffs; Electron; 3-111
- Cutoffs; Energy; 3-110
- Cutoffs; Energy; 3-111
- Cutoffs; Neutron; 3-110
- Cutoffs; Particle; 3-112
- Cutoffs; Photon; 3-111
- Cutoffs; Time; 3-110
- Cutoffs; Weight; 2-123
- Cutoffs; Weight; 3-110
- Cutoffs; Weight; 3-111
- DBCN card; 3-115
- DD card; 3-89
- DE/DF cards; 3-79
- DEMO problem; 5-1
- DRXS card; 3-97
- DS card; 3-52
- DXC card; 3-38
- DXT card; 3-91
- DXTRAN; 2-136
- DXTRAN; 3-91
- Data arrays; 3-113
- Data cards; 1-23
- Data cards; 3-18
- Dead fission; 3-98
- Debug information; 3-115
- Debug print; 3-115
- Debug print; 5-101
- Default values; 3-7
- Defaults; XSDIR; 2-20
- Defaults; XSDIR; G-7
- Definition; k_{eff} ; 2-146
- Density; 3-9
- Detailed physics treatment; 2-53
- Detailed physics; 3-105
- Detailed physics; 3-111
- Detector; Analog; 3-65
- Detector; Cards; 3-65
- Detector; Contribution; 3-38
- Detector; Diagnostics; 3-89
- Detector; Introduction; 2-75
- Detector; Point; 3-65
- Detector; Ring; 3-65
- Deterministic method; 1-2

INDEX

- Dictionary; E-1
- Dictionary; E-2
- Differential operator technique; 2-170
- Direction biasing; 2-133
- Direction biasing; 2-134
- Discrete reaction; Input card; 3-97
- Doppler broadening; G-7
- Dose function; 3-79
- Dose; H-5
- Dump cycle; 3-113
- Dynamic storage; D-5
- ELPT card; 3-111
- EMCPF; 3-111
- EMn card; 3-80
- ENDF reaction numbers; G-1
- ESPLT card; 3-29
- EXT card; 3-31
- Eigenvalue; 2-143
- Elastic scattering; 2-37
- Electron; Cross sections; F-49
- Electron; Cutoffs; 3-111
- Electron; Physics; 2-57
- Elements; 3-96
- En card; 3-72
- Energy Physics Cutoff card; 3-103
- Energy; Biasing; 2-122
- Energy; Cutoff; 2-120
- Energy; Cutoff; 3-110
- Energy; Multiplier; 3-80
- Energy; Roulette; 2-122
- Energy; Roulette; 3-29
- Energy; Splitting; 2-122
- Energy; Splitting; 3-29
- Energy; Tally; 3-64
- Error analysis; 1-6
- Error analysis; 2-88
- Errors, geometry; 3-8
- Errors, geometry; B-9
- Errors; 3-8
- Escape lifetime; 2-152
- Estimated variance; 2-90
- Event Log; 5-99
- Event log; 3-117
- Examples; 4-1
- Examples; Surfaces by points; 3-17
- Execution line; 1-29
- Execution options; 1-30
- Expected value; 2-89
- Exponential biasing; 2-133
- Exponential transform; 2-128
- Exponential transform; 3-31
- FCL card; 3-33
- FCn card; 3-72
- FEBL array; E-40
- FILES card; 3-119
- FILL card; 3-21
- FILL card; 3-25
- FMn card; 3-75
- FMn examples; 4-34
- FMn reactions; G-1
- FOM; 3-88
- FQn card; 3-75
- FSn card; 3-83
- FSn examples; 4-37
- FTn card; 3-93
- FTn card; 4-39
- FTn examples; 4-39
- FUn card; 3-86
- FUn card; 4-45
- Fatal errors; 3-8
- Features of MCNP; 1-4
- Figure of merit; 2-96
- Figure of merit; 3-88
- Files; 1-29
- Fission $\bar{\nu}$; 3-98
- Fission lifetime; 2-152
- Fission spectra; H-1
- Fission spectrum; 3-50
- Fission; 2-48
- Fission; 3-98
- Fission; 3-98
- Flagging; Cell; 3-81
- Flagging; Surface; 3-82
- Fluctuation chart; E-35
- Flux tally; 2-70
- Flux tally; 2-75
- Flux-to-dose Factors; H-5
- Fna card; 3-63

INDEX

- Forced collisions; 2-131
- Forced collisions; 3-33
- Format; Card; 3-4
- Format; Vertical; 3-6
- Forming Confidence Intervals; 2-107
- Fraction; Nuclide; 3-96
- Free gas model; 2-27
- Fusion spectrum; 3-50
- GPBLCM array; E-28
- Geometry errors; 3-8
- Geometry errors; B-9
- Geometry; Ambiguity; 2-12
- Geometry; Cells; 1-14
- Geometry; Complement; 2-9
- Geometry; Concave corners; 1-15
- Geometry; Coordinate system; 1-13
- Geometry; Examples; 4-1
- Geometry; Intersection; 1-15
- Geometry; Introduction; 1-13
- Geometry; Repeated structure; 2-10
- Geometry; Sense; 1-14
- Geometry; Splitting; 2-120
- Geometry; Summary; 1-13
- Geometry; Surfaces; 1-18
- Geometry; Union; 1-16
- Graphics; PLOT module; B-1
- Heating; 4-36
- Helpful hints; 1-33
- History Score PDF; 2-102
- History of MCNP; 2-2
- History; 2-6
- IBU; 3-87
- IDUM array; 3-113
- IMP card; 3-28
- INP; 1-21
- INP; 3-1
- IPTAL array; 3-86
- IPTAL array; E-31
- ITDS array; E-32
- Importance (zero); 3-29
- Importance; 2-120
- Importance; 3-110
- Importance; 3-28
- Inelastic scattering; 2-37
- Initiate-run; 3-110
- Initiate-run; 3-2
- Input errors; 3-8
- Input; 3-1
- Intensity; 2-70
- Interpolate (nI); 3-5
- Interrupts; 1-32
- Intersection; 1-15
- JPBLCM array; E-28
- JPTAL array; E-31
- Jerks/g; 3-64
- Jump (nJ); 3-5
- KCODE arrays; E-40
- KCODE problem; 5-64
- KCODE; 3-59
- KCODE; k_{eff} ; 2-143
- KSD array; E-27
- KSRC card; 3-61
- KTC array; E-28
- LAT card; 3-21
- LAT card; 3-24
- LIKE BUT; 3-9
- LOCDT array; E-32
- LOST card; 3-115
- Lattice Tally example; 4-42
- Lattice Tally; 3-69
- Lattice; Examples; 4-19
- Law of Large Numbers; 2-89
- Library Hierarchy; 3-97
- Lifespan; 2-151
- Lifetime; 2-148
- Lost particles; 3-115
- MAKXSf; C-12
- MAZP array; E-41
- MAZU array; E-41
- MCNP; Area calculation; 2-163
- MCNP; Criticality; 2-143
- MCNP; Estimation of errors; 2-88
- MCNP; Execution line; 1-29
- MCNP; Files; 1-29
- MCNP; Geometry; 1-13
- MCNP; History; 2-2
- MCNP; Input; 3-1

INDEX

- MCNP; Interrupts; 1-32
- MCNP; Options; 1-30
- MCNP; Physics; 2-24
- MCNP; Plotter; 2-166
- MCNP; Tallies; 2-68
- MCNP; Variance reduction; 2-114
- MCNP; Volume calculation; 2-163
- MCNPLOT; B-10
- MCRUN; 1-30
- MGOPT card; 3-102
- MODE card; 3-19
- MPLOT card; 3-122
- MTm card; 3-109
- Mass density; 3-9
- Material; Card; 3-95
- Material; Number; 3-9
- Material; Specification; 3-95
- Mean; 2-89
- Message block; 3-1
- Mm card; 3-95
- Modules; PLOT; B-1
- Monte Carlo method; 1-3
- Multigroup feature; 3-102
- Multigroup; 3-98
- Multigroup; Cross sections; F-36
- Multiplier (xM); 3-5
- ND; 3-66
- NONU card; 3-98
- NPS card; 3-112
- NT; 3-73
- NT; 3-73
- NT; 3-86
- NTX; 3-87
- Naming convention; D-2
- Neutron; Capture; 2-33
- Neutron; Collision nuclide; 2-27
- Neutron; Cross sections; 2-17
- Neutron; Cross sections; F-1
- Neutron; Cutoffs; 3-110
- Neutron; Fission; 2-48
- Neutron; Photon production; 2-31
- Neutron; Physics; 2-27
- Neutron; Scattering; 2-34
- Neutron; Thermal collisions; 2-27
- Normal to surface; 3-74
- Nubar; $\bar{\nu}$; 3-98
- Nuclide; fraction; 3-96
- Nuclide; identifier; 3-96
- Options; 1-30
- Output; 3-112
- Output; 3-120
- Output; 5-1
- PAC array; E-37
- PAN array; E-38
- PAX array; E-36
- PBL array; E-28
- PCC array; E-39
- PDn card; 3-38
- PERT Card; 3-128
- PHYS card; 3-103
- PHYS card; 3-104
- PHYS card; 3-105
- PIKMT card; 3-100
- PLOT input; B-2
- PLOT; B-2
- PRDMP card; 3-113
- PRINT card; 3-120
- PRPR; C-10
- PTRAC Card; 3-123
- PWB array; E-37
- PWT card; 3-30
- Parameters; E-1
- Parenthesis; 1-16
- Particle designators; 3-7
- Particle; 1-8
- Path-length stretching; 2-128
- Periodic boundary condition; 2-15
- Periodic boundary condition; 3-13
- Perturbation technique; 2-170
- Photon-production bias; 3-100
- Photon; Cross sections; 3-96
- Photon; Cross sections; F-33
- Photon; Cutoffs; 3-111
- Photon; Detailed physics treatment; 2-53

INDEX

- Photon; Physics; 2-50
- Photon; Production; 1-24
- Photon; Production; 2-31
- Photon; Scattering; 2-52
- Photon; Scattering; 2-53
- Photon; Simple physics treatment; 2-51
- Physics; Electrons; 2-57
- Physics; Neutrons; 2-27
- Physics; Photons; 2-50
- Plotter; 2-166
- Plotting; 3-122
- Point detector; 2-75
- Point detector; 3-65
- Power; 5-92
- Precision; 2-90
- Preprocessors; D-1
- Primer; 1-1
- Print cycle; 3-113
- Print hierarchy; 3-75
- Probability Density Function; 2-101
- Problem efficiency; 2-97
- Problem; Cutoffs; 3-110
- Problem; Title card; 3-2
- Prompt $\bar{\nu}$; 3-98
- RDUM array; 3-113
- RDUM card; 3-113
- RKPL array; E-40
- RTC array; E-28
- RTP array; E-35
- RUNTPE; D-6
- Radiative transfer theory; 2-70
- Random numbers; 2-169
- Reaction numbers; G-1
- Real array; 3-113
- Reflecting surface; 2-13
- Reflecting surface; 3-13
- Relative error; 2-93
- Repeat (nR); 3-5
- Repeated Structure Tally
 - example; 4-42
- Repeated Structure Tally; 3-69
- Repeated structure; Examples; 4-19
- Repeated structures; 2-10
- Repeated structures; 3-21
- Response function; 3-80
- Ring detector card; 3-65
- Russian roulette; 2-120
- Russian roulette; 3-29
- Russian roulette; 3-29
- $S(\alpha, \beta)$; 2-49
- $S(\alpha, \beta)$; 3-109
- $S(\alpha, \beta)$; G-4
- SB card; 2-133
- SB card; 3-48
- SC card; 3-53
- SDEF card; 3-40
- SDn card; 3-84
- SFn card; 3-82
- SI card; 3-48
- SP card; 3-48
- SRCDX; 4-52
- SSR card; 3-56
- SSW card; 3-55
- SWTM; 3-110
- Sample problem; 1-19
- Sample problem; 1-28
- Scattering; Elastic; 2-37
- Scattering; Inelastic; 2-37
- Scattering; Neutron; 2-34
- Scattering; Photon; 2-52
- Scattering; Photon; 2-53
- Segment divisor; 3-84
- Segmenting card; 3-83
- Sense; 1-14
- Sense; 3-74
- Simple physics treatment; 2-51
- Simple physics; 3-111
- Source arrays; E-27
- Source biasing; 2-134
- Source; Biasing; 2-132
- Source; Biasing; 3-48
- Source; Comment; 3-53
- Source; DS; 3-52
- Source; Dependent; 3-52
- Source; Direction biasing; 2-133
- Source; Energy bias; 3-48
- Source; Examples; 4-48
- Source; Fission; 3-50
- Source; Fusion; 3-50

INDEX

- Source; Information; 3-48
- Source; Introduction; 1-5
- Source; Probability; 3-48
- Source; SB; 3-48
- Source; SC; 3-53
- Source; SDEF; 3-40
- Source; SI; 3-48
- Source; SP; 3-48
- Source; SRCDX; 3-61
- Source; SSR; 3-56
- Source; SSW; 3-55
- Source; Specification; 3-39
- Source; Spectra; 3-50
- Source; Spectra; H-1
- Source; Subroutine; 3-61
- Source; Subroutine; 4-51
- Special treatments; 3-93
- Spectra constants; H-1
- Splitting; 3-29
- Standard deviation; 2-89
- Status; 1-32
- Steradian; 3-81
- Storage limits; 3-135
- Surface; Ambiguity; 2-12
- Surface; Ambiguity; 2-13
- Surface; Ambiguity; 4-8
- Surface; Area; 3-20
- Surface; Cards; 1-18
- Surface; Cards; 3-12
- Surface; Coefficients; 1-18
- Surface; Coefficients; 3-12
- Surface; Cones; 2-11
- Surface; Coordinate pairs; 3-16
- Surface; Defined by Equations; 3-12
- Surface; Flagging; 3-82
- Surface; Introduction; 1-18
- Surface; Mnemonics; 3-14
- Surface; Normal to; 3-74
- Surface; Points; 1-18
- Surface; Reflecting; 2-13
- Surface; Reflecting; 3-13
- Surface; Sense; 1-14
- Surface; Source; 3-55
- Surface; Torus; 2-11
- Surface; Transformation; 4-14
- Surface; periodic boundaries; 2-15
- Surface; periodic boundaries; 3-13
- Surface; white boundaries; 2-14
- Surface; white boundaries; 3-13
- System dependence; D-2
- T; 3-74
- TAL array; E-30
- TALLYX card; 3-86
- TALLYX examples; 4-45
- TALLYX subroutine; 3-87
- TASKS option; 1-31
- TDS array; E-33
- TEST1 problem; 5-10
- TFC array; E-35
- TFn card; 3-88
- THTME card; 3-108
- TMP card; 3-108
- TMn card; 3-80
- TOTNU card; 3-98
- TRCL card; 3-21
- TRCL card; 3-23
- TRn card; 3-26
- TRn card; 4-14
- Tally; Arrays; E-29
- Tally; Asterisk; 3-64
- Tally; Bins; 3-63
- Tally; Cards; 3-63
- Tally; Cards; 3-63
- Tally; Cell; 3-64
- Tally; Comment; 3-72
- Tally; DXTRAN; 2-136
- Tally; DXTRAN; 3-91
- Tally; Detector diagnostics; 3-89
- Tally; Detector; 2-75
- Tally; Dose; 3-79
- Tally; Energy; 3-64
- Tally; Examples; 4-34
- Tally; F1; 3-63
- Tally; FMn examples; 4-34
- Tally; FSn examples; 4-37
- Tally; FTn examples; 4-39
- Tally; Fluctuation chart; E-35
- Tally; Fluctuation; 3-88

INDEX

- Tally; Intensity; 2-70
- Tally; Introduction; 1-5
- Tally; Introduction; 2-68
- Tally; Lattice example; 4-42
- Tally; Lattices; 3-69
- Tally; Mnemonics; 3-63
- Tally; Multiplier; 3-75
- Tally; Plotting; B-10
- Tally; Pulse Height; 2-74
- Tally; Pulse height; 3-67
- Tally; Repeated Structure
example; 4-42
- Tally; Repeated Structures;
3-69
- Tally; Segmented; 3-83
- Tally; Special treatments; 3-93
- Tally; Specification; 3-62
- Tally; Summary; 1-5
- Tally; Surface; 2-70
- Tally; Surface; 3-64
- Tally; TALLYX examples; 4-45
- Tally; TALLYX; 3-87
- Tally; Types; 3-63
- Tally; Union; 3-65
- Tally; Units; 3-64
- Tally; Weight; 3-64
- Temperature; 2-30
- Temperature; 3-108
- Thermal; $S(\alpha, \beta)$; 2-49
- Thermal; Collisions; 2-27
- Thermal; Free gas model; 2-27
- Thermal; Times; 3-108
- Thermal; Treatment; 3-103
- Thermal; Treatment; 3-108
- Time; Cutoff; 2-120
- Time; Cutoff; 3-110
- Time; Multiplier; 3-80
- Title card; 3-2
- Tn card; 3-73
- Torus; 2-11
- Torus; 3-15
- Total $\bar{\nu}$; 3-98
- Track; 1-8
- Transformation; 3-26
- Transport arrays; E-28
- Tritium production; 4-36
- Type 1 table; F-1
- Type 1 table; F-4
- Type 2 table; F-1
- Type 2 table; F-10
- Type 3 table; F-1
- U card; 3-22
- Union operator; 1-16
- Union operator; 4-1
- Union operator; 4-1
- Units; 1-19
- Universe map Array; E-41
- User data arrays; 3-113
- VECT card; 3-33
- VOID card; 3-100
- VOL card; 3-20
- Variable names; D-2
- Variance estimation; 2-88
- Variance of the variance; 2-96
- Variance of the variance; 2-99
- Variance reduction; Correlated
sampling; 2-143
- Variance reduction; DXTRAN;
2-136
- Variance reduction; DXTRAN;
3-91
- Variance reduction; Energy cutoff;
2-120
- Variance reduction; Energy
roulette; 2-122
- Variance reduction; Energy
splitting; 2-122
- Variance reduction; Energy
splitting; 3-29
- Variance reduction; Exponential
transform; 2-128
- Variance reduction; Exponential
transform; 3-31
- Variance reduction; Forced
collisions; 2-131
- Variance reduction; Forced
collisions; 3-33
- Variance reduction; Geometry
splitting; 2-120
- Variance reduction; Introduction;
1-8
- Variance reduction; Introduction;

INDEX

- 2-114
- Variance reduction; PDn card;
3-38
- Variance reduction; Russian
roulette; 2-120
- Variance reduction; Russian
roulette; 3-29
- Variance reduction; Source
biasing; 2-132
- Variance reduction; Splitting;
3-29
- Variance reduction; Summary;
1-8
- Variance reduction; Time cutoff;
2-120
- Variance reduction; Weight cutoff;
2-123
- Variance reduction; Weight cutoff;
3-110
- Variance reduction; Weight
window; 3-34
- Vertical format; 3-6
- Void cell; 3-9
- Volumes; Calculation of; 2-163
- WC1; 3-110
- WC2; 3-110
- WWE card; 3-34
- WWG card; 3-37
- WWGE card; 3-37
- WWN card; 3-34
- WWP card; 3-34
- Warning messages; 3-8
- Weight Window Mesh; E-41
- Weight cutoff; 2-123
- Weight cutoff; 3-110
- Weight cutoff; 3-111
- Weight window generator;
2-126
- Weight window generator; 3-37
- Weight window; 3-34
- Weight; 2-25
- White boundaries; 2-14
- White boundaries; 3-13
- X card; 3-16
- X-Windows; B-2
- XSDIR; F-2
- XSLIST; G-8
- XSn card; 3-99
- Y card; 3-16
- Z card; 3-16
- ZAID; 3-96
- ZZZAAA; 3-96
- Zero importance; 3-29